

A1-F18AC-WDM-000

15 APRIL 1992

CHANGE 5 - 1 NOVEMBER 2002

TECHNICAL MANUAL

ORGANIZATIONAL MAINTENANCE

WIRING DIAGRAMS

**NAVY MODEL
F/A-18A
161353 THRU 163175**

N68936-01-D-0007

This volume is one of two volumes and is incomplete without A1-F18AC-WDM-010.

This volume contains pages/figures R001 00 through R178 00, Introduction, and L000 00 through L962 00.

DISTRIBUTION STATEMENT C. Distribution authorized to U.S. Government agencies and their contractors to protect publications required for official use or for administrative or operational purposes only, determined on 15 March 1988. Other requests for this document shall be referred to Commanding Officer, Naval Air Technical Data and Engineering Service Command, Naval Air Station North Island, P.O. Box 357031, Building 90 Distribution, San Diego, CA 92135-7031.

DESTRUCTION NOTICE. For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.

PUBLISHED BY DIRECTION OF COMMANDER, NAVAL AIR SYSTEMS COMMAND

0801LP1022636

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page A

NUMERICAL INDEX OF EFFECTIVE PAGES/FIGURES

List of Current Changes

Original 0 15 Apr 1992 Change 2 15 Oct 1993 Change 4 1 Nov 2001 Change 5 1 Nov 2002
Change 1 1 Sep 1992 Change 3 15 Dec 1994

Only those pages/figures assigned to the manual are listed in this index. If the numerical sequence is broken in the list, the missing page/figure numbers have not been assigned to this manual. Insert Change 5, pages/figures dated 1 November 2002. Dispose of superseded pages/figures. Superseded classified pages/figures shall be destroyed in accordance with applicable security regulations. The portion of text affected in a change or revision is indicated by change bars or the change symbol "R" in the outer margin of each column of text. Changes to illustrations are indicated by pointing hands, change bars, or MAJOR CHANGE symbols. Changes to diagrams may be indicated by shaded borders.

Total number of pages in this manual is 974 consisting of the following:

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
Title	5	R037 00	0	R084 00	4	R126 00	4
A	5	R038 00	0	R085 00	0	R126 01	4
B	5	R039 00	0	R086 00	4	R126 02	4
C	5	R040 00	0	R087 00	4	R126 03	4
D	5	R041 00	4	R088 00	4	R127 00	0
E	5	R042 00	0	R089 00	0	R128 00	0
F	5	R043 00	0	R090 00	0	R129 00	4
G blank	5	R044 00	0	R091 00	0	R130 00	4
TPDR-1	5	R045 00	0	R092 00	0	R131 00	4
TPDR-2 blank	5	R046 00	4	R093 00	4	R131 01	4
R001 00	0	R047 00	0	R094 00	4	R132 00	0
R002 00	0	R048 00	4	R095 00	4	R133 00	4
R003 00	0	R049 00	4	R096 00	4	R134 00	4
R004 00	0	R050 00	4	R097 00	4	R135 00	4
R005 00	0	R051 00	4	R098 00	4	R136 00	4
R006 00	0	R052 00	4	R099 00	4	R136 01	4
R007 00	0	R053 00	4	R100 00	4	R136 02	4
R008 00	0	R054 00	4	R101 00	4	R136 03	4
R009 00	0	R055 00	4	R101 01	4	R137 00	0
R010 00	0	R056 00	4	R101 02	4	R138 00	0
R011 00	0	R057 00	0	R102 00	0	R139 00	0
R012 00	0	R058 00	4	R103 00	4	R140 00	0
R013 00	0	R059 00	0	R104 00	4	R141 00	0
R014 00	0	R060 00	4	R105 00	5	R142 00	0
R015 00	0	R061 00	0	R106 00	5	R143 00	0
R016 00	0	R062 00	1	R106 01	5	R144 00	0
R017 00	0	R063 00	4	R107 00	0	R145 00	0
R018 00	0	R064 00	4	R108 00	0	R146 00	0
R019 00	0	R065 00	4	R109 00	0	R147 00	0
R020 00	1	R066 00	4	R110 00	0	R148 00	0
R021 00	0	R067 00	4	R111 00	0	R149 00	0
R022 00	0	R068 00	4	R112 00	0	R150 00	0
R023 00	0	R069 00	4	R113 00	0	R151 00	0
R024 00	0	R070 00	4	R114 00	4	R152 00	0
R025 00	0	R071 00	0	R114 01	4	R153 00	0
R026 00	0	R072 00	0	R115 00	0	R154 00	0
R027 00	0	R073 00	0	R116 00	4	R155 00	0
R028 00	0	R074 00	4	R116 01	4	R156 00	0
R029 00	0	R075 00	4	R117 00	0	R157 00	0
R030 00	0	R076 00	4	R118 00	0	R158 00	0
R031 00	1	R077 00	0	R119 00	0	R159 00	0
R032 00	0	R078 00	4	R120 00	4	R160 00	4
R033 00	0	R079 00	0	R121 00	4	R161 00	0
R034 00	0	R080 00	4	R122 00	4	R162 00	0
R035 00	4	R081 00	0	R123 00	4	R163 00	0
R035 01	4	R082 00	4	R124 00	4	R164 00	4
R036 00	0	R083 00	0	R125 00	4	R165 00	4

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page B

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
R166 00	4	10	4	L103 00		L114 00	
R167 00	0	L003 00		1	0	1	0
R168 00	0	1	0	2	0	2	0
R169 00	0	2	0	3	0	3	0
R170 00	0	L003 01		4	0	L114 01	
R171 00	0	1	0	L104 00		1	0
R172 00	0	2	0	1	0	2	0
R173 00	0	3	0	2	0	L115 00	
R174 00	4	L004 00		L105 00		1	0
R174 01	4	1	0	1	0	2	0
R175 00	2	2	0	2	0	L116 00	
R176 00	0	3	0	3	0	1	0
R177 00	4	4	0	4	0	2	0
R178 00 blank	4	5	0	L106 00		3	0
INTRO 1	4	6	0	1	0	L117 00	
INTRO 2	1	7	0	2	0	1	4
INTRO 3	1	L005 00		L107 00		2	4
INTRO 4	1	1	0	1	0	3	4
INTRO 5	1	2	0	2	0	L118 00	
INTRO 6	1	L006 00		L108 00		1	4
INTRO 7	1	1	0	1	0	2	0
INTRO 8	1	2	0	2	0	3	4
INTRO 9	1	L007 00		L109 00		4	4
INTRO 10	1	1	4	1	4	5	4
INTRO 11	1	2	0	2	4	6	4
INTRO 12	1	3	4	L110 00		L119 00	
INTRO 13	1	4	4	3	4	1	0
INTRO 14	1	5	4	4	4	2	0
INTRO 15	1	L008 00		1	4	3	0
INTRO 16	4	1	0	2	4	L200 00	
L000 00		2	0	3	4	1	0
1	0	3	0	4	4	2	0
2	0	4	0	L111 00		3	0
3	0	L009 00		1	4	L201 00	
4	0	1	0	2	4	1	0
5	0	2	0	3	0	2	0
6	0	3	0	4	4	L202 00	
7	0	4	0	5	4	1	0
8	0	L025 00		6	4	2	0
9	0	1	0	L111 01		L203 00	
10	0	2	0	1	4	1	0
L001 00		L026 00		2	4	2	0
1	1	L027 00		3	4	3	0
2	1	L100 00		4	4	L204 00	
3	1	1	0	5	4	1	1
4	1	2	0	6	4	2	1
5	1	3	0	7	4	3	1
6	1	4	0	8	4	L205 00	
L001 01		5	0	L112 00		1	1
1	0	6	0	1	0	2	1
2	0	L101 00		2	0	3	1
3	0	1	4	3	0	4	1
L002 00		2	0	4	0	L206 00	
1	4	3	0	5	0	1	0
2	4	4	4	L113 00		2	0
3	4	5	4	1	0	L207 00	
4	4	6	4	2	0	1	0
5	4	7	4	3	0	2	0
6	4	L102 00		4	0	3	0
7	4	1	0	1	0	4	0
8	4	2	0	2	0	5	0
9	4						

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page C

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
L208 00		L220 00		L312 00		L409 00	
1	4	1	0	1	0	1	0
2	4	2	0	2	0	2	0
3	4	3	0	L313 00		3	0
4	4	L221 00		1	0	4	0
5	4	1	0	2	0	5	0
6	4	2	0	3	0	6	0
L209 00		3	0	4	0	L410 00	
1	4	L300 00		L314 00		1	0
2	4	1	0	1	0	2	0
3	4	2	0	2	0	3	0
4	4	3	0	L315 00		4	0
5	4	L301 00		1	0	5	0
6	4	1	0	2	0	6	0
7	4	2	0	L316 00		L411 00	
L210 00		3	0	1	0	1	0
1	4	4	0	2	0	2	0
2	0	L302 00		L317 00		3	0
3	4	1	0	1	0	4	0
4	4	2	0	2	0	5	0
5	4	3	0	3	0	6	0
L211 00		4	0	4	0	L412 00	
1	4	5	0	L400 00		1	0
2	0	L303 00		L401 00		2	0
3	0	1	0	1	0	3	0
4	0	2	0	2	0	L413 00	
5	0	L304 00		3	0	1	0
L212 00		1	0	4	0	2	0
1	0	2	0	5	0	L414 00	
2	0	L305 00		L402 00		1	0
L213 00		1	0	1	0	2	0
1	4	2	0	2	0	L415 00	
2	4	3	0	3	0	1	0
3	0	4	0	4	0	2	0
4	0	L306 00		L403 00		L500 00	
5	4	1	0	L404 00		1	0
L214 00		2	0	1	0	2	0
1	4	3	0	2	0	3	0
2	0	L307 00		3	0	4	0
3	4	1	0	4	0	5	0
4	4	2	0	L405 00		6	0
5	4	3	0	1	4	L500 01	
L215 00		4	0	2	0	1	0
1	4	L308 00		3	4	2	0
2	4	1	0	4	4	3	0
3	4	2	0	5	4	L501 00	
4	4	3	0	6	4	1	4
5	4	4	0	L406 00		2	4
6	4	L309 00		1	0	3	0
L216 00		1	4	2	0	4	4
1	0	2	4	3	0	5	4
2	0	3	4	4	5	6	4
L217 00		4	4	5	0	7	4
1	0	L310 00		6	4	L502 00	
2	0	1	0	L407 00		1	4
L218 00		2	0	1	0	2	0
1	0	L311 00		2	0	3	4
2	0	1	0	3	0	4	4
L219 00		2	0	4	0	5	4
1	0	L311 01		L408 00			
2	0	1	0	1	0		
3	0	2	0	2	0		

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page D

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
L600 00		L612 01		L706 00		3	0
1	0	1	0	1	0	L721 00	
2	0	2	0	2	0	1	0
3	0	3	0	L707 00		2	0
4	0	L613 00		1	0	3	0
L601 00		1	0	2	4	L722 00	
1	0	2	0	L708 00		1	0
2	0	3	0	1	0	2	0
3	0	4	0	2	4	3	0
4	0	6	0	3	4	4	0
5	0	7	0	L709 00		5	0
6	0	L614 00		1	4	L723 00	
7	0	1	0	2	0	1	0
8	0	2	0	3	0	2	0
9	0	3	0	4	4	L724 00	
L602 00		4	0	5	4	1	0
1	0	L615 00		L710 00		2	0
2	0	1	0	1	0	3	0
3	0	2	0	2	0	L725 00	
4	0	3	0	3	0	1	0
L603 00		L616 00		4	0	2	0
1	0	1	0	5	0	L726 00	
2	0	2	0	6	0	1	0
3	0	3	0	L711 00		2	0
L604 00		L617 00		1	0	3	0
1	0	1	0	2	0	4	0
2	0	2	0	3	0	5	0
L605 00		3	0	L712 00		L727 00	
1	0	L618 00		1	0	1	0
2	0	1	0	2	0	2	0
3	0	2	0	3	0	3	0
4	0	L619 00		4	0	L728 00	
5	0	1	0	5	0	1	1
L606 00		2	0	L713 00		2	1
1	0	L700 00		1	0	L729 00	
2	0	1	4	2	0	1	0
L607 00		2	4	3	0	2	0
1	0	3	4	L714 00		L730 00	
2	4	4	4	1	0	1	0
3	4	5	4	2	0	2	0
L608 00		L701 00		L715 00		L731 00	
1	0	1	0	1	0	1	0
2	0	2	0	2	0	2	5
3	4	3	0	3	0	L732 00	
4	4	L702 00		4	0	1	0
5	0	1	0	5	0	2	0
6	4	2	0	L716 00		3	0
L609 00		3	0	1	0	L733 00	
1	4	4	0	2	0	1	0
2	4	L703 00		L717 00		2	0
3	4	1	0	1	0	L734 00	
L610 00		2	0	2	0	1	0
1	0	L704 00		L718 00		2	0
2	0	1	0	1	0	3	0
L611 00		2	0	2	0	4	0
1	0	L705 00		L719 00		5	0
2	0	1	0	1	0	L735 00	
3	0	2	0	2	0	1	0
L612 00		3	0	L720 00		2	0
1	0	4	0	1	0	3	0
2	0	5	0	2	0	4	0
3	0	6	0				

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page E

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
L736 00		L804 00		L813 01		L828 00	
1	0	1	0	1	0	1	0
2	0	2	0	2	0	2	0
L737 00		3	0	L814 00		3	0
1	0	L805 00		1	0	4	0
2	0	1	0	2	0	L829 00	
3	0	2	0	L815 00		1	0
L738 00		3	0	1	0	2	0
1	0	4	0	2	0	3	0
2	0	5	0	3	0	4	0
3	0	6	0	4	0	L830 00	
L739 00		L806 00		5	0	1	0
1	0	1	0	L816 00		2	0
2	0	2	0	1	0	3	0
3	0	3	0	2	0	L831 00	
4	0	4	0	L817 00		1	0
5	0	5	0	1	0	2	0
L740 00		6	0	2	0	3	0
1	0	L806 01		3	0	4	0
2	0	1	0	4	0	5	0
L741 00		2	0	5	0	6	0
1	0	3	0	L818 00		L832 00	
2	0	4	0	1	0	1	0
3	0	L807 00		2	0	2	0
L742 00		1	0	3	0	3	0
1	0	2	0	4	0	4	0
2	0	3	0	L819 00		L833 00	
3	0	4	0	1	0	1	0
4	0	5	0	2	0	2	0
L743 00		L808 00		L820 00		3	0
1	0	1	0	1	0	4	0
2	0	2	0	2	0	L900 00	
3	0	3	0	3	0	1	0
4	0	4	0	4	0	2	0
L744 00		5	0	5	0	L901 00	
1	0	L809 00		L821 00		1	0
2	0	1	0	1	0	2	0
3	0	2	0	2	0	L902 00	
L745 00		3	0	L822 00		1	0
1	0	4	0	1	0	2	0
2	0	5	0	2	0	3	0
3	0	L810 00		L823 00		L903 00	
L746 00		1	0	1	0	1	0
1	0	2	0	2	0	2	0
2	0	L811 00		L824 00		L904 00	
L800 00		1	0	1	0	1	0
1	0	2	0	2	0	2	0
2	0	3	0	3	0	L905 00	
3	0	4	0	L825 00		1	0
4	0	5	0	1	0	2	0
5	0	6	0	2	0	L906 00	
6	0	L812 00		L826 00		1	4
L801 00		1	0	1	0	2	4
1	0	2	0	2	0	3	4
2	0	3	0	3	0	4	4
3	0	4	0	L827 00		5	4
L802 00		L813 00		1	0	6	4
1	0	1	0	2	0	7	4
2	0	2	0	3	0	L907 00	
L803 00		3	0	4	0	1	0
1	0	4	0	5	0	2	4
2	0			6	0		

A1-F18AC-WDM-000

Change 5 - 1 November 2002

Page F/(G blank)

Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number	Page/Figure Number	Change Number
L908 00		3	4	L955 00		5	4
1	4	L912 00		1	0	L959 00	
2	4	1	0	2	0	1	0
3	4	2	0	L956 00		2	0
4	4	L950 00		1	4	3	4
5	4	1	0	2	4	4	4
L909 00		2	0	3	4	L960 00	
1	0	L951 00		4	4	1	5
2	0	1	0	5	4	2	0
3	4	2	0	6	4	3	0
4	4	L952 00		7	4	4	5
L910 00		1	0	L957 00		5	5
1	5	2	0	1	4	L961 00	
2	0	L953 00		2	4	1	0
3	0	1	0	L958 00		2	4
4	5	2	0	1	4	3	4
L911 00		L954 00		2	4	L962 00	
1	0	1	0	3	4	1	0
2	4	2	0	4	4	2	0

THIS PAGE INTENTIONALLY LEFT BLANK.

LIST OF TECHNICAL PUBLICATIONS DEFICIENCY REPORTS INCORPORATED

ORGANIZATIONAL MAINTENANCE

WIRING DIAGRAMS

This WP supersedes TPDR WP, dated 1 November 2001

1. The TPDRs listed below have been incorporated in this issue.

IDENTIFICATION NUMBER/ QA SEQUENCE NUMBER	LOCATION
39783-02-0111	WP L731 00, Sheet 2, Item 6
39783-97-0114	Page B
39783-99-0067	Page B

THIS PAGE INTENTIONALLY LEFT BLANK.

INDEX

WIRING DIAGRAMS

Title	Page No.
Equipment Location Figures Index	L000 00
Introduction	INTRO 1
Reference Designation Index	R002 00
Splice Area List	S001 00
Wiring Diagrams	D001 00

A1-F18AC-WDM-000

15 April 1992

R002 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND1-A001	L002 00	GND1-M003	L119 00	GND2-C005	L100 00
GND1-A005	L001 00	GND1-N001	L220 00	GND2-C006	L100 00
GND1-A006	L001 00	GND1-P001	L740 00	GND2-C007	L107 00
GND1-A008	L009 00	GND1-P002	L702 00	GND2-C008	L107 00
GND1-A009	L002 00	GND1-P003	L700 00	GND2-C009	L101 00 L103 00
GND1-B002	L003 00	GND1-P005	L728 00	GND2-C010	L103 00
GND1-C002	L105 00	GND1-S001	L808 00	GND2-D003	L205 00
GND1-C003	L107 00	GND1-S002	L831 00	GND2-D005	L207 00
GND1-C004	L100 00	GND1-S003	L811 00	GND2-D006	L203 00
GND1-C005	L103 00	GND1-T001	L815 00	GND2-D008	L207 00
GND1-C006	L116 00	GND1-T002	L806 00	GND2-D009	L203 00
GND1-E002	L111 00	GND1-T003	L827 00	GND2-E002	L111 00
GND1-E004	L109 00	GND1-U001	L908 00	GND2-E003	L109 00
GND1-E005	L113 00	GND1-U002	L910 00	GND2-E004	L113 00
GND1-E006	L108 00	GND1-U003	L911 00	GND2-E005	L110 00
GND1-E007	L118 00	GND1-U004	L906 00	GND2-E006	L109 00
GND1-E008	L111 00	GND1-V001	L961 00	GND2-F007	L211 00
GND1-F002	L213 00	GND1-V002	L960 00	GND2-F008	L209 00
GND1-F003	L215 00	GND2-A005	L001 00	GND2-F009	L211 00
GND1-F004	L303 00	GND2-A009	L002 00	GND2-F010	L209 00
GND1-F005	L208 00	GND2-A010	L002 00	GND2-F013	L215 00
GND1-H002	L405 00	GND2-A011	L001 01	GND2-F015	L215 00
GND1-H005	L406 00	GND2-B001	L004 00	GND2-F016	L208 00
GND1-H006	L404 00	GND2-B005	L009 00	GND2-F017	L317 00
GND1-J004	L410 00	GND2-B006	L004 00	GND2-F018	L213 00
GND1-L001	L502 00	GND2-B007	L003 01	GND2-F020	L213 00
GND1-M001	L600 00	GND2-C002	L105 00	GND2-F021	L303 00
GND1-M002	L119 00	GND2-C003	L105 00	GND2-F022	L215 00

A1-F18AC-WDM-000

15 April 1992

R003 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND2-H001	L405 00	GND2-P003	L605 00	GND2-S005	L808 00
GND2-H002	L405 00	GND2-P004	L607 00	GND2-S007	L809 00
GND2-H003	L406 00	GND2-P005	L608 00	GND2-S008	L831 00
GND2-H004	L401 00	GND2-P006	L710 00	GND2-T001	L806 01
GND2-H006	L406 00	GND2-P007	L712 00	GND2-T002	L817 00
GND2-H011	L406 00	GND2-P008	L700 00	GND2-T003	L817 00
GND2-H015	L405 00	GND2-P009	L702 00	GND2-T004	L806 00
GND2-J003	L402 00	GND2-P010	L700 00	GND2-T005	L827 00
	L410 00				
GND2-J004	L402 00	GND2-P011	L611 00	GND2-U002	L908 00
	L410 00	GND2-P012	L712 00	GND2-U004	L906 00
GND2-J006	L410 00	GND2-P013	L702 00	GND2-U006	L910 00
GND2-J008	L411 00	GND2-R001	L713 00	GND2-U008	L901 00
GND2-J009	L411 00	GND2-R003	L617 00	GND2-V002	L958 00
	L412 00				
GND2-J010	L409 00	GND2-R004	L705 00	GND2-V003	L956 00
GND2-K003	L501 00	GND2-R005	L708 00	GND2-V004	L960 00
GND2-L004	L502 00	GND2-R006	L713 00	GND2-V006	L951 00
GND2-L005	L502 00	GND2-R007	L709 00	GND3-A001	L001 00
GND2-L006	L502 00	GND2-R008	L609 00	GND3-A002	L009 00
GND2-M001	L600 00	GND2-R010	L705 00	GND3-A004	L002 00
	L601 00				
GND2-M002	L601 00	GND2-R011	L709 00	GND3-B004	L004 00
GND2-M003	L119 00	GND2-R012	L739 00	GND3-B005	L004 00
GND2-M004	L119 00	GND2-R013	L709 00	GND3-C002	L105 00
GND2-N001	L613 00	GND2-R014	L708 00	GND3-C004	L105 00
	L614 00				
GND2-N002	L613 00	GND2-R015	L705 00	GND3-C006	L100 00
GND2-N003	L612 01	GND2-S001	L813 00	GND3-C007	L116 00
	L613 00	GND2-S002	L817 00	GND3-D003	L205 00
GND2-P001	L712 00	GND2-S003	L809 00	GND3-E001	L108 00
GND2-P002	L712 00	GND2-S004	L808 00	GND3-E002	L113 00

A1-F18AC-WDM-000

15 April 1992

R004 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND3-F002	L209 00	GND3-P008	L611 00	GND4-F010	L211 00
GND3-F003	L211 00	GND3-R001	L619 00	GND4-F011	L211 00
GND3-F004	L211 00	GND3-R002	L713 00	GND4-F012	L209 00
GND3-F005	L215 00	GND3-R003	L713 00	GND4-H005	L406 00
GND3-F006	L209 00	GND3-R004	L705 00	GND4-H006	L406 00
GND3-F010	L213 00	GND3-R005	L708 00	GND4-H008	L405 00
GND3-F011	L303 00	GND3-R006	L713 00	GND4-H009	L405 00
GND3-F012	L208 00	GND3-R007	L705 00	GND4-H010	L404 00
GND3-F013	L215 00	GND3-R008	L618 00	GND4-H011	L401 00
GND3-H003	L401 00	GND3-S001	L809 00	GND4-H018	L405 00
GND3-H007	L406 00	GND3-T001	L806 01	GND4-J006	L411 00 L412 00
GND3-H008	L406 00	GND3-T002	L806 01	GND4-J007	L411 00
GND3-H016	L405 00	GND3-T003	L806 00	GND4-J009	L409 00 L410 00
GND3-J001	L411 00 L412 00	GND3-U001	L906 00	GND4-J010	L402 00 L410 00
GND3-J004	L402 00 L410 00	GND3-U008	L908 00	GND4-J013	L410 00
GND3-K001	L501 00	GND3-V001	L956 00	GND4-J016	L402 00 L410 00
GND3-L001	L502 00	GND3-V002	L958 00	GND4-J017	L409 00
GND3-L103	L502 00	GND4-A001	L001 00	GND4-L003	L500 00
GND3-M001	L119 00	GND4-B001	L003 00	GND4-L004	L502 00
GND3-N001	L613 00	GND4-B002	L003 00	GND4-N001	L612 01 L613 00
GND3-N002	L613 00	GND4-B003	L009 00	GND4-P001	L702 00
GND3-P002	L712 00	GND4-C001	L105 00	GND4-R001	L744 00
GND3-P003	L605 00	GND4-D001	L203 00	GND4-R002	L705 00
GND3-P004	L712 00	GND4-D004	L205 00	GND4-R003	L708 00
GND3-P005	L605 00	GND4-D006	L207 00	GND4-R004	L709 00
GND3-P006	L702 00	GND4-D007	L201 00	GND4-U001	L906 00
GND3-P007	L712 00	GND4-F006	L215 00		
		GND4-F008	L208 00		

A1-F18AC-WDM-000

15 April 1992

R005 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND4-U002	L908 00	GND9-C014	L101 00	GND9-F041	L213 00
GND4-V001	L958 00	GND9-D003	L205 00	GND9-F042	L303 00
GND4-V002	L960 00	GND9-D009	L201 00	GND9-H001	L406 00
GND4-V003	L960 00	GND9-D011	L207 00	GND9-H004	L401 00
GND4-V004	L956 00	GND9-D013	L203 00	GND9-H005	L405 00
GND5-B001	L009 00	GND9-D016	L207 00	GND9-H006	L405 00
GND5-E001	L109 00	GND9-E001	L118 00	GND9-H009	L405 00
GND5-F002	L211 00	GND9-E002	L113 00	GND9-H011	L404 00
GND5-J001	L410 00	GND9-E007	L109 00	GND9-H012	L406 00
GND5-P001	L606 00	GND9-E008	L109 00	GND9-J004	L409 00 L410 00
GND5-R001	L619 00	GND9-E011	L111 00	GND9-J005	L402 00 L410 00
GND8-H011	L405 00	GND9-E012	L108 00	GND9-J006	L411 00
GND9-A004	L002 00	GND9-F004	L317 00	GND9-J007	L402 00 L410 00
GND9-A005	L009 00	GND9-F014	L209 00	GND9-J015	L409 00
GND9-A008	L002 00	GND9-F015	L209 00	GND9-J017	L410 00
GND9-A009	L001 00	GND9-F017	L215 00	GND9-J019	L412 00
GND9-B001	L003 00	GND9-F018	L211 00	GND9-J028	L411 00 L412 00
GND9-B002	L004 00	GND9-F019	L211 00	GND9-K001	L501 00
GND9-B003	L004 00	GND9-F020	L211 00	GND9-K002	L501 00
GND9-B004	L009 00	GND9-F021	L317 00	GND9-L010	L502 00
GND9-B006	L009 00	GND9-F022	L213 00	GND9-L011	L502 00
GND9-C006	L105 00	GND9-F029	L215 00	GND9-L012	L502 00
GND9-C007	L107 00	GND9-F030	L209 00	GND9-L013	L502 00
GND9-C008	L103 00	GND9-F033	L213 00	GND9-M001	L601 00
GND9-C009	L100 00	GND9-F034	L208 00	GND9-M002	L601 00
GND9-C011	L100 00	GND9-F036	L215 00	GND9-M003	L601 00
GND9-C012	L105 00	GND9-F037	L211 00		
GND9-C013	L116 00	GND9-F038	L215 00		

A1-F18AC-WDM-000

15 April 1992

R006 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND9-M004	L601 00	GND9-R008	L617 00	GND9-U004	L906 00
GND9-M005	L601 00	GND9-R009	L609 00	GND9-U005	L906 00
GND9-M006	L601 00	GND9-R012	L739 00	GND9-U006	L908 00
GND9-M007	L600 00	GND9-R015	L709 00	GND9-U007	L909 00
GND9-M008	L601 00	GND9-S001	L813 00	GND9-U010	L910 00
GND9-M009	L119 00	GND9-S002	L809 00	GND9-U012	L905 00
GND9-M010	L119 00	GND9-S003	L800 00	GND9-U013	L910 00
GND9-M011	L601 00	GND9-S004	L831 00	GND9-U015	L905 00
GND9-N001	L613 00	GND9-S005	L808 00	GND9-V001	L958 00
GND9-N002	L613 00	GND9-S006	L800 00	GND9-V002	L958 00
GND9-N003	L614 00	GND9-S007	L809 00	GND9-V003	L956 00
GND9-N004	L612 01 L613 00	GND9-S008	L800 00	GND9-V004	L960 00
GND9-N006	L220 00	GND9-S009	L800 00	GND9-V007	L959 00
GND9-P001	L606 00	GND9-S010	L831 00	GND9-V008	L960 00
GND9-P002	L712 00	GND9-T001	L806 01	GND9-V009	L960 00
GND9-P003	L712 00	GND9-T003	L806 01	GND9-V012	L955 00
GND9-P004	L605 00	GND9-T004	L817 00	GND9-V013	L960 00
GND9-P005	L611 00	GND9-T005	L805 00	GND9-V015	L955 00
GND9-P009	L710 00	GND9-T006	L827 00	GND10B003	L004 00
GND9-P012	L700 00	GND9-T007	L829 00	GND10C005	L105 00
GND9-P013	L705 00	GND9-T008	L805 00	GND10C006	L107 00
GND9-P014	L705 00	GND9-T009	L806 00	GND10C007	L101 00
GND9-P015	L705 00	GND9-T010	L805 00	GND10E001	L118 00
GND9-P016	L700 00	GND9-T011	L805 00	GND10E005	L300 00
GND9-P017	L703 00	GND9-T013	L827 00	GND10E006	L113 00
GND9-R001	L619 00	GND9-U001	L910 00	GND10F001	L213 00
GND9-R002	L617 00	GND9-U002	L908 00	GND10F004	L300 00
GND9-R005	L709 00	GND9-U003	L908 00	GND10F005	L300 00

A1-F18AC-WDM-000

15 April 1992

R007 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
GND10F007	L317 00	GND10P011	L705 00	GND10V001	L956 00
GND10F009	L317 00	GND10P012	L700 00	GND10V002	L956 00
GND10H002	L406 00	GND10P013	L608 00	GND10V003	L960 00
GND10H003	L406 00	GND10R001	L713 00	GND10V004	L958 00
GND10H007	L404 00	GND10R002	L617 00	WTA002	L002 00
GND10H011	L405 00	GND10R003	L617 00	SPLICE	S001 00
GND10H013	L405 00	GND10R004	L619 00	WTB001	L004 00
GND10H014	L405 00	GND10R005	L713 00	SPLICE	S002 00
GND10J002	L409 00	GND10R006	L219 00	WTB002	L007 00
GND10J003	L411 00	GND10R008	L739 00	SPLICE	S003 00
	L412 00			WTC001	L115 00
GND10J008	L409 00	GND10R015	L708 00	SPLICE	S004 00
	L410 00	GND10R016	L709 00	WTC002	L103 00
GND10J009	L402 00	GND10S001	L817 00	SPLICE	S005 00
GND10J010	L412 00	GND10S002	L809 00	WTC003	L101 00
GND10L001	L500 00	GND10S003	L831 00	SPLICE	S006 00
GND10M001	L601 00	GND10S004	L809 00	WTC004	L116 00
GND10M002	L601 00	GND10S005	L801 00	SPLICE	S007 00
GND10M004	L600 00	GND10T001	L806 00	WTC005	L101 00
GND10M005	L600 00	GND10T002	L806 01	SPLICE	S008 00
GND10N001	L613 00	GND10T003	L806 00	WTC006	L105 00
GND10N002	L613 00	GND10T004	L827 00	SPLICE	S009 00
GND10N003	L612 00	GND10T005	L806 00	WTD001	L203 00
	L613 00			SPLICE	S010 00
GND10P001	L712 00	GND10T007	L804 00	WTD002	L201 00
GND10P002	L604 00	GND10U001	L906 00	SPLICE	S011 00
GND10P004	L606 00	GND10U003	L910 00	WTE001	L110 00
GND10P005	L604 00	GND10U004	L601 00	SPLICE	S012 00
GND10P006	L702 00	GND10U006	L908 00	WTE002	L114 00
GND10P007	L605 00	GND10U007	L912 00	SPLICE	S013 00
				WTE003	L111 00
				SPLICE	S014 00
				WTF001	L209 00
				SPLICE	S015 00
				WTF002	L215 00
				SPLICE	S016 00

A1-F18AC-WDM-000

15 April 1992

R008 00

REF PIN	DESIGNATION DWG.
WTF003	L213 00
SPLICE	S017 00
WTF004	L215 00
SPLICE	S018 00
WTF005	L209 00
SPLICE	S019 00
WTF006	L211 00
SPLICE	S020 00
WTF007	L211 00
SPLICE	S021 00
WTF008	L317 00
SPLICE	S022 00
WTF009	L304 00
SPLICE	S023 00
WTF010	L317 00
SPLICE	S024 01
WTH001	L405 00
SPLICE	S025 00
WTJ001	L410 00
SPLICE	S026 00
WTL001	L502 00
SPLICE	S027 00
WTL002	L415 00
SPLICE	S028 00
WTM002	L601 00
SPLICE	S029 00
WTM015	L119 00
SPLICE	S030 00
WTM016	L119 00
SPLICE	S031 00
WTN002	L614 00
SPLICE	S032 00
WTN015	L613 00
SPLICE	S033 00
WTP001	L610 00
SPLICE	S034 00
WTP003	L610 00
SPLICE	S035 00

REF PIN	DESIGNATION DWG.
WTP004	L605 00
SPLICE	S036 00
WTP006	L712 00
SPLICE	S037 00
WTP007	L702 00
SPLICE	S038 00
WTP008	L700 00
SPLICE	S039 00
WTP009	L603 00
SPLICE	S040 00
WTP010	L724 00
SPLICE	S041 00
WTR001	L608 00
SPLICE	S042 00
WTR002	L610 00
SPLICE	S043 00
WTR003	L705 00
SPLICE	S044 00
WTR005	L713 00
SPLICE	S045 00
WTR006	L705 00
SPLICE	S046 00
WTR007	L735 00
SPLICE	S047 00
WTR008	L616 00
SPLICE	S048 00
WTS001	L800 00
SPLICE	S049 00
WTS002	L808 00
SPLICE	S050 00
WTS003	L817 00
SPLICE	S051 00
WTS004	L801 00
	L809 00
	L811 00
SPLICE	S052 00
WTS005	L802 00
SPLICE	S053 00

REF PIN	DESIGNATION DWG.
WTS006	L809 00
SPLICE	S054 00
WTT001	L806 00
SPLICE	S055 00
WTT002	L804 00
	L806 00
	L815 00
SPLICE	S056 00
WTT003	L805 00
SPLICE	S057 00
WTT004	L806 01
SPLICE	S058 00
WTT005	L806 00
SPLICE	S059 00
WTT006	L806 01
SPLICE	S060 00
WTU001	L901 00
SPLICE	S061 00
WTU002	L910 00
SPLICE	S062 00
WTU004	L912 00
SPLICE	S063 00
WTU005	L908 00
SPLICE	S064 00
WTU006	L911 00
SPLICE	S065 00
WTU007	L601 00
SPLICE	S066 00
WTU008	L910 00
SPLICE	S067 00
WTV001	L951 00
SPLICE	S068 00
WTV002	L960 00
SPLICE	S069 00
WTV005	L958 00
SPLICE	S070 00
WTV006	L961 00
SPLICE	S071 00

A1-F18AC-WDM-000

15 April 1992

R009 00

REF DESIGNATION PIN DWG.

WTV007	L960 00
SPLICE	S072 00
01P02	L025 00
1	D395 00
2	D395 00
3	D396 00
4	SPARE
5	D395 00
6	D395 00
7	D395 00
8	D397 00
9	D396 00
10	D396 00
11	D396 00
12	D396 00
13	D396 00
14	D396 00
15	D396 00
16	D396 00
17	D396 00
18	D396 00
19	D396 00
20	D396 00
21	D396 00
22	D396 00
23	SPARE
24	D396 00
25	SPARE
26	SPARE
27	SPARE
28	D398 00
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	D396 00
35	D396 00
36	D396 00
37	SPARE
38	D396 00
39	D396 00
40	D396 00
41	D396 00
42	D396 00
43	D395 00
44	D396 00
45	D396 00
46	D396 00
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	D396 00
58	D396 00

REF DESIGNATION PIN DWG.

01P02	CONT
59	D396 00
60	D396 00
61	SPARE
62	D396 00
63	D405 00
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	D396 00
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
01P03	L025 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	D400 00
J	D397 00
K	SPARE
L	D405 00
M	D397 00
N	D400 00
P	D400 00
R	D400 00
S	D400 00
T	D400 00
U	D400 00
V	D400 00
W	D397 00
X	D397 00
01P08	L025 00
COAX	D404 00
02P01	L025 00
1	SPARE
2	SPARE
3	D397 00
4	D397 00
5	D399 00
6	D397 00
7	D398 00

REF DESIGNATION PIN DWG.

02P01	CONT
8	D398 00
9	D398 00
10	D397 00
11	D398 00
12	D399 00
13	D399 00
14	D399 00
15	D399 00
16	D399 00
17	D399 00
18	D399 00
19	D399 00
20	SPARE
21	SPARE
22	SPARE
23	D399 00
24	D399 00
25	D399 00
26	D399 00
27	D399 00
28	D399 00
29	D399 00
30	D399 00
31	D399 00
32	D399 00
33	D399 00
34	D399 00
35	D399 00
36	D399 00
37	D399 00
38	D399 00
39	D399 00
40	D399 00
41	D399 00
42	D399 00
43	D397 00
44	D398 00
45	D398 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	D399 00
52	D399 00
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE

A1-F18AC-WDM-000

15 April 1992

R010 00

REF DESIGNATION
PIN DWG.

02P01	CONT
66	SPARE
02P05	L025 00
COAX	D405 00
02P09	L025 00
1	D395 00
2	D395 00
3	D395 00
4	D395 00
5	D395 00
6	D395 00
7	D395 00
8	D395 00
9	D395 00
10	D395 00
11	D395 00
12	D395 00
13	D395 00
14	D395 00
15	D395 00
16	D395 00
17	D395 00
18	D395 00
19	D395 00
20	D395 00
21	D395 00
22	D395 00
23	D395 00
24	D395 00
25	D400 00
26	D400 00
27	D395 00
28	D395 00
29	D400 00
30	D400 00
31	D400 00
32	D395 00
33	D404 00
34	D404 00
35	D404 00
36	D400 00
37	D400 00
38	D400 00
39	D400 00
40	D400 00
41	D400 00
42	D400 00
43	D400 00
44	D404 00
45	D404 00
46	D404 00
47	D404 00
48	D404 00
49	D404 00
50	D404 00
51	D404 00
52	D400 00

REF DESIGNATION
PIN DWG.

02P09	CONT
53	D400 00
54	D400 00
55	D400 00
56	D404 00
57	D404 00
58	D404 00
59	SPARE
60	SPARE
61	SPARE
62	D404 00
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	D404 00
69	D401 00
70	D401 00
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D401 00
80	D395 00
81	D395 00
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	D395 00
93	D395 00
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	D395 00
105	SPARE
106	SPARE
107	D398 00
108	D398 00
109	D398 00
110	D398 00
111	SPARE
112	SPARE

REF DESIGNATION
PIN DWG.

02P09	CONT
113	SPARE
114	SPARE
115	D398 00
116	D398 00
117	D398 00
118	D398 00
119	D398 00
120	D398 00
121	D398 00
122	D398 00
123	D398 00
124	D403 00
125	D403 00
126	D403 00
127	D398 00
128	D398 00
02P18	L025 00
COAX	D405 00
03P02	L025 00
A	SPARE
B	SPARE
C	D405 00
D	D405 00
E	D397 00
F	D405 00
G	D405 00
H	SPARE
J	SPARE
K	SPARE
L	SPARE
03P03	L025 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D401 00
6	D401 00
7	D401 00
8	D398 00
9	D398 00
10	D398 00
11	D397 00
12	D397 00
13	D397 00
14	D397 00
15	D397 00
16	D405 00
17	SPARE
18	SPARE
19	SPARE
20	D401 00
21	D401 00
22	D401 00

A1-F18AC-WDM-000

15 April 1992

R011 00

REF DESIGNATION PIN DWG.

03P03	CONT
23	D401 00
24	D401 00
25	D401 00
26	D401 00
27	D401 00
28	D401 00
29	D401 00
30	D401 00
31	D401 00
32	D401 00
33	D401 00
34	D401 00
35	D401 00
36	D401 00
37	D398 00
03P04	L025 00
COAX	D405 00
04P01	L025 00
A	SPARE
B	SPARE
C	D397 00
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	D397 00
J	D397 00
K	D397 00
L	D397 00
M	D397 00
N	D397 00
P	D397 00
R	SPARE
S	SPARE
04P02	L025 00
COAX	D404 00
04P03	L025 00
1	SPARE
2	SPARE
3	SPARE
	4D396 00
5	D396 00
6	D400 00
7	D400 00
8	D400 00
9	D400 00
10	D404 00
11	D404 00
12	D404 00
13	D400 00
14	D400 00
15	D400 00

REF DESIGNATION PIN DWG.

04P03	CONT
16	D403 00
17	D404 00
18	D404 00
19	D403 00
20	D403 00
21	D403 00
22	D403 00
23	D403 00
24	D403 00
25	D403 00
26	D403 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	D396 00
33	D403 00
34	D400 00
35	D400 00
36	D404 00
37	D404 00
38	D404 00
39	D400 00
40	D400 00
41	D400 00
42	D404 00
43	D398 00
44	D403 00
45	D403 00
46	D403 00
47	D403 00
48	D403 00
49	D403 00
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	D404 00
56	D400 00
57	D400 00
58	D404 00
59	D404 00
60	D404 00
61	D404 00
62	SPARE
63	D403 00
64	D403 00
65	D403 00
66	D403 00
67	SPARE
68	D403 00
69	SPARE
70	SPARE
71	D400 00
72	SPARE
73	SPARE
74	D403 00
75	D403 00

REF DESIGNATION PIN DWG.

04P03	CONT
76	D403 00
77	D400 00
78	D400 00
79	D400 00
04P05	L025 00
COAX	D404 00
04P07	L025 00
1	D395 00
2	D395 00
3	D395 00
4	D395 00
5	D395 00
6	D395 00
7	D395 00
8	D404 00
9	D401 00
10	D401 00
11	D395 00
12	D395 00
13	D402 00
14	D399 00
15	D399 00
16	D404 00
17	D404 00
18	D399 00
19	D399 00
20	D395 00
21	D401 00
22	D399 00
23	D399 00
24	D399 00
25	D400 00
26	D400 00
27	D400 00
28	SPARE
29	D399 00
30	D399 00
31	D399 00
32	D399 00
33	D399 00
34	D399 00
35	D402 00
36	D400 00
37	D400 00
38	D400 00
39	D399 00
40	D399 00
41	D399 00
42	D399 00
43	D395 00
44	D395 00
45	D395 00
46	D402 00
47	D401 00
48	D401 00

A1-F18AC-WDM-000

15 April 1992

R012 00

REF DESIGNATION PIN DWG.

04P07	CONT
49	D401 00
50	D399 00
51	D399 00
52	D399 00
53	D395 00
54	D395 00
55	D395 00
56	D402 00
57	D402 00
58	D401 00
59	D401 00
60	D402 00
61	D402 00
62	D402 00
63	SPARE
64	D395 00
65	D395 00
66	D395 00
67	D402 00
68	D402 00
69	D402 00
70	D402 00
71	D402 00
72	D402 00
73	D402 00
74	D395 00
75	D395 00
76	D395 00
77	D402 00
78	D402 00
79	D402 00
80	D402 00
81	D402 00
82	D402 00
83	D395 00
84	D395 00
85	D395 00
86	D402 00
87	D402 00
88	D402 00
89	D402 00
90	D402 00
91	D402 00
92	D395 00
93	D395 00
94	D402 00
95	D402 00
96	D402 00
97	D402 00
98	D402 00
99	D402 00
100	D395 00

05P01	L027 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE

REF DESIGNATION PIN DWG.

05P01	CONT
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	D397 00
M	D397 00
N	D400 00
P	D400 00
R	D400 00
S	D405 00
T	D405 00
U	D405 00
V	D397 00
W	D397 00
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	D397 00
c	D405 00
d	SPARE
e	D397 00
f	D397 00

05P02	L027 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D400 00
18	D405 00
19	D397 00
20	D400 00
21	D405 00
22	D405 00
23	D406 00
24	D454 00
25	D405 00
26	D405 00
27	D405 00
28	D406 00
29	D454 00
30	D406 00
31	SPARE
32	SPARE
33	D406 00

REF DESIGNATION PIN DWG.

05P02	CONT
34	D406 00
35	D405 00
36	D405 00
37	D406 00
38	D406 00
39	D406 00
40	D406 00
41	D406 00
42	D406 00
43	D406 00
44	SPARE
45	D406 00
46	D406 00
47	D406 00
48	D406 00
49	D405 00
50	D405 00
51	D405 00
52	D405 00
53	D406 00
54	SPARE
55	D406 00
56	D406 00
57	D406 00
58	D406 00
59	D406 00
60	D405 00
61	D405 00
62	D405 00
63	D405 00
64	D405 00
65	D406 00
66	D454 00
67	D406 00
68	D406 00
69	D406 00
70	D406 00
71	SPARE
72	SPARE
73	D406 00
74	D454 00
75	D454 00
76	D454 00
77	D406 00
78	D406 00
79	D406 00
80	SPARE
81	SPARE
82	D454 00
83	D454 00
84	D454 00
85	D454 00
86	D454 00
87	D406 00
88	D406 00
89	D406 00
90	D406 00
91	D406 00
92	D406 00
93	D454 00

A1-F18AC-WDM-000

15 April 1992

R013 00

REF DESIGNATION PIN DWG.

05P02	CONT
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
05P03	L027 00
COAX	D404 00
05P04	L027 00
COAX	D404 00
05P05	L027 00
COAX	D404 00
05P06	L027 00
COAX	D405 00
07P01	L025 00
A	SPARE
B	SPARE
C	D405 00
D	D397 00
E	SPARE
F	SPARE
G	D405 00
H	D397 00
J	D397 00
K	D397 00
L	D397 00
M	D397 00
N	D397 00
P	D397 00
R	SPARE
S	SPARE
07P02	L025 00
A	D398 00
B	D398 00
C	D398 00
D	D403 00
E	D403 00
F	D403 00
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	D397 00
M	D403 00
N	D398 00
P	SPARE

REF DESIGNATION PIN DWG.

07P02	CONT
R	D397 00
S	D397 00
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	SPARE
c	D396 00
d	D396 00
e	D398 00
f	SPARE
g	SPARE
h	D398 00
k	D398 00
m	D397 00
n	D397 00
p	D398 00
q	SPARE
r	D398 00
s	D398 00
t	SPARE
u	D398 00
v	D396 00
w	D398 00
x	SPARE
07P05	L025 00
1	D402 00
2	D402 00
3	D402 00
4	SPARE
5	D396 00
6	D396 00
7	D396 00
8	SPARE
9	SPARE
10	SPARE
11	D396 00
12	D396 00
13	D396 00
14	D396 00
15	D401 00
16	D401 00
17	D401 00
18	D396 00
19	D399 00
20	SPARE
21	D396 00
22	D396 00
23	D399 00
24	D399 00
25	D401 00
26	D401 00
27	D401 00
28	D401 00

REF DESIGNATION PIN DWG.

07P05	CONT
29	SPARE
30	SPARE
31	D396 00
32	D396 00
33	D399 00
34	D399 00
35	D399 00
36	D401 00
37	D401 00
38	D401 00
39	D401 00
40	D401 00
41	D403 00
42	D396 00
43	D399 00
44	D399 00
45	D399 00
46	D399 00
47	D399 00
48	SPARE
49	SPARE
50	D401 00
51	D401 00
52	D401 00
53	SPARE
54	SPARE
55	SPARE
56	D403 00
57	D399 00
58	D399 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	D402 00
68	D402 00
69	D396 00
70	D399 00
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D402 00
80	D402 00
81	SPARE
82	D402 00
83	D402 00
84	D402 00
85	D402 00
86	D402 00
87	D402 00
88	D402 00

A1-F18AC-WDM-000

15 April 1992

R014 00

REF DESIGNATION PIN DWG.

07P05	CONT
89	SPARE
90	D403 00
91	D403 00
92	D403 00
93	D403 00
94	D402 00
95	D402 00
96	D402 00
97	D402 00
98	D402 00
99	D402 00
100	D403 00
101	D403 00
102	D403 00
103	D403 00
104	D403 00
105	D402 00
106	D402 00
107	D402 00
108	D402 00
109	D402 00
110	D403 00
111	D403 00
112	D403 00
113	D403 00
114	D403 00
115	SPARE
116	D402 00
117	D402 00
118	D402 00
119	D403 00
120	D403 00
121	D403 00
122	D402 00
123	D402 00
124	D402 00
125	D402 00
126	SPARE
127	SPARE
128	D403 00

07P06	L025 00
1	D406 00
2	D406 00
3	D406 00
4	D406 00
5	D406 00
6	D405 00
7	D405 00
8	D406 00
9	D406 00
10	D406 00
11	D406 00
12	D406 00
13	SPARE
14	D454 00
15	D454 00
16	SPARE

REF DESIGNATION PIN DWG.

07P06	CONT
17	D406 00
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D454 00
28	D406 00
29	D454 00
30	D454 00
31	D454 00
32	D454 00
33	D454 00
34	D454 00
35	D454 00
36	D454 00
37	D454 00
38	D406 00
39	D406 00
40	D406 00
41	D406 00
42	D406 00
43	D406 00
44	D405 00
45	D405 00
46	SPARE
47	D405 00
48	D405 00
49	D405 00
50	D406 00
51	D405 00
52	D406 00
53	D406 00
54	D406 00
55	D406 00
56	SPARE
57	SPARE
58	D406 00
59	D406 00
60	D406 00
61	D406 00
62	D405 00
63	D405 00
64	D405 00
65	D405 00
66	D405 00
67	D405 00
68	D406 00
69	D406 00
70	SPARE
71	SPARE
72	D406 00
73	SPARE
74	D406 00

REF DESIGNATION PIN DWG.

07P06	CONT
75	SPARE
76	D405 00
77	D406 00
78	SPARE
79	D405 00
1A-A019	L002 00
1A-A135	L002 00
NEG	D464 00
POS	D464 00
1A-A138	L002 00
1A-C005	L104 00
1A-C019	L102 00
1A-C023	L106 00
NEG	D140 00
POS	D140 00
1A-C072	L100 00
1A-D006	L202 00
1A-D024	L206 00
NEG	D351 00
POS	D351 00
1A-D035	L200 00
1A-D155	L202 00
1A-H004	L403 00
1A-J084	L408 00
1A-P001	L740 00
GND	D137 00
T1	D137 00
T2	D137 00
T3	D137 00
1A-R002	L744 00
GND	D138 00
T1	D138 00
T2	D138 00
T3	D138 00
1CRD124	L207 00
A1	D140 00

A1-F18AC-WDM-000

15 April 1992

R015 00

REF DESIGNATION PIN DWG.

1J-A153 L002 00

SEE 1P-A153

1J-C021 L115 00

A D147 00
B D147 00
C D147 00
E D148 00
F D149 00
N D147 00

1J-G089 L309 00

A D150 00
B D150 00
C SPARE
D D150 00
E D150 00
F D150 00
G D150 00

1K-C007 L104 00

A1 D137 00
A2 D144 00
A3 D147 00
B1 D137 00
B2 D144 00
B3 D147 00
C1 D137 00
C2 D144 00
C3 D147 00

1K-C022 L100 00

A1 D147 00
A2 D147 00
A3 D147 00
B1 D147 00
B2 D147 00
B3 D147 00
C1 D147 00
C2 D147 00
C3 D147 00

1K-C145 L100 00

A1 D147 00
A2 D145 00
B1 D147 00
B2 D145 00
C1 D147 00
C2 D147 00
C3 D147 00

1K-D008 L203 00

A1 D138 00

REF DESIGNATION PIN DWG.

1K-D008 CONT

A2 D145 00
A3 D146 00
B1 D138 00
B2 D145 00
B3 D146 00
C1 D138 00
C2 D145 00
C3 D146 00

1K-D146 L204 00

A1 D146 00
A2 D144 00
B1 D146 00
B2 D144 00
C1 D146 00
C2 D144 00

1M-J137 L408 00

1P-A019 L002 00

SEE 1P-C019

1P-A135 L002 00

A D142 00
B D142 00
C D142 00
D D142 00
E SPARE

1P-A138 L002 00

A SPARE
B D464 00
C D464 00
D D143 00
E D143 00
F D142 00
G D142 00
H D142 00
J D407 00
K D464 00
L D464 00

1P-A153 L002 00

A D464 00
B D464 00
C D464 00
D D464 00
E D464 00
F D464 00

1P-C005 L104 00

1 SPARE
2 D137 00

REF DESIGNATION PIN DWG.

1P-C005 CONT

3 D137 00
4 D137 00
5 D137 00
6 D137 00

1P-C007 L104 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 D150 00
9 D075 00
10 D152 00
11 D150 00
12 D103 00
13 D103 00
14 D146 00
15 D146 00
16 SPARE
17 SPARE
18 D137 00
19 D137 00
20 D137 00
21 D137 00
22 D146 00

1P-C019 L102 00

1 D147 00
2 D147 00
3 D147 00
4 D149 00
5 D149 00
6 D149 00
7 SPARE

1P-C022 L100 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 D148 00
9 D148 00
10 D146 00
11 D148 00
12 D153 00
13 D148 00
14 D148 00
15 D148 00
16 D148 00
17 D075 00

A1-F18AC-WDM-000

15 April 1992

R016 00

REF DESIGNATION PIN DWG.

1P-C022	CONT
18	D201 00
19	D105 00
20	D148 00
21	D148 00
22	D148 00
1P-C023	L106 00
A	D150 00
B	D150 00
C	D150 00
D	D150 00
E	SPARE
F	D150 00
G	SPARE
H	SPARE
1P-C072	L100 00
A	D142 00
B	D142 00
C	D142 00
D	D142 00
E	SPARE
F	SPARE
1P-C072A	L100 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	D143 00
H	SPARE
J	SPARE
K	D142 00
L	D143 00
M	D142 00
N	D142 00
P	D035 00
R	D407 00
S	D142 00
T	D153 00
U	D142 00
V	D142 00
W	D142 00
X	D142 00
Y	D142 00
Z	D142 00
1P-C072B	L100 00
A	D142 00
B	D142 00
C	SPARE
D	D142 00

REF DESIGNATION PIN DWG.

1P-C072B	CONT
E	SPARE
F	SPARE
1P-C145	L100 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D153 00
9	D080 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D300 00
21	D080 00
22	D080 00
1P-D006	L202 00
1	SPARE
2	D138 00
3	D138 00
4	D138 00
5	D138 00
6	D138 00
1P-D008	L203 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D335 00
9	D075 00
10	D152 00
11	D335 00
12	D106 00
13	D106 00
14	D146 00
15	D148 00
16	SPARE
17	SPARE
18	D138 00
19	D138 00

REF DESIGNATION PIN DWG.

1P-D008	CONT
20	D138 00
21	D138 00
22	D146 00
1P-D024	L206 00
A	D146 00
B	D146 00
C	D146 00
D	D146 00
E	D027 00
F	D027 00
G	SPARE
H	D027 00
1P-D035	L200 00
A	D143 00
B	D143 00
C	D143 00
D	D143 00
E	SPARE
F	SPARE
1P-D035A	L200 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	D143 00
J	SPARE
K	D407 00
L	D143 00
M	D407 00
N	D407 00
P	D035 00
R	D407 00
S	D143 00
T	D143 00
U	D152 00
V	D152 00
W	D122 00
X	D143 00
Y	D143 00
Z	D143 00
1P-D035B	L200 00
A	D143 00
B	D143 00
C	SPARE
D	D143 00
E	SPARE
F	SPARE

A1-F18AC-WDM-000

15 April 1992

R017 00

REF DESIGNATION PIN DWG.

1P-D146	L204 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D153 00
9	D080 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D300 00
21	D080 00
22	D080 00

1P-D155	L202 00
A	D462 00
B	D462 00
C	D185 00
D	D462 00
E	D462 00

1P-H004	L406 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D149 00
15	D149 00
16	SPARE
17	D153 00
18	D123 00
19	D123 00
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	D153 00
25	D149 00
26	D146 00

REF DESIGNATION PIN DWG.

1P-H004	CONT
27	D149 00
28	D149 00
29	D149 00
30	D149 00
31	D149 00
32	D149 00
33	D149 00
34	D149 00
35	D149 00
36	D149 00
37	D149 00

1P-J084	L411 00
1	SPARE
2	D462 00
3	D185 00
4	D185 00
5	D185 00
6	D185 00
7	D143 00
8	D143 00
9	D143 00
10	D085 00
11	D085 00
12	D413 00
13	D413 00
14	D142 00
15	D151 00
16	D407 00
17	D407 00
18	D143 00
19	D142 00
20	D142 00
21	D413 00
22	D413 00

1P-J137	L411 00
1	D142 00
2	D143 00
3	D143 00
4	D143 00
5	SPARE
6	D142 00

1P-P001	L742 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE

REF DESIGNATION PIN DWG.

1P-P001	CONT
12	SPARE
13	SPARE
14	SPARE
15	D137 00
16	D137 00
17	D139 00
18	D139 00
19	D137 00
20	D137 00
21	D137 00
22	D152 00
23	D152 00
24	D137 00
25	D137 00
26	D139 00
27	D413 00
28	D137 00
29	D137 00
30	D137 00
31	D139 00
32	D137 00
33	SPARE
34	D139 00
35	D413 00
36	D137 00
37	D139 00

1P-R002	L745 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D138 00
16	D138 00
17	D139 00
18	D139 00
19	D138 00
20	D138 00
21	D138 00
22	D152 00
23	D152 00
24	D138 00
25	D138 00
26	D139 00
27	D413 00
28	D138 00
29	D138 00
30	D138 00
31	D139 00

A1-F18AC-WDM-000

15 April 1992

R018 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
1P-R002	CONT	1X-D010	CONT	2J-P015	CONT
32	D138 00	B1	D145 00	h	D119 00
33	SPARE	B2	D147 00	j	D119 00
34	D139 00	B3	SPARE		
35	D413 00	C1	D145 00	2L-P011	L714 00
36	D138 00	C2	D147 00		
37	D139 00	C3	SPARE	2L-P012	L712 00
1S-G160	L101 00	1X-D026	L207 00	2P-M010A	L601 00
1	D462 00	A1	D140 00	1	SPARE
2	D462 00	A2	D351 00	2	SPARE
3	SPARE			3	SPARE
4	D462 00	1X-D108	L201 00	4	D349 00
5	D462 00			5	D458 00
6	D462 00	A1	D143 00	6	D349 00
		A2	D143 00	7	D458 00
				8	D121 00
1S-H141	L403 00	1X-E123	L108 00	9	D458 00
1	D413 00			10	SPARE
2	D413 00	A1	D140 00	11	D458 00
3	SPARE	A2	D140 00	12	SPARE
4	D075 00			13	SPARE
5	D075 00	2A-M010	L601 00	14	SPARE
6	D075 00			15	SPARE
7	D080 00	2A-N010	L612 00	16	SPARE
8	D080 00			17	SPARE
9	D080 00	2A-P015	L715 00	18	SPARE
10	D413 00			19	SPARE
11	D413 00	2J-P015	L712 00	20	SPARE
12	SPARE			21	SPARE
		A	D119 00	22	SPARE
1T-D046	L207 00	B	D117 00	23	SPARE
		C	D117 00	24	SPARE
GND	D150 00	D	D119 00	25	SPARE
HV	D150 00	E	D119 00	26	SPARE
LV	D150 00	F	D119 00	27	SPARE
		G	D119 00	28	D121 00
1X-C009	L100 00	H	D119 00	29	D121 00
		J	D119 00	30	D121 00
A1	D144 00	K	D119 00	31	D121 00
A2	D146 00	L	D119 00	32	D458 00
A3	SPARE	M	SPARE	33	D458 00
B1	D144 00	N	SPARE	34	D121 00
B2	D146 00	P	D119 00	35	D121 00
B3	SPARE	R	D458 00	36	D121 00
C1	D144 00	S	D119 00	37	SPARE
C2	D146 00	T	D117 00		
C3	SPARE	U	D119 00		
		V	D121 00		
		W	D119 00	2P-M010B	L601 00
1X-C107	L103 00	X	D119 00		
		Y	D119 00	1	SPARE
A1	D142 00	Z	D119 00	2	SPARE
A2	D142 00	a	D119 00	3	SPARE
		b	D119 00	4	D119 00
1X-D010	L202 00	c	D119 00	5	D119 00
		d	D121 00	6	D119 00
A1	D145 00	e	D119 00	7	D119 00
A2	D147 00	f	D119 00	8	D119 00
A3	SPARE	g	D119 00	9	D119 00

A1-F18AC-WDM-000

15 April 1992

R019 00

REF DESIGNATION
PIN DWG.

2P-M010B	CONT
10	D119 00
11	D119 00
12	D119 00
13	D119 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D119 00
21	D119 00
22	D119 00
23	D119 00
24	D119 00
25	D119 00
26	D119 00
27	D119 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	D119 00
35	D119 00
36	D119 00
37	D119 00

2P-N010A	L612 00
1	SPARE
2	SPARE
3	SPARE
4	D349 00
5	D458 00
6	D349 00
7	D458 00
8	D121 00
9	D458 00
10	SPARE
11	D458 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D121 00

REF DESIGNATION
PIN DWG.

2P-N010A	CONT
29	D121 00
30	D121 00
31	D121 00
32	D458 00
33	D458 00
34	D121 00
35	D121 00
36	D121 00
37	SPARE
2P-N010B	L612 00
1	SPARE
2	SPARE
3	SPARE
4	D119 00
5	D119 00
6	D119 00
7	D119 00
8	D119 00
9	D119 00
10	D119 00
11	D119 00
12	D119 00
13	D119 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D119 00
21	D119 00
22	D119 00
23	D119 00
24	D119 00
25	D119 00
26	D119 00
27	D119 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	D119 00
35	D119 00
36	D119 00
37	D119 00

2P-P011	L714 00
A	D458 00
B	D093 00
C	D093 00
D	D458 00
E	D458 00
F	SPARE

REF DESIGNATION
PIN DWG.

2P-P012	L712 00
1	D349 00
2	D349 00
3	D349 00
4	SPARE
5	D123 00
6	SPARE
2S-G002	L309 00
1	D353 00
2	D353 00
3	D353 00
2S-P023	L712 00
1	D349 00
2	D349 00
3	D349 00
3A-J085	L400 00
3A-M008	L600 00
3A-N008	L612 01
3B-M028	L600 00
3B-N033	L612 00
3G-P010	L743 00
3G-R011	L746 00
3J-M028	L600 00
1	D117 00
2	D117 00
3	D117 00
4	SPARE
5	D107 00
6	D107 00
7	D107 00
8	D107 00
9	SPARE
10	D117 00
11	D117 00
12	D117 00
13	D117 00
3J-N033	L612 00
1	D107 00
2	D107 00
3	D107 00
4	SPARE
5	D107 00
6	D107 00

A1-F18AC-WDM-000

Change 1 - 1 September 1992

R020 00

REF DESIGNATION
PIN DWG.

3J-N033	CONT
7	D107 00
8	D107 00
9	SPARE
10	D107 00
11	D107 00
12	D107 00
13	D107 00
3L-E079	L109 00
3L-P006	L743 00
3L-P095	L722 00
3L-R007	L746 00
3L-R096	L736 00
3MAP515	L743 00
3MAR516	L746 00
3M-H001	L400 00
3P-E079	L109 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D300 00
12	D300 00
13	D300 00
3P-H001	L401 00
1	SPARE
2	SPARE
3	SPARE
4	D171 00
5	D171 00
6	D112 00
7	D112 00
8	D099 00
9	D099 00
10	D112 00
11	D112 00
12	D171 00
13	D171 00
14	D171 00
15	D113 00
16	D113 00
17	D099 00

REF DESIGNATION
PIN DWG.

3P-H001	CONT
18	D099 00
19	D099 00
20	D171 00
21	D112 00
22	D099 00
23	SPARE
24	D113 00
25	D264 00
26	D264 00
27	SPARE
28	D112 00
29	D171 00
30	D113 00
31	SPARE
32	D099 00
33	D099 00
34	D264 00
35	D264 00
36	SPARE
37	D264 00
38	D099 00
39	D264 00
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D132 00
45	D132 00
46	D467 00
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	D348 00
59	D348 00
60	D348 00
61	SPARE
62	SPARE
63	D086 00
64	D467 00
65	D467 00
66	D086 00
3P-M008	L600 00
1	SPARE
2	D110 00
3	D110 00
4	D285 00
5	SPARE
6	D365 00
7	SPARE

REF DESIGNATION
PIN DWG.

3P-M008	CONT
8	D431 00
9	D109 00
10	D109 00
11	D431 00
12	D431 00
13	D109 00
3P-N008	L612 01
1	SPARE
2	D110 00
3	D110 00
4	D285 00
5	D117 00
6	D365 00
7	SPARE
8	D431 00
9	D109 00
10	D109 00
11	D431 00
12	D431 00
13	D109 00
3P-P006	L743 00
1	D108 00
2	SPARE
3	D108 00
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D360 00
10	SPARE
11	D002 00
12	SPARE
13	D108 00
3P-P010	L743 00
A	D109 00
B	D109 00
C	D109 00
3P-P055	L742 00
1	SPARE
2	D114 00
3	D114 00
4	SPARE
5	SPARE
6	SPARE
3P-P064	L743 00
A	D004 00
B	D004 00
C	SPARE

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
3P-P095	L722 00	4P-P009	L741 00	4P-R023	CONT
A	D108 00	A	D124 00	8	D331 00
B	D108 00	B	D126 00	9	D105 00
C	D108 00	C	D126 00	10	D128 00
		D	D127 00	11	SPARE
		E	SPARE	12	D128 00
3P-R007	L746 00	F	SPARE	13	D130 00
1	D368 00	4P-P010	L742 00	14	SPARE
2	SPARE			15	SPARE
3	D368 00	A	D125 00	16	SPARE
4	SPARE	B	D127 00	17	D354 00
5	SPARE	C	D127 00	18	D126 00
6	SPARE	D	D127 00	19	SPARE
7	SPARE	E	SPARE	20	SPARE
8	SPARE	F	SPARE	21	D126 00
9	D431 00			22	D126 00
10	SPARE	4P-P021	L715 00	23	SPARE
11	D165 00			24	SPARE
12	SPARE	A	D124 00	25	SPARE
13	D368 00	B	D331 00	26	SPARE
		C	D331 00	27	D126 00
3P-R011	L746 00	D	D354 00	28	D127 00
A	D110 00	E	SPARE	29	D127 00
B	D110 00	F	SPARE	30	D126 00
C	D110 00	4P-R015	L744 00	31	D127 00
				32	D354 00
		A	D124 00	33	D125 00
3P-R056	L745 00	B	D130 00	34	SPARE
1	SPARE	C	D130 00	35	D127 00
2	D106 00	D	D181 00	36	D341 00
3	D106 00	E	SPARE	37	D125 00
4	SPARE	F	SPARE	38	SPARE
5	SPARE	4P-R016	L744 00	39	D127 00
6	SPARE			40	D128 00
		A	D125 00	41	SPARE
3P-R065	L746 00	B	D128 00	42	D128 00
A	D347 00	C	D128 00	43	D116 00
B	D347 00	D	D181 00	44	D130 00
C	SPARE	E	SPARE	45	SPARE
		F	SPARE	46	D130 00
		4P-R022	L716 00	47	SPARE
3P-R096	L736 00			48	D130 00
A	D368 00	A	D125 00	49	D130 00
B	D368 00	B	D354 00	50	D181 00
C	D368 00	C	D128 00	51	D128 00
		D	D354 00	52	D128 00
		E	SPARE	53	D354 00
		F	SPARE	54	D354 00
3S-P055	L742 00			55	D105 00
		4P-R023	L739 00		
3S-P064	L743 00	1	SPARE	4P-S011	L813 00
		2	SPARE	A	D124 00
3S-R056	L745 00	3	SPARE	B	D126 00
		4	D331 00	C	D126 00
3S-R065	L746 00	5	D354 00	D	D126 00
		6	D128 00	E	SPARE
4A-R023	L739 00	7	D354 00	F	SPARE

A1-F18AC-WDM-000

15 April 1992

R022 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
4P-S013	L824 00	4P-T109C	CONT	5A-F028	CONT
A	D124 00	C	SPARE	2	D369 00
B	D125 00			3	D369 00
C	D125 00	4P-T109D	L817 00	5A-F029	L304 00
D	D341 00	1	SPARE		
E	SPARE	2	SPARE	1	D369 00
F	SPARE	3	D105 00	2	D369 00
4P-S014	L824 00	4	D105 00	3	D369 00
A	D125 00	5	SPARE		
B	D127 00	6	D105 00	5A-H013	L400 00
C	D127 00	4S-H026	L405 00	5A-H027	L403 00
D	D341 00	1	D354 00	5A-P111-P1	L742 00
E	SPARE	2	D354 00	5A-P111-T1	L742 00
F	SPARE	3	D354 00	5A-R030	L607 00
4P-T017	L813 00	4	D354 00	5A-R031	L608 00
A	D124 00	5	D354 00	5A-R032	L609 00
B	D128 00	6	D354 00	5A-R033	L610 00
C	D128 00	4SQT109	L817 00	5A-R034	L611 00
D	D130 00	4U-P009	L741 00	5A-R112	L745 00
E	SPARE	4U-P010	L742 00	SEE 5J-P111	
F	SPARE	4U-P021	L715 00	5A-R112-P1	L745 00
4P-T019	L824 00	4U-R015	L744 00	5A-S149	L809 00
A	D124 00	4U-R016	L744 00	EMI	D358 00
B	D128 00	4U-R022	L716 00	(P)GND	D358 00
C	D128 00	4U-S011	L813 00	(S)GND	D358 00
D	D116 00	4U-S013	L824 00	PWR	D358 00
E	SPARE	4U-S014	L824 00	STAT	D358 00
F	SPARE	4U-T017	L813 00	TEST	D358 00
4P-T020	L824 00	4U-T019	L824 00	5A-T150	L809 00
A	D125 00	4U-T020	L824 00	EMI	D358 00
B	D130 00	5A-B019	L004 00	(P)GND	D358 00
C	D130 00	5A-E053	L303 00	(S)GND	D358 00
D	D116 00	5A-F014	L214 00	PWR	D358 00
E	SPARE	5A-F028	L300 00	STAT	D358 00
F	SPARE	1	D369 00	TEST	D358 00
4P-T109A	L817 00			5A-U037	L904 00
A	D355 00			1	D161 00
B	D355 00			2	D161 00
C	SPARE			3	D161 00
4P-T109B	L817 00				
A	D355 00				
B	D355 00				
C	SPARE				
4P-T109C	L817 00				
A	D130 00				
B	D130 00				

A1-F18AC-WDM-000

15 April 1992

R023 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
5A-U038	L903 00	5J-G024	CONT	5J-P137	L607 00
1	D161 00	9	SPARE	SEE 5P-P137	
2	D161 00	10	D362 00		
3	D161 00	11	D362 00	5J-P145	L712 00
		12	D362 00	SEE 5P-P145	
5A-U039	L902 00	13	D362 00		
		14	D362 00	5J-R112	L745 00
1	D161 00	15	D362 00	A	D179 00
2	D161 00	16	D362 00	B	D179 00
3	D161 00	17	D362 00	C	SPARE
5A-V041	L954 00	18	D362 00		
		19	D362 00	5J-R120	L609 00
1	D161 00	20	D362 00	SEE 5P-R120	
2	D161 00	21	D362 00		
3	D161 00	22	D362 00	5J-R135	L739 00
		23	D362 00		
5A-V042	L953 00	24	D165 00	1	SPARE
		25	D165 00	2	SPARE
1	D161 00	26	D362 00	3	SPARE
2	D161 00	27	D362 00	4	SPARE
3	D161 00	28	D362 00	5	SPARE
		29	D362 00	6	D096 00
5A-V043	L952 00	30	D362 00	7	D096 00
		31	D362 00	8	D158 00
1	D161 00	32	D362 00	9	D158 00
2	D161 00	33	D362 00	10	SPARE
3	D161 00	34	D362 00	11	D129 00
		35	D362 00	12	D129 00
5B-P069	L611 00	36	D362 00	13	D096 00
		37	D362 00	14	D096 00
5B-P071	L741 00	38	D362 00	15	D096 00
		39	D416 00	16	D096 00
5B-P072	L721 00	40	D429 00	17	SPARE
		41	D362 00	18	D129 00
5B-R070	L733 00	42	D362 00	19	D129 00
		43	D362 00	20	D129 00
5DSB008	L007 00	44	D362 00	21	D096 00
		45	D362 00	22	D096 00
BLU	D166 00	46	D362 00	23	D096 00
WHT/BLU	D166 00	47	D362 00	24	D096 00
		48	D362 00	25	SPARE
5HPB006	L006 00	49	D362 00	26	D001 00
		50	D362 00	27	D001 00
5J-E035	L300 00	51	D362 00	28	D001 00
SEE 5P-E035		52	D362 00	29	D001 00
		53	D362 00	30	D001 00
		54	D362 00	31	D001 00
		55	D362 00	32	SPARE
5J-G024	L115 00	5J-P111	L742 00	33	D129 00
				34	D001 00
1	D362 00	A	D179 00	35	D001 00
2	D370 00	B	D179 00	36	D001 00
3	D429 00	C	SPARE	37	D129 00
4	D159 00			38	D001 00
5	D362 00	5J-P136	L608 00	39	D001 00
6	D362 00	SEE 5P-P136		40	SPARE
7	D362 00				
8	D362 00				

A1-F18AC-WDM-000

15 April 1992

R024 00

REF DESIGNATION PIN DWG.

5J-R135	CONT
41	SPARE
42	SPARE
43	D001 00
44	D001 00
45	D129 00
46	D129 00
47	SPARE
48	SPARE
49	D001 00
50	D001 00
51	D129 00
52	D129 00
53	D394 00
54	D342 00
55	D342 00
5J-R144	L713 00
SEE 5P-R144	
5J-U036	L902 00
SEE 5P-M036	
5J-V040	L952 00
SEE 5P-N040	
5L-B007	L007 00
5L-D009	L217 00
5L-E171	L300 00
Y/WHT	D155 00
Y/BLK	D155 00
Y/RED	D155 00
5L-F116	L314 00
5L-F160	L300 00
POS	D429 00
NEG	D429 00
CASE	D429 00
5L-P102	L710 00
5L-P119	L609 00
A	D336 00
B	D336 00
C	D336 00
5L-R110	L609 00
A	D342 00
B	D342 00
C	D342 00

REF DESIGNATION PIN DWG.

5L-R118	L609 00
A	D336 00
B	D336 00
C	D336 00
5L-R167	L609 00
YEL/RED	D370 00
YEL/WHT	D193 00
YEL/BLK	D193 00
5MTF140	L219 00
	L317 00
EXC NEG	D129 00
EXC POS	D129 00
OUT NEG	D129 00
OUT POS	D129 00
5MTP126	L602 00
EXC NEG	D001 00
EXC POS	D001 00
OUT NEG	D001 00
OUT POS	D001 00
5MTP127	L725 00
EXC NEG	D129 00
EXC POS	D129 00
OUT NEG	D129 00
OUT POS	D129 00
5MTR125	L615 00
EXC NEG	D001 00
EXC POS	D001 00
OUT NEG	D001 00
OUT POS	D001 00
5MTR128	L736 00
EXC NEG	D001 00
EXC POS	D001 00
OUT NEG	D001 00
OUT POS	D001 00
5MTR130	L710 00
	L711 00
EXC NEG	D096 00
EXC POS	D096 00
OUT NEG	D096 00
OUT POS	D096 00

REF DESIGNATION PIN DWG.

5MTT129	L813 00
EXC NEG	D096 00
EXC POS	D096 00
OUT NEG	D096 00
OUT POS	D096 00
5P-B006	L006 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D092 00
10	D092 00
11	D168 00
12	D092 00
13	SPARE
5P-B007	L007 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D159 00
G	SPARE
H	D092 00
J	D092 00
K	D092 00
5P-B019	L004 00
1	D155 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D098 00
7	D098 00
8	D098 00
9	D098 00
10	D098 00
11	D155 00
12	D155 00
13	D334 00
5P-D009	L217 00
1	D089 00
2	SPARE
3	D098 00
4	SPARE
5	SPARE
6	D089 00

A1-F18AC-WDM-000

15 April 1992

R025 00

REF DESIGNATION PIN DWG.

5P-E035	L300 00
1	SPARE
2	SPARE
3	D155 00
4	D155 00
5	D155 00
6	D155 00
7	D155 00
8	SPARE
9	SPARE
10	SPARE
11	D429 00
12	D429 00
13	D429 00

5P-E053	L303 00
1	D157 00
2	D157 00
3	D157 00
4	D157 00
5	D157 00
6	D157 00
7	D157 00
8	D157 00
9	D157 00
10	D462 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE

5P-F014A	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D160 00
14	D160 00
15	D160 00
16	D160 00
17	D160 00
18	D160 00

REF DESIGNATION PIN DWG.

5P-F014A	CONT
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D154 00
24	D154 00
25	D154 00
26	D154 00
27	D154 00
28	D154 00
29	D359 00
30	D359 00
31	D359 00
32	D161 00
33	D161 00
34	D161 00
35	D161 00
36	D161 00
37	D161 00
38	D156 00
39	D156 00
40	D156 00
41	SPARE
42	SPARE
43	SPARE
44	D156 00
45	D156 00
46	D156 00
47	SPARE
48	SPARE
49	SPARE
50	D156 00
51	D156 00
52	D156 00
53	D369 00
54	D369 00
55	D369 00

5P-F014B	L214 00
1	D160 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D160 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE

REF DESIGNATION PIN DWG.

5P-F014B	CONT
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D370 00
26	D362 00
27	D362 00
28	D362 00
29	D362 00
30	D362 00
31	D362 00
32	D362 00
33	D362 00
34	D362 00
35	D154 00
36	D416 00
37	D154 00
38	D160 00
39	D160 00
40	D160 00
41	D160 00
42	D362 00
43	D362 00
44	D362 00
45	D362 00
46	D362 00
47	D362 00
48	D362 00
49	D362 00
50	D362 00
51	D362 00
52	D362 00
53	D362 00
54	D362 00
55	D362 00

5P-F029	L304 00
1	D369 00
2	D369 00
3	D369 00
4	D369 00
5	D369 00
6	D369 00

5P-F035	L300 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D369 00
12	D369 00
13	D369 00

A1-F18AC-WDM-000

15 April 1992

R026 00

REF DESIGNATION PIN DWG.

5P-F116 L314 00
A D342 00
B D342 00
C SPARE
D SPARE
E SPARE
F D342 00

5P-G024 L310 00

SEE 5J-G024

5P-H013 L401 00
1 D165 00
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 D165 00
25 D165 00
26 D362 00
27 D362 00
28 D362 00
29 D362 00
30 D362 00
31 D362 00
32 D362 00
33 D362 00
34 D362 00
35 D086 00
36 D086 00
37 SPARE
38 SPARE
39 SPARE
40 SPARE
41 SPARE
42 D362 00
43 D362 00
44 D362 00
45 D362 00

REF DESIGNATION PIN DWG.

5P-H013 CONT
46 D362 00
47 D362 00
48 D362 00
49 D362 00
50 D362 00
51 D362 00
52 D362 00
53 D362 00
54 D362 00
55 D362 00

5P-H027 L406 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 D084 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 D394 00
18 D180 00
19 D342 00
20 D165 00
21 D342 00
22 D464 00
23 D464 00
24 D165 00
25 D180 00
26 D394 00
27 D084 00
28 SPARE
29 D180 00
30 D159 00
31 D168 00
32 D158 00
33 D464 00
34 D464 00
35 D089 00
36 D342 00
37 D334 00

5P-M036 L601 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 D161 00
6 D161 00
7 D161 00

REF DESIGNATION PIN DWG.

5P-M036 CONT
8 D161 00
9 D161 00
10 D161 00
11 D161 00
12 D161 00
13 D161 00

5P-N040 L614 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 D161 00
6 D161 00
7 D161 00
8 D161 00
9 D161 00
10 D161 00
11 D161 00
12 D161 00
13 D161 00

5P-P069 L611 00

1 SPARE
2 SPARE
3 D342 00
4 SPARE
5 D342 00
6 SPARE
7 D342 00
8 D180 00
9 SPARE
10 SPARE
11 SPARE
12 D342 00
13 D342 00

5P-P071 L741 00

1 SPARE
2 SPARE
3 D357 00
4 SPARE
5 SPARE
6 SPARE
7 D162 00
8 SPARE
9 SPARE
10 D162 00
11 D162 00
12 D357 00
13 SPARE

5P-P072 L721 00

1 SPARE
2 SPARE

A1-F18AC-WDM-000

15 April 1992

R027 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
5P-P072	CONT	5P-P137	CONT	5P-R031	L608 00
3	D370 00	12	SPARE	1	SPARE
4	SPARE	13	SPARE	2	SPARE
5	SPARE			3	SPARE
6	SPARE	5P-P145	L722 00	4	SPARE
7	D370 00	1	SPARE	5	SPARE
8	SPARE	2	SPARE	6	SPARE
9	D342 00	3	SPARE	7	SPARE
10	SPARE	4	SPARE	8	D157 00
11	D342 00	5	SPARE	9	SPARE
12	D342 00	6	SPARE	10	D157 00
13	SPARE	7	SPARE	11	D156 00
5P-P102	L710 00	8	SPARE	12	D156 00
1	D158 00	9	SPARE	13	D156 00
2	D158 00	10	SPARE		
3	SPARE	11	SPARE	5P-R032	L609 00
4	SPARE	12	SPARE	1	SPARE
5	SPARE	13	SPARE	2	SPARE
6	D158 00	14	SPARE	3	SPARE
5P-P113	L742 00	15	SPARE	4	D156 00
A	D179 00	16	SPARE	5	D156 00
B	D179 00	17	SPARE	6	D156 00
C	SPARE	18	D342 00		
D	SPARE	19	D370 00	5P-R033	L610 00
E	SPARE	20	D342 00	1	SPARE
F	SPARE	21	D370 00	2	SPARE
5P-P136	L608 00	22	D342 00	3	SPARE
1	SPARE	5P-P151	L726 00	4	D156 00
2	SPARE	A	D345 00	5	D156 00
3	SPARE	B	SPARE	6	D156 00
4	SPARE	C	D345 00		
5	D098 00	D	SPARE	5P-R034	L611 00
6	D098 00	E	SPARE	1	SPARE
7	SPARE	5P-P152	L726 00	2	SPARE
8	SPARE	A	D345 00	3	SPARE
9	SPARE	B	SPARE	4	D156 00
10	SPARE	C	D345 00	5	D156 00
11	SPARE	D	SPARE	6	D156 00
12	SPARE	E	SPARE		
13	SPARE	5P-R030	L607 00	5P-R070	L733 00
5P-P137	L607 00	1	SPARE	1	SPARE
1	SPARE	2	SPARE	2	SPARE
2	SPARE	3	SPARE	3	D180 00
3	SPARE	4	SPARE	4	SPARE
4	SPARE	5	SPARE	5	SPARE
5	D098 00	6	SPARE	6	SPARE
6	D098 00	7	SPARE	7	D162 00
7	SPARE	8	D157 00	8	SPARE
8	SPARE	9	SPARE	9	D162 00
9	SPARE	10	D157 00	10	SPARE
10	SPARE	11	D156 00	11	D162 00
11	SPARE	12	D156 00	12	D162 00
		13	D156 00	13	SPARE

A1-F18AC-WDM-000

15 April 1992

R028 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
5P-R114	L745 00	5P-T106	L806 01	7DSB017	L003 00
A	D179 00	A	D268 00	BLK	D226 00
B	D179 00	B	D268 00	WHT	D226 00
C	SPARE	C	SPARE	7DSG026	L305 00
D	SPARE	D	SPARE	7DSM007	L119 00
E	SPARE	E	SPARE	GND	D356 00
F	SPARE	F	D268 00	HV	D356 00
5P-R120	L609 00	5S-B010	L006 00	7DSN008	L221 00
1	SPARE	BLU	D159 00	GND	D356 00
2	D193 00	BRN	D159 00	HV	D356 00
3	D193 00	GRN	D159 00	7DSS023	L832 00
4	D370 00	ORN	D159 00	BLK	D226 00
5	D336 00	RED	D159 00	WHT	D226 00
6	D336 00	YEL	D159 00	7DSS030	L811 00
7	D336 00	5S-E172	L300 00	BLK	D226 00
8	D336 00	IN	D155 00	WHT	D226 00
9	D336 00	GND	D155 00	7DSS037	L833 00
10	D336 00	5S-P113	L742 00	7DST009	L829 00
11	D342 00	5S-P151	L726 00	7DST025	L828 00
12	D342 00	5S-P152	L726 00	BLK	D226 00
13	D342 00	5S-R114	L745 00	WHT	D226 00
5P-R144	L734 00	5S-R131	L608 00	7DSS037	L833 00
1	SPARE	GND	D098 00	7DST009	L829 00
2	SPARE	IN	D098 00	7DST025	L828 00
3	SPARE	5S-R132	L607 00	BLK	D226 00
4	SPARE	GND	D098 00	WHT	D226 00
5	SPARE	IN	D098 00	7DST031	L815 00
6	SPARE	5S-T106	L806 01	BLK	D226 00
7	SPARE	5TCP111	L742 00	WHT	D226 00
8	SPARE	5TCR112	L745 00	7DST038	L829 00
9	SPARE	5T-B012	L003 00	7DSU011	L911 00
10	SPARE	GND	D166 00	GND	D356 00
11	SPARE	HV	D166 00	HV	D356 00
12	SPARE	LV	D166 00	7DSU019	L911 00
13	SPARE	7A-L032	L500 01	1A	D227 00
14	SPARE	7A-S036	L808 00	1B	SPARE
15	SPARE	7A-S048	L811 00	2A	D227 00
16	SPARE	7DSA015	L001 00		
17	SPARE	BLK	D226 00		
18	D162 00	WHT	D226 00		
19	D162 00				
20	D162 00				
21	D180 00				
22	D162 00				
5P-T104	L806 00				
1	D166 00				
2	D166 00				
3	D166 00				
4	D166 00				
5	SPARE				
6	D166 00				

A1-F18AC-WDM-000

15 April 1992

R029 00

7REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
7DSU019	CONT	7FLT045	L827 00	7P-L032	CONT
2B	SPARE			20	SPARE
		LOAD	D226 00	21	SPARE
7DSU042	L912 00	1	D226 00	22	SPARE
				23	D133 00
7DSU049	L911 00	7FLT047	L806 00	24	SPARE
				25	D226 00
1B	D227 00	LOAD	D226 00	26	D133 00
2B	D227 00	1	D226 00	27	D133 00
				28	D133 00
7DSV010	L961 00	7FLU053	L910 00	29	D133 00
				30	D133 00
GND	D356 00	LOAD	D227 00	31	SPARE
HV	D356 00	1	D227 00	32	D356 00
				33	D133 00
7DSV021	L961 00	7FLV054	L960 00	34	D133 00
				35	D133 00
1A	SPARE	LOAD	D227 00	36	D133 00
1B	D227 00	1	D227 00	37	D133 00
2A	SPARE				
2B	D227 00	7J-U042	L912 00	7P-S036A	L808 00
7DSV043	L962 00	A	D356 00	1	SPARE
		B	SPARE	2	SPARE
7DSV050	L961 00	C	D356 00	3	SPARE
				4	D134 00
1A	D227 00	7J-V043	L962 00	5	D134 00
2A	D227 00			6	D134 00
		A	D356 00	7	D350 00
7E-A014	L001 00	B	SPARE	8	D134 00
		C	D356 00	9	D134 00
				10	D134 00
PWR	D226 00	7P-G026	L305 00	11	D134 00
TERM	D226 00			12	SPARE
		A	D133 00	13	SPARE
7E-B016	L003 00	B	SPARE	14	SPARE
		C	D133 00	15	D134 00
				16	D134 00
PWR	D226 00	7P-L032	L500 01	17	D134 00
TERM	D226 00			18	D134 00
				19	SPARE
7E-U018	L911 00	1	SPARE	20	SPARE
		2	SPARE	21	SPARE
PWR	D227 00	3	SPARE	22	SPARE
TERM	D227 00	4	SPARE	23	SPARE
		5	SPARE	24	SPARE
7E-V020	L961 00	6	SPARE	25	SPARE
		7	SPARE	26	D134 00
		8	SPARE	27	SPARE
PWR	D227 00	9	SPARE	28	SPARE
TERM	D227 00	10	SPARE	29	SPARE
		11	SPARE	30	SPARE
7FLS044	L831 00	12	SPARE	31	SPARE
		13	SPARE	32	SPARE
LOAD	D226 00	14	SPARE	33	SPARE
1	D226 00	15	SPARE	34	SPARE
		16	SPARE	35	SPARE
7FLS046	L808 00	17	SPARE	36	SPARE
		18	SPARE	37	SPARE
		19	SPARE		
LOAD	D226 00				
1	D226 00				

A1-F18AC-WDM-000

15 April 1992

R030 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
7P-S036B	L808 00	7P-T038	L829 00	8DSH143	L413 00
A	SPARE	A	SPARE	WHT/BLU	D081 00
B	D134 00	B	D134 00	WHT	D081 00
C	SPARE	C	SPARE	8DSH158	L401 00
D	SPARE	D	SPARE	PWR	D350 00
E	D134 00	E	D134 00	8DSJ017	L408 00
H	SPARE	F	SPARE	PWR	D085 00
J	SPARE	G	SPARE	8DSJ019	L411 00
K	D134 00	H	SPARE	PWR	D085 00
L	D134 00	J	SPARE	8DSJ025	L408 00
M	D134 00	K	D134 00	PWR	D087 00
7P-S036C	L808 00	L	D134 00	8DSJ028	L411 00
A	SPARE	M	D134 00	PWR	D081 00
B	D134 00	7T-T039	L806 00	GND	D081 00
C	SPARE	GND	D185 00	8DSJ054	L411 00
D	SPARE	HV	D356 00	PWR	D082 00
E	D134 00	LV	D185 00	8DSJ055	L402 00
F	SPARE	8A-J002	L408 00	PWR	D082 00
G	SPARE	8A-J042	L408 00	8DSJ066	L411 00
H	SPARE	8A-L001	L502 00	PWR	D085 00
J	SPARE	8A-L080	L415 00	8DSJ092	L408 00
K	D134 00	8DSH029	L406 00	PWR	D088 00
L	D134 00	PWR	D081 00	8DSJ128	L410 00
M	D134 00	GND	D081 00	PWR	D142 00
7P-S037	L833 00	8DSH030	L407 00	8DSJ150	L413 00
A	SPARE	PWR	D081 00	BLK	D409 00
B	D134 00	GND	D081 00	BLU	D409 00
C	SPARE	8DSH031	L406 00	GRN	D409 00
D	SPARE	PWR	D081 00	ORN	D409 00
E	D134 00	GND	D081 00	RED	D409 00
F	SPARE	8DS8031	L406 00	WHT	D409 00
G	SPARE	PWR	D081 00	BRN	D409 00
H	SPARE	GND	D081 00	YEL	D409 00
J	SPARE	8DSH056	L405 00	GND	D409 00
K	D134 00	PWR	D084 00		
L	D134 00	8DSH062	L405 00		
M	D134 00	PWR	D084 00		
7P-S048	L811 00	8DSH063	L406 00		
1	D134 00	PWR	D084 00		
2	D134 00	8DSH066	L405 00		
3	D134 00	PWR	D081 00		
4	D134 00	GND	D081 00		
5	D134 00	8DSH067	L405 00		
6	SPARE	PWR	D084 00		
7P-T009	L829 00	8DSH068	L405 00		
A	D185 00	PWR	D084 00		
B	D185 00	8DSH069	L405 00		
C	D185 00	PWR	D084 00		
D	SPARE	8DSH070	L405 00		

A1-F18AC-WDM-000

Change 1 - 1 September 1992

R031 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
8DSJ165	L411 00	8P-J002	CONT	8P-J042	CONT
PWR	D142 00	20	D081 00	27	SPARE
		21	D081 00	28	SPARE
8FLH096	L406 00	22	D081 00	29	SPARE
LINE	D081 00	23	D081 00	30	D335 00
LOAD	D081 00	24	D081 00	31	D143 00
		25	D081 00	32	D092 00
8FLH161	L405 00	26	D081 00	33	D467 00
LINE	D081 00	27	D081 00	34	D091 00
LOAD	D081 00	28	D081 00	35	SPARE
		29	D081 00	36	SPARE
8FLJ095	L411 00	30	D082 00	37	SPARE
LINE	D082 00	31	D081 00	38	SPARE
LOAD	D082 00	32	D081 00	39	D467 00
		33	D082 00	40	D357 00
8FLJ164	L411 00	34	D081 00	41	D335 00
LINE	D142 00	35	D082 00	42	SPARE
LOAD	D142 00	36	D080 00	43	SPARE
8M-H052	L403 00	37	D080 00	44	SPARE
				45	D150 00
8M-J020	L400 00	8P-J020	L402 00	46	D467 00
				47	D467 00
8M-J021	L400 00	1	D087 00	48	D150 00
		2	SPARE	49	D309 00
8P-H052	L405 00	3	D087 00	50	D090 00
				51	SPARE
		8P-J021	L402 00	52	D467 00
				53	D467 00
		1	D087 00	54	D467 00
		2	D087 00	55	D467 00
		3	SPARE		
				8P-L001A	L502 00
		8P-J042	L410 00		
				1	SPARE
		1	SPARE	2	SPARE
		2	SPARE	3	D467 00
		3	SPARE	4	D083 00
		4	D091 00	5	D083 00
		5	SPARE	6	SPARE
		6	D467 00	7	SPARE
		7	D467 00	8	SPARE
		8	D467 00	9	SPARE
		9	D090 00	10	SPARE
		10	D467 00	11	D092 00
		11	D335 00	12	SPARE
		12	SPARE	13	SPARE
		13	SPARE	14	D083 00
		14	SPARE	15	SPARE
		15	D153 00	16	SPARE
		16	SPARE	17	D467 00
		17	SPARE	18	SPARE
		18	D027 00	19	D083 00
		19	SPARE	20	D083 00
		20	SPARE	21	D083 00
		21	SPARE	22	D083 00
		22	SPARE	23	SPARE
		23	SPARE	24	SPARE
		24	D467 00	25	SPARE
		25	SPARE	26	SPARE
		26	SPARE	27	SPARE
8P-J002	L411 00				
1	SPARE				
2	SPARE				
3	SPARE				
4	SPARE				
5	SPARE				
6	SPARE				
7	SPARE				
8	D409 00				
9	D082 00				
10	D082 00				
11	D082 00				
12	D082 00				
13	D085 00				
14	D081 00				
15	D081 00				
16	D081 00				
17	D081 00				
18	D081 00				
19	D082 00				

A1-F18AC-WDM-000

15 April 1992

R032 00

REF DESIGNATION PIN DWG.

8P-L001A	CONT
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
8P-L001B	L502 00
1	D082 00
2	SPARE
3	SPARE
4	D084 00
5	SPARE
6	SPARE
7	D083 00
8	SPARE
9	SPARE
10	D085 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D085 00
22	D081 00
23	D081 00
24	SPARE
25	SPARE
26	D085 00
27	D085 00
28	SPARE
29	D086 00

REF DESIGNATION PIN DWG.

8P-L001B	CONT
30	D086 00
31	D086 00
32	D085 00
33	D086 00
34	D081 00
35	SPARE
36	D088 00
37	D088 00
38	D091 00
39	SPARE
40	D085 00
41	D091 00
42	D086 00
43	D091 00
44	D087 00
45	SPARE
46	SPARE
47	D081 00
48	SPARE
49	SPARE
50	D087 00
51	D087 00
52	D087 00
53	D087 00
54	D086 00
55	D085 00
56	SPARE
57	D086 00
58	SPARE
59	SPARE
60	D085 00
61	D087 00
62	D087 00
63	SPARE
64	D087 00
65	D083 00
66	SPARE
67	D158 00
68	D084 00
69	D086 00
70	D085 00
71	D082 00
72	D084 00
73	D084 00
74	SPARE
75	D083 00
76	D083 00
77	D084 00
78	D084 00
79	D084 00
80	SPARE
81	SPARE
82	SPARE
83	D086 00
84	D086 00
85	SPARE
86	SPARE
87	D083 00
88	D085 00
89	SPARE

REF DESIGNATION PIN DWG.

8P-L001B	CONT
90	SPARE
91	D085 00
92	SPARE
93	D088 00
94	D088 00
95	D085 00
96	D085 00
97	D085 00
98	D085 00
99	SPARE
100	D084 00
101	D088 00
102	SPARE
103	D081 00
104	D081 00
105	SPARE
106	D084 00
107	D085 00
108	SPARE
109	D087 00
110	D084 00
111	D081 00
112	D081 00
113	D084 00
114	D081 00
115	SPARE
116	D081 00
117	D081 00
118	D082 00
119	D082 00
120	D081 00
121	D081 00
122	SPARE
123	SPARE
124	SPARE
125	D083 00
126	SPARE
127	D081 00
128	D081 00
8P-L080	L415 00
1	D409 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D082 00
8	D082 00
9	D082 00
10	D409 00
11	SPARE
12	D409 00
13	D409 00
8P-L080A	L415 00
1	D409 00
2	SPARE

A1-F18AC-WDM-000

15 April 1992

R033 00

REF DESIGNATION PIN DWG.

8P-L080A	CONT
3	SPARE
4	SPARE
5	SPARE
6	D409 00
7	D409 00
8	D409 00
9	D409 00
10	D409 00
11	SPARE
12	D409 00
13	D409 00

8P-L080B	L415 00
1	D409 00
2	SPARE
3	D082 00
4	SPARE
5	D409 00
6	SPARE
7	D409 00
8	SPARE
9	SPARE
10	D082 00
11	D082 00
12	SPARE
13	SPARE

9A-P005	L605 00
---------	---------

9P-P005	L605 00
1	SPARE
2	SPARE
3	D118 00
4	D118 00
5	D118 00
6	SPARE
7	SPARE
8	D118 00
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D118 00
16	D118 00
17	D118 00
18	D118 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE

REF DESIGNATION PIN DWG.

9P-P005	CONT
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	D118 00
33	D132 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE

10HPG009	L311 00
----------	---------

10HPP003	L606 00
----------	---------

10HPP006	L606 00
----------	---------

10HPP008	L714 00
----------	---------

10HPR004	L619 00
----------	---------

10HPR007	L619 00
----------	---------

10L-F015	L316 00
----------	---------

10L-G017	L312 00
----------	---------

10L-R012	L617 00
----------	---------

10M-J005	L408 00
----------	---------

10M-P010	L605 00
----------	---------

10M-R011	L618 00
----------	---------

10P-F015	L316 00
----------	---------

A	D169 00
---	---------

B	D169 00
---	---------

C	D169 00
---	---------

10P-G009	L311 00
----------	---------

1	SPARE
---	-------

2	SPARE
---	-------

3	SPARE
---	-------

4	SPARE
---	-------

5	SPARE
---	-------

6	SPARE
---	-------

7	D001 00
---	---------

8	SPARE
---	-------

9	SPARE
---	-------

10	SPARE
----	-------

11	D001 00
----	---------

12	SPARE
----	-------

13	SPARE
----	-------

REF DESIGNATION PIN DWG.

10P-G017	L312 00
----------	---------

1	D093 00
---	---------

2	SPARE
---	-------

3	D093 00
---	---------

4	SPARE
---	-------

5	SPARE
---	-------

6	SPARE
---	-------

10P-J005	L410 00
----------	---------

1	SPARE
---	-------

2	SPARE
---	-------

3	SPARE
---	-------

4	SPARE
---	-------

5	SPARE
---	-------

6	SPARE
---	-------

7	SPARE
---	-------

8	SPARE
---	-------

9	SPARE
---	-------

10	D091 00
----	---------

11	D091 00
----	---------

12	D115 00
----	---------

13	D115 00
----	---------

14	D115 00
----	---------

15	D115 00
----	---------

16	D115 00
----	---------

17	D115 00
----	---------

18	D115 00
----	---------

19	D115 00
----	---------

20	D115 00
----	---------

21	D115 00
----	---------

22	D115 00
----	---------

10P-P003	L606 00
----------	---------

A	D115 00
---	---------

B	D115 00
---	---------

C	D115 00
---	---------

D	D115 00
---	---------

10P-P006A	L606 00
-----------	---------

A	D102 00
---	---------

B	D102 00
---	---------

C	SPARE
---	-------

D	D102 00
---	---------

E	SPARE
---	-------

F	SPARE
---	-------

10P-P006B	L606 00
-----------	---------

A	D102 00
---	---------

B	D102 00
---	---------

C	SPARE
---	-------

D	D102 00
---	---------

E	SPARE
---	-------

F	SPARE
---	-------

A1-F18AC-WDM-000

15 April 1992

R034 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
10P-P008	L714 00	10S-P006B	L606 00	12P-D004A	CONT
A	D335 00	10S-R007A	L619 00	14	SPARE
B	D093 00	10S-R007B	L619 00	15	SPARE
C	D093 00	12A-A004	L002 00	16	SPARE
D	D093 00	12A-D004	L204 00	17	D254 00
E	SPARE	12A-H008	L403 00	18	D455 00
F	SPARE	12CBH003	L406 00	19	D254 00
10P-P010	L605 00	LINE	D140 00	20	D169 00
A	D094 00	LOAD	D465 00	21	D245 00
B	D094 00	12CBJ001	L411 00	22	D169 00
C	SPARE	LINE	D351 00	23	SPARE
D	SPARE	LOAD	D465 00	24	SPARE
E	SPARE	12J-G029	L316 00	25	SPARE
F	SPARE	SEE 12P-G029		26	SPARE
10P-R004	L619 00	12J-G060	L306 00	27	D455 00
A	D115 00	SEE 12P-G060		28	D066 00
B	D115 00	12J-G061	L305 00	29	D066 00
C	D115 00	SEE 12P-G061		30	D176 00
D	D115 00	12L-G005	L313 00	31	D176 00
10P-R007A	L619 00	12L-G007	L308 00	32	D066 00
A	D097 00	12L-R006	L738 00	33	D254 00
B	D097 00	12P-A004A	L002 00	34	SPARE
C	SPARE	SEE 12P-D004A		35	SPARE
D	D097 00	12P-D004A	L204 00	36	SPARE
E	SPARE	1	SPARE	37	D172 00
F	SPARE	2	SPARE	38	D178 00
10P-R007B	L619 00	3	SPARE	39	D066 00
A	D097 00	4	SPARE	40	D066 00
B	D097 00	5	SPARE	41	D090 00
C	SPARE	6	SPARE	42	D066 00
D	D097 00	7	SPARE	43	D455 00
E	SPARE	8	SPARE	44	D455 00
F	SPARE	9	D245 00	45	SPARE
10P-R011	L618 00	10	D455 00	46	D066 00
A	D094 00	11	D455 00	47	SPARE
B	D094 00	12	D455 00	48	SPARE
C	SPARE	13	SPARE	49	D245 00
D	SPARE			50	D066 00
E	SPARE			51	D173 00
F	SPARE			52	D173 00
10P-R012	L617 00			53	D174 00
A	D093 00			54	D175 00
B	D093 00			55	D173 00
C	D093 00			56	D178 00
10S-P006A	L606 00			57	D245 00
				58	SPARE
				59	SPARE
				60	D455 00
				61	D173 00
				62	SPARE
				63	D173 00
				64	D173 00
				65	D175 00
				66	D176 00
				67	D172 00
				68	D066 00
				69	D455 00
				70	SPARE
				71	SPARE

A1-F18AC-WDM-000

R035 00

Change 4

REF DESIGNATION
PIN DWG.

12P-D004A	CONT
72	D254 00
73	D245 00
74	D178 00
75	D172 00
76	D175 00
77	D175 00
78	D174 00
79	D056 00
80	D254 00
81	SPARE
82	SPARE
83	SPARE
84	D254 00
85	D066 00
86	D174 00
87	D177 00
88	D172 00
89	D174 00
90	D245 00
91	D245 00
92	SPARE
93	SPARE
94	SPARE
95	D245 00
96	D254 00
97	D169 00
98	D174 00
99	D178 00
100	D178 00
101	D169 00
102	D066 00
103	SPARE
104	SPARE
105	SPARE
106	D245 00
107	D254 00
108	D254 00
109	D254 00
110	D245 00
111	D245 00
112	D245 00
113	SPARE
114	SPARE
115	SPARE
116	D455 00
117	D455 00
118	D455 00
119	D254 00
120	D066 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

12P-E004A	L110 00
1	SPARE
2	SPARE
3	SPARE

REF DESIGNATION
PIN DWG.

12P-E004A	CONT
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D245 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D254 00
18	SPARE
19	D254 00
20	D169 00
21	D245 00
22	D169 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D066 00
29	D066 00
30	D176 00
31	D176 00
32	D066 00
33	D254 00
34	SPARE
35	SPARE
36	SPARE
37	D172 00
38	D178 00
39	D066 00
40	D066 00
41	D089 00
42	D066 00
43	SPARE
44	SPARE
45	SPARE
46	D066 00
47	SPARE
48	SPARE
49	D245 00
50	D066 00
51	D173 00
52	D173 00
53	D174 00
54	D175 00
55	D173 00
56	D178 00
57	D245 00
58	SPARE
59	SPARE
60	SPARE
61	D173 00
62	SPARE
63	D173 00
64	D173 00
65	D175 00

REF DESIGNATION
PIN DWG.

12P-E004A	CONT
66	D176 00
67	D172 00
68	D066 00
69	SPARE
70	SPARE
71	SPARE
72	D254 00
73	D245 00
74	D178 00
75	D172 00
76	D175 00
77	D175 00
78	D174 00
79	D056 00
80	D254 00
81	SPARE
82	SPARE
83	SPARE
84	D254 00
85	D066 00
86	D174 00
87	D177 00
88	D172 00
89	D174 00
90	SPARE
91	D245 00
92	SPARE
93	SPARE
94	SPARE
95	D245 00
96	D254 00
97	D169 00
98	D174 00
99	D178 00
100	D178 00
101	D169 00
102	D066 00
103	SPARE
104	SPARE
105	SPARE
106	D245 00
107	D254 00
108	D254 00
109	D254 00
110	D245 00
111	D245 00
112	D245 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	D254 00
120	D066 00
12P-G005	L313 00
A	D454 00
B	D169 00
C	D169 00
D	D454 00
E	SPARE
F	SPARE

A1-F18AC-WDM-000

Change 4

R035 01

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
12P-G007	L308 00	12P-H008	CONT	12P-R006	CONT
A	D066 00	4	SPARE	B	D169 00
B	D066 00	5	SPARE	C	D167 00
C	SPARE	6	SPARE	D	D167 00
		7	SPARE	E	SPARE
		8	SPARE	F	SPARE
12P-G029	L316 00	9	SPARE		
1	SPARE	10	SPARE	12S-G046	L315 00
2	SPARE	11	D077 00		
3	D172 00	12	D077 00	CASE	D172 00
4	D172 00	13	D088 00	GND	D172 00
5	D172 00	14	D254 00	LOAD	D172 00
6	D172 00	15	D169 00	PWR	D172 00
		16	D254 00	TEST	D172 00
12P-G060	L306 00	17	D254 00		
1	SPARE	18	D086 00	12S-G049	L305 00
2	SPARE	19	D086 00		
3	D175 00	20	D169 00	CASE	D174 00
4	D175 00	21	D169 00	GND	D174 00
5	D175 00	22	D169 00	LOAD	D174 00
6	D175 00	23	D331 00	PWR	D174 00
		24	D454 00	TEST	D174 00
12P-G061	L305 00	25	D465 00		
1	SPARE	26	D465 00	12S-G051	L312 00
2	SPARE	27	D133 00		
3	D174 00	28	D465 00	CASE	D178 00
4	D174 00	29	D259 00	GND	D178 00
5	D174 00	30	SPARE	LOAD	D178 00
6	D174 00	31	D259 00	PWR	D178 00
		32	D193 00	TEST	D178 00
12P-H008	L405 00	33	SPARE		
1	SPARE	34	D219 00	12S-G057	L306 00
2	SPARE	35	D010 00		
3	SPARE	36	D219 00	CASE	D175 00
		37	D223 00	GND	D175 00
		12P-R006	L738 00		
		A	D454 00		

A1-F18AC-WDM-000

15 April 1992

R036 00

12S-G057	CONT	12S-R058	L730 00	13P-G008	CONT
LOAD	D175 00			3	SPARE
PWR	D175 00	CASE	D173 00	4	SPARE
TEST	D175 00	GND	D173 00	5	SPARE
12S-H010	L403 00	LOAD	D173 00	6	SPARE
		PWR	D173 00	7	D168 00
1	D417 00	TEST	D173 00	8	D075 00
2	D417 00			9	D168 00
12S-H011	L403 00	12S-R092	L730 00	10	D075 00
				11	D168 00
1	D417 00			12	D075 00
2	D417 00			13	SPARE
12S-P048	L718 00	CASE	D173 00	13P-P004	L700 00
		GND	D173 00		
CASE	D177 00	LOAD	D173 00	1	D196 00
GND	D177 00	PWR	D173 00	2	D196 00
LOAD	D177 00	TEST	D173 00	3	SPARE
PWR	D177 00			4	SPARE
TEST	D177 00	13A-D003	L206 00	5	SPARE
12S-P055	L722 00			6	D196 00
		13MTP006	L718 00	13P-P006	L718 00
CASE	D174 00				
GND	D174 00	13MTR005	L730 00	1	D167 00
LOAD	D174 00			2	D167 00
PWR	D174 00	13P-D003	L206 00	3	SPARE
TEST	D174 00			4	SPARE
12S-P059	L718 00	A	SPARE	5	SPARE
		B	D196 00	6	SPARE
CASE	D176 00	C	SPARE	13P-R005	L730 00
GND	D176 00	D	SPARE		
LOAD	D176 00	E	D168 00	1	D167 00
PWR	D176 00	F	D168 00	2	D167 00
TEST	D176 00	G	SPARE	3	SPARE
12S-P091	L718 00	H	D196 00	4	SPARE
		J	SPARE	5	SPARE
CASE	D176 00	K	SPARE	6	SPARE
GND	D176 00	L	SPARE	13S-G008	L312 00
LOAD	D176 00	M	D167 00	15A-E003	L108 00
PWR	D176 00	N	D167 00		
TEST	D176 00	P	SPARE	15J-K006	L501 00
12S-R047	L730 00	R	D002 00		
		S	SPARE	SEE 15P-E006	
CASE	D174 00	T	SPARE	15J-K007	L501 00
GND	D174 00	U	D167 00		
LOAD	D174 00	V	D167 00	SEE 15P-E007	
PWR	D174 00	W	D196 00	15M-H002	L403 00
TEST	D174 00	X	D196 00	15P-E003A	L108 00
12S-R053	L734 00	Y	D196 00		
		Z	D196 00	COAX	D003 00
CASE	D178 00	a	D196 00		
GND	D178 00	b	D196 00		
LOAD	D178 00	c	SPARE		
PWR	D178 00	13P-G008	L312 00		
TEST	D178 00				
		1	SPARE		
		2	SPARE		

A1-F18AC-WDM-000

15 April 1992

R037 00

REF DESIGNATION PIN DWG.

15P-E003B	L108 00
COAX	D003 00
15P-E006	L108 00
COAX	D003 00
15P-E007	L108 00
COAX	D003 00
15P-H002	L406 00
A	D003 00
B	SPARE
C	SPARE
D	D003 00
E	SPARE
P	SPARE
H	SPARE
J	SPARE
K	D003 00
L	D003 00
M	D003 00
N	D003 00
P	D003 00
R	D083 00
S	D083 00
T	SPARE
U	SPARE
V	D003 00
W	D003 00
COAX	D003 00
17A-J008	L408 00
17A-U017	L908 00
17A-V018	L958 00
17J-J008	L410 00
1	SPARE
2	SPARE
3	SPARE
4	D005 00
5	D006 00
6	SPARE
7	D006 00
8	SPARE
9	SPARE
10	SPARE
11	D005 00
12	SPARE
13	D006 00
17J-U017	L908 00
1	D007 00
2	D007 00
3	D007 00

REF DESIGNATION PIN DWG.

17J-J008	CONT
4	D334 00
5	D334 00
6	D334 00
7	D334 00
8	D334 00
9	SPARE
10	SPARE
11	D334 00
12	D334 00
13	D334 00
17J-V018	L958 00
1	D411 00
2	D411 00
3	D411 00
4	D008 00
5	D008 00
6	D008 00
7	D008 00
8	D008 00
9	SPARE
10	SPARE
11	D008 00
12	D008 00
13	D008 00
17S-U013	L901 00
GND	D359 00
LOAD	D359 00
PWR	D359 00
TEST	D359 00
17S-U015	L908 00
1	D334 00
2	D334 00
3	D334 00
4	D334 00
5	D334 00
6	D334 00
17S-V014	L951 00
GND	D005 00
LOAD	D005 00
PWR	D005 00
TEST	D005 00
17S-V016	L958 00
1	D008 00
2	D008 00
3	SPARE
4	D008 00
5	D008 00
6	SPARE

REF DESIGNATION PIN DWG.

18CBH001	L406 00
LINE	D140 00
LOAD	D012 00
18J-T014	L807 00
SEE 18P-T014	
18L-S003	L822 00
18P-S003	L822 00
A	D343 00
B	D343 00
C	D343 00
D	D343 00
E	SPARE
F	SPARE
18P-T014	L822 00
1	SPARE
2	D012 00
3	D012 00
4	D012 00
5	SPARE
6	D012 00
18S-S006	L822 00
GND	D012 00
LOAD	D012 00
PWR	D012 00
TEST	D012 00
19A-J003	L408 00
19CBJ001	L411 00
LINE	D351 00
LOAD	D011 00
19J-S013	L824 00
SEE 19P-S013	
19L-T009	L823 00
19P-J003	L410 00
1	SPARE
2	SPARE

A1-F18AC-WDM-000

15 April 1992

R038 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
19P-J003	CONT	19S-S006	L824 00	20P-K006	L501 00
3	SPARE				
4	SPARE	BLU	D011 00	A	D253 00
5	SPARE	BRN	D011 00	B	D253 00
6	D011 00	GRN	D011 00	C	D253 00
7	SPARE	ORN	D011 00	D	D029 00
8	SPARE	YEL	D011 00	E	SPARE
9	D092 00				
10	D011 00	19S-S008	L824 00	20S-C010	L115 00
11	SPARE				
12	D158 00	GND	D011 00	1	D029 00
13	D165 00	LOAD	D011 00	2	D029 00
14	D117 00	PWR	D011 00	3	D029 00
15	SPARE	TEST	D011 00	4	D029 00
16	D117 00			5	D029 00
17	D011 00	19S-T012	L825 00	6	D029 00
18	SPARE				
19	D011 00	20A-J003	L411 00	20S-L007	L502 00
20	D011 00				
21	D011 00	20B-K006	L501 00	BLU	D029 00
22	D011 00			BRN	D029 00
		20J-J003	L411 00	GRN	D029 00
19P-S013	L824 00			ORN	D029 00
1	D011 00	1	SPARE	RED	D029 00
2	SPARE	2	SPARE	YEL	D029 00
3	D011 00	3	SPARE		
4	D011 00	4	SPARE	20S-L008	L500 00
5	D011 00	5	SPARE		
6	D011 00	6	D253 00	BRN	D029 00
7	SPARE	7	SPARE	ORN	D029 00
8	D011 00	8	D029 00		
9	SPARE	9	D029 00	20S-M009	L119 00
10	D011 00	10	D029 00		
11	D011 00	11	D029 00	BLU	D253 00
12	D011 00	12	D029 00	YEL	D253 00
13	SPARE	13	D253 00		
				22A-A090	L002 00
19P-T009	L823 00	20K-L004	L502 00		
				22A-D002	L204 00
A	D094 00	A1	D028 00		
B	D094 00	A2	D253 00	22A-E003	L315 00
C	SPARE	A3	SPARE		
		X1	D029 00	22A-E004	L314 00
19P-T012	L825 00	X2	D029 00		
		G	D028 00	22A-G073	L308 00
A	SPARE				
B	SPARE	20K-L005	L502 00	22A-J026	L408 00
C	SPARE				
D	SPARE	A1	D028 00	22A-K170	L501 00
E	SPARE	A2	D253 00		
F	SPARE	A3	SPARE	22A-M076	L119 00
1	SPARE	X1	D029 00		
2	SPARE	X2	D029 00	22A-P005	L703 00
3	D094 00	G	D028 00		
4	D094 00	20P-J003	L411 00	22B-G056	L307 00
5	SPARE				
6	SPARE	SEE 20J-J003		22B-H069	L404 00

A1-F18AC-WDM-000

15 April 1992

R039 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
22B-J068	L409 00	22K-D055	CONT	22P-A089	L001 00
22B-M084	L119 00	X1	D346 00	1	SPARE
22B-M086	L119 00	X2	D019 00	2	SPARE
22FLA089	L001 00	22L-D096	L207 00	3	D021 00
22J-C108	L107 00	22L-E007	L316 00	4	SPARE
SEE 22P-G108		22L-E010	L315 00	5	D021 00
22J-D096	L207 00	22L-E098	L113 00	6	D021 00
1	SPARE	22L-G172	L308 00	22P-A090	L002 00
2	SPARE	22L-H171	L501 00	1	SPARE
3	SPARE	22L-K102	L501 00	2	SPARE
4	SPARE	22L-M008	L600 00	3	SPARE
5	D021 00	22L-N014	L614 00	4	SPARE
6	D021 00	22L-N017	L614 00	5	SPARE
22J-E098	L113 00	22L-P012	L705 00	6	SPARE
1	SPARE	22L-R006	L703 00	7	SPARE
2	SPARE	22L-R016	L706 00	8	SPARE
3	SPARE	22L-S023	L813 00	9	SPARE
4	SPARE	22L-S024	L818 00	10	SPARE
5	D346 00	22L-S025	L813 00	11	D023 00
6	D346 00	22L-T022	L820 00	12	D023 00
22J-F096	L209 00	22P-A087	L002 00	13	D022 00
1	SPARE	1	D021 00	14	D022 00
2	SPARE	2	D021 00	15	D193 00
3	SPARE	3	D046 00	16	D363 00
4	SPARE	4	D021 00	17	D022 00
5	D021 00	5	SPARE	18	D045 00
6	D021 00	6	SPARE	19	D045 00
22J-M099	L119 00	22P-A088	L002 00	20	D022 00
SEE 22P-M099		A	D021 00	21	D045 00
22J-S027	L813 00	B	D021 00	22	D045 00
SEE 22P-S027		C	D021 00	22P-D002A	L204 00
22J-S030	L813 00			1	SPARE
SEE 22P-P030				2	SPARE
22K-D055	L200 00			3	D046 00
	L207 00			4	D034 00
A1	D351 00			5	D034 00
A2	D019 00			6	D046 00
B1	D351 00			7	D075 00
B2	D019 00			8	SPARE
C1	D351 00			9	D075 00
C2	D019 00			10	D037 00
				11	D034 00
				12	D034 00
				13	D075 00
				14	D075 00
				15	SPARE
				16	SPARE
				17	D037 00
				18	D033 00
				19	D033 00
				20	SPARE
				21	SPARE
				22	SPARE
				23	SPARE
				24	D346 00
				25	D034 00

A1-F18AC-WDM-000

15 April 1992

R040 00

REF DESIGNATION PIN DWG.

22P-D002A	CONT
26	D034 00
27	D031 00
28	D046 00
29	SPARE
30	D036 00
31	D346 00
32	D046 00
33	D031 00
34	D031 00
35	SPARE
36	SPARE
37	D036 00
38	SPARE
39	D346 00
40	D046 00
41	D033 00
42	D352 00
43	D036 00
44	D036 00
45	D036 00
46	SPARE
47	D036 00
48	D027 00
49	D352 00
50	D036 00
51	D036 00
52	D036 00
53	SPARE
54	D036 00
55	D036 00

22P-D002B	L204 00
-----------	---------

1	D035 00
2	D031 00
3	D031 00
4	SPARE
5	SPARE
6	D035 00
7	D031 00
8	SPARE
9	SPARE
10	D045 00
11	D045 00
12	D035 00
13	D035 00
14	D035 00
15	D035 00
16	D035 00
17	D045 00
18	D045 00
19	D045 00
20	D035 00
21	SPARE
22	SPARE
23	D046 00
24	D046 00
25	D045 00
26	SPARE
27	SPARE

REF DESIGNATION PIN DWG.

22P-D002B	CONT
28	SPARE
29	SPARE
30	D035 00
31	D046 00
32	D045 00
33	D045 00
34	D045 00
35	SPARE
36	SPARE
37	SPARE
38	D046 00
39	D046 00
40	D045 00
41	D045 00
42	D035 00
43	D035 00
44	SPARE
45	D036 00
46	D036 00
47	SPARE
48	SPARE
49	D035 00
50	D035 00
51	D019 00
52	D019 00
53	D035 00
54	D035 00
55	D035 00

22P-D096	L207 00
----------	---------

SEE 22J-D096

22P-E003	L315 00
----------	---------

1	SPARE
2	D035 00
3	D035 00
4	D035 00
5	D035 00
6	SPARE
7	D035 00
8	SPARE
9	D035 00
10	D035 00
11	D035 00
12	SPARE
13	SPARE

22P-E004	L314 00
----------	---------

1	SPARE
2	D035 00
3	D031 00
4	D031 00
5	D035 00
6	SPARE
7	D035 00
8	SPARE

REF DESIGNATION PIN DWG.

22P-E004	CONT
9	D035 00
10	D035 00
11	D031 00
12	SPARE
13	SPARE

22P-E007	L316 00
----------	---------

1	D034 00
2	SPARE
3	D034 00
4	SPARE
5	SPARE
6	SPARE

22P-E010	L315 00
----------	---------

1	D036 00
2	D036 00
3	SPARE
4	SPARE
5	SPARE
6	SPARE

22P-E098	L113 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	D346 00
5	D346 00
6	D346 00

22P-F096	L209 00
----------	---------

SEE 22J-F096

22P-G056	L307 00
----------	---------

A	D019 00
B	D019 00
C	D019 00
D	SPARE
E	D019 00
F	D019 00
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE

22P-G073	L308 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE

A1-F18AC-WDM-000

Change 4

R041 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
22P-G073	CONT	22P-H171	CONT	22P-K170	CONT
7	D486 00	9	D456 00	11	D456 00
8	SPARE	10	D456 00	12	D456 00
9	SPARE	11	D456 00	13	D456 00
10	D023 00	12	D456 00	14	D456 00
11	D017 00	13	D456 00	15	D456 00
12	D017 00			16	D456 00
13	D022 00	22P-J026	L411 00	17	D456 00
				18	D268 00
22P-G108	L307 00	1	D031 00	19	D268 00
		2	SPARE	20	D268 00
A	D019 00	3	D031 00	21	D456 00
B	D019 00	4	SPARE	22	SPARE
C	D019 00	5	SPARE		
D	SPARE	6	D031 00	22P-M008	L600 00
E	D019 00	7	SPARE		
F	D019 00	8	D339 00	1	D034 00
		9	D339 00	2	SPARE
22P-G172	L308 00	10	SPARE	3	D034 00
		11	D339 00	4	SPARE
1	SPARE	12	D339 00	5	D034 00
2	SPARE	13	D339 00	6	SPARE
3	SPARE				
4	SPARE	22P-J068	L409 00	22P-M009	L600 00
5	SPARE				
6	SPARE	1	D017 00	1	SPARE
7	SPARE	2	D017 00	2	D036 00
8	SPARE	3	D008 00	3	SPARE
9	SPARE	4	D008 00	4	D036 00
10	SPARE	5	SPARE	5	D036 00
11	D456 00	6	SPARE	6	SPARE
12	SPARE	7	SPARE		
13	D466 00	8	SPARE	22P-M076	L119 00
		9	SPARE		
22P-H069	L404 00	10	SPARE	1	D020 00
		11	D017 00	2	D027 00
1	D017 00	12	D017 00	3	D022 00
2	D017 00	13	D017 00	4	SPARE
3	D008 00			5	SPARE
4	D008 00	22P-K102	L501 00	6	SPARE
5	SPARE			7	SPARE
6	SPARE	1	D023 00	8	SPARE
7	SPARE	2	D023 00	9	SPARE
8	SPARE	3	D023 00	10	SPARE
9	SPARE	4	SPARE	11	D022 00
10	SPARE	5	SPARE	12	D020 00
11	D017 00	6	SPARE	13	D022 00
12	D017 00				
13	D017 00	22P-K170	L501 00	22P-M084	L119 00
22P-H171	L501 00	1	SPARE	1	SPARE
		2	SPARE	2	D020 00
1	SPARE	3	SPARE	3	D020 00
2	SPARE	4	SPARE	4	D020 00
3	SPARE	5	SPARE	5	SPARE
4	SPARE	6	SPARE	6	SPARE
5	SPARE	7	SPARE	7	SPARE
6	SPARE	8	SPARE	8	SPARE
7	SPARE	9	D456 00	9	SPARE
8	D456 00	10	D168 00	10	SPARE

A1-F18AC-WDM-000

15 April 1992

R042 00

REF DESIGNATION PIN DWG.

22P-M084 CONT
11 D019 00
12 D019 00
13 D020 00

22P-M086 L119 00

A D022 00
B D023 00
C D023 00
D D022 00
E D023 00
F D022 00
G D046 00
H D045 00
J SPARE
K SPARE
L SPARE
M D022 00
N D022 00
P D022 00
R D022 00

22P-M099 L119 00

A D023 00
B D023 00
C D023 00
D D045 00
E D046 00
F SPARE
G SPARE
H SPARE
J SPARE
K SPARE
L SPARE
M SPARE
N D022 00
P D020 00
R D020 00
S D020 00
T D022 00
U D022 00
V D019 00

22P-N014 L614 00

1 D037 00
2 SPARE
3 D037 00
4 SPARE
5 D037 00
6 SPARE

22P-N017 L614 00

1 D037 00
2 SPARE
3 D037 00
4 SPARE

REF DESIGNATION PIN DWG.

22P-N017 CONT
5 D037 00
6 SPARE

22P-P005 L703 00

1 SPARE
2 D035 00
3 SPARE
4 D035 00
5 D035 00
6 SPARE

22P-P012 L705 00

1 D034 00
2 SPARE
3 D034 00
4 SPARE
5 D034 00
6 SPARE

22P-P030 L715 00

1 SPARE
2 SPARE
3 SPARE
4 D039 00
5 D030 00
6 D435 00
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 D039 00
14 D096 00
15 D096 00
16 D096 00
17 D430 00
18 D435 00
19 D435 00
20 D057 00
21 D096 00
22 D096 00

22P-R006 L703 00

1 D033 00
2 SPARE
3 D033 00
4 SPARE
5 D033 00
6 SPARE

22P-R015A L709 00

1 D033 00
2 SPARE
3 D033 00
4 SPARE

REF DESIGNATION PIN DWG.

22P-R015A CONT
5 SPARE
6 SPARE

22P-R015B L709 00

1 D352 00
2 D352 00
3 D030 00
4 D352 00
5 D352 00
6 SPARE

22P-R016 L706 00

1 D033 00
2 SPARE
3 D033 00
4 SPARE
5 D033 00
6 SPARE

22P-R110 L709 00

1 D019 00
2 SPARE
3 D020 00
4 SPARE
5 D019 00
6 SPARE

22P-S018 L813 00

1 SPARE
2 D039 00
3 D039 00
4 SPARE
5 D039 00
6 SPARE

22P-S019 L813 00

1 D039 00
2 SPARE
3 D039 00
4 SPARE
5 D039 00
6 SPARE

22P-S023 L813 00

A D057 00
B D057 00
C D057 00

22P-S024 L818 00

A D164 00

A1-F18AC-WDM-000

15 April 1992

R043 00

REF DESIGNATION PIN DWG,

22P-S024	CONT
B	D027 00
C	SPARE
22P-S025	L813 00
A	D030 00
B	D030 00
C	SPARE
D	SPARE
E	SPARE
F	SPARE
22P-S027	L813 00
1	D057 00
2	D039 00
3	SPARE
4	D039 00
5	D030 00
6	SPARE
22P-T022	L820 00
A	D035 00
B	D035 00
C	SPARE
22S-J095	L410 00
1	D021 00
2	D021 00
22S-P032	L702 00
1	D057 00
2	D057 00
3	SPARE
22S-P051	L700 00
1	D020 00
2	D020 00
22S-S018	L813 00
22S-S019	L813 00
23A-B003	L005 00
23L-B002	L004 00
23P-B002	L004 00
A	D339 00
B	SPARE
C	D339 00
D	D339 00
E	D339 00

REF DESIGNATION PIN DWG.

23P-B002	CONT
F	D339 00
23P-B003	L005 00
1	SPARE
2	D028 00
3	SPARE
4	D028 00
5	D028 00
6	SPARE
24A-P011	L728 00
24CBD001	L601 00
24J-P003	L710 00
SEE 24P-P003	
24P-M002	L601 00
A	D341 00
B	D013 00
C	D013 00
D	SPARE
E	D013 00
F	SPARE
24P-N006	L613 00
A	D430 00
B	D430 00
C	D340 00
D	SPARE
E	D430 00
F	SPARE
24P-N021	L613 00
A	D430 00
B	D340 00
C	D430 00
D	SPARE
E	D340 00
F	SPARE
24P-P003	L710 00
A	D430 00
B	D013 00
C	D013 00
D	SPARE
E	D013 00
F	SPARE
24P-P005	L611 00
A	D341 00
B	D013 00

REF DESIGNATION PIN DWG.

24P-P005	CONT
C	D013 00
D	SPARE
E	D013 00
F	SPARE
24P-P007	L807 00
A	D341 00
B	D013 00
C	D013 00
D	SPARE
E	D013 00
F	SPARE
24P-P011	L728 00
1	SPARE
2	SPARE
3	SPARE
4	D341 00
5	D430 00
6	D013 00
7	SPARE
8	D013 00
9	D013 00
10	D013 00
11	D013 00
12	D435 00
13	D013 00
14	SPARE
15	D013 00
16	D013 00
17	D340 00
18	D340 00
19	SPARE
20	D013 00
21	D013 00
22	SPARE
23	D435 00
24	D435 00
25	D013 00
26	D013 00
27	D340 00
28	D340 00
29	D340 00
30	D340 00
31	SPARE
32	D435 00
33	SPARE
34	D435 00
35	D435 00
36	SPARE
37	D435 00
38	SPARE
39	D435 00
40	SPARE
41	D435 00
42	SPARE
43	SPARE

A1-F18AC-WDM-000

15 April 1992

R044 00

REF DESIGNATION PIN DWG.

24P-P011 CONT
44 SPARE
45 SPARE
46 SPARE
47 D354 00
48 D354 00
49 SPARE
50 D014 00
51 SPARE
52 D014 00
53 D014 00
54 SPARE
55 D014 00

24P-R004 L607 00

A D430 00
B D340 00
C D340 00
D SPARE
E D340 00
F SPARE

24P-S009 L817 00

A D341 00
B D435 00
C D435 00
D SPARE
E D435 00
F SPARE

24P-T008 L813 00

A D430 00
B D435 00
C D435 00
D SPARE
E D435 00
F SPARE

24P-T010 L820 00

A D430 00
B D435 00
C D435 00
D SPARE
E D435 00
F SPARE

24U-N006 L613 00

24U-N021 L613 00

24U-P005 L611 00

24U-R004 L607 00

24U-S009 L817 00

REF DESIGNATION PIN DWG.

24U-T008 L813 00

24U-T010 L820 00

25A-H002 L407 00

25P-H002 L407 00

A D016 00
B D016 00
C D185 00
D D185 00
E SPARE
F SPARE

28A-B015 L009 00

28A-B016 L009 00

28E-A013 L009 00

PWR D015 00

28E-A021 L009 00

PWR D015 00

28E-B014 L009 00

PWR D015 00

28E-B022 L009 00

PWR D015 00

28E-E019 L117 00

PWR D018 00

28HRA017 L009 00

28HRB018 L009 00

28P-A017 L009 00

A D015 00
B D015 00
C D015 00
D D015 00
E D015 00
F SPARE

28P-B015 L009 00

A D015 00
B D015 00
C SPARE
D D015 00
E D015 00

REF DESIGNATION PIN DWG.

28P-B015 CONT
F D015 00
G D016 00
H SPARE
J D015 00
K SPARE

28P-B016 L009 00

A D015 00
B D015 00
C SPARE
D D015 00
E D015 00
F D015 00
G D016 00
H SPARE
J D015 00
K SPARE

28P-B018 L009 00

A D015 00
B D015 00
C D015 00
D D015 00
E D015 00
F SPARE

33M-J002 L400 00

33M-J007 L400 00

33M-J008 L400 00

33M-J009 L400 00

33M-J015 L400 00

33P-H011 L404 00

1 D339 00
2 SPARE
3 D339 00
4 SPARE
5 D339 00
6 SPARE
7 D038 00
8 SPARE
9 D038 00
10 SPARE
11 D038 00
12 SPARE
13 SPARE
14 SPARE
15 D038 00
16 SPARE
17 D038 00

A1-F18AC-WDM-000

15 April 1992

R045 00

REF DESIGNATION PIN DWG.

33P-H011 CONT
18 SPARE
19 D038 00
20 SPARE
21 D038 00
22 SPARE

33P-J002 L402 00

1 D465 00
2 D465 00
3 D465 00
4 SPARE
5 D465 00
6 D087 00
7 D087 00
8 D038 00
9 SPARE
10 SPARE
11 SPARE
12 D038 00
13 D038 00

33P-J007 L402 00

1 D087 00
2 D087 00
3 SPARE

33P-J008 L402 00

A D087 00
B D087 00
C SPARE

33P-J009 L410 00

COAX D088 00

33P-J015 L402 00

1 D038 00
2 D038 00
3 D038 00
4 D087 00
5 D087 00
6 D164 00
7 D164 00
8 D164 00
9 D164 00
10 D038 00
11 D164 00
12 SPARE
13 D038 00
14 D038 00
15 D038 00
16 D038 00
17 D038 00
18 D038 00
19 D038 00

REF DESIGNATION PIN DWG.

33P-J015 CONT
20 SPARE
21 SPARE
22 D038 00
23 SPARE
24 SPARE
25 SPARE
26 D187 00
27 D187 00
28 SPARE
29 SPARE
30 SPARE
31 SPARE
32 SPARE
33 SPARE
34 SPARE
35 SPARE
36 SPARE
37 SPARE

33PSH011 L404 00

34DSD011 L200 00

34DSG003 L305 00

34DSP004 L723 00

34P-D011 L200 00

1 D195 00
2 D195 00
3 D195 00
4 D195 00
5 D195 00
6 D196 00

34P-G003 L305 00

A D195 00
B D195 00
C D195 00
D D195 00
E D195 00
F D195 00
G D195 00
H D195 00
J SPARE
K SPARE

34P-P004 L723 00

A D168 00
B D168 00
C D168 00
D SPARE
E SPARE
F SPARE

REF DESIGNATION PIN DWG.

52A-C057 L106 00

52A-C159 L100 00

52A-C161 L102 00

52A-D024 L202 00

52A-D026 L206 00

52A-D092 L202 00

52A-E059 L111 00

52A-F058 L212 00

52A-H048 L403 00

52A-H049 L403 00

52A-H073 L400 00

52A-H075 L400 00

52A-H077 L403 00

52A-H079 L403 00

52A-H081 L403 00

52A-H083 L403 00

52A-H084 L400 00

52A-H087 L400 00

52A-H088 L403 00

52A-H089 L403 00

52A-H091 L403 00

52A-H093 L406 00

52A-H097 L403 00

52A-H098 L400 00

52A-J053 D412 00

52A-J074 L400 00

52A-J076 L400 00

52A-J078 L408 00

A1-F18AC-WDM-000

Change 4

R046 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
52A-J080	L408 00	52J-E011	L118 00	52J-G051	L308 00
52A-J094	L411 00	SEE 52P-E011		SEE 52P-G051	
52A-J155	L408 00	52J-F001	L317 00	52J-H032	L407 00
52A-J501	L400 00	SEE 52P-F001		SEE 52P-C032	
52A-N118	L613 00	52J-F002A	L301 00	52J-H033	L407 00
52A-U045	L906 00	SEE 52P-F002A		SEE 52P-C033	
52A-V044	L956 00	52J-F002B	L301 00	52J-H034	L404 00
52A-Y312	L400 00	SEE 52P-F002B		SEE 52P-A034	
52J-A034	L002 00	52J-F003	L219 00	52J-H039	L405 00
SEE 52P-A034		SEE 52P-F003		SEE 52P-C039	
52J-B021	L004 00	52J-F004A	L301 00	52J-H046	L404 00
SEE 52P-B021		SEE 52P-F004A		SEE 52P-A046	
52J-B023	L004 00	52J-F004B	L301 00	52J-H048	L406 00
SEE 52P-B023		SEE 52P-F004B		1	SPARE
52J-C022	L107 00	52J-F005A	L301 00	2	SPARE
SEE 52P-G022		SEE 52P-F005A		3	SPARE
52J-C051	L105 00	52J-F005B	L301 00	4	SPARE
SEE 52P-G051		SEE 52P-F005B		5	SPARE
52J-D038	L217 00	52J-F006	L219 00	6	SPARE
SEE 52P-D038		SEE 52P-F006		7	SPARE
52J-E007	L118 00	52J-G040	L309 00	8	SPARE
SEE 52P-E007		1	SPARE	9	SPARE
52J-E009A	L301 00	2	SPARE	10	SPARE
SEE 52P-E009A		3	SPARE	11	SPARE
52J-E009B	L301 00	4	SPARE	12	SPARE
SEE 52P-E009B		5	SPARE	13	SPARE
52J-E010A	L301 00	6	SPARE	14	SPARE
SEE 52P-E010A		7	SPARE	15	D343 00
52J-E010B	L301 00	8	SPARE	16	D012 00
SEE 52P-E010B		9	SPARE	17	D012 00
		10	D066 00	18	D343 00
		11	D066 00	19	SPARE
		12	D066 00	20	D012 00
		13	D066 00	21	D044 00
		14	D066 00	22	D389 00
		15	D011 00	23	D044 00
		16	D005 00	24	D182 00
		17	D066 00	25	D182 00
		18	D359 00	26	D182 00
		19	D066 00	27	D182 00
		20	D066 00	28	D182 00
		21	D066 00	29	D182 00
		22	D012 00	30	D182 00
				31	D182 00
				32	D182 00
				33	D072 00
				34	D072 00
				35	D072 00
				36	D260 00
				37	D182 00

A1-F18AC-WDM-000

15 April 1992

R047 00

REF DESIGNATION PIN DWG.

52J-H049	L405 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D133 00
12	D282 00
13	D303 00
14	D246 00
15	D246 00
16	D133 00
17	D133 00
18	SPARE
19	D217 00
20	SPARE
21	SPARE
22	D217 00

52J-H073	L401 00
1	D355 00
2	SPARE
3	SPARE
4	D370 00
5	D090 00
6	D091 00
7	D014 00
8	D088 00
9	SPARE
10	D090 00
11	D355 00
12	D032 00
13	D014 00
14	D012 00
15	D254 00
16	SPARE
17	D370 00
18	D254 00
19	D355 00
20	D409 00
21	D032 00
22	D126 00
23	D088 00
24	D127 00
25	D091 00
26	D357 00
27	D355 00
28	D091 00
29	SPARE
30	D254 00
31	D357 00
32	D162 00
33	D090 00

REF DESIGNATION PIN DWG.

52J-H073	CONT
34	D355 00
35	D088 00
36	D341 00
37	D341 00
38	D088 00
39	SPARE
40	D014 00
41	SPARE
42	SPARE
43	D341 00
44	D254 00
45	D355 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D254 00
51	D126 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE

52J-H083	L406 00
1	D084 00
2	D003 00
3	D003 00
4	D003 00
5	SPARE
6	D084 00
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE

52J-H085	L406 00
SEE 52P-C085	

52J-H088	L405 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D117 00
7	D117 00
8	D106 00
9	D172 00
10	D037 00
11	D037 00
12	D417 00
13	D417 00

REF DESIGNATION PIN DWG.

52J-J008	L411 00
SEE 52P-D008	
52J-J028	L412 00
SEE 52P-D028	
52J-J029	L412 00
SEE 52P-D029	
52J-J038	L410 00
SEE 52P-D038	
52J-J042	L409 00
SEE 52P-B042	
52J-J074	L402 00
1	D181 00
2	SPARE
3	SPARE
4	D162 00
5	D116 00
6	D126 00
7	D180 00
8	SPARE
9	SPARE
10	SPARE
11	D181 00
12	D381 00
13	SPARE
14	D392 00
15	D374 00
16	D374 00
17	D180 00
18	D181 00
19	D181 00
20	SPARE
21	SPARE
22	D409 00
23	SPARE
24	D130 00
25	SPARE
26	D126 00
27	D355 00
28	D128 00
29	D088 00
30	D354 00
31	D116 00
32	D162 00
33	D088 00
34	D181 00
35	D354 00
36	D353 00
37	D181 00

A1-F18AC-WDM-000

R048 00

Change 4

REF DESIGNATION PIN DWG.

52J-J074 CONT
38 SPARE
39 SPARE
40 SPARE
41 D381 00
42 D355 00
43 D181 00
44 D088 00
45 SPARE
46 SPARE
47 SPARE
48 SPARE
49 SPARE
50 SPARE
51 SPARE
52 SPARE
53 SPARE
54 SPARE
55 SPARE

52J-J086 L411 00

SEE 52P-D086

52J-J156 L409 00

SEE 52P-B156

52J-L030 L500 00

SEE 52P-F030

52J-L050 L415 00

SEE 52P-L050

52J-L154 L500 00

SEE 52P-L154

52J-L160 L502 00

SEE 52P-L160

52J-M069 L601 00

SEE 52P-M069

52J-M071 L601 00

SEE 52P-M071

52J-N070 L613 00

SEE 52P-N070

52J-N072 L613 00

SEE 52P-N072

REF DESIGNATION PIN DWG.

52J-P035 L702 00

SEE 52P-P035

52J-P103 L712 00

SEE 52P-P103

52J-P105 L715 00

SEE 52P-P105

52J-P110 L702 00

SEE 52P-P110

52J-P111 L604 00

SEE 52P-P111

52J-P112 L605 00

SEE 52P-S112

52J-P117 L702 00

SEE 52P-P117

52J-P123 L702 00

SEE 52P-P123

52J-P125 L741 00

SEE 52P-P125

52J-P157 L726 00

SEE 52P-P157

52J-P163 L608 00

SEE 52P-P163

52J-P164 L608 00

SEE 52P-P164

52J-P166 L608 00

SEE 52P-R166

52J-R036 L708 00

SEE 52P-R036

REF DESIGNATION PIN DWG.

52J-R102 L713 00

SEE 52P-R102

52J-R104 L745 00

SEE 52P-R104

52J-R113 L708 00

SEE 52P-R113

52J-R114 L617 00

SEE 52P-R114

52J-R116 L708 00

SEE 52P-R116

52J-R124 L744 00

SEE 52P-R124

52J-R158 L737 00

SEE 52P-R158

52J-R163 L608 00

SEE 52P-P163

52J-R164 L608 00

SEE 52P-P164

52J-R165 L608 00

SEE 52P-P165

52J-T108 L821 00

SEE 52P-T108

52J-U013 L906 00

SEE 52P-U013

52J-U015 L906 00

SEE 52P-U015

52J-U017 L906 00

SEE 52P-U017

52J-U019 L906 00

SEE 52P-U019

A1-F18AC-WDM-000

Change 4

R049 00

REF DESIGNATION PIN DWG.

52J-U045A	L906 00
SEE 52P-U045A	
52J-U045B	L906 00
SEE 52P-U045B	
52J-U045C	L906 00
SEE 52P-U045C	
52J-U045D	L906 00
SEE 52P-U045D	
52J-U062	L908 00
COAX	SPARE
S2A	D190 00
1	SPARE
2A	D190 00
2B	D190 00
3	D217 00
4	SPARE
5	SPARE
6	D217 00
7	D217 00
8	SPARE
9	D416 00
10	SPARE
11	D255 00
12	D199 00
13	D209 00
14	SPARE
15	D261 00
16	D416 00
17	D209 00
18	D209 00
19	D241 00
20	D217 00
21	D416 00
22	D416 00
23	D217 00
24	D199 00
25	D199 00
26	D199 00
27	D241 00
28	D217 00
29	D217 00
30	D217 00
31	D217 00
32	D217 00
33	D206 00
34	D209 00
35	D209 00
36	D255 00
37	D241 00
38	D418 00
39	D418 00
40	D418 00
41	D418 00

REF DESIGNATION PIN DWG.

52J-U062	CONT
42	D418 00
43	D120 00
44	D206 00
45	D209 00
46	D199 00
47	D255 00
48	D217 00
49	D416 00
50	SPARE
51	D217 00
52	D261 00
53	D261 00
54	D120 00
55	D206 00
56	D206 00
57	D206 00
58	D120 00
59	D120 00
60	D120 00
61	D206 00
62	SPARE
63	SPARE
64	SPARE
65	D416 00
66	SPARE
67	SPARE
68	SPARE
69	D416 00
70	D416 00
71	D217 00
72	SPARE
73	D259 00
74	D259 00
75	D259 00
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D217 00
83	D416 00
84	D259 00
85	D261 00
86	D259 00
87	D255 00
88	D255 00
89	SPARE
90	D261 00
91	SPARE
92	SPARE
93	D261 00
94	D259 00
95	D259 00
96	D259 00
97	D259 00
98	D222 00
99	D261 00
100	D107 00
101	D255 00
102	D259 00
103	D261 00

REF DESIGNATION PIN DWG.

52J-U062	CONT
104	SPARE
105	SPARE
106	D120 00
107	D255 00
108	SPARE
109	SPARE
110	D261 00
111	D120 00
112	D418 00
113	SPARE
114	D261 00
115	D418 00
116	D261 00
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	D221 00
122	D221 00
123	SPARE
124	SPARE
125	D221 00
126	SPARE
127	SPARE
128	SPARE
129	D221 00
130	D221 00
131	D221 00
132	D219 00
133	D221 00
134	SPARE
135	D219 00
136	D217 00
137	D221 00
138	D219 00
139	D221 00
140	D219 00
141	D221 00
142	D255 00
52J-U063	L906 00
COAX	SPARE
S2A	D190 00
1	D359 00
2A	D190 00
2B	D190 00
3	D224 00
4	D359 00
5	D359 00
6	D229 00
7	D229 00
8	D464 00
9	D205 00
10	D205 00
11	SPARE
12	D255 00
13	D484 00
14	D155 00
15	D205 00

A1-F18AC-WDM-000

Change 4

R050 00

REF DESIGNATION PIN DWG.

52J-U063	CONT
16	D205 00
17	D209 00
18	D484 00
19	D241 00
20	D229 00
21	D205 00
22	D229 00
23	D229 00
24	D199 00
25	D199 00
26	D484 00
27	D241 00
28	D484 00
29	D241 00
30	D241 00
31	D224 00
32	D229 00
33	D473 00
34	D209 00
35	D484 00
36	D484 00
37	D241 00
38	D229 00
39	D414 00
40	D206 00
41	D206 00
42	D206 00
43	D120 00
44	D473 00
45	D209 00
46	D199 00
47	D484 00
48	D414 00
49	D410 00
50	SPARE
51	D229 00
52	D229 00
53	D229 00
54	D120 00
55	D206 00
56	D206 00
57	D206 00
58	D120 00
59	D120 00
60	D120 00
61	D473 00
62	SPARE
63	SPARE
64	SPARE
65	D410 00
66	SPARE
67	SPARE
68	SPARE
69	D414 00
70	D414 00
71	D255 00
72	SPARE
73	D229 00
74	D229 00
75	D229 00
76	SPARE

REF DESIGNATION PIN DWG.

52J-U063	CONT
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D414 00
83	D414 00
84	D229 00
85	D229 00
86	D229 00
87	D414 00
88	D484 00
89	SPARE
90	D229 00
91	SPARE
92	SPARE
93	D229 00
94	D229 00
95	D229 00
96	D229 00
97	D229 00
98	D259 00
99	D229 00
100	D107 00
101	D229 00
102	D229 00
103	D229 00
104	SPARE
105	SPARE
106	D120 00
107	D229 00
108	SPARE
109	D484 00
110	D484 00
111	D120 00
112	D205 00
113	D484 00
114	D484 00
115	D205 00
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
129	SPARE
130	SPARE
131	SPARE
132	SPARE
133	SPARE
134	SPARE
135	SPARE
136	SPARE
137	SPARE

REF DESIGNATION PIN DWG.

52J-U063	CONT
138	SPARE
139	SPARE
140	SPARE
141	SPARE
142	D255 00
52J-U150	L910 00
SEE 52P-U150	
52J-U152	L910 00
SEE 52P-U152	
52J-V012	L956 00
SEE 52P-V012	
52J-V014	L956 00
SEE 52P-V014	
52J-V016	L956 00
SEE 52P-V016	
52J-V020	L956 00
SEE 52P-V020	
52J-V044A	L956 00
SEE 52P-V044A	
52J-V044B	L956 00
SEE 52P-V044B	
52J-V044C	L956 00
SEE 52P-V044C	
52J-V044D	L956 00
SEE 52P-V044D	
52J-V067	L956 00
COAX	SPARE
S2A	D330 00
1	D154 00
2A	D330 00
2B	D330 00
3	D224 00
4	D154 00
5	D154 00
6	SPARE
7	D224 00
8	D464 00
9	D154 00
10	D154 00
11	SPARE

A1-F18AC-WDM-000

Change 4

R051 00

REF DESIGNATION
PIN DWG.

52J-U063	CONT
12	D208 00
13	D483 00
14	D155 00
15	D154 00
16	D154 00
17	D208 00
18	D483 00
19	D240 00
20	D330 00
21	D154 00
22	D330 00
23	D224 00
24	D200 00
25	D200 00
26	D483 00
27	D240 00
28	D483 00
29	D330 00
30	D330 00
31	D224 00
32	D224 00
33	D473 00
34	D208 00
35	D483 00
36	D483 00
37	D240 00
38	D238 00
39	D414 00
40	D204 00
41	D204 00
42	D204 00
43	D204 00
44	D473 00
45	D208 00
46	D200 00
47	D483 00
48	D414 00
49	D410 00
50	SPARE
51	D330 00
52	D238 00
53	D238 00
54	D204 00
55	D205 00
56	D205 00
57	D205 00
58	D204 00
59	D204 00
60	D204 00
61	D473 00
62	SPARE
63	SPARE
64	SPARE
65	D410 00
66	SPARE
67	SPARE
68	SPARE
69	D414 00
70	D414 00
71	D330 00
72	SPARE

REF DESIGNATION
PIN DWG.

52J-V067	CONT
73	D238 00
74	D238 00
75	D122 00
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D414 00
83	D414 00
84	D122 00
85	D255 00
86	D238 00
87	D414 00
88	D224 00
89	SPARE
90	D238 00
91	SPARE
92	SPARE
93	D238 00
94	D122 00
95	D238 00
96	D238 00
97	D238 00
98	D222 00
99	D224 00
100	D122 00
101	D204 00
102	D122 00
103	D255 00
104	SPARE
105	SPARE
106	D204 00
107	D238 00
108	D483 00
109	D483 00
110	D483 00
111	D204 00
112	D205 00
113	SPARE
114	D483 00
115	D205 00
116	D483 00
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
129	SPARE
130	SPARE
131	SPARE
132	SPARE
133	SPARE

REF DESIGNATION
PIN DWG.

52J-V067	CONT
134	SPARE
135	SPARE
136	SPARE
137	SPARE
138	SPARE
139	SPARE
140	SPARE
141	SPARE
142	D255 00
52J-V068	L958 00
COAX	SPARE
S2A	D190 00
1	SPARE
2A	D190 00
2B	D190 00
3	D224 00
4	SPARE
5	SPARE
6	SPARE
7	D224 00
8	SPARE
9	D416 00
10	SPARE
11	D189 00
12	D208 00
13	D255 00
14	SPARE
15	D260 00
16	D416 00
17	D208 00
18	D255 00
19	D240 00
20	D255 00
21	D416 00
22	D416 00
23	D224 00
24	D200 00
25	D200 00
26	D255 00
27	D240 00
28	D255 00
29	D260 00
30	D260 00
31	D224 00
32	D224 00
33	D207 00
34	D208 00
35	D204 00
36	D260 00
37	D240 00
38	D260 00
39	D260 00
40	D207 00
41	D207 00
42	D207 00
43	D207 00
44	D207 00
45	D208 00
46	D200 00
47	D260 00

A1-F18AC-WDM-000

Change 4

R052 00

REF DESIGNATION PIN DWG.

52J-V068	CONT
48	D224 00
49	D416 00
50	SPARE
51	D255 00
52	D260 00
53	D260 00
54	D207 00
55	D204 00
56	D204 00
57	D204 00
58	D207 00
59	D207 00
60	D207 00
61	D207 00
62	SPARE
63	SPARE
64	SPARE
65	D416 00
66	SPARE
67	SPARE
68	SPARE
69	D416 00
70	D416 00
71	D224 00
72	SPARE
73	D189 00
74	D189 00
75	D122 00
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D260 00
83	D416 00
84	D122 00
85	D204 00
86	D189 00
87	D255 00
88	D200 00
89	SPARE
90	D260 00
91	SPARE
92	SPARE
93	D260 00
94	D122 00
95	D189 00
96	D189 00
97	D189 00
98	D222 00
99	D260 00
100	D122 00
101	D260 00
102	D122 00
103	D204 00
104	SPARE
105	SPARE
106	D210 00
107	D255 00
108	D260 00

REF DESIGNATION PIN DWG.

52J-V068	CONT
109	SPARE
110	D260 00
111	D210 00
112	D207 00
113	D260 00
114	D260 00
115	D207 00
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	D220 00
122	D220 00
123	SPARE
124	SPARE
125	D220 00
126	SPARE
127	SPARE
128	SPARE
129	D220 00
130	D220 00
131	D220 00
132	D219 00
133	D220 00
134	SPARE
135	D219 00
136	D224 00
137	D220 00
138	D219 00
139	D220 00
140	D219 00
141	D220 00
142	D255 00
52J-V151	L960 00
SEE 52P-V151	
52J-V153	L960 00
SEE 52P-V153	
52P-A034	L002 00
1	D063 00
2	D063 00
3	D063 00
4	D063 00
5	SPARE
6	D462 00
7	D008 00
8	D165 00
9	D223 00
10	D143 00
11	D464 00
12	SPARE
13	D410 00
14	D185 00
15	D389 00
16	D012 00

REF DESIGNATION PIN DWG.

52P-A034	CONT
17	D254 00
18	D254 00
19	D186 00
20	D186 00
21	D186 00
22	D186 00
23	D032 00
24	SPARE
25	D389 00
26	D016 00
27	D254 00
28	D335 00
29	D165 00
30	D158 00
31	D158 00
32	D334 00
33	D186 00
34	D032 00
35	D245 00
36	D389 00
37	D274 00
38	D254 00
39	D168 00
40	D149 00
41	D149 00
42	D149 00
43	D149 00
44	D342 00
45	D186 00
46	D185 00
47	D080 00
48	D274 00
49	D254 00
50	D159 00
51	D149 00
52	D365 00
53	D172 00
54	D106 00
55	D149 00
56	D253 00
57	D080 00
58	D142 00
59	D274 00
60	D254 00
61	D180 00
62	D149 00
63	D365 00
64	D342 00
65	D365 00
66	D151 00
67	D353 00
68	D143 00
69	D002 00
70	D143 00
71	D389 00
72	D274 00
73	D254 00
74	D089 00
75	D153 00
76	D149 00
77	D146 00

A1-F18AC-WDM-000

Change 4

R053 00

REF DESIGNATION PIN DWG.

52P-A034	CONT
78	D149 00
79	D133 00
80	D080 00
81	D142 00
82	D153 00
83	D123 00
84	D250 00
85	D169 00
86	D342 00
87	D334 00
88	D149 00
89	D149 00
90	D133 00
91	D017 00
92	D223 00
93	D123 00
94	D075 00
95	D389 00
96	D250 00
97	D169 00
98	D066 00
99	D066 00
100	D003 00
101	D407 00
102	D017 00
103	D223 00
104	D075 00
105	D075 00
106	D385 00
107	D251 00
108	D251 00
109	D251 00
110	D037 00
111	D037 00
112	D017 00
113	D413 00
114	D413 00
115	D462 00
116	D374 00
117	D149 00
118	D130 00
119	D130 00
120	D130 00
121	D185 00
122	D185 00
123	D143 00
124	D143 00
125	D185 00
126	SPARE
127	SPARE
128	SPARE

52P-A046	L002 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE

REF DESIGNATION PIN DWG.

52P-A046	CONT
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D232 00
29	D232 00
30	D269 00
31	D269 00
32	D269 00
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	D232 00
40	D024 00
41	D024 00
42	D025 00
43	D025 00
44	D269 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D232 00
51	D024 00
52	D235 00
53	D235 00
54	D024 00
55	D026 00
56	D269 00
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	D025 00
62	D024 00
63	D232 00
64	D235 00
65	D232 00
66	D024 00
67	D026 00
68	SPARE

REF DESIGNATION PIN DWG.

52P-A046	CONT
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	D269 00
74	D025 00
75	D024 00
76	D024 00
77	D024 00
78	D026 00
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D269 00
86	D025 00
87	D025 00
88	D025 00
89	D025 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	D269 00
99	D269 00
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

A1-F18AC-WDM-000

Change 4

R054 00

REF DESIGNATION
PIN DWG.

52P-B021	L007 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D166 00
14	D166 00
15	D159 00
16	D159 00
17	D092 00
18	D092 00
19	D168 00
20	D092 00
21	D159 00
22	D092 00

52P-B023	L004 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D379 00
12	D386 00
13	D386 00
14	D386 00
15	D380 00
16	D379 00
17	D386 00
18	D386 00
19	D386 00
20	D386 00
21	D386 00
22	D380 00
23	D380 00
24	D380 00
25	D380 00
26	D053 00
27	D016 00
28	D016 00
29	D153 00
30	D053 00
31	D053 00
32	D053 00
33	D163 00
34	D135 00
35	D135 00

REF DESIGNATION
PIN DWG.

52P-B023	CONT
36	D135 00
37	D135 00
38	D135 00
39	D135 00
40	D135 00
41	D135 00
42	D135 00
43	D061 00
44	D061 00
45	D061 00
46	D061 00
47	D061 00
48	D104 00
49	D070 00
50	D070 00
51	D070 00
52	D070 00
53	D070 00
54	D070 00
55	D070 00
56	D070 00
57	D070 00
58	D070 00
59	D070 00
60	D070 00
61	D070 00
62	D070 00
63	D064 00
64	D064 00
65	D060 00
66	D060 00
67	D060 00
68	D060 00
69	D060 00
70	D060 00
71	D060 00
72	D060 00
73	D060 00
74	D060 00
75	D060 00
76	D060 00
77	D060 00
78	D015 00
79	D015 00

52P-B042	L004 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE

REF DESIGNATION
PIN DWG.

52P-B042	CONT
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	D232 00
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	D070 00
41	D070 00
42	D070 00
43	D070 00
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	D070 00
52	D070 00
53	D070 00
54	D070 00
55	D104 00
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	D070 00
63	D070 00
64	D339 00
65	D339 00
66	D070 00
67	D387 00
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D232 00
75	D070 00

A1-F18AC-WDM-000

Change 4

R055 00

REF DESIGNATION PIN DWG.

52P-B042	CONT
76	D070 00
77	D070 00
78	D387 00
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	D232 00
87	D232 00
88	D232 00
89	D387 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-B156	L005 00
1	SPARE
2	D142 00
3	SPARE
4	SPARE
5	D088 00

REF DESIGNATION PIN DWG.

52P-B156	CONT
6	D142 00
52P-C032	L105 00
1	D263 00
2	SPARE
3	SPARE
4	D010 00
5	SPARE
6	SPARE
7	D217 00
8	D263 00
9	SPARE
10	D077 00
11	D135 00
12	D104 00
13	D072 00
14	SPARE
15	D074 00
16	D062 00
17	SPARE
18	D132 00
19	D090 00
20	D056 00
21	D353 00
22	SPARE
23	D095 00
24	D104 00
25	D072 00
26	D062 00
27	D136 00
28	D133 00
29	D226 00
30	D350 00
31	D134 00
32	D104 00
33	D003 00
34	D077 00
35	D104 00
36	D072 00
37	D062 00
38	D136 00
39	D356 00
40	D121 00
41	D458 00
42	D069 00
43	D020 00
44	D003 00
45	D063 00
46	D104 00
47	D104 00
48	D062 00
49	D136 00
50	D133 00
51	D071 00
52	D104 00
53	SPARE
54	D047 00
55	D346 00
56	D003 00
57	D063 00

REF DESIGNATION PIN DWG.

52P-C032	CONT
58	D074 00
59	D062 00
60	D136 00
61	D464 00
62	D071 00
63	SPARE
64	SPARE
65	SPARE
66	D047 00
67	D196 00
68	D063 00
69	D063 00
70	D413 00
71	D072 00
72	D062 00
73	D136 00
74	D464 00
75	D069 00
76	D069 00
77	D069 00
78	D185 00
79	D353 00
80	D135 00
81	D072 00
82	D165 00
83	D074 00
84	D062 00
85	D136 00
86	SPARE
87	D010 00
88	D063 00
89	D413 00
90	D136 00
91	D072 00
92	D072 00
93	D150 00
94	D062 00
95	D074 00
96	D062 00
97	D136 00
98	D136 00
99	D136 00
100	D136 00
101	D136 00
102	D072 00
103	D072 00
104	SPARE
105	D062 00
106	D074 00
107	D062 00
108	D063 00
109	D063 00
110	D062 00
111	D062 00
112	D074 00
113	D072 00
114	SPARE
115	D062 00
116	D165 00
117	D336 00
118	SPARE

A1-F18AC-WDM-000

R056 00

Change 4

REF DESIGNATION PIN DWG.

52P-C032	CONT
119	SPARE
120	D074 00
121	SPARE
122	SPARE
123	SPARE
124	D394 00
125	D342 00
126	D180 00
127	D342 00
128	D180 00

52P-C033	L105 00
----------	---------

A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
N	SPARE
N	SPARE
P	SPARE
Q	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	SPARE
c	SPARE
d	SPARE
e	SPARE
f	SPARE
g	SPARE
h	SPARE
i	SPARE
j	SPARE
k	SPARE
m	SPARE
n	SPARE
p	SPARE
q	SPARE
r	SPARE
s	SPARE
t	SPARE
u	SPARE
v	D464 00
w	D454 00
x	D331 00
y	D465 00
z	SPARE
AC	SPARE

REF DESIGNATION PIN DWG.

52P-C033	CONT
BB	SPARE
CC	SPARE
DD	D016 00
EE	D350 00
FF	D353 00
GG	D133 00
HH	D011 00
JJ	D002 00
KK	D331 00
LL	D343 00
NM	D343 00
NN	D012 00
PP	D011 00

52P-C039	L116 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D074 00
6	SPARE
7	SPARE
8	D354 00
9	D052 00
10	D224 00
11	D224 00
12	D260 00
13	D259 00
14	D127 00
15	SPARE
16	D052 00
17	D362 00
18	D362 00
19	D362 00
20	D074 00
21	D044 00
22	SPARE
23	D259 00
24	SPARE
25	SPARE
26	D052 00
27	D362 00
28	D074 00
29	D362 00
30	D362 00
31	D362 00
32	D362 00
33	SPARE
34	D193 00
35	D354 00
36	D032 00
37	D052 00
38	D362 00
39	D132 00
40	D348 00
41	D348 00
42	D348 00
43	D076 00
44	D362 00
45	SPARE
46	D193 00

REF DESIGNATION PIN DWG.

52P-C039	CONT
47	D050 00
48	D052 00
49	D362 00
50	D132 00
51	D100 00
52	D101 00
53	D101 00
54	D424 00
55	D076 00
56	D362 00
57	D044 00
58	D193 00
59	D052 00
60	D362 00
61	SPARE
62	D100 00
63	D171 00
64	SPARE
65	D171 00
66	D424 00
67	SPARE
68	D362 00
69	D051 00
70	D424 00
71	D341 00
72	D052 00
73	D362 00
74	D354 00
75	D171 00
76	D171 00
77	D171 00
78	SPARE
79	D362 00
80	D051 00
81	D355 00
82	SPARE
83	D032 00
84	D052 00
85	D362 00
86	SPARE
87	SPARE
88	D354 00
89	SPARE
90	D362 00
91	D051 00
92	D355 00
93	D051 00
94	SPARE
95	D063 00
96	D052 00
97	D362 00
98	D362 00
99	D362 00
100	D362 00
101	D362 00
102	D355 00
103	D355 00
104	SPARE
105	SPARE
106	D032 00
107	D058 00
108	D058 00
109	D058 00

A1-F18AC-WDM-000

15 April 1992

R057 00

REF DESIGNATION PIN DWG.

52P-C039 CONT
110 D058 00
111 D058 00
112 D051 00
113 D355 00
114 SPARE
115 D341 00
116 D032 00
117 D341 00
118 D254 00
119 D032 00
120 D032 00
121 D126 00
122 SPARE
123 SPARE
124 D370 00
125 D370 00
126 D254 00
127 SPARE
128 SPARE

52P-C057A L106 00

A SPARE
B D144 00
C D144 00
D D144 00
E D144 00
F D144 00
G D144 00
H D144 00
J D144 00
K D144 00
L D144 00

52P-C057B L106 00

A SPARE
B SPARE
C D140 00
D D140 00
E D140 00
F D140 00

52P-C057C L106 00

A D197 00
B D007 00
C D016 00
D D370 00
E D429 00
F D158 00
G D022 00
H D022 00
J D022 00
K D148 00
L D148 00
M D197 00
N SPARE
P D007 00
R SPARE

REF DESIGNATION PIN DWG.

52P-C057C CONT
S D007 00
T D414 00
U D248 00
V D015 00
W D416 00
X D257 00
Y D211 00
Z D197 00
a D261 00
b D229 00
c D201 00
d D257 00
e D211 00
f D211 00
g D211 00
h D107 00
k D229 00
m D229 00
n D229 00
p D229 00
q D107 00
r D259 00
s D259 00
t D259 00
u D259 00
v D032 00
w D032 00
x D032 00
y SPARE
z SPARE
AC SPARE
BB SPARE
CC SPARE
DD SPARE
EE SPARE
FF SPARE
GG SPARE
HH SPARE
JJ SPARE
KK SPARE
LL SPARE
MM SPARE
NN SPARE
PP SPARE
RR SPARE
SS SPARE
TT SPARE
UU SPARE
VV SPARE
XX SPARE
YY SPARE
ZZ SPARE

52P-C057D L106 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE

REF DESIGNATION PIN DWG.

52P-C057D CONT
7 SPARE
8 SPARE
9 D462 00
10 SPARE
11 D462 00
12 D185 00
13 SPARE
14 D057 00
15 D185 00
16 D185 00
17 SPARE
18 D185 00
19 D185 00
20 SPARE
21 SPARE
22 D008 00
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 D008 00
28 SPARE
29 D166 00
30 SPARE
31 D358 00
32 D044 00
33 SPARE
34 D217 00
35 D425 00
36 D416 00
37 D416 00
38 D359 00
39 D359 00
40 D429 00
41 D045 00
42 D022 00
43 D133 00
44 D007 00
45 D007 00
46 D007 00
47 D045 00
48 D274 00
49 D153 00
50 D388 00
51 D223 00
52 D106 00
53 D425 00
54 D064 00
55 D016 00
56 D002 00
57 D185 00
58 D159 00
59 D133 00
60 D017 00
61 D017 00
62 D017 00
63 D274 00
64 D274 00

A1-F18AC-WDM-000

Change 4

R058 00

REF DESIGNATION
PIN DWG.

52P-C057D	CONT
65	D274 00
66	D016 00
67	D064 00
68	D064 00
69	D064 00
70	D018 00
71	D114 00
72	D114 00
73	D114 00
74	D049 00
75	D049 00
76	D049 00
77	D134 00
78	D003 00
79	D133 00
80	SPARE
81	D168 00
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	D388 00
87	D382 00
88	D374 00
89	D123 00
90	D465 00
91	D373 00
92	D358 00
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	D465 00
100	D465 00
101	D357 00
102	D373 00
103	D394 00
104	D394 00
105	D160 00
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	D373 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE

REF DESIGNATION
PIN DWG.

52P-C057D	CONT
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-C057E	L106 00
1	D410 00
2	D074 00
3	D193 00
4	D366 00
5	D044 00
6	D032 00
7	D025 00
8	SPARE
9	D176 00
10	SPARE
11	SPARE
12	D074 00
13	SPARE
14	D343 00
15	D022 00
16	SPARE
17	D006 00
18	D389 00
19	D389 00
20	D389 00
21	D389 00
22	SPARE
23	D032 00
24	D343 00
25	D022 00
26	D306 00
27	D224 00
28	D149 00
29	D022 00
30	D177 00
31	D148 00
32	D146 00
33	D016 00
34	D032 00
35	D123 00
36	D123 00
37	D302 00
38	D012 00
39	D152 00
40	D069 00
41	D078 00
42	D345 00
43	D186 00
44	D148 00
45	D006 00
46	D004 00
47	D143 00
48	D302 00
49	D309 00
50	D005 00
51	D465 00
52	D274 00
53	D385 00

REF DESIGNATION
PIN DWG.

52P-C057E	CONT
54	D075 00
55	D186 00
56	D350 00
57	D006 00
58	D139 00
59	D302 00
60	D196 00
61	D149 00
62	D038 00
63	D274 00
64	D149 00
65	D186 00
66	D149 00
67	D345 00
68	D019 00
69	D069 00
70	SPARE
71	D261 00
72	D302 00
73	D370 00
74	SPARE
75	SPARE
76	D143 00
77	D142 00
78	D025 00
79	D133 00
80	D071 00
81	D347 00
82	D149 00
83	D175 00
84	D302 00
85	D012 00
86	D148 00
87	D186 00
88	D149 00
89	D367 00
90	D037 00
91	D175 00
92	D105 00
93	D105 00
94	D274 00
95	D367 00
96	D282 00
97	D462 00
98	D394 00
99	D037 00
100	D023 00
101	D245 00
102	D074 00
103	D103 00
104	D089 00
105	D274 00
106	D337 00
107	D415 00
108	D335 00
109	D069 00
110	D069 00
111	D069 00
112	D069 00
113	SPARE

A1-F18AC-WDM-000

15 April 1992

R059 00

REF DESIGNATION PIN DWG.

52P-C057E	CONT
114	D006 00
115	D462 00
116	D343 00
117	D343 00
118	D343 00
119	D123 00
120	D009 00
121	D309 00
122	D148 00
123	D020 00
124	D020 00
125	D149 00
126	D046 00
127	D046 00
128	D308 00

52P-C057F	L106 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D053 00
6	SPARE
7	SPARE
8	D020 00
9	SPARE
10	SPARE
11	D022 00
12	D241 00
13	D241 00
14	D241 00
15	D020 00
16	D020 00
17	D046 00
18	SPARE
19	D012 00
20	D018 00
21	D037 00
22	D241 00
23	D020 00
24	SPARE
25	SPARE
26	D027 00
27	D133 00
28	D133 00
29	SPARE
30	D241 00
31	D018 00
32	D018 00
33	SPARE
34	SPARE
35	D168 00
36	D037 00
37	D241 00
38	D038 00
39	SPARE
40	D335 00
41	D335 00
42	D019 00

REF DESIGNATION PIN DWG.

52P-C057F	CONT
43	D053 00
44	D337 00
45	D325 00
46	D325 00
47	SPARE
48	SPARE
49	SPARE
50	D027 00
51	D175 00
52	SPARE
53	SPARE
54	D334 00
55	D334 00
56	D337 00
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	D095 00
63	SPARE
64	D302 00
65	SPARE
66	D103 00
67	D020 00
68	D068 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	D334 00
74	SPARE
75	D336 00
76	D001 00
77	SPARE
78	D425 00
79	D379 00
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D416 00
86	D172 00
87	D175 00
88	D172 00
89	D425 00
90	D379 00
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	D254 00
99	D346 00
100	D379 00
101	D379 00
102	SPARE

REF DESIGNATION PIN DWG.

52P-C057F	CONT
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-C057G	L106 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D394 00
7	D394 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE

A1-F18AC-WDM-000

R060 00

Change 4

REF DESIGNATION
PIN DWG.

52P-C057G	CONT
32	SPARE
33	SPARE
34	D160 00
35	SPARE
36	SPARE
37	SPARE
38	D363 00
39	D363 00
40	D363 00
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D254 00
51	D392 00
52	D392 00
53	D392 00
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	D455 00
81	D465 00
82	D392 00
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE

REF DESIGNATION
PIN DWG.

52P-C057G	CONT
92	SPARE
93	SPARE
94	D268 00
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
52P-C085	L103 00
A	SPARE
B	D151 00
C	D140 00
D	D151 00
52P-C159A	L102 00
A	D144 00
B	SPARE
C	D144 00
D	D144 00
E	D144 00
F	D144 00
G	D144 00
H	D144 00
J	D144 00
K	D144 00
L	D144 00
52P-C159B	L100 00
A	D142 00
B	D142 00
C	D142 00
D	D140 00
E	SPARE
F	SPARE
G	SPARE
H	D140 00
J	D140 00
K	D140 00
L	D140 00
52P-C159C	L100 00
A	SPARE
B	SPARE
C	SPARE
D	D143 00
E	D143 00
F	D143 00
52P-C159D	L100 00
A	SPARE
B	D151 00
C	D151 00

REF DESIGNATION
PIN DWG.

52P-C159D	CONT
D	D152 00
E	D152 00
F	D152 00
52P-C159E	L100 00
A	D311 00
B	D311 00
C	SPARE
D	SPARE
E	D353 00
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	D025 00
b	D025 00
c	D025 00
d	D025 00
e	D025 00
f	D025 00
g	D150 00
h	D150 00
k	D150 00
m	D248 00
n	D406 00
p	D025 00
q	D353 00
r	D028 00
s	D028 00
t	D049 00
u	D142 00
v	D025 00
w	D025 00
x	D228 00
52P-C159F	L102 00
1	SPARE
2	SPARE
3	SPARE
4	D429 00
5	D157 00
6	D301 00
7	D155 00
8	D155 00

A1-F18AC-WDM-000

15 April 1992

R061 00

REF DESIGNATION PIN DWG.

52P-C159F	CONT
9	D462 00
10	SPARE
11	D057 00
12	SPARE
13	D143 00
14	D391 00
15	D155 00
16	D462 00
17	D008 00
18	D300 00
19	D394 00
20	D151 00
21	D143 00
22	D425 00
23	D416 00
24	D462 00
25	D462 00
26	D123 00
27	D143 00
28	D143 00
29	D166 00
30	D009 00
31	D016 00
32	SPARE
33	SPARE
34	D300 00
35	D166 00
36	D143 00
37	D149 00
38	D155 00
39	SPARE
40	SPARE
41	SPARE
42	D153 00
43	D156 00
44	D153 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	D155 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE
52P-C159G	L102 00
1	D186 00
2	D186 00
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D159 00
9	D360 00
10	D282 00

REF DESIGNATION PIN DWG.

52P-C159G	CONT
11	D202 00
12	D202 00
13	D349 00
14	D166 00
15	D010 00
16	D334 00
17	D336 00
18	SPARE
19	D282 00
20	D391 00
21	D407 00
22	D202 00
23	D166 00
24	D367 00
25	SPARE
26	SPARE
27	D300 00
28	D150 00
29	D150 00
30	D150 00
31	D150 00
32	D142 00
33	D159 00
34	D367 00
35	SPARE
36	D186 00
37	D186 00
38	D186 00
39	D186 00
40	D069 00
41	D367 00
42	D158 00
43	D157 00
44	D336 00
45	SPARE
46	D462 00
47	D165 00
48	D180 00
49	D341 00
50	D125 00
51	D078 00
52	D366 00
53	D225 00
54	D071 00
55	SPARE
56	SPARE
57	D342 00
58	D158 00
59	D143 00
60	D334 00
61	D253 00
62	D142 00
63	D142 00
64	D143 00
65	D142 00
66	SPARE
67	SPARE
68	D302 00
69	D027 00
70	D334 00

REF DESIGNATION PIN DWG.

52P-C159G	CONT
71	D261 00
72	SPARE
73	D143 00
74	D143 00
75	SPARE
76	SPARE
77	SPARE
78	D139 00
79	D407 00
80	D143 00
81	D299 00
82	D337 00
83	D308 00
84	D464 00
85	SPARE
86	SPARE
87	D098 00
88	D103 00
89	D105 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	D010 00
52P-C161	L102 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	D155 00
20	D465 00
21	D465 00
22	D466 00
23	D466 00
24	D150 00
25	D335 00
26	D455 00
27	D465 00

A1-F18AC-WDM-000

Change 1 - 1 September 1992

R062 00

REF DESIGNATION PIN DWG.

52P-C161	CONT
28	D465 00
29	D394 00
30	D416 00
31	D465 00
32	D465 00
33	D334 00
34	D465 00
35	D337 00
36	D335 00
37	D462 00
38	SPARE
39	SPARE
40	SPARE

52P-D008	L203 00
A	D046 00
B	D198 00
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	D126 00
J	D162 00
K	D357 00
L	D028 00
M	D028 00

52P-D024A	L202 00
A	SPARE
B	D145 00
C	D145 00
D	D145 00
E	D145 00
F	D145 00
G	D145 00
H	D145 00
J	D145 00
K	D145 00
L	D145 00

52P-D024B	L202 00
A	D351 00
B	D351 00
C	D151 00
D	D351 00
E	D151 00
F	D351 00
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE

52P-D024C	L202 00
A	D057 00
B	D057 00

REF DESIGNATION PIN DWG.

52P-D024C	CONT
C	D057 00
D	D015 00
E	SPARE
F	D083 00
G	D083 00
H	D083 00
J	D467 00
K	D057 00
L	D057 00
M	D057 00
N	D057 00
P	D150 00
R	D057 00
S	D057 00
T	D057 00
U	D057 00
V	D057 00
W	D057 00
X	D057 00
Y	SPARE
Z	SPARE
a	D122 00
b	D122 00
c	D198 00
d	D198 00
e	D198 00
f	D122 00
g	D122 00
h	D142 00
k	D142 00
m	D142 00
n	SPARE
p	D122 00
q	D146 00
r	D146 00
s	D122 00
t	D122 00
u	D122 00
v	D150 00
w	D122 00
x	D146 00

52P-D024D	L202 00
1	D363 00
2	D005 00
3	D005 00
4	D016 00
5	D363 00
6	D132 00
7	D132 00
8	D132 00
9	D005 00
10	D023 00
11	D363 00
12	D017 00
13	D339 00
14	D339 00
15	D363 00
16	D005 00

REF DESIGNATION PIN DWG.

52P-D024D	CONT
17	D168 00
18	D363 00
19	D017 00
20	D049 00
21	D153 00
22	D339 00
23	D118 00
24	D466 00
25	D201 00
26	D017 00
27	D115 00
28	D115 00
29	D153 00
30	D115 00
31	D154 00
32	D363 00
33	D339 00
34	D017 00
35	D123 00
36	D345 00
37	D115 00
38	D153 00
39	D143 00
40	D363 00
41	D245 00
42	D153 00
43	D345 00
44	D115 00
45	D346 00
46	D060 00
47	D132 00
48	D132 00
49	D132 00
50	D082 00
51	D005 00
52	D201 00
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	D123 00
62	D153 00
63	D168 00
64	D339 00
65	SPARE
66	D017 00
67	D363 00
68	D363 00
69	D363 00
70	D363 00
71	SPARE
72	SPARE
73	SPARE

A1-F18AC-WDM-000

Change 4

R063 00

REF DESIGNATION PIN DWG.

52P-D024D	CONT
74	D143 00
75	D115 00
76	D057 00
77	D057 00
78	D057 00
79	D057 00
52P-D024E	L202 00
A	D351 00
B	D351 00
C	SPARE
D	SPARE
E	SPARE
F	D351 00
52P-D026A	L206 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D145 00
G	D145 00
H	D145 00
J	D145 00
K	D145 00
L	D145 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	D168 00
13	D201 00
14	D466 00
15	D016 00
16	D075 00
17	D023 00
18	D005 00
19	D456 00
20	D262 00
21	D029 00
22	SPARE
23	D339 00
24	SPARE
25	D466 00
26	D075 00
27	D075 00
28	D168 00
29	D153 00
30	D168 00
31	D005 00

REF DESIGNATION PIN DWG.

52P-D026A	CONT
32	D245 00
33	D465 00
34	D345 00
35	D132 00
36	D363 00
37	D017 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D456 00
43	D456 00
44	D456 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
52P-D026B	L206 00
A	D351 00
B	SPARE
C	D151 00
D	D351 00
E	D151 00
F	D351 00
G	D351 00
H	D351 00
52P-D026C	L206 00
A	D057 00
B	D467 00
C	D057 00
D	D198 00
E	D057 00
F	D228 00
G	D191 00
H	D198 00
J	D228 00
K	D057 00
L	D057 00
M	D057 00
N	D057 00
P	D168 00
R	D168 00
S	D198 00
T	D474 00
U	SPARE
V	SPARE
W	SPARE
X	D465 00
Y	SPARE

REF DESIGNATION PIN DWG.

52P-D026C	CONT
Z	SPARE
a	D122 00
b	D122 00
c	D198 00
d	D198 00
e	D198 00
f	D122 00
g	D122 00
h	D122 00
k	D228 00
m	D122 00
n	D122 00
p	D122 00
q	D259 00
r	D122 00
s	D122 00
t	D122 00
u	D122 00
v	D122 00
w	D122 00
x	D259 00
52P-D026D	L206 00
1	D201 00
2	D466 00
3	D466 00
4	D300 00
5	D201 00
6	D075 00
7	D075 00
8	D075 00
9	D168 00
10	D075 00
11	D168 00
12	D413 00
13	D262 00
14	D413 00
15	D413 00
16	D075 00
17	D075 00
18	D075 00
19	D413 00
20	D262 00
21	D300 00
22	D201 00
23	D201 00
24	D466 00
25	D466 00
26	D075 00
27	D075 00
28	D168 00
29	D168 00
30	D168 00
31	D168 00
32	D168 00
33	D345 00
34	D123 00
35	D153 00
36	D153 00
37	D153 00

A1-F18AC-WDM-000

Change 4

R064 00

REF DESIGNATION
PIN DWG.

52P-D028	L205 00
1	SPARE
2	SPARE
3	D180 00
4	D180 00
5	D162 00
6	SPARE
7	SPARE
8	SPARE
9	D089 00
10	D090 00
11	D181 00
12	D029 00
13	D059 00
14	SPARE
15	D392 00
16	SPARE
17	D080 00
18	D467 00
19	D467 00
20	D092 00
21	D080 00
22	D083 00
23	D059 00
24	D392 00
25	D392 00
26	D089 00
27	D005 00
28	D115 00
29	D115 00
30	D073 00
31	D019 00
32	D019 00
33	D083 00
34	D059 00
35	D465 00
36	D392 00
37	D361 00
38	D103 00
39	D115 00
40	D363 00
41	D029 00
42	D029 00
43	D029 00
44	D019 00
45	D089 00
46	D059 00
47	D455 00
48	D361 00
49	D339 00
50	D361 00
51	D363 00
52	D164 00
53	D164 00
54	D038 00
55	D029 00
56	D017 00
57	D089 00
58	D059 00
59	D014 00

REF DESIGNATION
PIN DWG.

52P-D028	CONT
60	D467 00
61	D142 00
62	D363 00
63	D164 00
64	D164 00
65	D164 00
66	D339 00
67	D195 00
68	D017 00
69	D090 00
70	D008 00
71	D017 00
72	D088 00
73	D245 00
74	D143 00
75	D164 00
76	D339 00
77	D339 00
78	D407 00
79	D017 00
80	D088 00
81	D059 00
82	SPARE
83	SPARE
84	D116 00
85	D181 00
86	D153 00
87	D143 00
88	D150 00
89	D407 00
90	D021 00
91	D409 00
92	D059 00
93	SPARE
94	SPARE
95	SPARE
96	D361 00
97	D195 00
98	D195 00
99	D195 00
100	D016 00
101	D016 00
102	D092 00
103	D038 00
104	SPARE
105	SPARE
106	SPARE
107	D060 00
108	D054 00
109	D409 00
110	SPARE
111	D082 00
112	D092 00
113	SPARE
114	D253 00
115	SPARE
116	SPARE
117	SPARE
118	D153 00
119	SPARE

REF DESIGNATION
PIN DWG.

52P-D028	CONT
120	D075 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-D029	L205 00
1	D135 00
2	D014 00
3	D135 00
4	D014 00
5	D135 00
6	D116 00
7	D130 00
8	D132 00
9	D163 00
10	D068 00
11	D068 00
12	D409 00
13	D068 00
14	D181 00
15	D135 00
16	D184 00
17	D077 00
18	D077 00
19	D077 00
20	D029 00
21	D011 00
22	D011 00
23	D163 00
24	D128 00
25	D135 00
26	D184 00
27	D063 00
28	D264 00
29	D264 00
30	D026 00
31	SPARE
32	D465 00
33	D011 00
34	D068 00
35	D014 00
36	D054 00
37	D184 00
38	D073 00
39	D113 00
40	D038 00
41	D038 00
42	D038 00
43	D182 00
44	D465 00
45	D011 00
46	D068 00
47	D014 00
48	D184 00

A1-F18AC-WDM-000

Change 4

R065 00

REF DESIGNATION
PIN DWG.

52P-D029	CONT
49	D073 00
50	D113 00
51	D038 00
52	D049 00
53	D049 00
54	D027 00
55	D182 00
56	D465 00
57	D233 00
58	D068 00
59	D117 00
60	D073 00
61	D113 00
62	D038 00
63	D049 00
64	D049 00
65	D049 00
66	D339 00
67	D112 00
68	D465 00
69	D233 00
70	D254 00
71	D054 00
72	D184 00
73	D091 00
74	D113 00
75	D038 00
76	D049 00
77	D049 00
78	D112 00
79	D132 00
80	D233 00
81	SPARE
82	D354 00
83	D054 00
84	D184 00
85	D335 00
86	D264 00
87	D264 00
88	D112 00
89	D112 00
90	D118 00
91	D235 00
92	D068 00
93	D029 00
94	D054 00
95	D054 00
96	D184 00
97	D413 00
98	SPARE
99	D117 00
100	D118 00
101	D118 00
102	D235 00
103	D068 00
104	D067 00
105	D456 00
106	D054 00
107	D184 00
108	D184 00

REF DESIGNATION
PIN DWG.

52P-D029	CONT
109	D184 00
110	D184 00
111	D184 00
112	D184 00
113	D068 00
114	D031 00
115	D413 00
116	SPARE
117	D068 00
118	D068 00
119	D068 00
120	D068 00
121	SPARE
122	D051 00
123	SPARE
124	SPARE
125	SPARE
126	D075 00
127	D075 00
128	D075 00
52P-D038	L217 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D416 00
10	D416 00
11	D410 00
12	D476 00
13	D476 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	D476 00
19	SPARE
20	D476 00
21	D476 00
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	D051 00
27	D476 00
28	D051 00
29	D051 00
30	D026 00
31	D026 00
32	D051 00
33	SPARE
34	D476 00
35	SPARE
36	SPARE
37	D471 00

REF DESIGNATION
PIN DWG.

52P-D038	CONT
38	D471 00
39	D051 00
40	D115 00
41	D335 00
42	D184 00
43	D184 00
44	D051 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D051 00
51	D115 00
52	D250 00
53	D250 00
54	D115 00
55	SPARE
56	D190 00
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	D051 00
62	D115 00
63	D251 00
64	D250 00
65	D251 00
66	D115 00
67	D476 00
68	D193 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D088 00
75	D115 00
76	D115 00
77	D115 00
78	D476 00
79	D370 00
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D024 00
86	D083 00
87	D083 00
88	D083 00
89	D091 00
90	D370 00
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D025 00

A1-F18AC-WDM-000

Change 4

R066 00

REF DESIGNATION PIN DWG.

52P-D038	CONT
98	D025 00
99	D026 00
100	D026 00
101	D026 00
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

52P-D086	L201 00
	L203 00
A	SPARE
B	D151 00
C	D351 00
D	D151 00

52P-D092A	L202 00
A	D152 00
B	D152 00
C	D152 00
D	D152 00
E	SPARE
F	D143 00

52P-D092B	L202 00
A	D063 00
B	D480 00
C	D333 00
D	D333 00
E	SPARE
F	D222 00
G	D259 00
H	D222 00

REF DESIGNATION PIN DWG.

52P-D092B	CONT
J	D222 00
K	SPARE
L	D223 00
52P-D092C	L202 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D254 00
14	D126 00
15	D180 00
16	D394 00
17	SPARE
18	D173 00
19	D176 00
20	D262 00
21	D111 00
22	D425 00
23	D467 00
24	D172 00
25	D038 00
26	D301 00
27	D467 00
28	D075 00
29	D080 00
30	D430 00
31	D124 00
32	D354 00
33	D021 00
34	D021 00
35	SPARE
36	SPARE
37	D038 00

52P-E007	L118 00
1	D413 00
2	D137 00
3	D137 00
4	D137 00
5	D137 00
6	D137 00
7	D137 00
8	D137 00
9	D137 00
10	D137 00
11	D413 00
12	D137 00
13	D139 00
14	D137 00

REF DESIGNATION PIN DWG.

52P-E007	CONT
15	D034 00
16	D034 00
17	D174 00
18	D174 00
19	D174 00
20	D174 00
21	D176 00
22	D176 00
23	SPARE
24	SPARE
25	SPARE
26	D033 00
27	D177 00
28	SPARE
29	SPARE
30	D139 00
31	SPARE
32	SPARE
33	D176 00
34	SPARE
35	SPARE
36	D349 00
37	D033 00
38	D177 00
39	SPARE
40	D045 00
41	D023 00
42	D046 00
43	D023 00
44	SPARE
45	D176 00
46	SPARE
47	SPARE
48	D230 00
49	D177 00
50	SPARE
51	D034 00
52	D036 00
53	D036 00
54	D019 00
55	D020 00
56	D176 00
57	D173 00
58	SPARE
59	D230 00
60	D177 00
61	SPARE
62	D034 00
63	SPARE
64	D035 00
65	D035 00
66	D022 00
67	D176 00
68	D176 00
69	D233 00
70	SPARE
71	SPARE
72	D009 00
73	D093 00
74	SPARE

A1-F18AC-WDM-000

R067 00

Change 4

REF DESIGNATION
PIN DWG.

52P-E007	CONT
75	D020 00
76	D020 00
77	D020 00
78	D027 00
79	D176 00
80	D233 00
81	SPARE
82	SPARE
83	SPARE
84	D196 00
85	D167 00
86	SPARE
87	SPARE
88	SPARE
89	D037 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	D196 00
97	D167 00
98	D168 00
99	SPARE
100	D168 00
101	D425 00
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	D218 00
108	D218 00
109	D218 00
110	D234 00
111	D234 00
112	D233 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

52P-E009A	L302 00
1	SPARE
2	SPARE
3	SPARE

REF DESIGNATION
PIN DWG.

52P-E009A	CONT
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D241 00
15	SPARE
16	SPARE
17	D241 00
18	SPARE
19	SPARE
20	SPARE
21	D241 00
22	D224 00
23	D241 00
24	D241 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D378 00
31	SPARE
32	SPARE
33	D388 00
34	D378 00
35	D378 00
36	SPARE
37	D377 00
38	D217 00
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	D371 00
44	D371 00
45	D371 00
46	D371 00
47	D371 00
48	D371 00
49	D371 00
50	D377 00
51	D241 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	D371 00
57	D371 00
58	D371 00
59	D371 00
60	D371 00
61	D371 00
62	D371 00
63	D375 00

REF DESIGNATION
PIN DWG.

52P-E009A	CONT
64	SPARE
65	D230 00
66	SPARE
67	SPARE
68	SPARE
69	D371 00
70	D371 00
71	D378 00
72	D378 00
73	SPARE
74	D376 00
75	D376 00
76	SPARE
77	D375 00
78	D248 00
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	D330 00
92	D248 00
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
52P-E009B	L302 00
A1	D380 00
A2	D380 00
52P-E010A	L302 00
1	D209 00
2	D209 00
3	D209 00
4	D241 00
5	D241 00
6	D031 00
7	D012 00
8	D325 00
9	D325 00
10	SPARE
11	SPARE
12	SPARE
13	D335 00
14	D115 00
15	D115 00

A1-F18AC-WDM-000

Change 4

R068 00

REF DESIGNATION
PIN DWG.

52P-E010A	CONT
16	D115 00
17	D012 00
18	D343 00
19	D343 00
20	D012 00
21	D325 00
22	D347 00
23	D365 00
24	D365 00
25	SPARE
26	SPARE
27	D115 00
28	D356 00
29	D355 00
30	D011 00
31	SPARE
32	D268 00
33	D102 00
34	D102 00
35	D102 00
36	D102 00
37	D007 00
38	D007 00
39	SPARE
40	D003 00
41	D355 00
42	D105 00
43	D355 00
44	D100 00
45	D170 00
46	D102 00
47	D170 00
48	D424 00
49	D424 00
50	D007 00
51	D359 00
52	D007 00
53	D003 00
54	D341 00
55	D354 00
56	D348 00
57	D348 00
58	D170 00
59	D170 00
60	D170 00
61	D101 00
62	D101 00
63	D334 00
64	D007 00
65	D359 00
66	D007 00
67	D003 00
68	D100 00
69	D348 00
70	D341 00
71	D126 00
72	D127 00
73	D124 00
74	D354 00
75	D354 00

REF DESIGNATION
PIN DWG.

52P-E010A	CONT
76	D354 00
77	D334 00
78	D359 00
79	SPARE
80	SPARE
81	D111 00
82	D370 00
83	SPARE
84	D355 00
85	D355 00
86	D226 00
87	D134 00
88	D350 00
89	D134 00
90	D466 00
91	D158 00
92	D098 00
93	D342 00
94	D098 00
95	D121 00
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	D009 00
101	D311 00
102	SPARE
103	SPARE
104	SPARE
105	D180 00
106	D342 00
52P-E010B	L302 00
12	D414 00
2	D107 00
3	D107 00
4	D201 00
5	D229 00
6	D229 00
7	D211 00
8	D259 00
9	D259 00
10	D259 00
11	D257 00
12	D229 00
13	D416 00
14	D211 00
15	D259 00
16	D259 00
17	D248 00
18	D229 00
19	SPARE
20	D211 00
21	D211 00
22	D229 00
23	D261 00
24	D350 00
25	SPARE
26	SPARE

REF DESIGNATION
PIN DWG.

52P-E011	L118 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	D370 00
N	D370 00
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	D471 00
Z	D471 00
a	SPARE
b	SPARE
c	SPARE
d	SPARE
e	SPARE
f	SPARE
g	SPARE
h	SPARE
k	SPARE
m	SPARE
n	SPARE
p	D197 00
q	SPARE
r	SPARE
s	SPARE
t	SPARE
u	SPARE
v	SPARE
w	D361 00
x	D361 00
y	SPARE
z	D197 00
AA	D197 00
BB	D189 00
CC	D022 00
DD	D022 00
EE	D022 00
FF	D189 00
GG	D189 00
HH	D198 00
52P-E059	L111 00
1	SPARE
2	SPARE
3	SPARE

A1-F18AC-WDM-000

Change 4

R069 00

REF DESIGNATION PIN DWG.

52P-E059	CONT
4	SPARE
5	SPARE
6	SPARE
7	D164 00
8	D253 00
9	D346 00
10	D027 00
11	D346 00
12	D346 00
13	D029 00
14	D035 00
15	D165 00
16	D346 00
17	D168 00
18	D168 00
19	D334 00
20	SPARE
21	SPARE
22	SPARE
23	D030 00
24	D430 00
25	D033 00
26	D456 00
27	D462 00
28	D031 00
29	D466 00
30	D465 00
31	D002 00
32	D173 00
33	D456 00
34	D033 00
35	D430 00
36	D033 00
37	D415 00
38	SPARE
39	D158 00
40	D036 00
41	D172 00
42	D037 00
43	D106 00
44	D069 00
45	SPARE
46	D033 00
47	D358 00
48	SPARE
49	D358 00
50	D139 00
51	D173 00
52	D300 00
53	D002 00
54	D464 00
55	D254 00
56	D080 00
57	SPARE
58	D034 00
59	D456 00
60	D166 00
61	D139 00
62	D037 00
63	D165 00

REF DESIGNATION PIN DWG.

52P-E059	CONT
64	D093 00
65	D093 00
66	D037 00
67	D016 00
68	D358 00
69	SPARE
70	SPARE
71	D352 00
72	D180 00
73	D092 00
74	D168 00
75	D339 00
76	D037 00
77	D048 00
78	D018 00
79	D245 00
80	SPARE
81	D034 00
82	SPARE
83	D352 00
84	D394 00
85	SPARE
86	D325 00
87	D020 00
88	D006 00
89	D020 00
90	D037 00
91	D027 00
92	D223 00
93	SPARE
94	SPARE
95	D352 00
96	D160 00
97	D245 00
98	D105 00
99	D347 00
100	D075 00
101	D031 00
102	D165 00
103	D010 00
104	SPARE
105	SPARE
106	D034 00
107	D394 00
108	D165 00
109	D157 00
110	D157 00
111	D157 00
112	D157 00
113	D217 00
114	SPARE
115	SPARE
116	D034 00
117	D034 00
118	D098 00
119	SPARE
120	D034 00
121	SPARE
122	SPARE
123	SPARE

REF DESIGNATION PIN DWG.

52P-E059	CONT
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-F001	L219 00
A	SPARE
B	SPARE
C	D122 00
D	D122 00
E	D122 00
F	D198 00
G	D198 00
H	D198 00
J	D361 00
K	D361 00
L	D122 00
M	D122 00
N	D122 00
P	D122 00
R	D122 00
S	D223 00
T	D215 00
U	D215 00
V	D215 00
W	D122 00
X	D041 00
52P-F002A	L302 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D058 00
9	D257 00
10	D257 00
11	D257 00
12	D058 00
13	D230 00
14	D224 00
15	D224 00
16	D224 00
17	D224 00
18	D229 00
19	D217 00
20	D217 00
21	D200 00
22	D200 00
23	D230 00
24	D240 00
25	D224 00
26	D230 00
27	D224 00
28	D204 00

A1-F18AC-WDM-000

Change 4

R070 00

REF DESIGNATION PIN DWG.

52P-F002A	CONT
29	D204 00
30	D204 00
31	D204 00
32	D204 00
33	D205 00
34	D205 00
35	D205 00
36	D120 00
37	D120 00
38	D240 00
39	D248 00
40	D330 00
41	D204 00
42	D204 00
43	D206 00
44	D206 00
45	D206 00
46	D115 00
47	D311 00
48	D311 00
49	D410 00
50	D120 00
51	D230 00
52	D224 00
53	D330 00
54	D207 00
55	D205 00
56	D418 00
57	D418 00
58	D206 00
59	D115 00
60	D115 00
61	D416 00
62	D416 00
63	D206 00
64	D120 00
65	D213 00
66	D473 00
67	D224 00
68	D207 00
69	D120 00
70	D120 00
71	D120 00
72	D206 00
73	D418 00
74	D120 00
75	D206 00
76	D206 00
77	D206 00
78	D213 00
79	D473 00
80	SPARE
81	D204 00
82	D204 00
83	D207 00
84	D207 00
85	D204 00
86	D207 00
87	D207 00
88	D207 00

REF DESIGNATION PIN DWG.

52P-F002A	CONT
89	D207 00
90	D210 00
91	D210 00
92	D210 00
93	D473 00
94	SPARE
95	D262 00
96	D230 00
97	D230 00
98	SPARE
99	D473 00
100	SPARE
101	D473 00
102	D473 00
103	D473 00
104	D473 00
105	D473 00
106	D473 00
52P-F002B	L302 00
1	D057 00
2	D122 00
3	D122 00
4	D122 00
5	D189 00
6	D189 00
7	D228 00
8	D237 00
9	D122 00
10	D060 00
11	D040 00
12	D189 00
13	D416 00
14	D219 00
15	D238 00
16	D238 00
17	D238 00
18	D122 00
19	D414 00
20	D219 00
21	D219 00
22	D222 00
23	D222 00
24	D222 00
25	D238 00
26	D260 00
52P-F003	L317 00
1	D413 00
2	D138 00
3	D138 00
4	D138 00
5	D138 00
6	D138 00
7	D138 00
8	D138 00
9	D138 00
10	D138 00

REF DESIGNATION PIN DWG.

52P-F003	CONT
11	D413 00
12	D138 00
13	D139 00
14	D139 00
15	D138 00
16	SPARE
17	SPARE
18	D178 00
19	D178 00
20	D178 00
21	D178 00
22	D173 00
23	D233 00
24	D233 00
25	SPARE
26	SPARE
27	D174 00
28	D173 00
29	D173 00
30	D173 00
31	D173 00
32	D173 00
33	SPARE
34	D169 00
35	SPARE
36	D230 00
37	D174 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	D173 00
44	SPARE
45	SPARE
46	D051 00
47	D174 00
48	SPARE
49	D037 00
50	D020 00
51	D019 00
52	SPARE
53	SPARE
54	D173 00
55	SPARE
56	SPARE
57	SPARE
58	D234 00
59	D174 00
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	D234 00
70	D093 00

A1-F18AC-WDM-000

15 April 1992

R071 00

REF DESIGNATION PIN DWG.

52P-F003	CONT
71	D454 00
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	D233 00
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	D218 00
91	D218 00
92	D218 00
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE

52P-F004A	L302 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D021 00
9	D163 00
10	D163 00
11	D163 00
12	D054 00
13	D118 00
14	D115 00
15	D097 00
16	D097 00
17	D097 00
18	D097 00
19	D059 00
20	D059 00
21	D059 00
22	D059 00
23	D059 00
24	D059 00
25	D054 00
26	D132 00
27	D001 00

REF DESIGNATION PIN DWG.

52P-F004A	CONT
28	D245 00
29	D245 00
30	D004 00
31	D458 00
32	D353 00
33	D156 00
34	SPARE
35	D311 00
36	D068 00
37	D425 00
38	D242 00
39	D054 00
40	D118 00
41	D028 00
42	D268 00
43	D264 00
44	D264 00
45	D113 00
46	D097 00
47	D113 00
48	D264 00
49	D264 00
50	SPARE
51	D242 00
52	D054 00
53	D118 00
54	D056 00
55	D029 00
56	D114 00
57	D114 00
58	D113 00
59	D112 00
60	D112 00
61	D112 00
62	D112 00
63	D105 00
64	D106 00
65	D225 00
66	D054 00
67	D268 00
68	D056 00
69	D114 00
70	D057 00
71	D057 00
72	D057 00
73	D365 00
74	D103 00
75	D103 00
76	D103 00
77	SPARE
78	D225 00
79	D054 00
80	D118 00
81	D055 00
82	D055 00
83	D055 00
84	D225 00
85	D358 00
86	D358 00
87	D358 00

REF DESIGNATION PIN DWG.

52P-F004A	CONT
88	D225 00
89	D225 00
90	D225 00
91	D225 00
92	D225 00
93	D054 00
94	D125 00
95	D225 00
96	D029 00
97	D268 00
98	D016 00
99	D016 00
100	D006 00
101	D054 00
102	D364 00
103	D364 00
104	D364 00
105	D364 00
106	D054 00

52P-F004B	L302 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D114 00
29	D114 00
30	D114 00
31	D265 00
32	SPARE
33	SPARE
34	D155 00
35	D155 00
36	D155 00
37	D265 00
38	SPARE

A1-F18AC-WDM-000

15 April 1992

R072 00

REF DESIGNATION PIN DWG.

52P-F004B	CONT
39	SPARE
40	SPARE
41	D157 00
42	D261 00
43	D181 00
44	D130 00
45	D354 00
46	D011 00
47	SPARE
48	SPARE
49	D011 00
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	D157 00
55	D261 00
56	D005 00
57	D005 00
58	D116 00
59	D094 00
60	D011 00
61	D011 00
62	D011 00
63	D242 00
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	D157 00
69	D005 00
70	D006 00
71	D105 00
72	D242 00
73	D258 00
74	D258 00
75	D258 00
76	D258 00
77	D242 00
78	SPARE
79	SPARE
80	D357 00
81	D157 00
82	D157 00
83	D157 00
84	D462 00
85	D357 00
86	SPARE
87	D429 00
88	D155 00
89	D155 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	D162 00
95	SPARE
96	SPARE
97	SPARE

REF DESIGNATION PIN DWG.

52P-F004B	CONT
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
52P-F005A	L302 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D020 00
14	D425 00
15	D411 00
16	D021 00
17	D021 00
18	D021 00
19	D411 00
20	D342 00
21	D336 00
22	D166 00
23	D166 00
24	SPARE
25	SPARE
26	D411 00
27	D045 00
28	D411 00
29	D411 00
30	D411 00
31	D154 00
32	D154 00
33	D154 00
34	D154 00
35	D154 00
36	D154 00
37	D464 00
38	D394 00
39	SPARE
40	D014 00
41	D161 00
42	D161 00
43	D027 00
44	D359 00
45	D359 00
46	D430 00
47	D008 00

REF DESIGNATION PIN DWG.

52P-F005A	CONT
48	D008 00
49	D347 00
50	D160 00
51	D160 00
52	SPARE
53	SPARE
54	D161 00
55	D161 00
56	SPARE
57	D023 00
58	D359 00
59	D014 00
60	D354 00
61	D353 00
62	D354 00
63	SPARE
64	D160 00
65	D160 00
66	SPARE
67	SPARE
68	D161 00
69	D057 00
70	D023 00
71	D057 00
72	D023 00
73	D160 00
74	D035 00
75	D430 00
76	D164 00
77	D430 00
78	D156 00
79	SPARE
80	D464 00
81	D161 00
82	D369 00
83	D369 00
84	D369 00
85	D156 00
86	D156 00
87	D156 00
88	D156 00
89	D156 00
90	D156 00
91	D156 00
92	D156 00
93	SPARE
94	D342 00
95	D158 00
96	D394 00
97	D129 00
98	D129 00
99	D129 00
100	D129 00
101	D129 00
102	D130 00
103	D130 00
104	D130 00
105	SPARE
106	SPARE

A1-F18AC-WDM-000

15 April 1992

R073 00

REF DESIGNATION PIN DWG.

52P-F005B	L302 00
1	SPARE
2	SPARE
3	SPARE
4	D146 00
5	D148 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D146 00
36	D353 00
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE

REF DESIGNATION PIN DWG.

52P-F005B	CONT
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
52P-F006	L317 00
1	SPARE
2	SPARE
3	D180 00
4	SPARE
5	D162 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	D045 00
19	D045 00
20	D045 00
21	D045 00
22	D045 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D045 00
28	D045 00
29	SPARE
30	D033 00
31	D045 00
32	D045 00
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	D045 00
38	D045 00
39	D033 00
40	SPARE
41	SPARE
42	D167 00
43	D030 00
44	SPARE
45	SPARE
46	SPARE
47	D041 00
48	SPARE
49	D352 00

REF DESIGNATION PIN DWG.

52P-F006	CONT
50	D352 00
51	SPARE
52	D033 00
53	D167 00
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	D041 00
60	SPARE
61	D033 00
62	D027 00
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	D041 00
71	D041 00
72	D041 00
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
52P-F030	L211 00
1	SPARE
2	D268 00
3	D268 00
4	D268 00
5	D029 00
6	D168 00

A1-F18AC-WDM-000

Change 4

R074 00

REF DESIGNATION
PIN DWG.

52P-F030	CONT
7	D456 00
8	D456 00
9	D456 00
10	D466 00
11	D067 00
12	D352 00
13	D352 00
14	D037 00
15	D005 00
16	D354 00
17	D041 00
18	D041 00
19	D041 00
20	D041 00
21	D041 00
22	D131 00
23	D131 00
24	SPARE
25	D077 00
26	D063 00
27	D063 00
28	D063 00
29	D065 00
30	D065 00
31	D065 00
32	D065 00
33	D065 00
34	D065 00
35	D065 00
36	D065 00
37	D065 00
38	D065 00
39	D065 00
40	D065 00
41	D065 00
42	D065 00
43	D065 00
44	D354 00
45	SPARE
46	D006 00
47	D006 00
48	D027 00
49	D031 00
50	D031 00
51	D030 00
52	SPARE
53	SPARE
54	D352 00
55	D352 00
56	D352 00
57	D352 00
58	D036 00
59	D036 00
60	D036 00
61	D036 00
62	D036 00
63	D036 00
64	D036 00
65	D036 00
66	D036 00

REF DESIGNATION
PIN DWG.

52P-F030	CONT
67	D036 00
68	D036 00
69	D036 00
70	D023 00
71	SPARE
72	D057 00
73	D023 00
74	D057 00
75	D023 00
76	SPARE
77	D027 00
78	D021 00
79	D021 00
52P-F058A	L212 00
A	D015 00
B	D015 00
C	D046 00
D	D057 00
E	D224 00
F	D480 00
G	D480 00
H	SPARE
J	D237 00
R	D057 00
L	D057 00
M	D057 00
N	D189 00
P	D189 00
R	D189 00
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	D057 00
b	D057 00
c	D057 00
d	D411 00
e	D411 00
f	D411 00
g	SPARE
h	SPARE
k	SPARE
m	SPARE
n	SPARE
p	SPARE
q	D198 00
r	D198 00
s	D198 00
t	D219 00
u	D219 00
v	D219 00
w	SPARE
x	D123 00

REF DESIGNATION
PIN DWG.

52P-F058B	L212 00
1	D066 00
2	D245 00
3	D363 00
4	D044 00
5	D016 00
6	D168 00
7	D020 00
8	D018 00
9	D195 00
10	D261 00
11	D196 00
12	D196 00
13	D195 00
14	D149 00
15	D016 00
16	D195 00
17	D019 00
18	D023 00
19	D014 00
20	D172 00
21	D066 00
22	SPARE
23	D195 00
24	D466 00
25	D016 00
26	D092 00
27	D346 00
28	D201 00
29	D123 00
30	D123 00
31	D040 00
32	D181 00
33	D092 00
34	D195 00
35	D201 00
36	D148 00
37	D088 00
38	D017 00
39	D467 00
40	D153 00
41	D153 00
42	D153 00
43	D168 00
44	D149 00
45	D116 00
46	D148 00
47	D201 00
48	D409 00
49	D019 00
50	D060 00
51	D153 00
52	D301 00
53	SPARE
54	D092 00
55	D079 00
56	D466 00
57	D181 00
58	D196 00
59	SPARE

A1-F18AC-WDM-000

Change 4

R075 00

REF DESIGNATION
PIN DWG.

52P-F058B	CONT
60	D346 00
61	D345 00
62	D047 00
63	D299 00
64	D301 00
65	D306 00
66	D195 00
67	D079 00
68	D363 00
69	D088 00
70	D262 00
71	D075 00
72	D467 00
73	D346 00
74	D055 00
75	D168 00
76	D149 00
77	D114 00
78	D079 00
79	D363 00
80	D467 00
81	D195 00
82	SPARE
83	D146 00
84	D083 00
85	D023 00
86	D060 00
87	D467 00
88	D053 00
89	D079 00
90	D073 00
91	D090 00
92	D195 00
93	D053 00
94	SPARE
95	D089 00
96	D083 00
97	SPARE
98	D308 00
99	D308 00
100	D017 00
101	D149 00
102	D245 00
103	D195 00
104	D262 00
105	SPARE
106	D409 00
107	D196 00
108	D409 00
109	D089 00
110	D089 00
111	D090 00
112	D080 00
113	D195 00
114	D262 00
115	SPARE
116	D075 00
117	D259 00
118	D168 00
119	D195 00

REF DESIGNATION
PIN DWG.

52P-F058B	CONT
120	D195 00
121	D262 00
122	SPARE
123	D035 00
124	D075 00
125	D079 00
126	D075 00
127	D053 00
128	D262 00
52P-F058C	L212 00
1	SPARE
2	SPARE
3	D476 00
4	D476 00
5	SPARE
6	SPARE
7	SPARE
8	D014 00
9	D471 00
10	D308 00
11	D006 00
12	D128 00
13	SPARE
14	D014 00
15	SPARE
16	D006 00
17	D471 00
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	D011 00
23	D106 00
24	SPARE
25	SPARE
26	D005 00
27	D257 00
28	D300 00
29	D367 00
30	D024 00
31	D024 00
32	D259 00
33	D011 00
34	D117 00
35	D014 00
36	D098 00
37	D005 00
38	D262 00
39	D139 00
40	D302 00
41	D152 00
42	D308 00
43	SPARE
44	D193 00
45	D011 00
46	D117 00
47	D173 00
48	D341 00

REF DESIGNATION
PIN DWG.

52P-F058C	CONT
49	D257 00
50	D139 00
51	D354 00
52	D125 00
53	D079 00
54	D057 00
55	D173 00
56	D044 00
57	D011 00
58	D075 00
59	D075 00
60	D248 00
61	D075 00
62	D116 00
63	D114 00
64	D308 00
65	D308 00
66	D114 00
67	D169 00
68	D075 00
69	D011 00
70	D467 00
71	D066 00
72	D245 00
73	D058 00
74	D245 00
75	D341 00
76	D018 00
77	D153 00
78	D152 00
79	D173 00
80	D011 00
81	D245 00
82	D245 00
83	D169 00
84	D254 00
85	D257 00
86	D021 00
87	D282 00
88	D300 00
89	D057 00
90	SPARE
91	D011 00
92	SPARE
93	D410 00
94	SPARE
95	D152 00
96	D430 00
97	D207 00
98	D152 00
99	D193 00
100	D053 00
101	D058 00
102	D196 00
103	SPARE
104	SPARE
105	D103 00
106	D106 00
107	SPARE
108	SPARE

A1-F18AC-WDM-000

Change 4

R076 00

REF DESIGNATION PIN DWG.

52P-F058C	CONT
109	D124 00
110	D094 00
111	D011 00
112	D011 00
113	D257 00
114	SPARE
115	D014 00
116	SPARE
117	D353 00
118	D353 00
119	D079 00
120	D018 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

52P-F058D	L212 00
A	D122 00
B	D122 00
C	D189 00
D	D189 00
E	D189 00
F	D122 00
G	D122 00
H	D122 00
J	D238 00
K	D238 00
L	D238 00
M	D416 00
N	D414 00
P	SPARE
R	SPARE
S	D122 00
T	D260 00
U	D259 00
V	D238 00
W	D122 00
X	D122 00
Y	D122 00
Z	D215 00
a	D215 00
b	D215 00
c	D139 00
d	D041 00
e	D122 00
f	D259 00
g	SPARE

52P-F058E	L212 00
1	SPARE
2	SPARE
3	SPARE
4	D346 00

REF DESIGNATION PIN DWG.

52P-F058E	CONT
5	D075 00
6	D075 00
7	D175 00
8	SPARE
9	D132 00
10	D132 00
11	D245 00
12	D245 00
13	D075 00
14	SPARE
15	D300 00
16	D132 00
17	D169 00
18	SPARE
19	D169 00
20	SPARE
21	D169 00
22	D331 00
23	SPARE
24	SPARE
25	D300 00
26	D274 00
27	D150 00
28	D331 00
29	SPARE
30	D038 00
31	SPARE
32	SPARE
33	D106 00
34	D027 00
35	SPARE
36	SPARE
37	D274 00
38	D166 00
39	D066 00
40	D061 00
41	D079 00
42	D061 00
43	D079 00
44	D038 00
45	D037 00
46	SPARE
47	D169 00
48	D274 00
49	D017 00
50	D245 00
51	D168 00
52	SPARE
53	SPARE
54	SPARE
55	D079 00
56	SPARE
57	D168 00
58	SPARE
59	D274 00
60	D017 00
61	D064 00
62	SPARE
63	SPARE
64	D339 00

REF DESIGNATION PIN DWG.

52P-F058E	CONT
65	D173 00
66	D173 00
67	D064 00
68	SPARE
69	D168 00
70	SPARE
71	D164 00
72	D274 00
73	D017 00
74	D090 00
75	D173 00
76	SPARE
77	D339 00
78	D064 00
79	SPARE
80	D245 00
81	SPARE
82	D335 00
83	D361 00
84	D309 00
85	D017 00
86	D064 00
87	D064 00
88	D064 00
89	D064 00
90	SPARE
91	D008 00
92	D038 00
93	D169 00
94	D462 00
95	D361 00
96	D411 00
97	D017 00
98	D017 00
99	D019 00
100	D037 00
101	D002 00
102	D005 00
103	D038 00
104	SPARE
105	SPARE
106	D361 00
107	D411 00
108	D411 00
109	D008 00
110	D006 00
111	D005 00
112	D005 00
113	D089 00
114	D008 00
115	SPARE
116	D361 00
117	D142 00
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	D407 00
123	SPARE
124	SPARE

A1-F18AC-WDM-000

15 April 1992

R077 00

REF DESIGNATION PIN DWG.

52P-F058E	CONT
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-F160	L209 00
1	D385 00
2	SPARE
3	SPARE
4	D385 00
5	D373 00
6	D373 00
7	D373 00
8	D381 00
9	SPARE
10	D385 00
11	D384 00
12	SPARE
13	D382 00
14	D382 00
15	D381 00
16	SPARE
17	D385 00
18	D384 00
19	D372 00
20	D373 00
21	D373 00
22	D381 00
23	D374 00
24	SPARE
25	SPARE
26	D372 00
27	D372 00
28	D372 00
29	SPARE
30	SPARE
31	D381 00
32	SPARE
33	D379 00
34	SPARE
35	D387 00
36	D387 00
37	D381 00
38	D387 00
39	SPARE
40	SPARE
41	D379 00
42	D374 00
43	D381 00
44	D381 00
45	D382 00
46	SPARE
47	SPARE
48	D382 00
49	D382 00
50	D381 00
51	D382 00
52	SPARE
53	SPARE

REF DESIGNATION PIN DWG.

52P-F160	CONT
54	SPARE
55	SPARE
52P-G022	L307 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D195 00
7	D195 00
8	D195 00
9	SPARE
10	SPARE
11	D304 00
12	D195 00
13	D195 00
14	D174 00
15	D195 00
16	SPARE
17	SPARE
18	SPARE
19	D195 00
20	SPARE
21	D174 00
22	D175 00
23	D280 00
24	SPARE
25	SPARE
26	D280 00
27	D195 00
28	SPARE
29	D304 00
30	D174 00
31	D133 00
32	D280 00
33	SPARE
34	SPARE
35	D280 00
36	SPARE
37	D174 00
38	SPARE
39	D280 00
40	D133 00
41	D280 00
42	SPARE
43	SPARE
44	D304 00
45	D175 00
46	D175 00
47	D280 00
48	SPARE
49	D280 00
50	SPARE
51	SPARE
52	D304 00
53	D175 00
54	D280 00
55	SPARE

REF DESIGNATION PIN DWG.

52P-G022	CONT
56	D280 00
57	SPARE
58	SPARE
59	D304 00
60	D280 00
61	D280 00
62	D280 00
63	SPARE
64	SPARE
65	SPARE
66	SPARE
52P-G051	L308 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D456 00
28	SPARE
29	SPARE
30	SPARE
31	D168 00
32	D360 00
33	D222 00
34	D222 00
35	D360 00
36	D336 00
37	D001 00
38	D001 00
39	D466 00
40	D168 00
41	D023 00
42	D017 00
43	D022 00
44	D017 00
45	D178 00
46	D178 00

A1-F18AC-WDM-000

Change 4

R078 00

REF DESIGNATION PIN DWG.

52P-G051	CONT
47	D178 00
48	D178 00
49	SPARE
50	SPARE
51	SPARE
52	D486 00
53	D093 00
54	D093 00
55	D454 00
56	D454 00
57	D169 00
58	D169 00
59	D066 00
60	D066 00
61	D075 00
62	D075 00
63	D244 00
64	D244 00
65	D244 00
66	D244 00
67	D225 00
68	D242 00
69	D242 00
70	D225 00
71	D244 00
72	D244 00
73	D244 00
74	D244 00
75	D242 00
76	D242 00
77	D242 00
78	D242 00
79	D225 00
52P-H075	L401 00
1	D223 00
2	D355 00
3	D223 00
4	D130 00
5	D354 00
6	D181 00
7	D181 00
8	D355 00
9	D058 00
10	D058 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D010 00
16	D088 00
17	D092 00
18	D355 00
19	D130 00
20	D058 00
21	D089 00
22	D085 00
23	D085 00
24	SPARE

REF DESIGNATION PIN DWG.

52P-H075	CONT
25	D058 00
26	D058 00
27	SPARE
28	D219 00
29	D181 00
30	D410 00
31	D130 00
32	D193 00
33	D224 00
34	D058 00
35	D409 00
36	D224 00
37	D193 00
52P-H077A	L405 00
1	D214 00
2	D214 00
3	D214 00
4	D214 00
5	D086 00
6	D301 00
7	D282 00
8	SPARE
9	SPARE
10	D080 00
11	D086 00
12	D417 00
13	D066 00
14	D331 00
15	SPARE
16	D051 00
17	SPARE
18	D075 00
19	D052 00
20	SPARE
21	D051 00
22	D066 00
23	D051 00
24	D080 00
25	D002 00
26	D052 00
27	D133 00
28	D133 00
29	D052 00
30	D417 00
31	D196 00
32	D214 00
33	D214 00
34	D195 00
35	D052 00
36	D080 00
37	D080 00
52P-H077B	L405 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE

REF DESIGNATION PIN DWG.

52P-H077B	CONT
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D301 00
15	D301 00
16	D246 00
17	D246 00
18	D246 00
19	D246 00
20	D246 00
21	D246 00
22	D301 00
52P-H079	L406 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D462 00
7	D462 00
8	D089 00
9	D121 00
10	D092 00
11	D458 00
12	SPARE
13	D350 00
14	SPARE
15	D353 00
16	D083 00
17	D083 00
18	D365 00
19	D121 00
20	D103 00
21	D365 00
22	D365 00
52P-H081	L407 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D274 00
14	D274 00

A1-F18AC-WDM-000

15 April 1992

R079 00

REF DESIGNATION PIN DWG.

52P-H081	CONT
15	D274 00
16	SPARE
17	D274 00
18	D274 00
19	D002 00
20	D334 00
21	D084 00
22	D084 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE

52P-H084	L401 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	D089 00
5	D052 00
6	D309 00
7	D052 00
8	D086 00
9	D089 00
10	D409 00
11	D254 00
12	D092 00
13	D254 00
14	D254 00
15	D309 00
16	D092 00
17	D052 00
18	D309 00
19	D058 00
20	D058 00
21	D052 00
22	D086 00

52P-H087	L402 00
----------	---------

1	D385 00
2	D385 00
3	SPARE
4	D385 00
5	D044 00
6	D044 00
7	SPARE
8	SPARE

REF DESIGNATION PIN DWG.

52P-H087	CONT
9	SPARE
10	SPARE
11	SPARE
12	D389 00
13	D044 00
14	D389 00
15	D044 00
16	SPARE
17	SPARE
18	SPARE
19	D032 00
20	D389 00
21	D389 00
22	D044 00
23	D044 00
24	SPARE
25	SPARE
26	D032 00
27	D087 00
28	D087 00
29	D044 00
30	D044 00
31	D032 00
32	SPARE
33	SPARE
34	D032 00
35	D052 00
36	D346 00
37	D044 00
38	D032 00
39	D385 00
40	SPARE
41	SPARE
42	SPARE
43	D032 00
44	D044 00
45	D185 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE

52P-H088	L405 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D117 00
7	D117 00
8	D106 00
9	D172 00
10	D037 00

REF DESIGNATION PIN DWG.

52P-H088	CONT
11	D037 00
12	D417 00
13	D417 00

52P-H089	L406 00
----------	---------

1	D077 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D077 00
8	D084 00
9	D084 00
10	D077 00
11	D071 00
12	D071 00
13	D071 00

52P-H091	L406 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D334 00
14	D342 00
15	D342 00
16	D158 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D350 00
28	D134 00
29	D133 00
30	D083 00
31	D083 00
32	D133 00
33	D133 00
34	D133 00
35	D133 00
36	D133 00
37	D133 00

A1-F18AC-WDM-000

Change 4

R080 00

REF DESIGNATION
PIN DWG.

52P-H098 L401 00
1 D183 00
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D183 00
8 D183 00
9 D183 00
10 D183 00
11 D085 00
12 D085 00
13 D085 00

52P-J053 L412 00
1 D019 00
2 D019 00
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 D017 00
10 D082 00
11 D082 00
12 D082 00
13 D019 00

52P-J076 L402 0
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D088 00
8 D089 00
9 SPARE
10 SPARE
11 SPARE
12 D091 00
13 D091 00
14 SPARE
15 SPARE
16 D025 00
17 D025 00
18 D025 00
19 D025 00
20 D190 00
21 D190 00
22 D193 00

52P-J078 L411 00
1 D456 00
2 SPARE

REF DESIGNATION
PIN DWG.

52P-J078 CONT
3 D075 00
4 D036 00
5 D023 00
6 D023 00
7 D057 00
8 D057 00
9 D037 00
10 D023 00
11 D023 00
12 D352 00
13 D016 00
14 D016 00
15 D036 00
16 D031 00
17 D036 00
18 D027 00
19 D466 00
20 D084 00
21 D030 00
22 D016 00
23 D036 00
24 D027 00
25 D456 00
26 SPARE
27 D056 00
28 D020 00
29 D352 00
30 D118 00
31 D036 00
32 SPARE
33 D021 00
34 D084 00
35 D352 00
36 D352 00
37 D118 00
38 D036 00
39 SPARE
40 SPARE
41 D036 00
42 D118 00
43 D132 00
44 D118 00
45 D036 00
46 SPARE
47 SPARE
48 D036 00
49 D036 00
50 D036 00
51 D036 00
52 SPARE
53 SPARE
54 SPARE
55 SPARE

52P-J080 L411 00
1 D361 00
2 D361 00
3 D361 00

REF DESIGNATION
PIN DWG.

52P-J080 CONT
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 D471 00
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 D024 00
20 D025 00
21 D024 00
22 D361 00
23 D361 00
24 D049 00
25 D049 00
26 D049 00
27 D049 00
28 D049 00
29 D049 00
30 D049 00
31 D025 00
32 D025 00
33 D025 00
34 D025 00
35 D025 00
36 D085 00
37 D085 00

52P-J155 L411 00
1 D059 00
2 D059 00
3 D059 00
4 D059 00
5 D059 00
6 D080 00
7 D080 00
8 SPARE
9 SPARE
10 SPARE
11 D059 00
12 D059 00
13 D059 00

52P-L050 L500 00
1 D081 00
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D409 00

A1-F18AC-WDM-000

15 April 1992

R081 00

REF DESIGNATION PIN DWG.

52P-L050	CONT
8	D409 00
9	D409 00
10	D081 00
11	D082 00
12	D082 00
13	D082 00
52P-L154	L500 00
1	D081 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D409 00
8	D409 00
9	D409 00
10	D081 00
11	D082 00
12	D082 00
13	D082 00
52P-M069	L601 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D241 00
11	D241 00
12	D247 00
13	D247 00
14	D247 00
15	D247 00
16	D412 00
17	D412 00
18	D412 00
19	D412 00
20	D359 00
21	D359 00
22	D210 00
23	D210 00
24	SPARE
25	SPARE
26	D210 00
27	D209 00
28	D209 00
29	D230 00
30	D230 00
31	D359 00
32	D247 00
33	D161 00
34	D161 00
35	D161 00

REF DESIGNATION PIN DWG.

52P-M069	CONT
36	D226 00
37	D356 00
52P-M071	L601 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	D211 00
H	D257 00
J	SPARE
K	D248 00
52P-N070	L614 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D240 00
14	D240 00
15	D005 00
16	D005 00
17	D005 00
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	D240 00
23	D226 00
24	D356 00
25	D330 00
26	D330 00
27	D213 00
28	D213 00
29	SPARE
30	SPARE
31	D200 00
32	D200 00
33	D161 00
34	D161 00
35	D161 00
36	SPARE
37	SPARE
52P-N072	L614 00
A	SPARE

REF DESIGNATION PIN DWG.

52P-N072	CONT
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	D228 00
H	D057 00
J	SPARE
K	D237 00
L	SPARE
M	SPARE
52P-N118A	L613 00
1	D354 00
2	D347 00
3	D009 00
4	SPARE
5	SPARE
6	SPARE
7	D103 00
8	D103 00
9	D031 00
10	D030 00
11	D108 00
12	D353 00
13	D347 00
14	D347 00
15	D349 00
16	D009 00
17	D027 00
18	D108 00
19	D004 00
20	D130 00
21	D347 00
22	D353 00
23	D285 00
24	D014 00
25	D146 00
26	D103 00
27	D365 00
28	D130 00
29	D354 00
30	D004 00
31	D121 00
32	D360 00
33	D009 00
34	D311 00
35	D146 00
36	D365 00
37	D349 00
38	SPARE
39	D014 00
40	D121 00
41	D110 00
42	D023 00
43	D130 00
44	D148 00
45	D431 00
46	D014 00

A1-F18AC-WDM-000

R082 00

Change 4

REF DESIGNATION PIN DWG.

52P-N118A	CONT
47	SPARE
48	D121 00
49	D360 00
50	D027 00
51	D130 00
52	D108 00
53	D431 00
54	D431 00
55	D004 00
56	D368 00
57	D030 00
58	D002 00
59	D106 00
60	D105 00
61	D431 00
62	D368 00
63	D031 00
64	D353 00
65	SPARE
66	D350 00

52P-N118B	L613 00
1	D311 00
2	D311 00
3	D035 00
4	SPARE
5	D107 00
6	D009 00
7	D164 00
8	SPARE
9	D357 00
10	D311 00
11	D057 00
12	D117 00
13	D107 00
14	D107 00
15	SPARE
16	D009 00
17	D357 00
18	D107 00
19	D107 00
20	D116 00
21	SPARE
22	D156 00
23	SPARE
24	D014 00
25	D123 00
26	D057 00
27	D107 00
28	D116 00
29	D122 00
30	D117 00
31	D114 00
32	SPARE
33	D162 00
34	D039 00
35	D035 00
36	D107 00
37	D117 00
38	D118 00
39	D117 00

REF DESIGNATION PIN DWG.

52P-N118B	CONT
40	D107 00
41	SPARE
42	D117 00
43	D341 00
44	D057 00
45	D057 00
46	D117 00
47	D117 00
48	D114 00
49	D108 00
50	D368 00
51	D039 00
52	D057 00
53	D107 00
54	D114 00
55	D107 00
56	D179 00
57	D357 00
58	D430 00
59	SPARE
60	D023 00
61	D023 00
62	D009 00
63	D179 00
64	D004 00
65	D117 00
66	D004 00

52P-P035	L720 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D176 00
10	D176 00
11	D176 00
12	D176 00
13	D167 00
14	D167 00
15	D176 00
16	D176 00
17	D176 00
18	D176 00
19	D177 00
20	D177 00
21	D177 00
22	D177 00

52P-P064A	L728 00
A	D330 00
B	D330 00
C	D203 00
D	D203 00
E	SPARE
F	SPARE
G	D222 00
H	SPARE

REF DESIGNATION PIN DWG.

52P-P064A	CONT
J	SPARE
K	SPARE
52P-P064B	L728 00
A	D203 00
B	D203 00
C	D203 00
D	D203 00
E	D203 00
F	D203 00
G	D203 00
H	D203 00
J	D203 00
K	D211 00
L	D211 00
M	D222 00
N	D222 00
P	D203 00
R	D203 00
S	D201 00
T	D203 00
U	D203 00
V	D208 00
W	D208 00
X	D208 00
Y	SPARE
Z	D201 00
a	SPARE
b	D201 00
c	D222 00
d	D201 00
e	D211 00
f	SPARE
g	D222 00
h	D201 00
i	SPARE
j	SPARE
k	D202 00
m	D201 00
n	D203 00
p	D222 00
q	D222 00
r	D201 00
s	D201 00
t	D201 00
u	D201 00
v	SPARE
w	D201 00
x	D222 00
y	D203 00
z	D201 00
AA	D191 00
BB	D222 00
CC	D201 00
DD	D481 00
EE	D481 00
FF	D481 00
GG	D222 00
HH	D201 00
JJ	D203 00
KK	D203 00
LL	D222 00

A1-F18AC-WDM-000

15 April 1992

R083 00

REF DESIGNATION PIN DWG.

52P-P103	L715 00
1	SPARE
2	D004 00
3	SPARE
4	D347 00
5	SPARE
6	SPARE
7	D431 00
8	D004 00
9	D004 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D004 00
15	D349 00
16	SPARE
17	SPARE
18	D162 00
19	D357 00
20	D357 00
21	D347 00
22	D347 00
23	SPARE
24	SPARE
25	D009 00
26	D030 00
27	D179 00
28	SPARE
29	SPARE
30	D114 00
31	D114 00
32	D114 00
33	D114 00
34	SPARE
35	SPARE
36	SPARE
37	D110 00
38	D110 00
39	D110 00
40	SPARE
41	D347 00
42	D002 00
43	D365 00
44	D109 00
45	D109 00
46	D431 00
47	D002 00
48	D458 00
49	D435 00
50	D435 00
51	D435 00
52	SPARE
53	SPARE
54	SPARE
55	D354 00
56	D331 00
57	D331 00
58	SPARE
59	SPARE

REF DESIGNATION PIN DWG.

52P-P103	CONT
60	SPARE
61	D124 00
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
52P-P105	L741 00
1	D114 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D002 00
9	D162 00
10	SPARE
11	D004 00
12	SPARE
13	D004 00
14	D162 00
15	D004 00
16	D004 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D357 00
26	SPARE
27	D004 00
28	SPARE
29	D114 00
30	D108 00
31	D162 00
32	D127 00
33	D357 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE

REF DESIGNATION PIN DWG.

52P-P105	CONT
38	SPARE
39	SPARE
40	D179 00
41	D179 00
42	SPARE
43	SPARE
44	SPARE
45	D179 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D365 00
54	SPARE
55	D431 00
56	D127 00
57	D108 00
58	D046 00
59	D360 00
60	D114 00
61	SPARE
62	SPARE
63	D179 00
64	D431 00
65	SPARE
66	D009 00
67	SPARE
68	D125 00
69	D127 00
70	D002 00
71	SPARE
72	SPARE
73	D108 00
74	SPARE
75	SPARE
76	D114 00
77	D458 00
78	D109 00
79	D109 00
52P-P110	L720 00
1	D129 00
2	D345 00
3	D345 00
4	D345 00
5	D345 00
6	SPARE
7	D111 00
8	SPARE
9	D129 00
10	D129 00
11	D129 00
12	D325 00
13	D325 00
14	D108 00
15	D108 00

A1-F18AC-WDM-000

Change 4

R084 00

REF DESIGNATION PIN DWG.

52P-P110	CONT
16	D164 00
17	D424 00
18	D170 00
19	D170 00
20	D170 00
21	D100 00
22	D100 00
23	D111 00
24	SPARE
25	SPARE
26	D168 00
27	D424 00
28	D435 00
29	D014 00
30	D014 00
31	D014 00
32	D014 00
33	D348 00
34	D267 00
35	SPARE
36	SPARE
37	D168 00
38	D101 00
39	D435 00
40	D340 00
41	D013 00
42	D013 00
43	D013 00
44	D056 00
45	D348 00
46	D267 00
47	SPARE
48	D168 00
49	D101 00
50	D435 00
51	D340 00
52	D341 00
53	D013 00
54	D013 00
55	D340 00
56	D056 00
57	D348 00
58	D267 00
59	SPARE
60	D170 00
61	D435 00
62	D340 00
63	D341 00
64	D354 00
65	D354 00
66	D013 00
67	D340 00
68	D056 00
69	D267 00
70	SPARE
71	SPARE
72	D430 00
73	D170 00
74	D435 00
75	D013 00

REF DESIGNATION PIN DWG.

52P-P110	CONT
76	D013 00
77	D013 00
78	D340 00
79	D118 00
80	D102 00
81	D100 00
82	SPARE
83	D199 00
84	D325 00
85	D122 00
86	D435 00
87	D013 00
88	D013 00
89	D013 00
90	D132 00
91	D115 00
92	D100 00
93	SPARE
94	SPARE
95	D199 00
96	D002 00
97	D116 00
98	D116 00
99	D118 00
100	D118 00
101	D118 00
102	D115 00
103	D267 00
104	SPARE
105	SPARE
106	D199 00
107	D102 00
108	D102 00
109	D102 00
110	D102 00
111	D115 00
112	D115 00
113	D230 00
114	SPARE
115	D094 00
116	D208 00
117	D208 00
118	D208 00
119	D199 00
120	D230 00
121	SPARE
122	D199 00
123	SPARE
124	D199 00
125	D208 00
126	SPARE
127	SPARE
128	SPARE
52P-P111	L724 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE

REF DESIGNATION PIN DWG.

52P-P111	CONT
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D267 00
10	D100 00
11	D100 00
12	D267 00
13	D424 00
14	D424 00
15	SPARE
16	SPARE
17	D267 00
18	D348 00
19	D348 00
20	D102 00
21	D115 00
22	D115 00
23	D101 00
24	SPARE
25	SPARE
26	D267 00
27	D348 00
28	D116 00
29	D122 00
30	D116 00
31	D170 00
32	D115 00
33	D101 00
34	SPARE
35	SPARE
36	D267 00
37	D100 00
38	D118 00
39	D435 00
40	D056 00
41	D056 00
42	D170 00
43	D115 00
44	D094 00
45	SPARE
46	D111 00
47	D100 00
48	D118 00
49	D435 00
50	D341 00
51	D435 00
52	D056 00
53	D101 00
54	D102 00
55	SPARE
56	SPARE
57	SPARE
58	D111 00
59	D170 00
60	D118 00
61	D132 00
62	D118 00
63	D101 00
64	D102 00

A1-F18AC-WDM-000

15 April 1992

R085 00

REF DESIGNATION PIN DWG.

52P-P111	CONT
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	D325 00
70	D170 00
71	D170 00
72	D424 00
73	D424 00
74	D102 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D325 00
80	D164 00
81	D325 00
82	D002 00
83	D102 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
52P-P117	L720 00
A	D222 00
B	D222 00
C	D222 00
D	D222 00
E	D108 00
F	D108 00
G	D424 00
H	D424 00
J	D424 00
K	D101 00
L	D101 00
M	SPARE
N	SPARE
P	D219 00
R	D222 00
S	D211 00
T	D211 00
U	D222 00
V	D219 00
W	D201 00
X	D219 00

REF DESIGNATION PIN DWG.

52P-P117	CONT
Y	D211 00
Z	D197 00
52P-P119	L743 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D114 00
15	D114 00
16	D009 00
17	SPARE
18	D046 00
19	D431 00
20	D004 00
21	D431 00
22	D004 00
23	SPARE
24	D365 00
25	D002 00
26	SPARE
27	D458 00
28	D139 00
29	SPARE
30	D139 00
31	D004 00
32	D004 00
33	D365 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
52P-P123	L720 00
1	SPARE
2	SPARE
3	SPARE
4	D127 00
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D152 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D139 00
15	D137 00
16	D137 00
17	SPARE
18	D126 00
19	D126 00
20	D124 00
21	SPARE
22	SPARE
23	SPARE
24	D152 00
25	D137 00
26	D413 00
27	D413 00
28	D137 00
29	D137 00
30	D139 00
31	D137 00
32	D137 00
33	D137 00
34	D137 00
35	D137 00

REF DESIGNATION PIN DWG.

52P-P123	CONT
16	D137 00
17	SPARE
18	D126 00
19	D126 00
20	D124 00
21	SPARE
22	SPARE
23	SPARE
24	D152 00
25	D137 00
26	D413 00
27	D413 00
28	D137 00
29	D137 00
30	D139 00
31	D137 00
32	D137 00
33	D137 00
34	D137 00
35	D137 00
36	D137 00
37	D137 00
52P-P125	L722 00
1	SPARE
2	SPARE
3	SPARE
4	D127 00
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D152 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D139 00
15	D137 00
16	D137 00
17	SPARE
18	D126 00
19	D126 00
20	D124 00
21	SPARE
22	SPARE
23	SPARE
24	D152 00
25	D137 00
26	D413 00
27	D413 00
28	D137 00
29	D137 00
30	D139 00
31	D137 00
32	D137 00
33	D137 00
34	D137 00
35	D137 00

A1-F18AC-WDM-000

Change 4

R086 00

REF DESIGNATION PIN DWG.

52P-P125	CONT
36	D137 00
37	D137 00
52P-P157	L719 00
1	SPARE
2	SPARE
3	SPARE
4	D176 00
5	D176 00
6	D176 00
7	D167 00
8	D167 00
9	D176 00
10	D176 00
11	D176 00
12	D176 00
13	D176 00
52P-P163	L608 00
A	D485 00
B	D485 00
C	D222 00
D	D219 00
E	D219 00
F	D219 00
G	D211 00
H	D211 00
J	D211 00
K	D350 00
L	D201 00
52P-P164	L608 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D424 00
10	D201 00
11	D201 00
12	D211 00
13	D211 00
14	SPARE
15	SPARE
16	D424 00
17	D357 00
18	D056 00
19	D056 00
20	D056 00
21	D170 00
22	D170 00
23	D211 00
24	SPARE
25	SPARE
26	D101 00

REF DESIGNATION PIN DWG.

52P-P164	CONT
27	D162 00
28	D349 00
29	D347 00
30	D004 00
31	D057 00
32	D057 00
33	D101 00
34	D211 00
35	SPARE
36	SPARE
37	D101 00
38	D164 00
39	D004 00
40	D132 00
41	D118 00
42	D118 00
43	D118 00
44	D004 00
45	D101 00
46	D211 00
47	SPARE
48	D100 00
49	D122 00
50	D111 00
51	D118 00
52	D340 00
53	D340 00
54	D340 00
55	D116 00
56	D347 00
57	D424 00
58	D211 00
59	D100 00
60	D013 00
61	D030 00
62	D123 00
63	D340 00
64	D340 00
65	D340 00
66	D435 00
67	D116 00
68	D013 00
69	D424 00
70	SPARE
71	SPARE
72	D267 00
73	D013 00
74	D094 00
75	D014 00
76	D435 00
77	D435 00
78	D173 00
79	D013 00
80	D170 00
81	D170 00
82	SPARE
83	SPARE

REF DESIGNATION PIN DWG.

52P-P164	CONT
85	D013 00
86	D093 00
87	D114 00
88	D114 00
89	D002 00
90	D013 00
91	D170 00
92	D100 00
93	SPARE
94	SPARE
95	D485 00
96	D267 00
97	D325 00
98	D325 00
99	D127 00
100	D325 00
101	D365 00
102	D170 00
103	D431 00
104	SPARE
105	SPARE
106	D485 00
107	D267 00
108	D348 00
109	D348 00
110	D348 00
111	D100 00
112	D100 00
113	D485 00
114	SPARE
115	SPARE
116	D485 00
117	D485 00
118	D485 00
119	D485 00
120	D485 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
52P-P165	L608 00
1	D265 00
2	D210 00
3	D210 00
4	D210 00
5	D170 00
6	D268 00
7	SPARE
8	D265 00
9	D107 00
10	D107 00
11	D416 00
12	D356 00
13	D226 00

A1-F18AC-WDM-000

Change 4

R087 00

REF DESIGNATION PIN DWG.

52P-P165	CONT
14	D031 00
15	SPARE
16	D265 00
17	D107 00
18	D161 00
19	D161 00
20	D161 00
21	D466 00
22	D003 00
23	D265 00
24	SPARE
25	D265 00
26	D117 00
27	D013 00
28	D100 00
29	D348 00
30	D348 00
31	D348 00
32	D003 00
33	D410 00
34	SPARE
35	D258 00
36	D117 00
37	D013 00
38	D100 00
39	D170 00
40	D101 00
41	D101 00
42	D013 00
43	D003 00
44	D464 00
45	SPARE
46	D117 00
47	D013 00
48	D170 00
49	D170 00
50	D355 00
51	D355 00
52	D424 00
53	D013 00
54	D230 00
55	SPARE
56	SPARE
57	D258 00
58	D117 00
59	D325 00
60	D170 00
61	D170 00
62	D424 00
63	D013 00
64	D230 00
65	D180 00
66	D370 00
67	SPARE
68	D258 00
69	D370 00
70	D325 00
71	D127 00
72	D325 00
73	D365 00

REF DESIGNATION PIN DWG.

52P-P165	CONT
74	D342 00
75	D412 00
76	SPARE
77	SPARE
78	D258 00
79	D009 00
80	D311 00
81	D023 00
82	D253 00
83	D341 00
84	D412 00
85	SPARE
86	SPARE
87	D247 00
88	D247 00
89	D247 00
90	D247 00
91	D412 00
92	D412 00
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
52P-R036	L732 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D173 00
10	D173 00
11	D173 00
12	D173 00
13	D167 00
14	D167 00
15	D173 00
16	D173 00
17	D173 00
18	D173 00
19	D174 00
20	D174 00
21	D174 00
22	D174 00
52P-R065	L705 00
1	D122 00
2	D198 00
3	D189 00
4	D207 00
5	D189 00

REF DESIGNATION PIN DWG.

52P-R065	CONT
6	D189 00
7	D482 00
8	D208 00
9	D208 00
10	D199 00
11	D199 00
12	SPARE
13	SPARE
14	D189 00
15	D216 00
16	SPARE
17	SPARE
18	D207 00
19	D208 00
20	D207 00
21	D189 00
22	D262 00
23	D216 00
24	D482 00
25	D216 00
26	D191 00
27	D216 00
28	SPARE
29	SPARE
30	D216 00
31	SPARE
32	SPARE
33	D216 00
34	D216 00
35	D216 00
36	D230 00
37	D417 00
38	SPARE
39	D189 00
40	D482 00
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	D216 00
47	D122 00
48	D216 00
49	D189 00
50	D189 00
51	D482 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	D189 00
57	D262 00
58	SPARE
59	D230 00
60	D189 00
61	D154 00
62	D154 00
63	D155 00
64	D473 00
65	SPARE

A1-F18AC-WDM-000

Change 4

R088 00

REF DESIGNATION PIN DWG.

52P-R065	CONT
66	SPARE
67	D216 00
68	D216 00
69	D417 00
70	SPARE
71	D154 00
72	D248 00
73	D216 00
74	D473 00
75	D473 00
76	SPARE
77	D141 00
78	D216 00
79	D141 00
80	D189 00
81	D262 00
82	D262 00
83	D216 00
84	SPARE
85	SPARE
86	D216 00
87	D262 00
88	D216 00
89	D216 00
90	D464 00
91	D216 00
92	D216 00
93	D141 00
94	D216 00
95	D262 00
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	D141 00
52P-R066A	L739 00
A	D203 00
B	D203 00
C	D203 00
D	D261 00
E	SPARE
F	SPARE
G	D262 00
H	SPARE
J	SPARE
K	SPARE
52P-R066B	L739 00
A	D202 00
B	D202 00
C	D202 00
D	D202 00
E	D202 00
F	D202 00
G	D202 00
H	D202 00
J	D202 00
K	D215 00

REF DESIGNATION PIN DWG.

52P-R066B	CONT
L	D215 00
M	D215 00
N	D211 00
P	D202 00
R	D202 00
S	D202 00
T	D202 00
U	D202 00
V	D208 00
W	D208 00
X	D208 00
Y	SPARE
Z	D202 00
a	SPARE
b	D202 00
c	D141 00
d	D202 00
e	D215 00
f	SPARE
g	D167 00
h	D202 00
i	SPARE
j	SPARE
k	D202 00
m	D202 00
n	D202 00
p	D215 00
q	D215 00
r	D202 00
s	D202 00
t	D202 00
u	D202 00
v	SPARE
w	D202 00
x	D202 00
y	D208 00
z	D202 00
AA	D216 00
BB	D191 00
CC	D122 00
DD	D482 00
EE	D482 00
FF	D482 00
GG	D215 00
HH	D202 00
JJ	D208 00
KK	D202 00
LL	D141 00
52P-R102	L715 00
1	D431 00
2	D109 00
3	D109 00
4	D110 00
5	D110 00
6	D458 00
7	SPARE
8	D138 00
9	D139 00
10	D162 00

REF DESIGNATION PIN DWG.

52P-R102	CONT
11	D162 00
12	D096 00
13	D096 00
14	D430 00
15	SPARE
16	D138 00
17	D139 00
18	D179 00
19	D368 00
20	D106 00
21	D096 00
22	D096 00
23	D106 00
24	SPARE
25	D138 00
26	SPARE
27	D179 00
28	D368 00
29	D365 00
30	D127 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	D138 00
37	D179 00
38	D179 00
39	D138 00
40	SPARE
41	D431 00
42	SPARE
43	D039 00
44	SPARE
45	SPARE
46	SPARE
47	D179 00
48	D128 00
49	D108 00
50	D360 00
51	D179 00
52	SPARE
53	D354 00
54	D004 00
55	SPARE
56	D009 00
57	D179 00
58	D108 00
59	D165 00
60	D128 00
61	D128 00
62	D108 00
63	D152 00
64	D152 00
65	SPARE
66	SPARE
67	D057 00
68	D458 00
69	D181 00
70	D106 00
71	D152 00

A1-F18AC-WDM-000

15 April 1992

R089 00

REF DESIGNATION PIN DWG.

52P-R102	CONT
72	D110 00
73	D354 00
74	D138 00
75	D039 00
76	SPARE
77	D106 00
78	SPARE
79	D125 00
80	D127 00
81	D125 00
82	D152 00
83	D138 00
84	D138 00
85	SPARE
86	D138 00
87	D096 00
88	D285 00
89	D125 00
90	D413 00
91	D413 00
92	SPARE
93	SPARE
94	D138 00
95	D138 00
96	D138 00
97	SPARE
98	SPARE
99	SPARE
100	D127 00

52P-R104	L716 00
1	D347 00
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D106 00
12	D096 00
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D413 00
21	D413 00
22	D139 00
23	D139 00
24	D138 00
25	D138 00
26	SPARE
27	D349 00
28	SPARE

REF DESIGNATION PIN DWG.

52P-R104	CONT
29	D138 00
30	D106 00
31	SPARE
32	D128 00
33	D347 00
34	D138 00
35	SPARE
36	SPARE
37	D179 00
38	D009 00
39	D046 00
40	D347 00
41	D347 00
42	SPARE
43	SPARE
44	SPARE
45	D152 00
46	D138 00
47	D138 00
48	D458 00
49	D179 00
50	D138 00
51	D110 00
52	D138 00
53	D179 00
54	D365 00
55	D285 00
56	D110 00
57	D106 00
58	SPARE
59	SPARE
60	D138 00
61	D368 00
62	D138 00
63	SPARE
64	D431 00
65	D110 00
66	D128 00
67	D179 00
68	D165 00
69	SPARE
70	SPARE
71	D181 00
72	SPARE
73	D368 00
74	D138 00
75	D125 00
76	D110 00
77	D152 00
78	D106 00
79	D138 00

52P-R113	L732 00
1	D360 00
2	D360 00
3	D360 00
4	D360 00
5	D189 00
6	D248 00

REF DESIGNATION PIN DWG.

52P-R113	CONT
7	D360 00
8	D360 00
g	D208 00
10	D208 00
11	D208 00
12	D208 00
13	D199 00
14	D262 00
15	D248 00
16	D240 00
17	D097 00
18	D097 00
19	D105 00
20	D417 00
21	D417 00
22	SPARE
23	D199 00
24	D216 00
25	D189 00
26	D240 00
27	D097 00
28	D331 00
29	D354 00
30	D354 00
31	D128 00
32	D128 00
33	SPARE
34	D199 00
35	D216 00
36	D248 00
37	D240 00
38	D097 00
39	D331 00
40	D125 00
41	D341 00
42	D126 00
43	D126 00
44	D128 00
45	SPARE
46	D199 00
47	D262 00
48	D240 00
49	D097 00
50	D127 00
51	D125 00
52	SPARE
53	SPARE
54	D181 00
55	D126 00
56	D128 00
57	D129 00
58	D189 00
59	D240 00
60	D093 00
61	D127 00
62	D105 00
63	D130 00
64	D130 00
65	D130 00
66	D354 00

A1-F18AC-WDM-000

15 April 1992

R090 00

REF DESIGNATION PIN DWG.

52P-R113	CONT
67	D126 00
68	D128 00
69	D129 00
70	D262 00
71	D262 00
72	D230 00
73	D115 00
74	D127 00
75	D354 00
76	D354 00
77	D354 00
78	D126 00
79	D116 00
80	D129 00
81	D207 00
82	D248 00
83	D189 00
84	D051 00
85	D115 00
86	SPARE
87	SPARE
88	D127 00
89	D127 00
90	D128 00
91	D129 00
92	D189 00
93	D189 00
94	SPARE
95	D216 00
96	D096 00
97	D115 00
98	D115 00
99	SPARE
100	SPARE
101	D128 00
102	D096 00
103	D094 00
104	D262 00
105	SPARE
106	D191 00
107	D096 00
108	D096 00
109	D096 00
110	D096 00
111	D096 00
112	D096 00
113	D189 00
114	SPARE
115	SPARE
116	D216 00
117	SPARE
118	D189 00
119	D207 00
120	D207 00
121	SPARE
122	SPARE
123	SPARE
124	D124 00
125	SPARE
126	SPARE

REF DESIGNATION PIN DWG.

52P-R113	CONT
127	SPARE
128	SPARE
52P-R114	L735 00
1	D115 00
2	SPARE
3	SPARE
4	D097 00
5	D094 00
6	D115 00
7	D115 00
8	D097 00
9	D093 00
10	D115 00
11	D097 00
12	D097 00
13	D097 00
52P-R116	L732 00
A	D141 00
B	D010 00
C	D141 00
D	D141 00
E	SPARE
F	D141 00
G	SPARE
H	SPARE
J	SPARE
K	D167 00
L	D169 00
M	D167 00
N	SPARE
P	D454 00
R	SPARE
S	SPARE
T	SPARE
U	D368 00
V	D368 00
W	D368 00
X	D167 00
Y	D215 00
Z	D211 00
a	D248 00
b	D215 00
c	D141 00
d	D141 00
e	SPARE
f	SPARE
g	D215 00
h	D215 00
i	D223 00
j	SPARE
k	SPARE
m	D122 00
n	D215 00
p	D141 00
q	D215 00
r	D122 00

REF DESIGNATION PIN DWG.

52P-R120	L746 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D106 00
15	D106 00
16	D046 00
17	SPARE
18	D009 00
19	D285 00
20	D347 00
21	D110 00
22	D347 00
23	SPARE
24	D365 00
25	D096 00
26	SPARE
27	D458 00
28	D139 00
29	SPARE
30	D139 00
31	D347 00
32	D349 00
33	D365 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
52P-R124	L734 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D124 00
11	D130 00
12	D130 00
13	D181 00
52P-R158	L731 00
1	SPARE
2	SPARE
3	SPARE

A1-F18AC-WDM-000

15 April 1992

R091 00

REF DESIGNATION PIN DWG.

52P-R158	CONT
4	D173 00
5	D173 00
6	D173 00
7	D167 00
8	D167 00
9	D173 00
10	D173 00
11	D173 00
12	D173 00
13	D173 00

52P-R166	L608 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D121 00
12	D365 00
13	D128 00
14	D128 00
15	D128 00
16	D128 00
17	D126 00
18	D126 00
19	D126 00
20	D341 00
21	D125 00
22	D125 00

52P-S055A	L818 00
-----------	---------

1	D111 00
2	D348 00
3	D100 00
4	D100 00
5	D266 00
6	D266 00
7	D300 00
8	SPARE
9	D101 00
10	D101 00
11	D056 00
12	D056 00
13	D348 00
14	D348 00
15	D348 00
16	D266 00
17	D266 00
18	D300 00
19	SPARE
20	D266 00
21	D266 00
22	D424 00

REF DESIGNATION PIN DWG.

52P-S055A	CONT
23	D424 00
24	D100 00
25	D100 00
26	D424 00
27	SPARE
28	D100 00
29	D266 00
30	SPARE
31	D424 00

52P-S055B	L818 00
-----------	---------

1	D111 00
2	SPARE
3	SPARE
4	D111 00
5	D111 00
6	D170 00
7	D170 00
8	D111 00
9	D267 00
10	D002 00
11	D325 00
12	D325 00
13	D325 00
14	D267 00
15	D111 00
16	D111 00
17	D111 00
18	D111 00
19	D170 00
20	D170 00
21	D170 00
22	D111 00
23	D111 00
24	D267 00
25	D116 00
26	D116 00
27	D116 00
28	D122 00
29	D116 00
30	D267 00
31	D267 00

52P-S055C	L818 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D113 00
7	D113 00
8	D113 00
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE

REF DESIGNATION PIN DWG.

52P-S055C	CONT
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE

52P-S112	L811 00
----------	---------

2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	D424 00
19	D424 00
20	D101 00
21	D101 00
22	SPARE
23	SPARE
24	D111 00
25	D111 00
26	D111 00
27	D116 00
28	D111 00
29	D348 00
30	D111 00
31	D325 00
32	D325 00
33	D100 00
34	D100 00
35	SPARE
36	SPARE
37	D267 00
38	D267 00
39	D267 00
40	D267 00

A1-F18AC-WDM-000

15 April 1992

R092 00

REF DESIGNATION PIN DWG.

52P-S112	CONT
41	D300 00
42	D300 00
43	D266 00
44	D266 00
45	D266 00
46	D266 00
47	D266 00
48	D266 00
49	D266 00
50	D027 00
51	D164 00
52	D325 00
53	D002 00
54	D424 00
55	D348 00
56	D348 00
57	D348 00
58	D100 00
59	D100 00
60	D170 00
61	D170 00
62	D170 00
63	D424 00
64	D424 00
65	D101 00
66	D101 00
67	D170 00
68	D170 00
69	D122 00
70	D116 00
71	D116 00
72	D116 00
73	D056 00
74	D056 00
75	D056 00
76	D435 00
77	D435 00
78	D435 00
79	D341 00

52P-T056A	L820 00
1	D425 00
2	D425 00
3	D264 00
4	D264 00
5	D275 00
6	D273 00
7	D300 00
8	SPARE
9	D112 00
10	D112 00
11	D055 00
12	D055 00
13	D348 00
14	D348 00
15	D348 00
16	D275 00
17	D273 00
18	D300 00

REF DESIGNATION PIN DWG.

52P-T056A	CONT
19	SPARE
20	D273 00
21	D273 00
22	D264 00
23	D264 00
24	D112 00
25	D112 00
26	D264 00
27	SPARE
28	D112 00
29	D275 00
30	SPARE
31	D264 00

52P-T056B	L820 00
1	D425 00
2	SPARE
3	SPARE
4	D113 00
5	D113 00
6	D112 00
7	D112 00
8	D425 00
9	D113 00
10	D009 00
11	D114 00
12	D114 00
13	D114 00
14	D113 00
15	D425 00
16	D116 00
17	D113 00
18	D113 00
19	D113 00
20	D113 00
21	D113 00
22	D425 00
23	D425 00
24	D113 00
25	D116 00
26	D116 00
27	D116 00
28	D122 00
29	D116 00
30	D113 00
31	D113 00

52P-T056C	L820 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D113 00
7	D113 00
8	D113 00
9	SPARE
10	SPARE

REF DESIGNATION PIN DWG.

52P-T056C	CONT
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE

52P-T108	L806 01
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	D264 00
19	D264 00
20	D112 00
21	D112 00
22	SPARE
23	SPARE
24	D122 00
25	D113 00
26	D113 00
27	D116 00
28	D425 00
29	D425 00
30	D425 00
31	D114 00
32	D114 00
33	D112 00
34	D112 00
35	SPARE
36	SPARE

A1-F18AC-WDM-000

Change 4

R093 00

REF DESIGNATION PIN DWG.

52P-T108	CONT
37	D113 00
38	D113 00
39	D113 00
40	D113 00
41	D300 00
42	D300 00
43	D275 00
44	D275 00
45	D275 00
46	D273 00
47	D273 00
48	D273 00
49	D273 00
50	D035 00
51	D035 00
52	D114 00
53	D009 00
54	D264 00
55	D264 00
56	D264 00
57	D348 00
58	D348 00
59	D348 00
60	D113 00
61	D113 00
62	D113 00
63	D264 00
64	D264 00
65	D112 00
66	D112 00
67	D112 00
68	D112 00
69	D116 00
70	D116 00
71	D116 00
72	D116 00
73	D055 00
74	D055 00
75	D055 00
76	D435 00
77	D435 00
78	D435 00
79	D430 00

52P-U013	L906 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D120 00
12	D240 00
13	D240 00
14	D208 00

REF DESIGNATION PIN DWG.

52P-U013	CONT
15	D473 00
16	D473 00
17	SPARE
18	D120 00
19	D206 00
20	D206 00
21	D206 00
22	D208 00
23	SPARE
24	SPARE
25	SPARE
26	D120 00
27	D206 00
28	D206 00
29	D464 00
30	D359 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	D205 00
38	D155 00
39	D359 00
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D224 00
45	SPARE
46	D120 00
47	D359 00
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	D229 00
53	SPARE
54	D199 00
55	D199 00
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

52P-U015	L906 00
A	D416 00
B	D261 00
C	D222 00
D	D219 00
E	D219 00

REF DESIGNATION PIN DWG.

52P-U015	CONT
F	D219 00
G	D107 00
H	D259 00
J	D259 00
K	D259 00
L	D259 00
52P-U017	L906 00
A	D410 00
B	D414 00
C	D485 00
D	D259 00
E	SPARE
F	D229 00
G	D107 00
H	D229 00
J	D229 00
K	D229 00
L	D229 00
52P-U019	L906 00
1	D416 00
2	SPARE
3	SPARE
4	SPARE
5	D206 00
6	D206 00
7	D206 00
8	D206 00
9	SPARE
10	SPARE
11	D206 00
12	D217 00
13	D217 00
14	SPARE
15	D120 00
16	SPARE
17	SPARE
18	D418 00
19	D120 00
20	D007 00
21	SPARE
22	SPARE
23	D120 00
24	SPARE
25	SPARE
26	D418 00
27	D418 00
28	D007 00
29	D007 00
30	D007 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	D120 00

A1-F18AC-WDM-000

Change 4

R094 00

REF DESIGNATION PIN DWG.

52P-U019	CONT
38	D334 00
39	D334 00
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	D007 00
48	D007 00
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

52P-U045A	L906 00
A	D259 00
B	D259 00
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	D259 00
T	D481 00
U	D481 00
V	D481 00
W	D211 00
X	D211 00
Y	D211 00
Z	D007 00
a	D007 00
b	D007 00
c	D229 00
d	D229 00
e	D007 00
f	D229 00
g	SPARE
h	SPARE

REF DESIGNATION PIN DWG.

52P-U045A	CONT
i	SPARE
j	SPARE
k	SPARE
l	SPARE
m	SPARE
n	SPARE
p	SPARE
q	SPARE
r	SPARE
s	SPARE
t	SPARE
u	SPARE
v	SPARE
w	SPARE
x	SPARE
y	SPARE
z	D261 00

52P-U045B	L906 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	D248 00
c	SPARE
d	D241 00
e	D241 00
f	SPARE
g	SPARE
h	SPARE
i	SPARE
j	SPARE
k	SPARE
l	SPARE
m	SPARE
n	SPARE
p	SPARE
q	D217 00
r	D241 00
s	D224 00
t	D008 00
u	SPARE

REF DESIGNATION PIN DWG.

52P-U045B	CONT
v	D008 00
w	D330 00
x	D241 00
y	D414 00
z	SPARE
AA	D414 00
BB	D248 00
CC	D241 00
DD	D481 00
EE	D229 00
FF	D481 00
GG	D211 00
HH	SPARE
JJ	D229 00
KK	D224 00
LL	D248 00

52P-U045C	L906 00
A	D261 00
B	D107 00
C	D107 00
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	D229 00
T	D229 00
U	D229 00
V	D007 00
W	D007 00
X	D007 00
Y	D416 00
Z	D414 00
a	D229 00
b	D261 00
c	D259 00
d	D259 00
e	D259 00
f	D229 00

52P-U045D	L906 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE

A1-F18AC-WDM-000

Change 4

R095 00

REF DESIGNATION PIN DWG.

52P-U045D	CONT
R	SPARE
S	D481 00
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	D481 00
b	D481 00
c	D481 00
52P-U150	L910 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D210 00
6	D209 00
7	D209 00
8	D210 00
9	SPARE
10	SPARE
11	D210 00
12	D297 00
13	D297 00
14	D391 00
15	D209 00
16	SPARE
17	SPARE
18	D247 00
19	D418 00
20	D420 00
21	D420 00
22	D391 00
23	D209 00
24	SPARE
25	SPARE
26	D418 00
27	D420 00
28	D420 00
29	D307 00
30	D302 00
31	D199 00
32	SPARE
33	SPARE
34	D247 00
35	D307 00
36	D307 00
37	D391 00
38	D199 00
39	SPARE
40	SPARE
41	SPARE
42	D247 00
43	D247 00
44	D247 00
45	D230 00
46	SPARE
47	SPARE

REF DESIGNATION PIN DWG.

52P-U150	CONT
48	SPARE
49	SPARE
50	SPARE
51	D230 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE
52P-U152	L910 00
A	D257 00
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	D211 00
H	D248 00
J	D226 00
K	D356 00
52P-V012	L956 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	D204 00
12	D240 00
13	D240 00
14	D208 00
15	D473 00
16	D473 00
17	SPARE
18	D204 00
19	D205 00
20	D204 00
21	D204 00
22	D208 00
23	SPARE
24	SPARE
25	SPARE
26	D204 00
27	D205 00
28	D205 00
29	D464 00
30	D154 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	D204 00
38	D155 00
39	D154 00

REF DESIGNATION PIN DWG.

52P-V012	CONT
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D224 00
45	SPARE
46	D205 00
47	D154 00
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	D224 00
53	SPARE
54	D199 00
55	D199 00
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
52P-V014	L956 00
A	D416 00
B	D260 00
C	D222 00
D	D219 00
E	D219 00
F	D219 00
G	D122 00
H	D122 00
J	D189 00
K	D189 00
L	D189 00
52P-V016	L956 00
A	D410 00
B	D414 00
C	SPARE
D	SPARE
E	D238 00
F	D222 00
G	D122 00
H	D122 00
J	D238 00
K	D238 00
L	D238 00
52P-V020	L956 00
1	D416 00
2	SPARE
3	SPARE
4	SPARE
5	D207 00
6	D207 00
7	D204 00

A1-F18AC-WDM-000

Change 4

R096 00

REF DESIGNATION PIN DWG.

52P-V020	CONT
8	D204 00
9	SPARE
10	SPARE
11	D204 00
12	D224 00
13	D224 00
14	SPARE
15	D207 00
16	SPARE
17	SPARE
18	D207 00
19	D210 00
20	D411 00
21	SPARE
22	SPARE
23	D207 00
24	SPARE
25	SPARE
26	D207 00
27	D207 00
28	D411 00
29	D411 00
30	D411 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	D207 00
38	D008 00
39	D008 00
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	D411 00
48	D411 00
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

REF DESIGNATION PIN DWG.

52P-V044A	L956 00
A	D189 00
B	D189 00
C	D122 00
D	D482 00
E	D122 00
F	D482 00
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	D189 00
T	D482 00
U	D482 00
V	D482 00
W	D215 00
X	D215 00
Y	D215 00
Z	D411 00
a	D411 00
b	D411 00
c	D238 00
d	D238 00
e	D482 00
f	D238 00
g	SPARE
h	SPARE
i	SPARE
j	SPARE
k	SPARE
l	SPARE
m	SPARE
n	SPARE
p	SPARE
q	SPARE
r	SPARE
s	SPARE
t	SPARE
u	SPARE
v	SPARE
w	SPARE
x	SPARE
y	SPARE
z	D238 00
AA	SPARE
BB	SPARE
CC	SPARE
DD	SPARE
EE	SPARE
FF	SPARE
GG	SPARE
HH	SPARE
JJ	D238 00
52P-V044B	L956 00
A	SPARE
B	SPARE

REF DESIGNATION PIN DWG.

52P-V044B	CONT
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	D473 00
c	D224 00
d	SPARE
e	D058 00
f	SPARE
g	SPARE
h	SPARE
i	SPARE
j	SPARE
k	SPARE
l	SPARE
m	SPARE
n	D230 00
o	D257 00
p	D473 00
q	D224 00
r	D058 00
s	D262 00
t	D008 00
u	D008 00
v	D008 00
w	D473 00
x	D257 00
y	D198 00
z	SPARE
AA	D122 00
BB	D473 00
CC	D248 00
DD	D202 00
EE	D198 00
FF	D202 00
GG	D057 00
HH	D230 00
JJ	SPARE
KK	D257 00
LL	D198 00
52P-V044C	L956 00
A	D260 00
B	D122 00

A1-F18AC-WDM-000

Change 4

R097 00

REF DESIGNATION PIN DWG.

52P-V044C	CONT
C	D122 00
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	D238 00
T	D238 00
U	D238 00
V	D411 00
W	D411 00
X	D411 00
Y	D416 00
Z	D414 00
a	D238 00
b	D260 00
c	D189 00
d	D189 00
e	D189 00
f	D238 00

52P-V044D	L956 00
A	D057 00
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	D237 00
T	SPARE
U	SPARE
V	SPARE
W	SPARE
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	D260 00
c	D260 00

52P-V151	L960 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE

REF DESIGNATION PIN DWG.

52P-V151	CONT
5	D200 00
6	D200 00
7	D200 00
8	D330 00
9	SPARE
10	SPARE
11	D200 00
12	D286 00
13	D286 00
14	D391 00
15	D330 00
16	SPARE
17	SPARE
18	D200 00
19	D420 00
20	D286 00
21	D286 00
22	D391 00
23	SPARE
24	SPARE
25	SPARE
26	D420 00
27	D286 00
28	D286 00
29	D421 00
30	D301 00
31	SPARE
32	SPARE
33	SPARE
34	D208 00
35	D421 00
36	D421 00
37	D391 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D208 00
43	D213 00
44	D213 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE

52P-V153	L960 00
A	D237 00
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	D228 00
H	D057 00
J	D226 00

REF DESIGNATION PIN DWG.

52P-V153	CONT
K	D356 00
60A-A503	L025 00
60A-A505	L025 00
60A-A506	L025 00
60A-P008	L608 00
60E-A501	L025 00
60E-S011	L810 00
60E-T014	L814 00
60E-U013	L907 00
60E-V016	L957 00
60J-A001A	L001 00

A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	SPARE
G	SPARE
H	SPARE
J	SPARE
K	SPARE
L	D025 00
M	D025 00
N	D025 00
P	D025 00
R	D025 00
S	D025 00
T	D025 00
U	D025 00
V	D025 00
W	D025 00
X	SPARE
Y	SPARE
Z	SPARE
a	SPARE
b	D025 00
c	D025 00
d	SPARE
e	D025 00
f	D025 00

60J-A001B	L001 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE

A1-F18AC-WDM-000

Change 4

R098 00

REF DESIGNATION PIN DWG.

60J-A001B	CONT
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D024 00
18	D025 00
19	D025 00
20	D025 00
21	SPARE
22	D025 00
23	D025 00
24	D024 00
25	D040 00
26	SPARE
27	SPARE
28	D026 00
29	D026 00
30	D026 00
31	SPARE
32	SPARE
33	D222 00
34	D222 00
35	SPARE
36	SPARE
37	D025 00
38	D025 00
39	D025 00
40	D024 00
41	D024 00
42	D024 00
43	D024 00
44	SPARE
45	D222 00
46	D232 00
47	D235 00
48	D024 00
49	D024 00
50	D024 00
51	D024 00
52	D024 00
53	D024 00
54	SPARE
55	D486 00
56	D232 00
57	D235 00
58	D024 00
59	D024 00
60	D024 00
61	D024 00
62	D024 00
63	D024 00
64	D024 00
65	D486 00
66	D486 00
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE

REF DESIGNATION PIN DWG.

60J-A001B	CONT
72	SPARE
73	D026 00
74	D040 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	D040 00
88	D232 00
89	D232 00
90	D232 00
91	D234 00
92	D234 00
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
60J-A001C	L001 00
COAX	D367 00
60J-A001D	L001 00
COAX	D367 00
60J-A001E	L001 00
COAX	D367 00
60J-A001F	L001 00
COAX	D040 00
60J-E007	L301 00
SEE 60P-E007	
60J-H017	L404 00
SEE 60P-A017	
60J-H018	L404 00
SEE 60P-A018	
60J-S027	L808 00
SEE 60P-S027	
60J-T029	L806 00
SEE 60P-T029	
60J-U012	L906 00
SEE 60P-U012	

REF DESIGNATION PIN DWG.

60J-V015	L956 00
SEE 60P-V015	
60P-A017	L002 00
COAX	D367 00
60P-A018	L002 00
COAX	D367 00
60P-A033	L002 00
TBP	D
60P-E007	L302 00
COAX	D367 00
60P-P008A	L608 00
COAX	D367 00
60P-P008B	L608 00
COAX	D367 00
60P-P008C	L608 00
COAX	D367 00
60P-P008D	L608 00
COAX	D338 00
60P-P008E	L608 00
COAX	D338 00
60P-S011	L810 00
COAX	D338 00
60P-S027	L811 00
COAX	D338 00
60P-T014	L814 00
COAX	D338 00
60P-T029	L815 00
COAX	D338 00
60P-U012	L906 00
COAX	D367 00
60P-U013	L907 00
COAX	D367 00
60P-V015	L956 00
COAX	D367 00
60P-V016	L957 00
COAX	D367 00
60TRA504	L025 00
61A-A020	L002 00
61A-A246	L002 00
61A-E009	L108 00

A1-F18AC-WDM-000

Change 4

R099 00

REF	DESIGNATION	
PIN	DWG.	
61A-F001	L214 00	
61A-F010	L210 00	
61A-J022	L408 00	
61A-P014	L727 00	
61A-R016	L738 00	
61A-U011	L912 00	
61A-V019	L962 00	
61CPE047	L108 00	
61CPP028	L610 00	
61CPU030	L906 00	
61CPV031	L956 00	
61E-G244	L311 01	
61J-A120	L002 00	
A	D218 00	
B	SPARE	
C	SPARE	
D	SPARE	
E	SPARE	
F	SPARE	
G	SPARE	
H	SPARE	
J	SPARE	
K	SPARE	
L	SPARE	
M	SPARE	
N	D228 00	
P	D228 00	
R	D228 00	
T	D218 00	
U	D218 00	
V	D218 00	
W	D218 00	
X	D228 00	
Y	D228 00	
Z	D218 00	
61J-D245	L216 00	
SEE 61P-G245		
61J-E013	L301 00	
SEE 61P-E013		
61J-E018	L118 00	
SEE 61P-E018		
61J-E025	L118 00	
SEE 61P-E025		
61J-E166	L118 00	
SEE 61P-E166		
61J-E176	L118 00	
SEE 61P-E176		

REF	DESIGNATION	
PIN	DWG.	
61J-F034	L301 00	
SEE 61P-F034		
61J-F036	L301 00	
SEE 61P-F036		
61J-F037	L301 00	
SEE 61P-F037		
61J-F038	L301 00	
SEE 61P-F038		
61J-F039	L301 00	
SEE 61P-F039		
61J-J033	L411 00	
SEE 61P-D033		
61J-J035	L409 00	
SEE 61P-D035		
61J-J040	L409 00	
SEE 61P-D040		
61J-P110A	L700 00	
A	SPARE	
B	SPARE	
C	SPARE	
D	SPARE	
E	SPARE	
F	SPARE	
G	SPARE	
H	SPARE	
J	D201 00	
K	D361 00	
L	D361 00	
M	D197 00	
N	D197 00	
P	D197 00	
R	SPARE	
S	D361 00	
61J-P110B	L700 00	
1	D485 00	
2	D485 00	
3	D485 00	
4	D485 00	
5	D485 00	
6	D485 00	
7	D234 00	
8	D234 00	
9	D233 00	
10	D471 00	
11	D471 00	
12	D485 00	
13	D485 00	
14	SPARE	
15	D218 00	
16	D218 00	

REF	DESIGNATION	
PIN	DWG.	
60J-P110B	CONT	
17	D218 00	
18	D361 00	
19	D361 00	
20	D233 00	
21	D233 00	
22	D233 00	
61J-P110C	L700 00	
PIN	D190 00	
SKT	D190 00	
61J-P169	L700 00	
SEE 61P-P169		
61J-R037	L302 00	
SEE 61P-F037		
61J-R039	L302 00	
SEE 61P-F039		
61J-R111A	L709 00	
1	SPARE	
2	SPARE	
3	SPARE	
4	SPARE	
5	D233 00	
6	D233 00	
7	D234 00	
8	D234 00	
9	SPARE	
10	SPARE	
11	SPARE	
12	SPARE	
13	SPARE	
14	SPARE	
15	SPARE	
16	D361 00	
17	D233 00	
18	D233 00	
19	D361 00	
20	D218 00	
21	D218 00	
22	D218 00	
61J-R111B	L709 00	
A	SPARE	
B	SPARE	
C	SPARE	
D	D122 00	
E	D237 00	
F	D237 00	
G	D122 00	
H	SPARE	
J	SPARE	
K	SPARE	
L	D122 00	
M	D237 00	

A1-F18AC-WDM-000

Change 4

R100 00

REF DESIGNATION PIN DWG.

61J-R170	L
SEE 61P-R170	
61J-R175	L709 00
COAX	D234 00
61J-U027	L906 00
SEE 61P-U027	
61J-U041	L906 00
SEE 61P-U041	
61J-U045	L906 00
SEE 61P-U045	
61J-U265	L908 00
SEE 61P-U265	
61J-V026	L956 00
SEE 61P-V026	
61J-V042	L956 00
SEE 61P-V042	
61J-V046	L956 00
SEE 61P-V046	
61J-V266	L958 00
SEE 61P-V266	
61L-B164	L004 00
61L-G165	L311 00
61P-A020A	L002 00
1	SPARE
2	SPARE
3	D228 00
4	D228 00
5	SPARE
6	D228 00
7	D228 00
8	SPARE
9	SPARE
10	D209 00
11	D209 00
12	SPARE
13	SPARE
14	D200 00
15	D200 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D228 00
21	SPARE
22	SPARE
23	D228 00
24	SPARE
25	D209 00

REF DESIGNATION PIN DWG.

61P-A020A	CONT
26	SPARE
27	D200 00
28	D200 00
29	SPARE
30	SPARE
31	SPARE
32	D218 00
33	D218 00
34	D248 00
35	D248 00
36	SPARE
37	SPARE
61P-A020B	L002 00
A	D218 00
B	D218 00
C	D218 00
D	D218 00
E	D228 00
F	D259 00
G	D228 00
H	D222 00
J	D222 00
K	D218 00
L	D228 00
M	D218 00
61P-A246A	L002 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D010 00
10	D010 00
11	D010 00
12	D010 00
13	D010 00
61P-A246B	L002 00
1	D251 00
2	D251 00
3	D251 00
4	D250 00
5	D250 00
6	D232 00
7	SPARE
8	D232 00
9	D232 00
10	D232 00
11	D235 00
12	D235 00
13	D387 00
14	D387 00
15	D387 00
16	D232 00

REF DESIGNATION PIN DWG.

61P-A246B	CONT
17	D232 00
18	D232 00
19	D232 00
20	D010 00
21	D010 00
22	D010 00
61P-A246C	L002 00
COAX	D010 00
61P-B164	L004 00
A	D218 00
B	SPARE
C	D218 00
D	SPARE
E	SPARE
F	SPARE
61P-B184	L004 00
1	SPARE
2	SPARE
3	D456 00
4	D261 00
5	D261 00
6	D261 00
61P-B185	L004 00
A	SPARE
B	D261 00
C	D261 00
61P-D033	L203 00
1	D221 00
2	D221 00
3	D221 00
4	SPARE
5	SPARE
6	D220 00
7	D220 00
8	SPARE
9	D220 00
10	SPARE
11	SPARE
12	D220 00
13	D220 00
14	SPARE
15	SPARE
16	SPARE
17	D221 00
18	D221 00
19	SPARE
20	D221 00
21	D221 00
22	D221 00
23	D220 00
24	D220 00
25	D220 00
26	SPARE

A1-F18AC-WDM-000

Change 4

R101 00

REF DESIGNATION PIN DWG.

61P-D033	CONT
27	SPARE
28	D220 00
29	D221 00
30	SPARE
31	D221 00
32	SPARE
33	D220 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
61P-D035	L217 00
COAX	D260 00
61P-D040	L217 00
COAX	D006 00
61P-E009A	L108 00
A	SPARE
B	D238 00
C	D238 00
D	SPARE
E	D238 00
F	SPARE
G	SPARE
H	SPARE
J	D238 00
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D238 00
X	SPARE
Y	SPARE
Z	D259 00
a	SPARE
b	SPARE
c	SPARE
d	SPARE
e	D238 00
f	D202 00
g	D202 00
h	D238 00
i	SPARE
j	SPARE
k	SPARE
m	D202 00
n	D259 00
p	SPARE
q	SPARE
r	SPARE
s	SPARE
t	SPARE
u	SPARE

REF DESIGNATION PIN DWG.

61P-E009A	CONT
v	SPARE
w	SPARE
x	SPARE
y	SPARE
z	SPARE
AA	SPARE
BB	D238 00
CC	SPARE
DD	SPARE
EE	SPARE
FF	SPARE
GG	D259 00
HH	SPARE
JJ	SPARE
KK	SPARE
LL	SPARE
MM	SPARE
NN	SPARE
PP	SPARE
61P-E009B	L108 00
A	D255 00
B	D255 00
C	SPARE
61P-E013	L302 00
COAX	D255 00
61P-E018	L118 00
PIN	D234 00
SKT	D234 00
61P-E025	L118 00
COAX	D255 00
61P-E047A	L108 00
COAX	D255 00
61P-E047B	L108 00
COAX	D255 00
61P-E047C	L108 00
COAX	D255 00
61P-E166	L118 00
PIN	D190 00
SKT	D190 00
61P-E176	L118 00
COAX	D234 00
61P-F001A	L214 00
1	SPARE
2	SPARE
3	SPARE

REF DESIGNATION PIN DWG.

61P-F001A	CONT
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D206 00
11	D206 00
12	SPARE
13	D473 00
14	D473 00
15	SPARE
16	SPARE
17	SPARE
18	D206 00
19	D206 00
20	D238 00
21	D204 00
22	D473 00
23	D473 00
24	D473 00
25	SPARE
26	SPARE
27	SPARE
28	D205 00
29	D206 00
30	D238 00
31	D237 00
32	D120 00
33	D210 00
34	D473 00
35	D473 00
36	SPARE
37	D204 00
38	D204 00
39	D205 00
40	D205 00
41	D249 00
42	D252 00
43	D120 00
44	D120 00
45	D222 00
46	D222 00
47	D473 00
48	D207 00
49	D207 00
50	D204 00
51	D204 00
52	D249 00
53	D252 00
54	D252 00
55	D120 00
56	D120 00
57	D222 00
58	D473 00
59	SPARE
60	D207 00
61	D418 00
62	D237 00
63	D209 00
64	D209 00
65	D200 00

A1-F18AC-WDM-000

Change 4

R101 01

REF DESIGNATION PIN DWG.

61P-F001A	CONT
66	D237 00
67	D120 00
68	D204 00
69	D120 00
70	D473 00
71	SPARE
72	D418 00
73	D418 00
74	D237 00
75	D209 00
76	D200 00
77	D418 00
78	D205 00
79	D207 00
80	D120 00
81	D248 00
82	SPARE
83	SPARE
84	D206 00
85	D206 00
86	D120 00
87	D120 00
88	D238 00
89	D205 00
90	D205 00
91	D230 00
92	D120 00
93	D473 00
94	SPARE
95	SPARE
96	SPARE
97	D237 00
98	D120 00
99	D120 00
100	D207 00
101	D207 00
102	D230 00
103	D120 00
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	D237 00
109	D120 00
110	D204 00
111	D204 00
112	D207 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	D204 00
120	D026 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE

REF DESIGNATION PIN DWG.

61P-F001A	CONT
128	SPARE
61P-F001B	L214 00
1	D262 00
2	D262 00
3	D262 00
4	D230 00
5	D053 00
6	D217 00
7	D053 00
8	D230 00
9	D248 00
10	D230 00
11	D224 00
12	D224 00
13	D330 00
14	D224 00
15	D248 00
16	D058 00
17	D058 00
18	D257 00
19	D257 00
20	D257 00
21	D257 00
22	D241 00
23	D241 00
24	D262 00
25	D241 00
26	D241 00
27	D241 00
28	D058 00
29	D058 00
30	D240 00
31	D240 00
32	D241 00
33	D193 00
34	D051 00
35	D217 00
36	D191 00
37	D238 00
38	D238 00
39	D058 00
40	D058 00
41	D058 00
42	D240 00
43	D025 00
44	D245 00
45	D193 00
46	D026 00
47	D051 00
48	D238 00
49	D238 00
50	SPARE
51	D010 00
52	D010 00
53	D207 00
54	SPARE
55	D217 00
56	D370 00
57	D051 00
58	D026 00

REF DESIGNATION PIN DWG.

61P-F001B	CONT
59	D238 00
60	SPARE
61	D051 00
62	D026 00
63	D051 00
64	D053 00
65	D053 00
66	D051 00
67	D051 00
68	D051 00
69	D026 00
70	D026 00
71	D040 00
72	D193 00
73	D051 00
74	D051 00
75	D040 00
76	D210 00
77	D213 00
78	D213 00
79	D213 00
80	D410 00
81	D052 00
82	D053 00
83	D053 00
84	D051 00
85	D248 00
86	SPARE
87	D210 00
88	D206 00
89	D207 00
90	D207 00
91	D052 00
92	D053 00
93	D224 00
94	D224 00
95	D330 00
96	D217 00
97	D230 00
98	D370 00
99	D210 00
100	D206 00
101	D206 00
102	D193 00
103	D224 00
104	D193 00
105	D229 00
106	D230 00
107	D238 00
108	D238 00
109	D224 00
110	D238 00
111	D052 00
112	D052 00
113	D058 00
114	D052 00
115	D238 00
116	D238 00
117	D238 00
118	D051 00
119	D260 00
120	D223 00

A1-F18AC-WDM-000

Change 4

R101 02

REF DESIGNATION PIN DWG.

61P-F001B	CONT
121	D052 00
122	D261 00
123	D238 00
124	D193 00
125	D190 00
126	D052 00
127	D052 00
128	D052 00

61P-F001C	L214 00
COAX	D186 00
1	SPARE
2	D186 00
3	D363 00
4	D190 00
5	D190 00
6	D190 00

61P-F001D	L214 00
COAX	D190 00
1	SPARE
2	SPARE
3	SPARE
4	D190 00
5	D330 00
6	D225 00
7	D260 00

61P-F001E	L214 00
COAX	D190 00
A	D091 00
B	D228 00
C	D091 00

REF DESIGNATION PIN DWG.

61P-F001E	CONT
D	SPARE
E	D228 00
F	D228 00
G	SPARE
H	D091 00
J	D228 00
K	D228 00
L	D228 00
M	SPARE
N	SPARE
P	SPARE
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	D228 00
W	D228 00
X	D091 00
Y	D228 00
Z	D228 00
a	SPARE
b	D228 00
c	SPARE
d	SPARE
e	SPARE
f	SPARE
g	SPARE
h	SPARE
i	D228 00
j	D228 00
k	D228 00
l	SPARE
m	D091 00
n	SPARE

REF DESIGNATION PIN DWG.

61P-F001E	CONT
p	SPARE
q	SPARE
r	D228 00
61P-F001F	L214 00
COAX	D190 00
61P-F001G	L214 00
COAX	D363 00
61P-F001H	L214 00
COAX	D190 00
61P-F001J	L214 00
COAX	D330 00
61P-F001K	L214 00
COAX	D225 00
61P-F001M	L214 00
COAX	D260 00
61P-F010A	L210 00
A	D057 00
B	D057 00
C	D057 00
D	D191 00
E	D191 00
F	D191 00
61P-F010B	L210 00
1	D191 00
2	D237 00

A1-F18AC-WDM-000

15 April 1992

R102 00

REF DESIGNATION PIN DWG.

61P-F010B	CONT
3	D238 00
4	D237 00
5	D237 00
6	D252 00
7	D252 00
8	D252 00
9	SPARE
10	SPARE
11	SPARE
12	D383 00
13	D383 00
14	D385 00
15	D385 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D040 00
21	D040 00
22	D040 00
23	D238 00
24	D237 00
25	SPARE
26	SPARE
27	D238 00
28	D237 00
29	D238 00
30	SPARE
31	D237 00
32	D237 00
33	D249 00
34	D249 00
35	D249 00
36	SPARE
37	SPARE
38	D383 00
39	D383 00
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D237 00
51	D238 00
52	D191 00
53	D238 00
54	D238 00
55	D191 00
56	D191 00
57	D191 00
58	D197 00
59	D197 00

REF DESIGNATION PIN DWG.

61P-F010B	CONT
60	D385 00
61	D385 00
62	D040 00
63	D040 00
64	D040 00
65	D383 00
66	SPARE
67	D238 00
68	D238 00
69	D238 00
70	D237 00
71	D383 00
72	D383 00
73	D383 00
74	D383 00
75	SPARE
76	SPARE
77	SPARE
78	D207 00
79	SPARE
61P-F034	L302 00
1	D221 00
2	D221 00
3	D221 00
4	SPARE
5	SPARE
6	D220 00
7	D220 00
8	SPARE
9	D220 00
10	SPARE
11	SPARE
12	D220 00
13	D220 00
14	SPARE
15	SPARE
16	SPARE
17	D221 00
18	D221 00
19	SPARE
20	D221 00
21	D221 00
22	D221 00
23	D220 00
24	D220 00
25	D220 00
26	SPARE
27	SPARE
28	D220 00
29	D221 00
30	SPARE
31	D221 00
32	SPARE
33	D220 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE

REF DESIGNATION PIN DWG.

61P-F036	L302 00
PIN	D190 00
SKT	D190 00
61P-F037	L302 00
PIN	D190 00
SKT	D190 00
61P-F038	L302 00
PIN	D330 00
SKT	D330 00
61P-F039	L302 00
PIN	D190 00
SKT	D190 00
61P-G165	L311 00
A	D222 00
B	D222 00
C	SPARE
D	SPARE
E	SPARE
F	SPARE
61P-G244	L311 01
COAX	D010 00
61P-G245	L311 01
COAX	D010 00
61P-J022A	L411 00
A	D409 00
B	D089 00
C	D198 00
D	D085 00
E	D085 00
F	D198 00
G	D198 00
H	D046 00
J	D198 00
61P-J022B	L411 00
1	D221 00
2	D221 00
3	D221 00
4	D221 00
5	D221 00
6	D220 00
7	D220 00
8	SPARE

A1-F18AC-WDM-000

R103 00

Change 4

REF DESIGNATION PIN DWG.

61P-J022B	CONT
9	D220 00
10	D220 00
11	D220 00
12	D220 00
13	D220 00
14	SPARE
15	SPARE
16	SPARE
17	D221 00
18	D221 00
19	SPARE
20	D221 00
21	D221 00
22	D221 00
23	D220 00
24	D220 00
25	D220 00
26	SPARE
27	SPARE
28	D220 00
29	D221 00
30	SPARE
31	D221 00
32	SPARE
33	D220 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE

61P-J022C	L411 00
1	SPARE
2	D416 00
3	D370 00
4	D416 00
5	D370 00
6	SPARE
7	SPARE
8	SPARE
9	D410 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE

61P-P014A	L727 00
1	SPARE
2	SPARE
3	SPARE
4	D201 00
5	D201 00
6	D201 00
7	SPARE
8	D222 00
9	D201 00
10	D202 00
11	SPARE
12	SPARE
13	SPARE

REF DESIGNATION PIN DWG.

61P-P014A	CONT
14	SPARE
15	SPARE
16	D191 00
17	D201 00
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	D219 00
23	SPARE
24	SPARE
25	SPARE
26	D230 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	D201 00
34	SPARE
35	SPARE
36	SPARE
37	D203 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	D203 00
49	D203 00
50	D203 00
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	D203 00
59	D203 00
60	D203 00
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	D230 00
67	SPARE
68	SPARE
69	D203 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE

REF DESIGNATION PIN DWG.

61P-P014A	CONT
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D219 00
83	D203 00
84	SPARE
85	D203 00
86	D197 00
87	D201 00
88	D201 00
89	SPARE
90	SPARE
91	D201 00
92	SPARE
93	SPARE
94	D219 00
95	SPARE
96	D201 00
97	SPARE
98	SPARE
99	SPARE
100	SPARE

61P-P014B	L727 00
1	SPARE
2	D199 00
3	SPARE
4	D203 00
5	D203 00
6	D208 00
7	D208 00
8	D199 00
9	D199 00
10	D199 00
11	D199 00
12	D199 00
13	D203 00
14	D203 00
15	D222 00
16	D222 00
17	D222 00
18	SPARE
19	D211 00
20	SPARE
21	SPARE
22	D211 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE

A1-F18AC-WDM-000

Change 4

R104 00

REF DESIGNATION PIN DWG.

61P-P014B	CONT
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE

REF DESIGNATION PIN DWG.

61P-P014B	CONT
97	SPARE
98	SPARE
99	D199 00
61P-P014C	L727 00
1	SPARE
2	SPARE
3	SPARE
4	D330 00
5	D330 00
6	SPARE
7	D222 00
8	D203 00
9	SPARE
10	SPARE
11	SPARE
12	D330 00
13	D203 00
61P-P028A	L610 00
COAX	D255 00
61P-P028B	L610 00
COAX	D255 00
61P-P028C	L610 00
COAX	D255 00
61P-P169	L700 00
COAX	D190 00
61P-R016A	L738 00
1	SPARE
2	SPARE
3	D417 00
4	D202 00
5	D202 00
6	D202 00
7	D417 00
8	D191 00
9	D202 00
10	D202 00
11	D248 00
12	D189 00
13	D189 00
14	SPARE
15	D360 00
16	D216 00
17	D202 00
18	SPARE
19	SPARE
20	D262 00
21	SPARE
22	SPARE
23	D189 00
24	D360 00
25	D189 00
26	D051 00
27	SPARE
28	SPARE

REF DESIGNATION PIN DWG.

61P-R016A	CONT
29	D216 00
30	D216 00
31	SPARE
32	SPARE
33	D202 00
34	D189 00
35	D189 00
36	SPARE
37	D202 00
38	SPARE
39	SPARE
40	D262 00
41	D141 00
42	D141 00
43	SPARE
44	D262 00
45	D248 00
46	SPARE
47	SPARE
48	D202 00
49	D202 00
50	D202 00
51	D141 00
52	D010 00
53	D010 00
54	SPARE
55	D216 00
56	D207 00
57	SPARE
58	D202 00
59	D202 00
60	D202 00
61	D141 00
62	D240 00
63	D141 00
64	SPARE
65	D360 00
66	D230 00
67	D207 00
68	D189 00
69	D202 00
70	SPARE
71	D141 00
72	D141 00
73	SPARE
74	SPARE
75	D240 00
76	D207 00
77	D189 00
78	D248 00
79	D248 00
80	SPARE
81	D141 00
82	D248 00
83	D202 00
84	D240 00
85	D202 00
86	D122 00
87	D202 00
88	D202 00
89	SPARE
90	D223 00

A1-F18AC-WDM-000

Change 5

R105 00

REF DESIGNATION PIN DWG.

61P-R016A CONT
91 D122 00
92 SPARE
93 D262 00
94 D141 00
95 SPARE
96 D202 00
97 SPARE
98 SPARE
99 SPARE
100 D262 00

61P-R016B L738 00

1 SPARE
2 D199 00
3 SPARE
4 D202 00
5 D202 00
6 D208 00
7 D208 00
8 D199 00
9 D199 00
10 D199 00
11 D199 00
12 D199 00
13 D202 00
14 D202 00
15 D215 00
16 D215 00
17 D215 00
18 SPARE
19 D199 00
20 SPARE
21 SPARE
22 D199 00

61P-R016C L738 00

1 SPARE
2 SPARE
3 SPARE
4 D203 00
5 D203 00
6 SPARE
7 D262 00
8 D261 00
9 SPARE
10 SPARE
11 SPARE
12 D203 00
13 D262 00

61P-R162 L705 00
COAX D255 00

61P-R167 L705 00
A D248 00
B D189 00
C SPARE
D D360 00
E D360 00

REF DESIGNATION PIN DWG.

61P-R167 CONT
F D141 00
G D360 00
H D141 00
J D010 00
K D360 00
L D360 00
M D360 00
N D360 00
P D141 00
R D189 00
S D248 00
T D248 00
U D360 00
V D360 00
W D141 00
X D248 00
Y D360 00
Z SPARE
a D360 00
b SPARE
c D122 00

61P-R168 L705 00
PIN D234 00
SKT D234 00

61P-R170 L
BLK D234 00
RED D234 00

61P-U011A L912 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 D210 00
6 D210 00
7 SPARE
8 SPARE
9 D210 00
10 D210 00
11 D209 00
12 D209 00
13 D210 00
14 D210 00
15 D199 00
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 D199 00
21 D199 00
22 D210 00

61P-U011B L912 00
1 D211 00
2 D257 00
3 D257 00
4 D257 00

REF DESIGNATION PIN DWG.

61P-U011B CONT
5 D257 00
6 D257 00
7 D257 00
8 D257 00
9 D257 00
10 D230 00
11 D230 00
12 D257 00
13 SPARE
14 SPARE
15 D257 00
16 SPARE
17 SPARE
18 D257 00
19 SPARE
20 SPARE
21 SPARE
22 SPARE

61P-U021A L911 00
1 D257 00
2 D257 00
3 SPARE
4 D209 00
5 D199 00
6 D257 00
7 SPARE
8 D199 00
9 D248 00
10 D199 00
11 D199 00
12 SPARE
13 SPARE
14 D199 00
15 D257 00
16 D257 00
17 D199 00
18 D210 00
19 D210 00
20 D257 00
21 D210 00
22 D210 00
23 D210 00
24 D199 00
25 D257 00
26 D257 00
27 D209 00

61P-U027 L906 00
PIN D190 00
SKT D190 00

61P-U030A L906 00
COAX D255 00

61P-U030B L906 00
COAX D255 00

A1-F18AC-WDM-000

Change 5

R106 00

REF DESIGNATION PIN DWG.

61P-U030C	L906 00
COAX	D255 00
61P-U041	L906 00
PIN	D190 00
SKT	D190 00
61P-U045	L906 00
1	D221 00
2	D221 00
3	D221 00
4	D221 00
5	SPARE
6	D221 00
7	D221 00
8	D221 00
9	SPARE
10	D221 00
11	D221 00
12	SPARE
13	D221 00
61P-U265	L908 00
BLK	D190 00
RED	D190 00
61P-V019A	L962 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D213 00
6	D213 00
7	SPARE
8	SPARE
9	D213 00
10	D213 00
11	D200 00
12	D200 00
13	D213 00
14	D213 00
15	D208 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D208 00
21	D208 00
22	D213 00
61P-V019B	L962 00
1	D057 00
2	D213 00
3	D213 00
4	D228 00
5	D213 00
6	D213 00

REF DESIGNATION PIN DWG.

61P-V019B	CONT
7	D213 00
8	D213 00
9	D213 00
10	D330 00
11	D330 00
12	SPARE
13	D213 00
14	SPARE
15	D213 00
16	SPARE
17	SPARE
18	D213 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
61P-V026	L956 00
PIN	D190 00
SKT	D190 00
61P-V029A	L961 00
1	D213 00
2	D213 00
3	D200 00
4	D208 00
5	D200 00
6	D213 00
7	SPARE
8	D200 00
9	D237 00
10	D200 00
11	D200 00
12	SPARE
13	SPARE
14	D200 00
15	D228 00
16	D228 00
17	SPARE
18	D213 00
19	D213 00
20	D213 00
21	D213 00
22	D213 00
23	D213 00
24	D200 00
25	D213 00
26	D213 00
27	D208 00
61P-V031A	L956 00
COAX	D255 00
61P-V031B	L956 00
COAX	D255 00

REF DESIGNATION PIN DWG.

61P-V031C	L956 00
COAX	D255 00
61P-V042	L956 00
BLK	D330 00
PIN	D330 00
RED	D330 00
SKT	D330 00
61P-V046	L956 00
1	D220 00
2	D220 00
3	D220 00
4	D220 00
5	SPARE
6	D220 00
7	D220 00
8	D220 00
9	SPARE
10	D220 00
11	D220 00
12	SPARE
13	D220 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
61P-V266	L958 00
BLK	D190 00
RED	D190 00
61S-B184	L004 00
61S-B185	L004 00
61S-C163	L115 00
BLU	D228 00
RED	D228 00
YEL	D228 00
61S-G153	L309 00
1	D223 00
2	SPARE
3	D223 00
4	D223 00
5	SPARE
6	D223 00
7	D223 00
8	D223 00
61S-H177	L407 00
1	SPARE

A1-F18AC-WDM-000

Change 5

R106 01

REF DESIGNATION
PIN DWG.

61S-H177	CONT
2	D198 00
3	D198 00
61T-U301	L910 00
J1	D209 00
J2	D209 00
J3	D209 00
61T-U303	L910 00
J1	D199 00
J2	D199 00
J3	D199 00
61T-V302	L960 00
J1	D208 00
J2	D208 00
J3	D208 00
61T-V304	L960 00
J1	D200 00
J2	D200 00
J3	D200 00
61X-D161	L204 00
A2	D260 00
A2	D259 00
X2	D262 00
X2	D224 00
G	D224 00

REF DESIGNATION
PIN DWG.

62A-A013	L001 01
62A-A028	L002 00
62A-B010	L003 01
62A-B014	L008 00
62A-E006	L110 00
62A-E009	L114 01
62A-J007	L400 00
62A-J008	L400 00
62A-P024	L609 00
62A-S012	L831 00
62A-T011	L827 00
62CPS036B	L831 00
62CPT035B	L827 00
62E-A020	L001 01
62E-B015	L003 01
62E-S018	L833 00
62E-T017	L829 00

REF DESIGNATION
PIN DWG.

62FLA019	L001 01
62FLB016	L003 01
62FLS026	L831 00
62FLT025	L827 00
62J-A030E	L001 01
1	D388 00
2	D388 00
3	SPARE
4	SPARE
5	SPARE
6	D388 00
62J-B029E	L003 01
1	D388 00
2	D388 00
3	SPARE
4	SPARE
5	SPARE
6	D388 00
62J-B037	L003 01
SEE 62P-B037	
62J-B038	L003 01
SEE	62P-B038

A1-F18AC-WDM-000

15 April 1992

R107 00

REF DESIGNATION PIN DWG.

62J-E021 L301 00

SEE 62P-E021

62J-E022 L301 00

SEE 62P-E022

62J-E023 L301 00

SEE 62P-E023

62J-J007 L402 00

1 SPARE
2 SPARE
3 SPARE
4 D374 00
5 SPARE
6 D381 00
7 SPARE
8 SPARE
9 D382 00
10 D382 00
11 SPARE
12 SPARE
13 D381 00
14 SPARE
15 SPARE
16 D381 00
17 D381 00
18 D384 00
19 SPARE
20 SPARE
21 D374 00
22 D381 00
23 SPARE
24 D382 00
25 D382 00
26 SPARE
27 D372 00
28 D381 00
29 SPARE
30 D384 00
31 SPARE
32 SPARE
33 D379 00
34 D379 00
35 SPARE
36 SPARE
37 SPARE

62P-A013A L001 01

1 D386 00
2 D386 00
3 D386 00
4 SPARE
5 SPARE

REF DESIGNATION PIN DWG.

62P-A013A CONT

6 D377 00
7 D375 00
8 D376 00
9 D376 00
10 D378 00
11 D380 00
12 SPARE
13 D378 00
14 D386 00
15 D386 00
16 D386 00
17 D377 00
18 D375 00
19 D378 00
20 D380 00
21 D386 00
22 D386 00

62P-A013B L001 01

COAX D043 00

62P-A013C L001 01

COAX D043 00

62P-A013D L001 01

COAX D043 00

62P-A019A L001 01

COAX D043 00

62P-A019B L001 01

COAX D043 00

62P-A020 L001 01

COAX D043 00

62P-A028A L002 00

COAX D043 00

62P-A028B L002 00

COAX D043 00

62P-A028C L002 00

COAX D043 00

62P-A030A L001 01

COAX D043 00

REF DESIGNATION PIN DWG.

62P-A030B L001 01

COAX D043 00

62P-A030C L001 01

COAX D043 00

62P-A030D L001 01

COAX D043 00

62P-A030E L001 01

SEE 62J-A030E

62P-B010A L003 01

1 D371 00
2 D371 00
3 D371 00
4 SPARE
5 SPARE
6 D377 00
7 D375 00
8 D376 00
9 D376 00
10 D378 00
11 D380 00
12 SPARE
13 D378 00
14 D371 00
15 D371 00
16 D371 00
17 D377 00
18 D375 00
19 D378 00
20 D380 00
21 D371 00
22 D371 00

62P-B010B L003 01

COAX D043 00

62P-B010C L003 01

COAX D043 00

62P-B010D L003 01

COAX D042 00

62P-B014A L008 00

1 D380 00
2 D380 00
3 SPARE
4 D380 00

A1-F18AC-WDM-000

15 April 1992

R108 00

REF DESIGNATION PIN DWG.

62P-B014A	CONT
5	D380 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D386 00
14	D386 00
15	D386 00
16	D386 00
17	D386 00
18	D379 00
19	D380 00
20	D380 00
21	D380 00
22	D380 00
23	SPARE
24	SPARE
25	SPARE
26	D386 00
27	D386 00
28	D386 00
29	SPARE
30	D379 00

62P-B014B	L008 00
COAX	D043 00

62P-B014C	L008 00
COAX	D043 00

62P-B015	L003 01
COAX	D043 00

62P-B016A	L003 01
COAX	043 00

62P-B016B	L003 01
COAX	D043 00

62P-B029A	L003 01
COAX	D043 00

62P-B029B	L003 01
COAX	D043 00

62P-B029C	L003 01
COAX	D043 00

REF DESIGNATION PIN DWG.

62P-B029D	L003 01
COAX	D042 00
62P-B029E	L003 01
SEE 62J-B029E	
62P-B037	L003 01
COAX	D043 00
62P-B038	L003 01
COAX	D043 00
62P-E006A	L110 00
1	SPARE
2	D378 00
3	D378 00
4	D378 00
5	D032 00
6	SPARE
7	D381 00
8	SPARE
9	D381 00
10	D372 00
11	SPARE
12	D381 00
13	D374 00
14	D372 00
15	D384 00
16	D375 00
17	D384 00
18	D384 00
19	D384 00
20	D384 00
21	D384 00
22	D384 00
23	SPARE
24	D380 00
25	D380 00
26	SPARE
27	D380 00
28	D380 00
29	D380 00
30	D380 00
31	D380 00
32	D381 00
33	D381 00
34	D373 00
35	SPARE
36	SPARE
37	D372 00
38	D381 00
39	D381 00
40	D374 00
41	D377 00
42	D377 00

REF DESIGNATION PIN DWG.

62P-E006A	CONT
43	D384 00
44	D384 00
45	D384 00
46	SPARE
47	D380 00
48	SPARE
49	SPARE
50	D380 00
51	SPARE
52	D380 00
53	SPARE
54	D381 00
55	SPARE
56	D381 00
57	D373 00
58	SPARE
59	D381 00
60	D372 00
61	D384 00
62	D384 00
63	D384 00
64	D384 00
65	SPARE
66	SPARE
67	SPARE
68	D378 00
69	SPARE
70	SPARE
71	D373 00
72	D373 00
73	D376 00
74	D376 00
75	D384 00
76	SPARE
77	D378 00
78	D373 00
79	D375 00

62P-E006B	L110 00
1	D232 00
2	D384 00
3	D374 00
4	D379 00
5	D385 00
6	D379 00
7	D385 00
8	D379 00
9	D374 00
10	D374 00
11	D384 00
12	SPARE
13	D374 00
14	D383 00
15	D383 00
16	D384 00
17	D384 00
18	D374 00
19	D383 00
20	D374 00

A1-F18AC-WDM-000

15 April 1992

R109 00

REF DESIGNATION PIN DWG.

62P-E006B	CONT
21	SPARE
22	D383 00
23	D385 00
24	D383 00
25	D383 00
26	D197 00
27	SPARE
28	SPARE
29	D387 00
30	D232 00
31	SPARE
32	SPARE
33	D385 00
34	D385 00
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	D374 00
40	D383 00
41	D383 00
42	D384 00
43	D383 00
44	D374 00
45	D383 00
46	SPARE
47	D385 00
48	D385 00
49	D197 00
50	D387 00
51	SPARE
52	SPARE
53	SPARE
54	D374 00
55	D379 00
56	D374 00
57	SPARE
58	D385 00
59	D374 00
60	D383 00
61	D374 00
62	D383 00
63	D383 00
64	D383 00
65	D385 00
66	D383 00
67	D383 00
68	D374 00
69	D374 00
70	D383 00
71	D384 00
72	D374 00
73	D384 00
74	D383 00
75	D383 00
76	D383 00
77	D379 00
78	D383 00
79	D383 00

REF DESIGNATION PIN DWG.

62P-E006C	L110 00
1	D382 00
2	D382 00
3	D382 00
4	D382 00
5	D382 00
6	D382 00
7	D382 00
8	SPARE
9	SPARE
10	D382 00
11	D382 00
12	D382 00
13	D382 00
62P-E009A	L114 01
COAX	D043 00
62P-E009B	L114 01
COAX	D042 00
62P-E009C	L114 01
COAX	D042 00
62P-E009D	L114 01
COAX	D043 00
62P-E009E	L114 01
COAX	D043 00
62P-E009F	L114 01
COAX	D043 00
62P-E009G	L114 01
COAX	D043 00
62P-E009H	L114 01
COAX	D042 00
62P-E009K	L114 01
A	D373 00
B	D373 00
C	D373 00
D	D373 00
E	SPARE
F	D373 00

REF DESIGNATION PIN DWG.

62P-E009L	L114 01
1	D371 00
2	D371 00
3	D371 00
4	D371 00
5	D371 00
6	D371 00
7	D371 00
8	D371 00
9	D371 00
10	D386 00
11	D386 00
12	D386 00
13	SPARE
14	SPARE
15	D371 00
16	D371 00
17	D386 00
18	D386 00
19	D371 00
20	D371 00
21	D371 00
22	D371 00
23	D371 00
24	D371 00
25	D386 00
26	D386 00
27	SPARE
28	SPARE
29	SPARE
30	D371 00
31	D386 00
32	D371 00
33	D371 00
34	D371 00
35	D371 00
36	D371 00
37	D371 00
62P-E009M	L114 01
1	D384 00
2	D384 00
3	D386 00
4	D384 00
5	D384 00
6	SPARE
7	D384 00
8	D384 00
9	SPARE
10	D384 00
11	SPARE
12	SPARE
13	D386 00
14	D386 00
15	D386 00
16	D386 00
17	D386 00
18	D379 00
19	D384 00

A1-F18AC-WDM-000

15 April 1992

R110 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
62P-E009M	CONT	62P-P024B	L609 00	62P-S036B	L831 00
20	D384 00				
21	D384 00	COAX	D042 00	COAX	D042 00
22	D384 00				
23	D384 00	62P-P024C	L609 00	62P-S036C	L831 00
24	D384 00				
25	D384 00	COAX	D042 00	COAX	D042 00
26	D386 00				
27	D386 00	62P-S012A	L831 00		
28	D386 00				
29	SPARE	1	D371 00	62P-S036D	L831 00
30	D379 00	2	D371 00		
31	SPARE	3	D371 00	COAX	D043 00
32	D379 00	4	SPARE		
33	D379 00	5	SPARE	62P-T011A	L827 00
34	SPARE	6	D377 00		
35	SPARE	7	D375 00		
36	D379 00	8	D376 00	1	D371 00
37	D379 00	9	D376 00	2	D371 00
		10	D378 00	3	D371 00
62P-E021	L302 00	11	D380 00	4	SPARE
		12	SPARE	5	SPARE
COAX	D042 00	13	D375 00	6	D377 00
		14	D371 00	7	D375 00
62P-E022	L302 00	15	D371 00	8	D376 00
		16	D371 00	9	D376 00
COAX	D042 00	17	D377 00	10	D378 00
		18	D375 00	11	D380 00
62P-E023	L302 00	19	D378 00	12	SPARE
		20	D380 00	13	D378 00
COAX	D042 00	21	D371 00	14	D371 00
		22	D371 00	15	D371 00
62P-J008	L402 00			16	D371 00
		62P-S012B	L831 00	17	D377 00
1	SPARE			18	D375 00
2	SPARE	COAX	D042 00	19	D378 00
3	SPARE			20	D380 00
4	SPARE	62P-S012C	L831 00	21	D371 00
5	D372 00			22	D371 00
6	D373 00	COAX	D042 00		
7	D373 00				
8	D387 00	62P-S012D	L831 00	62P-T011B	L827 00
9	D387 00				
10	D372 00	COAX	D043 00	COAX	D042 00
11	D372 00				
12	D382 00	62P-S018	L833 00	62P-T011C	L827 00
13	SPARE				
14	SPARE	COAX	D042 00		
15	SPARE			COAX	D042 00
16	SPARE	62P-S026A	L831 00		
17	SPARE				
18	D372 00	COAX	D042 00	62P-T011D	L827 00
19	D382 00				
20	SPARE	62P-S026B	L831 00	COAX	D042 00
21	SPARE				
22	D382 00	COAX	D042 00		
				62P-T017	L829 00
62P-P024A	L609 00	62P-S036A	L831 00		
				COAX	D042 00
COAX	D042 00	COAX	D042 00		

A1-F18AC-WDM-000

15 April 1992

R111 00

REF DESIGNATION
PIN DWG.

62P-T025A L827 00

COAX D042 00

62P-T025B L827 00

COAX D042 00

62P-T035A L827 00

COAX D042 00

62P-T035B L827 00

COAX D042 00

62P-T035C L827 00

COAX D042 00

62P-T035D L827 00

COAX D042 00

62S-A030 L001 01

62S-B029 L003 01

62S-S036 L831 00

PWR D388 00

RTN D388 00

GND D388 00

62S-T035 L827 00

PWR D388 00

RTN D388 00

GND D388 00

64A-E001 L112 00

64DCE002 L314 00

64DCE003 L314 00

64DCF004 L209 00

64E-P005 L700 00

64E-R007 L709 00

64E-S006 L810 00

64E-T008 L814 00

64FLE010 L109 00

REF DESIGNATION
PIN DWG.

64J-E001F L112 00

SEE 64P-E001F

64J-P021 L605 00

SEE 64P-S021

64J-R022 L618 00

SEE 64P-T022

64P-B019 L004 00

64P-B020 L009 00

64P-E001A L112 00

A D032 00

B SPARE

C SPARE

D D032 00

E D032 00

F D032 00

64P-E001B L112 00

A D032 00

B D032 00

C SPARE

D D032 00

E D032 00

F D254 00

G D032 00

H SPARE

J D341 00

K SPARE

L D032 00

M D032 00

N D032 00

P D032 00

R D032 00

S D032 00

T D341 00

U D032 00

V SPARE

64P-E001C L112 00

COAX D338 00

64P-E001F L112 00

A D384 00

B D384 00

C D384 00

D D383 00

E D383 00

F D383 00

REF DESIGNATION
PIN DWG.

64P-E001F CONT

G D383 00

H D383 00

J D263 00

K D383 00

L D383 00

M D383 00

N D383 00

P D374 00

R D374 00

S D374 00

T D384 00

U D384 00

V D384 00

W D263 00

X D263 00

Y D383 00

Z D383 00

a D383 00

b D383 00

c D383 00

d D383 00

e D383 00

f D383 00

g D383 00

h D383 00

k D383 00

m D383 00

n D374 00

p D374 00

q D374 00

r D374 00

s D374 00

t D374 00

u D384 00

v D384 00

w D384 00

x D374 00

y D374 00

z D374 00

AA SPARE

BB SPARE

CC D387 00

DD D387 00

EE D387 00

FF SPARE

GG SPARE

HH SPARE

64P-E001G L112 00

A D374 00

B D374 00

C D263 00

D D374 00

E D374 00

F D263 00

64P-E001L L112 00

COAX D338 00

A1-F18AC-WDM-000

15 April 1992

R112 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
64P-E001Q	L112 00	64P-E002C	L314 00	64P-T008	L814 00
1	SPARE				
2	D383 00	COAX	D338 00	COAX	D338 00
3	D263 00				
4	D383 00	64P-E002D	L314 00	64P-T022	L815 00
5	SPARE				
6	D383 00	COAX	D338 00	COAX	D338 00
7	D263 00				
8	SPARE	64P-E003A	L314 00	65A-L003	L502 00
9	SPARE				
10	SPARE	COAX	D338 00	65J-P004	L700 00
11	SPARE				
12	SPARE	64P-E003B	L314 00	A	D041 00
13	D052 00			B	D041 00
14	D263 00	COAX	D338 00	C	D041 00
15	D263 00			D	D041 00
16	SPARE	64P-E003C	L314 00	E	D041 00
17	SPARE			P	D041 00
18	SPARE	COAX	D338 00	G	D041 00
19	SPARE			H	D041 00
20	SPARE	64P-E003D	L314 00	J	D041 00
21	D263 00			K	D041 00
22	D263 00	COAX	D338 00	L	D041 00
23	D263 00			M	D041 00
24	SPARE	64P-E010A	L109 00	N	D041 00
25	SPARE			P	D041 00
26	SPARE	COAX	D338 00	R	D041 00
27	SPARE			S	D041 00
28	SPARE	64P-E010B	L109 00	T	D041 00
29	SPARE			U	D041 00
30	SPARE	COAX	D338 00	V	D041 00
31	SPARE			W	D041 00
32	SPARE			X	D041 00
				Y	D041 00
64P-E001R	L112 00	64P-F004A	L209 00	Z	D041 00
				a	D041 00
COAX	D338 00	COAX	D338 00	b	D041 00
				c	D041 00
64P-E001S	L112 00	64P-F004B	L209 00	d	D041 00
				e	D041 00
COAX	D338 00	COAX	D338 00	f	D041 00
				g	D041 00
64P-E001U	L112 00	64P-P005	L700 00	h	D041 00
				j	D041 00
COAX	D338 00	COAX	D338 00	65J-R005	L709 00
64P-E001V	L112 00	64P-R007	L709 00	A	D041 00
				B	D041 00
COAX	D338 00	COAX	D338 00	C	D041 00
				D	D041 00
64P-E002A	L314 00	64P-S006	L810 00	E	D041 00
				F	D041 00
COAX	D338 00	COAX	D338 00	G	D041 00
				H	D041 00
64P-E002B	L314 00	64P-S021	L811 00	J	D041 00
				R	D041 00
COAX	D338 00	COAX	D338 00	L	D041 00
				M	D041 00
				N	D041 00

A1-F18AC-WDM-000

15 April 1992

R113 00

REF DESIGNATION PIN DWG.

65J-R005	CONT
P	D041 00
R	D041 00
S	D041 00
T	D041 00
U	D041 00
V	D041 00
W	D041 00
X	D041 00
Y	D041 00
Z	D041 00
a	D041 00
b	D041 00
c	D041 00
d	D041 00
e	D041 00
f	D041 00
g	D041 00
h	D041 00
j	D041 00

65P-L003	L502 00
A	D041 00
B	D044 00
C	D041 00
D	D389 00
E	SPARE
F	D041 00
G	SPARE
H	D389 00
J	D389 00
K	SPARE
L	D044 00
M	D389 00
N	SPARE
O	SPARE
P	D041 00
Q	SPARE
R	SPARE
S	D044 00
T	D044 00
U	D389 00
V	D041 00

65P-P001A	L700 00
A	D041 00
B	D041 00
C	D041 00
D	D041 00
E	D041 00
F	D041 00
G	D041 00
H	D041 00
J	D041 00
K	D041 00
L	D041 00
M	D041 00
N	D041 00
P	D041 00

REF DESIGNATION PIN DWG.

65P-P001A	CONT
R	D041 00
S	D041 00
T	D041 00
U	D041 00
V	D041 00
W	D041 00
X	D041 00
Y	D041 00
Z	D041 00
a	D041 00
b	D041 00
c	D041 00
d	D041 00
e	D041 00
f	D041 00
g	D041 00
h	D041 00
j	D041 00

65P-P001B	L700 00
A	D041 00
B	D041 00
C	D041 00
D	D041 00
E	D041 00
F	D041 00
G	D041 00
H	D041 00
J	D041 00
K	D041 00
L	D041 00
M	D041 00
N	D041 00
P	D041 00
R	D041 00
S	D041 00
T	D041 00
U	D041 00
V	D041 00
W	D041 00
X	D041 00
Y	D041 00
Z	D041 00
a	D041 00
b	D041 00
c	D041 00
d	D041 00
e	D041 00
f	D041 00
g	D041 00
h	D041 00
j	D041 00

65P-R002A	L709 00
A	D041 00
B	D041 00
C	D041 00
D	D041 00

REF DESIGNATION PIN DWG.

65P-R002A	CONT
E	D041 00
F	D041 00
G	D041 00
H	D041 00
J	D041 00
K	D041 00
L	D041 00
M	D041 00
N	D041 00
P	D041 00
R	D041 00
S	D041 00
T	D041 00
U	D041 00
V	D041 00
W	D041 00
X	D041 00
Y	D041 00
Z	D041 00
a	D041 00
b	D041 00
c	D041 00
d	D041 00
e	D041 00
f	D041 00
g	D041 00
h	D041 00
j	D041 00

65P-R002B	L709 00
A	D041 00
B	D041 00
C	D041 00
D	D041 00
E	D041 00
F	D041 00
G	D041 00
H	D041 00
J	D041 00
K	D041 00
L	D041 00
M	D041 00
N	D041 00
P	D041 00
R	D041 00
S	D041 00
T	D041 00
U	D041 00
V	D041 00
W	D041 00
X	D041 00
Y	D041 00
Z	D041 00
a	D041 00
b	D041 00
c	D041 00
d	D041 00
e	D041 00
f	D041 00

A1-F18AC-WDM-000

Change 4

R114 00

REF DESIGNATION PIN DWG.

65P-R002B	CONT
g	D041 00
h	D041 00
j	D041 00
65S-H027	L403 00
1	D044 00
2	D044 00
66A-F001	L208 00
66J-C004	L116 00
SEE	66P-C004
66P-C004	L116 00
COAX	D040 00
66P-P001A	L208 00
A	D024 00
B	D047 00
C	D263 00
D	D263 00
E	D263 00
F	SPARE
G	SPARE
H	SPARE
J	D374 00
K	SPARE
L	D374 00
M	D040 00
N	D024 00
P	D024 00
R	D071 00
S	D263 00
T	D263 00
U	SPARE
V	D374 00
W	SPARE
X	D374 00
66P-P001B	L208 00
A	D040 00
B	SPARE
C	SPARE
D	SPARE
E	D040 00
F	D040 00
66P-F001C	L208 00
1	D143 00
2	SPARE
3	SPARE
4	SPARE
5	D377 00
6	D377 00
7	D375 00

REF DESIGNATION PIN DWG.

66P-F001C	CONT
8	D375 00
9	D381 00
10	D163 00
11	D163 00
12	D163 00
13	D376 00
14	SPARE
15	D377 00
16	D376 00
17	D040 00
18	D040 00
19	D024 00
20	D024 00
21	D374 00
22	SPARE
23	SPARE
24	SPARE
25	D143 00
26	D143 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	D374 00
32	D388 00
33	D143 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	D381 00
50	SPARE
51	D381 00
52	D032 00
53	SPARE
54	D379 00
55	D379 00
66P-F001D	L208 00
A	D047 00
B	D060 00
C	D040 00
D	D040 00
E	D040 00
F	SPARE
G	SPARE
H	D052 00
J	D061 00
K	D047 00

REF DESIGNATION PIN DWG.

66P-F001D	CONT
L	D040 00
66P-F001E	L208 00
66P-F001F	L208 00
1	SPARE
2	SPARE
3	D469 00
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D469 00
31	D469 00
32	D469 00
33	D469 00
67A-J002	L408 00
67A-T001	L806 00
67E-S004	L816 00
67E-T005	L819 00
67J-S009	L813 01
SEE	67P-S009
67J-T008	L820 00
SEE	67P-T008
67P-J002	L410 00
1	SPARE
2	SPARE
3	SPARE

A1-F18AC-WDM-000

Change 4

R114 01

REF DESIGNATION PIN DWG.

66P-F001C	CONT
4	D060 00
5	D163 00
6	D054 00
7	D060 00
8	D054 00
9	D054 00
10	D060 00
11	D054 00
12	D054 00
13	D089 00
14	D092 00

REF DESIGNATION PIN DWG.

66P-F001C	CONT
15	D091 00
16	D091 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D089 00
22	SPARE
23	D054 00
24	SPARE
25	SPARE

REF DESIGNATION PIN DWG.

66P-F001C	CONT
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D054 00
31	SPARE
32	SPARE
33	SPARE
34	SPARE

A1-F18AC-WDM-000

15 April 1992

R115 00

REF DESIGNATION PIN DWG.

67P-J002	CONT
35	SPARE
36	SPARE
37	SPARE
67P-S004	L816 00
COAX	D060 00
67P-S009	L813 01
COAX	D060 00
67P-T001A	L806 00
A	D163 00
B	D054 00
C	D054 00
D	SPARE
E	SPARE
F	D054 00
G	D054 00
H	D364 00
J	SPARE
K	SPARE
L	D054 00
M	D054 00
N	D163 00
P	D364 00
R	D054 00
S	D163 00
T	D054 00
U	D054 00
V	D364 00
67P-T001B	L806 00
COAX	D060 00
67P-T001C	L806 00
COAX	D060 00
67P-T001E	L806 00
COAX	D040 00
67P-T001G	L806 00
COAX	D060 00
67P-T005	L819 00
COAX	D060 00
67P-T008	L820 00
COAX	D060 00
68A-E001	L111 00

REF DESIGNATION PIN DWG.

68P-E001A	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D049 00
22	D049 00
23	D232 00
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	D049 00
33	D232 00
34	D232 00
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D234 00
45	D234 00
46	D234 00
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE

REF DESIGNATION PIN DWG.

68P-E001A	CONT
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	D049 00
68	D049 00
69	D049 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	D049 00
81	D049 00
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	D068 00
102	D068 00
103	D068 00
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	D049 00
112	D049 00
113	D049 00
114	SPARE
115	SPARE
116	SPARE
117	SPARE

A1-F18AC-WDM-000

Change 4

R116 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
68P-E001A	CONT	69J-F007	L301 00	69P-F001B	CONT
118	SPARE			GG	D047 00
119	D075 00	SEE 69P-F007		HH	D047 00
120	D075 00			69P-F001C	L210 00
121	D075 00	69J-L016	L209 00		
122	SPARE	SEE 69P-F016		COAX	D047 00
123	SPARE			69P-F001D	L210 00
124	SPARE	69P-F001B	L210 00		
125	SPARE	A	SPARE	COAX	D047 00
126	SPARE	B	SPARE	69P-F001E	L210 00
127	SPARE	C	SPARE		
128	SPARE	D	SPARE	COAX	D047 00
68P-E001C	L111 00	E	SPARE	69P-F001F	L210 00
A	SPARE	F	SPARE		
B	SPARE	G	SPARE	COAX	D047 00
C	SPARE	H	SPARE		
D	SPARE	J	SPARE	69P-F007	L302 00
E	SPARE	K	D047 00		
F	SPARE	L	D136 00	COAX	D047 00
G	D049 00	M	SPARE		
H	SPARE	N	SPARE	69P-F008A	L209 00
J	D049 00	P	SPARE		
K	SPARE	R	D047 00	COAX	D047 00
L	D049 00	S	D047 00		
M	SPARE	T	SPARE	69P-F008B	L316 00
N	SPARE	U	SPARE		
P	SPARE	V	SPARE	COAX	D047 00
R	SPARE	W	SPARE		
S	D049 00	X	SPARE	69P-F016	L209 00
T	D049 00	Y	SPARE		
U	D049 00	Z	SPARE	1	SPARE
V	SPARE	a	SPARE	2	SPARE
W	D049 00	b	SPARE	3	SPARE
X	SPARE	c	SPARE	4	SPARE
Y	D049 00	d	SPARE	5	SPARE
Z	D049 00	e	SPARE	6	SPARE
68P-E011A	L111 00	f	D047 00	7	SPARE
		g	D136 00	8	SPARE
TBP	D	h	SPARE	9	SPARE
		i	SPARE	10	SPARE
68P-E011C	L111 00	j	D047 00	11	SPARE
		k	D047 00	12	SPARE
TBP	D	m	SPARE	13	D078 00
		n	SPARE	14	D078 00
68P-E011D	L111 00	p	SPARE	15	D078 00
		q	SPARE	16	D050 00
TBP	D	s	SPARE	17	D050 00
		t	SPARE	18	D050 00
68P-E011E	L111 00	u	SPARE	19	D050 00
		v	SPARE	69P-R006	L607 00
TBP	D	w	D047 00		
		x	D136 00	COAX	D047 00
69A-F001	L210 00	y	D047 00		
		z	SPARE	70A-A003	L001 00
69CPF008	L209 00	AA	SPARE		
		BB	D047 00	70A-B004	L003 00
69E-R006	L607 00	CC	SPARE		
		DD	SPARE	70A-E005	L118 00
		EE	SPARE		
		FF	SPARE	70A-F001	L210 00

A1-F18AC-WDM-000

Change 4

R116 01

REF DESIGNATION	
PIN	DWG.

70J-A003	L001 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D077 00
10	D018 00
11	D018 00
12	D018 00

REF DESIGNATION	
PIN	DWG.

70J-A003	CONT
13	D018 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D055 00
21	D055 00
22	D055 00
23	D055 00
24	D276 00

REF DESIGNATION	
PIN	DWG.

70J-A003	CONT
25	D276 00
26	D077 00
27	D077 00
28	D077 00
29	D077 00
30	D276 00
31	D276 00
32	D077 00
33	D077 00

A1-F18AC-WDM-000

15 April 1992

R117 00

REF DESIGNATION PIN DWG.

70J-A003	CONT
34	D077 00
35	D077 00
36	D077 00
37	D077 00

70J-B004	L003 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D018 00
9	D048 00
10	D018 00
11	D018 00
12	D018 00
13	D057 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D055 00
21	D055 00
22	D055 00
23	D055 00
24	D276 00
25	D276 00
26	D055 00
27	D055 00
28	D055 00
29	D055 00
30	D276 00
31	D276 00
32	D055 00
33	D055 00
34	D055 00
35	D055 00
36	D048 00
37	D048 00

70P-E005	L118 00
A	D048 00
B	D018 00
C	D048 00
D	D048 00
E	D048 00
F	D018 00
G	SPARE
H	SPARE
J	SPARE

70P-F001A	L210 00
1	SPARE

REF DESIGNATION PIN DWG.

70P-E005	CONT
3	SPARE
4	D055 00
5	D077 00
6	D077 00
7	D077 00
8	D077 00
9	SPARE
10	D055 00
11	D055 00
12	D055 00
13	D055 00
14	SPARE
15	D055 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D077 00
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D252 00
28	D252 00
29	SPARE
30	SPARE
31	D252 00
32	D249 00
33	D249 00
34	SPARE
35	SPARE
36	D249 00
37	SPARE

70P-F001B	L210 00
1	D159 00
2	SPARE
3	SPARE
4	SPARE
5	D465 00
6	D465 00
7	D465 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D077 00
14	D077 00
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D048 00
21	D048 00
22	SPARE

REF DESIGNATION PIN DWG.

70P-F001B	CONT
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D055 00
31	D055 00
32	SPARE
33	D056 00
34	D056 00
35	SPARE
36	D048 00
37	D048 00
38	D048 00
39	D048 00
40	D048 00
41	D465 00
42	SPARE
43	D048 00
44	D048 00
45	D048 00
46	D048 00
47	D048 00
48	D048 00
49	D069 00
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	D055 00
55	D456 00
56	SPARE
57	SPARE
58	SPARE
59	D416 00
60	SPARE
61	SPARE
62	SPARE
63	D056 00
64	D046 00
65	D046 00
66	D059 00
67	D046 00
68	D046 00
69	D046 00
70	D046 00
71	SPARE
72	D339 00
73	D048 00
74	D339 00
75	D059 00
76	D048 00
77	SPARE
78	SPARE
79	SPARE

A1-F18AC-WDM-000

15 April 1992

R118 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
70P-F001B	CONT	71P-B001A	L009 00	72P-A002B	CONT
80	D159 00			D	D135 00
81	SPARE	COAX	D053 00	E	D135 00
82	SPARE			F	D061 00
83	SPARE	71P-B001B	L009 00	G	D135 00
84	SPARE			H	D135 00
85	D056 00	A	D153 00	J	D135 00
86	D056 00	B	D053 00	K	D135 00
87	D048 00	C	D053 00	L	D061 00
88	D059 00	D	D104 00	M	D061 00
89	D196 00	E	SPARE	N	D135 00
90	D196 00	F	SPARE	P	D061 00
91	D196 00	G	SPARE	R	SPARE
92	SPARE	H	SPARE	S	SPARE
93	SPARE	J	SPARE	T	SPARE
94	SPARE	K	D070 00	U	SPARE
95	D048 00	L	D070 00	V	D061 00
96	D048 00	M	D053 00	72P-A002D	L009 00
97	D159 00	N	SPARE	COAX	D061 00
98	SPARE	P	D053 00	72P-A002F	L009 00
99	D048 00	R	SPARE	COAX	D061 00
100	D059 00	S	SPARE	72P-A002G	L009 00
101	D059 00	T	SPARE	COAX	D061 00
102	D059 00	U	SPARE	72P-A002H	L009 00
103	D059 00	V	SPARE	COAX	D061 00
104	D059 00	W	D053 00	72P-B001A	L009 00
105	D059 00	X	D053 00	1	SPARE
106	D048 00	Y	SPARE	2	D061 00
107	D059 00	Z	SPARE	3	D061 00
108	D059 00	a	SPARE	4	D061 00
109	D059 00	b	SPARE	5	D061 00
110	SPARE	c	SPARE	6	D061 00
111	D059 00	71P-B004	L004 00	7	D163 00
112	D059 00			8	SPARE
113	D059 00	COAX	D053 00	9	D061 00
114	D059 00	71P-F006	L209 00	10	D061 00
115	SPARE			11	SPARE
116	SPARE	COAX	D053 00	12	SPARE
117	SPARE	72A-A002	L009 00	13	SPARE
118	D048 00	72E-B004	L008 00	14	SPARE
119	D048 00	72J-B009	L004 00	15	SPARE
120	D048 00			72P-B004	L008 00
121	SPARE	SEE 72P-B009		COAX	D061 00
122	SPARE	72P-A002A	L009 00	72P-B009	L004 00
123	SPARE	COAX	D061 00	COAX	D061 00
124	SPARE	72P-A002B	L009 00	72REB001	L009 00
125	SPARE			74A-F002	L208 00
126	SPARE	A	D135 00		
127	SPARE	B	SPARE		
128	SPARE	C	D135 00		
71ARB001	L009 00				
71J-B004	L004 00				
SEE 71P-B004					
71J-F006	L209 00				
SEE 71P-F006					

A1-F18AC-WDM-000

15 April 1992

R119 00

REF DESIGNATION PIN DWG.

74J-B007 L004 00

SEE 74P-B007

74J-B008 L004 00

SEE 74P-B008

74P-B001A L008 00

1 SPARE
2 D064 00
3 D071 00
4 SPARE
5 D070 00
6 D070 00
7 D070 00
8 D070 00
9 D070 00
10 D070 00
11 D070 00
12 D070 00
13 D070 00
14 D070 00
15 D070 00
16 D064 00
17 D064 00
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 D060 00
23 D060 00
24 D060 00
25 D060 00
26 D060 00
27 D060 00
28 D060 00
29 D060 00
30 D060 00
31 D060 00
32 D060 00
33 D060 00
34 D060 00
35 D060 00
36 D060 00
37 D060 00

74P-B001B L008 00

COAX D071 00

74P-B001C L008 00

COAX D071 00

74P-B007 L004 00

COAX D071 00

REF DESIGNATION PIN DWG.

74P-B008 L004 00

COAX D071 00

74P-F002A L208 00

1 D064 00
2 SPARE
3 D164 00
4 D064 00
5 D064 00
6 D064 00
7 D064 00
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 D164 00
32 D164 00
33 D064 00
34 D064 00
35 D064 00
36 D164 00
37 D164 00

74P-F002B L208 00

1 SPARE
2 SPARE
3 D064 00
4 D064 00
5 SPARE
6 D064 00
7 D064 00
8 D072 00
9 D072 00
10 SPARE
11 SPARE
12 D072 00
13 D064 00
14 SPARE
15 SPARE
16 SPARE

REF DESIGNATION PIN DWG.

74P-F002B CONT

17 SPARE
18 D060 00
19 D060 00
20 D060 00
21 D060 00
22 D060 00
23 SPARE
24 SPARE
25 D060 00
26 D060 00
27 D060 00
28 D060 00
29 SPARE
30 D060 00
31 D060 00
32 D060 00
33 D060 00
34 SPARE
35 D060 00
36 D060 00
37 D060 00

74P-F002D L208 00

COAX D071 00

74P-F002F L208 00

COAX D071 00

74REB001 L008 00

75A-N001 L220 00

75J-N001 L220 00

1 D059 00
2 D059 00
3 SPARE
4 D059 00
5 SPARE
6 D059 00
7 SPARE
8 D059 00
9 SPARE
10 SPARE
11 D059 00
12 D059 00
13 D059 00

76A-B023 L004 00

76A-F001 L208 00

76A-F002 L210 00

76A-H009 L403 00

A1-F18AC-WDM-000

Change 4

R120 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
76A-J008	L408 00	76P-B011B	L009 00	76P-F001B	CONT
76E-B001	L009 00	COAX	D071 00	33	D104 00
76E-F012	L316 00	76P-B018	L004 00	34	D063 00
76E-R013	L608 00	COAX	D050 00	35	SPARE
76J-B018	L004 00	76P-B023A	L004 00	36	SPARE
SEE 76P-B018		1	D078 00	37	SPARE
76J-F005	L209 00	2	SPARE	38	D062 00
SEE 76P-F005		3	SPARE	39	D063 00
76J-F019	L301 00	4	SPARE	40	D062 00
SEE 76P-F019		5	SPARE	41	SPARE
76J-F029	L209 00	6	SPARE	42	D062 00
SEE 76P-F029		7	SPARE	43	D063 00
76J-G043	L117 00	8	SPARE	44	SPARE
1	D078 00	9	D078 00	45	SPARE
2	SPARE	10	D078 00	46	SPARE
3	D078 00	11	D078 00	47	D063 00
4	D078 00	12	D078 00	48	D062 00
5	D078 00	13	D078 00	49	SPARE
76J-H016	L407 00	76P-F001A	L208 00	50	SPARE
A	D078 00	COAX	D050 00	51	SPARE
B	D078 00	76P-F001B	L208 00	52	SPARE
C	D078 00	1	D062 00	53	D063 00
D	SPARE	2	D075 00	54	SPARE
E	D078 00	3	D075 00	55	D062 00
F	D078 00	4	D075 00		
76J-J003	L409 00	5	SPARE	76P-F001E	L208 00
SEE 76P-B003		6	D136 00	1	SPARE
76P-B003	L004 00	7	SPARE	PIN	D252 00
1	D078 00	8	D063 00	SKT	D252 00
2	D078 00	9	D062 00		
3	SPARE	10	D062 00	76P-F001G	L208 00
4	SPARE	11	D063 00	1	SPARE
5	SPARE	12	D062 00	PIN	D249 00
6	SPARE	13	D072 00	SKT	D249 00
7	SPARE	14	SPARE		
8	SPARE	15	SPARE	76P-F002A	L210 00
9	D078 00	16	D104 00	COAX	D050 00
10	D078 00	17	D067 00		
11	D078 00	18	SPARE	76P-F002B	L210 00
12	D078 00	19	SPARE	1	SPARE
13	D078 00	20	SPARE	2	D075 00
76P-B011A	L009 00	21	SPARE	3	D075 00
COAX	D050 00	22	SPARE	4	D075 00
		23	SPARE	5	SPARE
		24	SPARE	6	D136 00
		25	SPARE	7	SPARE
		26	SPARE	8	D050 00
		27	SPARE	9	D065 00
		28	D104 00	10	D065 00
		29	D062 00	11	D063 00
		30	SPARE	12	D065 00
		31	D062 00	13	D077 00
		32	D104 00	14	SPARE
				15	SPARE

A1-F18AC-WDM-000

Change 4

R121 00

REF DESIGNATION
PIN DWG.

76P-F002B CONT
16 D104 00
17 D067 00
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 SPARE
28 D104 00
29 D065 00
30 SPARE
31 D065 00
32 D104 00
33 D104 00
34 D063 00
35 SPARE
36 SPARE
37 SPARE
38 D065 00
39 D063 00
40 D065 00
41 SPARE
42 D065 00
43 D063 00
44 SPARE
45 SPARE
46 SPARE
47 D065 00
48 D065 00
49 SPARE
50 SPARE
51 SPARE
52 SPARE
53 D065 00
54 SPARE
55 D065 00

76P-F002E L210 00

1 SPARE
PIN D233 00
SKT D233 00
PIN D252 00
SKT D252 00

76P-F002G L210 00

1 SPARE
PIN D235 00
SKT D235 00
PIN D250 00
SKT D250 00

76P-F004A L209 00

1 SPARE

REF DESIGNATION
PIN DWG.

76P-F004A CONT
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 D063 00
10 D073 00
11 D073 00
12 D077 00
13 D077 00
14 D077 00
15 D063 00
16 D063 00
17 D063 00
18 D136 00
19 SPARE
20 SPARE
21 D466 00
22 D077 00

76P-F004B L209 00

COAX D074 00

76P-F004C L209 00

COAX D050 00

76P-F004D L209 00

COAX D050 00

76P-F004E L209 00

COAX D131 00

76P-F004F L209 00

COAX D074 00

76P-F004G L209 00

COAX D053 00

76P-F004H L209 00

COAX D050 00

76P-F005 L209 00

COAX D050 00

REF DESIGNATION
PIN DWG.

76P-F012A L316 00

COAX D074 00

76P-F012B L316 00

COAX D047 00

76P-F019 L302 00

COAX D074 00

76P-F029 L316 00

COAX D074 00

76P-F041A L208 00

COAX D050 00

76P-F041B L208 00
1 D062 00
2 SPARE
3 SPARE
4 D075 00
5 SPARE
6 D136 00
7 SPARE
8 SPARE
9 D062 00
10 D062 00
11 SPARE
12 D062 00
13 SPARE
14 SPARE
15 SPARE
16 D104 00
17 D067 00
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 SPARE
28 D104 00
29 D062 00
30 SPARE
31 D062 00
32 D104 00
33 D104 00
34 D063 00
35 SPARE
36 SPARE
37 SPARE
38 D062 00
39 D063 00
40 D062 00
41 D063 00
42 D062 00

A1-F18AC-WDM-000

R122 00

Change 4

REF DESIGNATION PIN DWG.

76P-F041B	CONT
43	D063 00
44	SPARE
45	SPARE
46	SPARE
47	D063 00
48	D062 00
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D063 00
54	SPARE
55	D062 00

76P-F041E	L208 00
-----------	---------

EMI	D475 00
1	SPARE
2	SPARE
3	D475 00
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	D475 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D475 00
31	D475 00
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE

REF DESIGNATION PIN DWG.

76P-F041E	CONT
46	SPARE
47	SPARE
48	SPARE
49	D475 00
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	D475 00

76P-F041F	L208 00
1	D063 00
2	D063 00
3	D063 00
4	D063 00
5	SPARE
6	D063 00

76P-F042A	L210 00
COAX	D050 00

76P-F042B	L210 00
1	SPARE
2	SPARE
3	D075 00
4	D075 00
5	SPARE
6	D136 00
7	SPARE
8	SPARE
9	D065 00
10	D065 00
11	SPARE
12	D065 00
13	D077 00
14	SPARE
15	SPARE
16	D104 00
17	D067 00
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D104 00
29	D065 00
30	D050 00
31	D065 00
32	D104 00
33	D104 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D065 00
39	SPARE

REF DESIGNATION PIN DWG.

76P-F042B	CONT
40	D065 00
41	D063 00
42	D065 00
43	D063 00
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	D065 00
49	D063 00

76P-F042E	L210 00
EMI	D474 00
1	SPARE
2	SPARE
3	D474 00
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	D474 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	D474 00
31	D474 00
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	D474 00
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D474 00
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	D474 00

A1-F18AC-WDM-000

Change 4

R123 00

REF DESIGNATION PIN DWG.

76P-F042E CONT
50 SPARE
51 SPARE
52 SPARE
53 SPARE
54 D474 00

76P-F042F L210 00
1 D474 00
2 D474 00
3 D474 00
4 D474 00
5 SPARE
6 D474 00

76P-F042G L210 00
1 SPARE
2 SPARE
3 SPARE
4 D050 00
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 D050 00
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 D050 00
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 D050 00
22 SPARE
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 SPARE
28 D050 00
29 SPARE
30 SPARE
31 SPARE
32 SPARE
33 SPARE
34 D078 00
35 D078 00
36 SPARE
37 D078 00

76P-F042H L210 00
1 D078 00
2 D078 00
3 D078 00
4 SPARE
5 SPARE
6 SPARE
7 D078 00

REF DESIGNATION PIN DWG.

76P-F042H CONT
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 D078 00
17 D078 00
18 D078 00

76P-H009A L406 00
1 SPARE
2 D072 00
3 SPARE
4 D069 00
5 D158 00
6 D158 00
7 D135 00
8 D135 00
9 D135 00
10 D074 00
11 D136 00
12 D245 00
13 D072 00
14 D074 00
15 D070 00
16 D077 00
17 D132 00
18 D072 00
19 D135 00
20 D135 00
21 D074 00
22 D135 00
23 D072 00
24 D077 00
25 D135 00
26 SPARE
27 SPARE
28 D070 00
29 D070 00
30 D070 00
31 D070 00
32 D070 00
33 D070 00
34 D072 00
35 D063 00
36 SPARE
37 SPARE
38 SPARE
39 D070 00
40 D070 00
41 D070 00
42 D070 00
43 D070 00
44 D070 00
45 SPARE
46 SPARE
47 SPARE
48 SPARE

REF DESIGNATION PIN DWG.

76P-H009A CONT
49 SPARE
50 D072 00
51 D072 00
52 D063 00
53 D072 00
54 SPARE
55 D070 00
56 SPARE
57 SPARE
58 D074 00
59 SPARE
60 SPARE
61 SPARE
62 SPARE
63 D069 00
64 D069 00
65 D069 00
66 D063 00
67 SPARE
68 SPARE
69 SPARE
70 SPARE
71 SPARE
72 SPARE
73 SPARE
74 SPARE
75 D069 00
76 D136 00
77 D136 00
78 D136 00
79 D136 00
80 D136 00
81 D136 00
82 SPARE
83 SPARE
84 SPARE
85 SPARE
86 SPARE
87 D136 00
88 D136 00
89 D136 00
90 SPARE
91 D136 00
92 D136 00
93 SPARE
94 SPARE
95 D072 00
96 D072 00
97 D072 00
98 D072 00
99 D072 00
100 D063 00
101 D072 00
102 SPARE
103 SPARE
104 D072 00
105 D072 00
106 D077 00
107 SPARE
108 D072 00
109 D073 00

A1-F18AC-WDM-000

Change 4

R124 00

REF DESIGNATION PIN DWG.

76P-H009A	CONT
110	D073 00
111	SPARE
112	D063 00
113	D090 00
114	SPARE
115	D284 00
116	D077 00
117	D095 00
118	D074 00
119	D074 00
120	D336 00
121	D072 00
122	SPARE
123	D072 00
124	D072 00
125	D074 00
126	D074 00
127	D074 00
128	SPARE

76P-H009B L406 00

1	SPARE
2	SPARE
3	SPARE
4	D353 00
5	D050 00
6	SPARE
7	D072 00
8	D063 00
9	D072 00
10	D063 00
11	D063 00
12	D065 00
13	D065 00
14	D050 00
15	D063 00
16	D063 00
17	D063 00
18	SPARE
19	D065 00
20	D065 00
21	D065 00
22	D065 00
23	SPARE
24	SPARE
25	SPARE
26	D062 00
27	D062 00
28	SPARE
29	D065 00
30	D063 00
31	D065 00
32	D050 00
33	SPARE
34	SPARE
35	D014 00
36	SPARE
37	SPARE
38	D062 00
39	D014 00

REF DESIGNATION PIN DWG.

76P-H009B	CONT
40	D065 00
41	D132 00
42	D065 00
43	D050 00
44	D050 00
45	D373 00
46	D373 00
47	D373 00
48	D063 00
49	D062 00
50	D062 00
51	D062 00
52	SPARE
53	D065 00
54	SPARE
55	D047 00
56	D047 00
57	D047 00
58	D104 00
59	SPARE
60	D104 00
61	D062 00
62	D062 00
63	D104 00
64	D062 00
65	D050 00
66	D050 00
67	D050 00
68	D051 00
69	D051 00
70	D051 00
71	D063 00
72	D353 00
73	SPARE
74	D062 00
75	D062 00
76	D065 00
77	D065 00
78	D104 00
79	D104 00
80	D104 00
81	SPARE
82	D354 00
83	D077 00
84	D063 00
85	D062 00
86	D062 00
87	D104 00
88	D104 00
89	D050 00
90	D050 00
91	SPARE
92	D051 00
93	SPARE
94	D063 00
95	D063 00
96	SPARE
97	D062 00
98	D065 00
99	D065 00
100	D050 00

REF DESIGNATION PIN DWG.

76P-H009B	CONT
101	D263 00
102	D067 00
103	D050 00
104	D050 00
105	SPARE
106	SPARE
107	D062 00
108	D065 00
109	D065 00
110	D050 00
111	D263 00
112	SPARE
113	D070 00
114	D050 00
115	D070 00
116	D065 00
117	D065 00
118	D070 00
119	D263 00
120	SPARE
121	D050 00
122	D072 00
123	D050 00
124	D070 00
125	D070 00
126	D067 00
127	D067 00
128	D067 00

76P-H009D L406 00

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D078 00
6	D078 00
7	D078 00
8	D078 00
9	SPARE
10	D078 00
11	D078 00
12	SPARE
13	D078 00
14	D078 00
15	D078 00
16	D078 00
17	D078 00
18	D078 00
19	D078 00
20	SPARE
21	D078 00
22	D050 00
23	D050 00
24	D078 00
25	D078 00
26	D050 00
27	SPARE
28	D078 00
29	D078 00
30	D078 00
31	SPARE

A1-F18AC-WDM-000

R125 00

Change 4

REF DESIGNATION
PIN DWG.

76P-H009D	CONT
32	D050 00
33	D078 00
34	D078 00
35	SPARE
36	D078 00
37	D078 00
38	D078 00
39	D078 00
40	SPARE
41	SPARE
42	D078 00
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	D078 00
48	D050 00
49	D050 00
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	D078 00
55	D078 00
56	SPARE
57	SPARE
58	SPARE
59	D078 00
60	D078 00
61	D078 00
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	D078 00

76P-J008A	L411 00
A	SPARE
B	SPARE
C	D074 00
D	SPARE
E	SPARE
F	D050 00
G	SPARE
H	D085 00
J	D050 00
K	D074 00
L	D050 00
N	D050 00
N	D067 00
P	D050 00
R	D050 00
S	D050 00
T	D050 00
U	D050 00
V	SPARE
W	SPARE

REF DESIGNATION
PIN DWG.

76P-J008A	CONT
X	D050 00
Y	SPARE
Z	D063 00
a	D050 00
b	D050 00
c	SPARE
76P-J008B	L411 00
A	D050 00
B	D050 00
C	SPARE
D	SPARE
E	D078 00
F	D078 00
G	SPARE
H	SPARE
J	SPARE
K	D078 00
L	D078 00
M	SPARE
N	D078 00
P	D050 00
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
76P-R013A	L608 00
COAX	D074 00
76P-R013B	L608 00
COAX	D071 00
76S-F004	L209 00
77A-L001	L500 01
77FLF003	L211 00
77J-G002	L117 00
A	SPARE
B	D131 00
C	D131 00
D	D131 00
E	D131 00
F	D131 00
G	D131 00
H	D131 00
77J-L004	L500 00
SEE 77P-F004	
77P-F003A	L211 00
COAX	D131 00

REF DESIGNATION
PIN DWG.

77P-F003B	L211 00
COAX	D131 00
77P-F004	L500 00
COAX	D131 00
77P-L001A	L500 01
COAX	D131 00
77P-L001B	L500 01
1	D072 00
2	D068 00
3	D068 00
4	D163 00
5	SPARE
6	D068 00
7	D068 00
8	D068 00
9	D068 00
10	SPARE
11	SPARE
12	D068 00
13	D068 00
14	D068 00
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	D068 00
20	D068 00
21	D068 00
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D068 00
29	D068 00
30	D068 00
31	SPARE
32	D068 00
33	D068 00
34	D068 00
35	D068 00
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	D131 00

A1-F18AC-WDM-000

Change 4

R126 00

REF DESIGNATION
PIN DWG.

77P-L001B CONT
50 D131 00
51 D131 00
52 SPARE
53 SPARE
54 SPARE
55 SPARE

77P-L001E L500 01

PIN D232 00
SKT D232 00

77P-L001G L500 01

PIN D235 00
SKT D235 00

78A-A017 L002 00

78A-E001 L110 00

78A-E003 L111 00

78E-B026 L007 00

78J-B007 L004 00

SEE 78P-B007

78J-B019 L007 00

SEE 78P-B019

78J-E008 L301 00

SEE 78P-E008

78P-A017A L002 00

COAX D487 00

78P-A017B L002 00

COAX D487 00

78P-A017C L002 00

COAX D487 00

78P-A017D L002 00

COAX D487 00

78P-A017E L002 00

COAX D487 00

78P-A017F L002 00

COAX D487 00

REF DESIGNATION
PIN DWG.

78P-A017G L002 00

COAX D487 00

78P-A017H L002 00
1 SPARE
2 SPARE
3 D480 00
4 D480 00
5 D480 00
6 D480 00
7 D480 00
8 D480 00
9 D480 00
10 D480 00
11 D480 00
12 D480 00
13 SPARE
14 SPARE
15 D001 00
16 D480 00
17 D480 00
18 SPARE
19 D480 00
20 SPARE
21 D480 00

78P-A022 L002 00

COAX D487 00

78P-A023 L002 00

COAX D487 00

78P-A024 L002 00

COAX D487 00

78P-B007 L004 00

COAX D071 00

78P-B019 L007 00

COAX D487 00

78P-B025 L002 00

COAX D487 00

78P-B026 L007 00

COAX D487 00

78P-E001A L110 00
1 D048 00
2 D048 00
3 D048 00
4 D048 00
5 D048 00

REF DESIGNATION
PIN DWG.

78P-E001A CONT
6 D048 00
7 D048 00
8 D071 00
9 D071 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 D079 00
17 D079 00
18 D079 00
19 D079 00
20 D069 00
21 SPARE
22 D069 00
23 D136 00
24 D071 00
25 SPARE
26 D069 00
27 D069 00
28 SPARE
29 SPARE
30 D048 00
31 D048 00
32 D048 00
33 D048 00
34 SPARE
35 D069 00
36 D069 00
37 D069 00
38 SPARE
39 SPARE
40 SPARE
41 D079 00
42 D079 00
43 D079 00
44 D079 00
45 D079 00
46 D079 00
47 D079 00
48 D079 00
49 D079 00
50 D079 00
51 D079 00
52 D079 00
53 D079 00
54 SPARE
55 D069 00
56 SPARE
57 D079 00
58 D079 00
59 D079 00
60 D079 00
61 D136 00
62 SPARE
63 D072 00
64 SPARE
65 D079 00
66 D069 00

A1-F18AC-WDM-000

Change 4

R126 01

REF DESIGNATION
PIN DWG.

78P-E001A CONT
67 D069 00
68 D069 00
69 D069 00
70 D072 00
71 D069 00
72 D073 00
73 SPARE
74 D079 00
75 D069 00
76 SPARE
77 D069 00
78 D069 00
79 D069 00

78P-E001B L110 00
A SPARE
B D071 00
C D071 00
D SPARE
E D071 00
F D071 00
G D071 00
H D047 00
J SPARE
K SPARE

78P-E001C L110 00
COAX D071 00

78P-E001D L110 00
COAX D071 00

78P-E003 L111 00
1 D071 00
2 D071 00
3 D071 00
4 D071 00
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 D136 00
10 SPARE
11 D069 00
12 SPARE
13 SPARE
14 D136 00
15 D001 00
16 D071 00
17 D069 00
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 SPARE

REF DESIGNATION
PIN DWG.

78P-E003 CONT
25 SPARE
26 SPARE
27 SPARE
28 D069 00
29 SPARE
30 D069 00
31 SPARE
32 D069 00
33 D074 00
34 D069 00
35 SPARE
36 SPARE
37 D077 00

78P-E008 L302 00
COAX D071 00
78P-E016A L111 00
COAX D487 00

78P-E016B L111 00
COAX D487 00

78P-E016C L111 00
COAX D071 00

78P-E016D L111 00
COAX D071 00

78P-E016K L111 00
EMI D074 00
1 D480 00
2 D480 00
3 D480 00
4 D480 00
5 D480 00
6 D480 00
7 D480 00
8 D040 00
9 D143 00
10 D143 00
11 D069 00
12 D069 00
13 D069 00
14 D069 00
15 D072 00
16 SPARE
17 SPARE
18 D069 00
19 D077 00
20 D074 00
21 D072 00
22 SPARE
23 D040 00
24 D143 00

REF DESIGNATION
PIN DWG.

78P-E016K CONT
25 D143 00
26 SPARE
27 D143 00
28 D143 00
29 D143 00
30 SPARE
31 SPARE
32 SPARE
33 SPARE
34 D480 00
35 SPARE
36 D480 00
37 D480 00
38 D480 00
39 D048 00
40 D048 00
41 D048 00
42 D048 00
43 D048 00
44 D048 00
45 D048 00
46 D048 00
47 D048 00
48 D048 00
49 D048 00
50 D069 00
51 D071 00
52 D071 00
53 D074 00
54 SPARE
55 D040 00

78P-E016M L111 00
1 SPARE
2 SPARE
3 D480 00
4 D480 00
5 D480 00
6 D480 00
7 D480 00
8 D480 00
9 D480 00
10 D480 00
11 D480 00
12 D480 00
13 D480 00
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 D136 00

78P-E016N L111 00
COAX D047 00

78P-E016P L111 00
COAX D071 00

A1-F18AC-WDM-000

Change 4

R126 02

REF DESIGNATION
PIN DWG.

78P-K005 L501 00
1 SPARE
2 SPARE
3 D336 00
4 SPARE
5 SPARE
6 D074 00
7 SPARE
8 SPARE
9 D074 00
10 D077 00
11 D074 00
12 D074 00
13 D074 00

78S-K005 L501 00

79A-J001 L400 00

79A-J006 L400 00

79A-J007 L400 00

79A-L021 L500 01

79A-L022 L400 00

79A-L023 L500 01

79J-L024 L502 00

1 D392 00
2 D392 00
3 D392 00
4 D393 00
5 SPARE
6 SPARE
7 D393 00
8 D393 00
9 D393 00
10 SPARE
11 SPARE
12 D393 00
13 D393 00

79P-J001A L401 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE

REF DESIGNATION
PIN DWG.

79P-J001A CONT
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 D076 00
25 D076 00
26 SPARE
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 SPARE
32 SPARE
33 SPARE
34 SPARE
35 SPARE
36 SPARE
37 SPARE
38 D415 00
39 D415 00
40 D076 00
41 D076 00
42 SPARE
43 SPARE
44 SPARE
45 SPARE
46 SPARE
47 SPARE
48 SPARE
49 SPARE
50 SPARE
51 D076 00
52 D076 00
53 SPARE
54 D076 00
55 D076 00
56 SPARE
57 SPARE
58 SPARE
59 SPARE
60 SPARE
61 D076 00
62 D076 00
63 SPARE
64 SPARE
65 D076 00
66 D076 00
67 SPARE
68 D415 00
69 D415 00
70 SPARE
71 SPARE
72 SPARE
73 SPARE
74 SPARE
75 SPARE

REF DESIGNATION
PIN DWG.

79P-J001A CONT
76 SPARE
77 D076 00
78 D076 00
79 SPARE
80 D415 00
81 D415 00
82 D076 00
83 D076 00
84 SPARE
85 SPARE
86 SPARE
87 SPARE
88 SPARE
89 SPARE
90 SPARE
91 SPARE
92 SPARE
93 SPARE
94 D076 00
95 D076 00
96 SPARE
97 SPARE
98 SPARE
99 SPARE
100 SPARE
101 D076 00
102 D076 00
103 SPARE
104 SPARE
105 SPARE
106 SPARE

79P-J001B L401 00

1 D392 00
2 SPARE
3 SPARE
4 D115 00
5 D115 00
6 D115 00
7 D073 00
8 D392 00
9 D392 00
10 D392 00
11 D393 00
12 SPARE
13 D393 00
14 D393 00
15 SPARE
16 D195 00
17 D195 00
18 D195 00
19 D195 00
20 D073 00
21 D073 00
22 SPARE
23 D086 00
24 D086 00
25 D073 00
26 D393 00
27 D393 00
28 SPARE

A1-F18AC-WDM-000

R126 03

Change 4

REF DESIGNATION PIN DWG.

79P-J001B	CONT
29	SPARE
30	D072 00
31	D072 00
32	D072 00
33	D072 00
34	D072 00
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	D393 00
42	SPARE
43	D073 00
44	D086 00
45	D073 00
46	D184 00
47	D072 00
48	D184 00
49	D073 00
50	D184 00
51	SPARE
52	D184 00
53	SPARE
54	D393 00
55	SPARE
56	SPARE
57	D184 00
58	SPARE
59	SPARE
60	SPARE
61	D184 00
62	SPARE
63	SPARE
64	SPARE
65	D393 00
66	SPARE
67	D184 00
68	SPARE
69	D184 00

REF DESIGNATION PIN DWG.

79P-J001B	CONT
70	SPARE
71	D184 00
72	SPARE
73	D184 00
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	D393 00
79	D393 00
80	SPARE
81	D184 00
82	SPARE
83	D184 00
84	SPARE
85	D184 00
86	SPARE
87	D184 00
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	D073 00
95	D069 00
96	SPARE
97	D086 00
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	D075 00
103	D075 00
104	D075 00
105	SPARE
106	SPARE
79P-L021A	L500 01
A	SPARE
B	SPARE

REF DESIGNATION PIN DWG.

79P-L021A	CONT
C	D393 00
D	D393 00
E	D393 00
F	D393 00
G	SPARE
H	D067 00
J	D067 00
K	SPARE
L	SPARE
M	SPARE
N	SPARE
P	SPARE
R	D392 00
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D393 00
X	SPARE
79P-L021B	L500 01
1	SPARE
2	D455 00
3	D455 00
4	SPARE
5	SPARE
6	D455 00
79P-L023	L500 01
1	D393 00
2	D393 00
3	D393 00
4	D465 00
5	SPARE
6	D150 00
7	D150 00
8	D393 00
9	D393 00
10	D150 00

A1-F18AC-WDM-000

15 April 1992

R127 00

REF DESIGNATION PIN DWG.

79P-L023	CONT
11	D150 00
12	SPARE
13	D393 00
14	D393 00
15	SPARE
16	SPARE
17	SPARE
18	D393 00
19	D393 00
20	D393 00
21	D393 00
22	SPARE

80A-H001	L400 00
----------	---------

80A-J002	L400 00
----------	---------

80A-J003	L400 00
----------	---------

80J-L021	L500 00
----------	---------

SEE 80P-L021

80J-L022	L500 00
----------	---------

SEE 80P-L022

80P-H001A	L401 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	D415 00
5	SPARE
6	D076 00
7	D076 00
8	SPARE
9	D024 00
10	D024 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D182 00
16	D182 00
17	SPARE
18	D076 00
19	SPARE
20	D076 00
21	D076 00
22	SPARE
23	D024 00
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D182 00
29	D182 00
30	D182 00

REF DESIGNATION PIN DWG.

80P-H001A	CONT
31	D415 00
32	D415 00
33	D076 00
34	D076 00
35	SPARE
36	D024 00
37	SPARE
38	SPARE
39	SPARE
40	D251 00
41	D251 00
42	SPARE
43	D183 00
44	D183 00
45	SPARE
46	D076 00
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	D182 00
53	SPARE
54	SPARE
55	SPARE
56	D183 00
57	D183 00
58	SPARE
59	SPARE
60	D183 00
61	D183 00
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	D076 00
67	D250 00
68	D250 00
69	SPARE
70	SPARE
71	D067 00
72	SPARE
73	D183 00
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D076 00
80	SPARE
81	SPARE
82	SPARE
83	D076 00
84	D183 00
85	D067 00
86	D183 00
87	D183 00
88	SPARE
89	SPARE

REF DESIGNATION PIN DWG.

80P-H001A	CONT
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	D076 00
97	D183 00
98	SPARE
99	D067 00
100	SPARE
101	D183 00
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE

80P-H001B	L401 00
-----------	---------

A1	SPARE
A2	D186 00
A3	D186 00
A4	D367 00
A5	D006 00
A6	D150 00
A7	SPARE
1	D186 00
2	D186 00
3	D186 00
4	D067 00
5	SPARE
6	D086 00
7	D086 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D067 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE

80P-J002A	L401 00
-----------	---------

1	SPARE
---	-------

A1-F18AC-WDM-000

15 April 1992

R128 00

REF DESIGNATION PIN DWG.

80P-J002A	CONT
2	SPARE
3	SPARE
4	D415 00
5	SPARE
6	D076 00
7	D076 00
8	SPARE
9	D024 00
10	D024 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D182 00
16	D182 00
17	SPARE
18	D076 00
19	SPARE
20	D076 00
21	D076 00
22	SPARE
23	D024 00
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	D182 00
29	D182 00
30	D182 00
31	D415 00
32	D415 00
33	D076 00
34	D076 00
35	SPARE
36	D024 00
37	SPARE
38	SPARE
39	SPARE
40	D232 00
41	D232 00
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	D076 00
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	D182 00
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	D076 00
61	D076 00

REF DESIGNATION PIN DWG.

80P-J002A	CONT
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	D076 00
67	D235 00
68	D235 00
69	SPARE
70	SPARE
71	D067 00
72	SPARE
73	D183 00
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D076 00
80	SPARE
81	SPARE
82	SPARE
83	D182 00
84	D076 00
85	D067 00
86	D183 00
87	D076 00
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	D182 00
97	D076 00
98	SPARE
99	D067 00
100	SPARE
101	D076 00
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
80P-J002B	L401 00
A1	SPARE
A2	D187 00
A3	D187 00
A4	D367 00
A5	D260 00
A6	D150 00
A7	SPARE
1	D363 00
2	D363 00
3	D363 00
4	D363 00
5	SPARE

REF DESIGNATION PIN DWG.

80P-J002B	CONT
6	D087 00
7	D087 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D363 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
80P-J003A	L401 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D183 00
14	D076 00
15	SPARE
16	D067 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	D183 00
27	SPARE
28	D076 00
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE

A1-F18AC-WDM-000

R129 00

Change 4

REF DESIGNATION
PIN DWG.

80P-J003A	CONT
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	D067 00
41	D076 00
42	SPARE
43	D076 00
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D067 00
54	SPARE
55	D076 00
56	D076 00
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	D067 00
68	SPARE
69	SPARE
70	D067 00
71	D183 00
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	D183 00
81	SPARE
82	D183 00
83	D067 00
84	SPARE
85	D183 00
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE

REF DESIGNATION
PIN DWG.

80P-J003A	CONT
91	SPARE
92	SPARE
93	SPARE
94	D183 00
95	D183 00
96	SPARE
97	D183 00
98	D183 00
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
80P-J003B	L401 00
A1	SPARE
A2	SPARE
A3	SPARE
A4	D187 00
A5	D186 00
A6	D187 00
A7	D186 00
1	D186 00
2	D186 00
3	D186 00
4	D186 00
5	SPARE
6	D086 00
7	D086 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D186 00
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
80P-L021	L500 00
PIN	D150 00
SKT	D150 00

REF DESIGNATION
PIN DWG.

80P-L022	L500 00
PIN	D150 00
SKT	D150 00
82A-F001	L210 00
82P-F001A	L210 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D104 00
7	D135 00
8	D135 00
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	D135 00
14	D135 00
15	D135 00
16	D284 00
17	D184 00
18	D184 00
19	D184 00
20	D184 00
21	D184 00
22	D409 00
23	D409 00
24	D136 00
25	D136 00
26	D064 00
27	D064 00
28	D164 00
29	D164 00
30	D164 00
31	D164 00
32	D091 00
33	SPARE
34	D063 00
35	D184 00
36	D131 00
37	D064 00
38	D064 00
39	D131 00
40	D131 00
41	D164 00
42	D163 00
43	SPARE
44	D040 00
45	D040 00
46	D163 00
47	D163 00
48	D054 00
49	D054 00
50	D047 00
51	SPARE
52	D131 00

A1-F18AC-WDM-000

Change 4

R130 00

REF DESIGNATION PIN DWG.

82P-F001A	CONT
53	D054 00
54	D163 00
55	D364 00
56	D163 00
57	SPARE
58	SPARE
59	D132 00
60	D132 00
61	D040 00
62	SPARE
63	D038 00
64	SPARE
65	D054 00
66	D364 00
67	D054 00
68	D054 00
69	D153 00
70	D132 00
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	D132 00
78	D364 00
79	D364 00
80	SPARE
81	SPARE
82	D038 00
83	D038 00
84	D038 00
85	SPARE
86	SPARE
87	D163 00
88	SPARE
89	D132 00
90	D132 00
91	SPARE
92	SPARE
93	SPARE
94	D038 00
95	D038 00
96	D038 00
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	D091 00
104	D005 00
105	D098 00
106	D370 00
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE

REF DESIGNATION PIN DWG.

82P-F001A	CONT
113	D370 00
114	SPARE
115	D063 00
116	D051 00
117	SPARE
118	SPARE
119	SPARE
120	D370 00
121	D370 00
122	SPARE
123	D074 00
124	D185 00
125	D079 00
126	D079 00
127	D072 00
128	SPARE
82P-F001B	L210 00
1	D252 00
2	D252 00
3	SPARE
4	D249 00
5	SPARE
6	D054 00
7	D054 00
8	SPARE
9	SPARE
10	SPARE
11	D249 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D047 00
24	D047 00
25	SPARE
26	D184 00
27	D184 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	D136 00
35	D136 00
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE

REF DESIGNATION PIN DWG.

82P-F001B	CONT
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	D184 00
52	D184 00
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	D163 00
60	D163 00
61	SPARE
62	D184 00
63	D184 00
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	D184 00
74	D184 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
82P-F001C	L210 00
1	SPARE
2	SPARE
3	SPARE
4	D069 00
5	D136 00
6	D136 00
7	D069 00
8	SPARE
9	D074 00
10	D136 00
11	SPARE
12	D132 00
13	D072 00
14	D072 00
15	D074 00
16	D104 00
17	D072 00
18	D104 00
19	D074 00

A1-F18AC-WDM-000

Change 4

R131 00

REF DESIGNATION
PIN DWG.

82P-F001C	CONT
20	SPARE
21	SPARE
22	D135 00
23	D135 00
24	D079 00
25	D090 00
26	D074 00
27	D074 00
28	D074 00
29	D136 00
30	D136 00
31	D136 00
32	D136 00
33	D136 00
34	D136 00
35	D136 00
36	D136 00
37	D136 00
38	D136 00
39	D136 00
40	D047 00
41	D069 00
42	SPARE
43	D079 00
44	SPARE
45	D079 00
46	D135 00
47	D135 00
48	D053 00
49	D053 00
50	D053 00
51	D047 00
52	D047 00
53	SPARE
54	D132 00
55	D079 00
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	D079 00
67	D079 00
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE

REF DESIGNATION
PIN DWG.

82P-F001C	CONT
76	SPARE
77	D136 00
78	D079 00
79	SPARE
80	SPARE
81	SPARE
82	D079 00
83	D079 00
84	D079 00
85	D079 00
86	D079 00
87	D079 00
88	SPARE
89	D079 00
90	D079 00
91	D079 00
92	D136 00
93	D079 00
94	D135 00
95	D135 00
96	D135 00
97	D135 00
98	D061 00
99	D061 00
100	D135 00
101	D135 00
102	D135 00
103	D135 00
104	D135 00
105	D163 00
106	D061 00
107	D079 00
108	D079 00
109	D136 00
110	D079 00
111	D069 00
112	D069 00
113	D069 00
114	D079 00
115	D069 00
116	D079 00
117	D079 00
118	D079 00
119	D079 00
120	D079 00
121	D079 00
122	D079 00
123	D079 00
124	D079 00
125	D079 00
126	D079 00
127	D069 00
128	D069 00
83A-E001	L111 00
83A-E021	L111 01
83A-F002	L214 00
83A-F004	L215 00

REF DESIGNATION
PIN DWG.

83A-F015	L215 00
83A-F022	L215 00
83A-Y013	L111 00
	L214 00
83J-G003	L309 00
1	SPARE
2	D040 00
3	D040 00
4	D040 00
5	D040 00
6	D040 00
7	D040 00
8	SPARE
9	D269 00
10	SPARE
11	D040 00
12	D040 00
13	D232 00
14	D269 00
15	D269 00
16	SPARE
17	D250 00
18	SPARE
19	D269 00
20	D269 00
21	SPARE
22	D234 00
23	D234 00
24	SPARE
25	D232 00
26	D232 00
27	D232 00
28	D232 00
29	D250 00
30	SPARE
31	D367 00
32	D367 00
33	D232 00
34	D232 00
35	D251 00
36	D251 00
37	D251 00
83J-H023	L405 00
SEE 83P-H023A	
83P-H023B	
83J-L018	L502 00
SEE 83P-F018	
83P-E001A	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE

A1-F18AC-WDM-000

Change 4

R131 01

REF DESIGNATION
PIN DWG.

83P-E001A	CONT
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE

REF DESIGNATION
PIN DWG.

83P-E001A	CONT
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE

REF DESIGNATION
PIN DWG.

83P-E001A	CONT
17	D271 00
18	D271 00
19	D271 00

A1-F18AC-WDM-000

15 April 1992

R132 00

REF DESIGNATION PIN DWG.

83P-E001A	CONT
20	D271 00
21	D271 00
22	D271 00
23	D271 00
24	D271 00
25	D271 00
26	D271 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	D271 00
41	D271 00
42	D271 00
43	D271 00
44	D274 00
45	D274 00
46	D271 00
47	D271 00
48	D271 00
49	D271 00
50	D271 00
51	D271 00
52	D104 00
53	D274 00
54	D271 00
55	D068 00
56	D068 00
57	D191 00
58	D191 00
59	D104 00
60	D104 00
61	D104 00
62	D104 00
63	D271 00
64	D104 00
65	D068 00
66	D191 00
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	D271 00
76	D271 00
77	D271 00
78	D010 00
79	D010 00

REF DESIGNATION PIN DWG.

83P-E001A	CONT
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	D243 00
87	D068 00
88	D271 00
89	D274 00
90	D274 00
91	D274 00
92	D271 00
93	D271 00
94	D243 00
95	D243 00
96	SPARE
97	SPARE
98	D271 00
99	D271 00
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	D068 00
106	D068 00
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
83P-E001B	L111 00
1	SPARE
2	SPARE
3	D274 00
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE

REF DESIGNATION PIN DWG.

83P-E001B	CONT
9	SPARE
10	D274 00
11	D274 00
12	D274 00
13	D274 00
83P-E001C	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D048 00
11	D048 00
12	D076 00
13	D076 00
14	SPARE
15	D182 00
16	D182 00
17	D132 00
18	D132 00
19	D049 00
20	D049 00
21	D120 00
22	D120 00
23	D218 00
24	D218 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	D024 00
30	D024 00
31	SPARE
32	SPARE
33	D218 00
34	D218 00
35	SPARE
36	SPARE
37	SPARE
38	D214 00
39	D214 00
40	D182 00
41	D132 00
42	D049 00
43	D120 00
44	D214 00
45	D214 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE

A1-F18AC-WDM-000

R133 00

Change 4

REF DESIGNATION PIN DWG.

83P-E001C	CONT
53	D214 00
54	D218 00
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	D024 00
64	D076 00
65	D218 00
66	D214 00
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	D102 00
76	D097 00
77	D097 00
78	D097 00
79	D097 00
80	D097 00
81	D097 00
82	D102 00
83	D102 00
84	D102 00
85	D102 00
86	D102 00
87	D271 00
88	SPARE
89	D271 00
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	D271 00
95	D271 00
96	D040 00
97	D040 00
98	SPARE
99	SPARE
100	D271 00
101	D271 00
102	SPARE
103	SPARE
104	D269 00
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE

REF DESIGNATION PIN DWG.

83P-E001C	CONT
111	SPARE
112	SPARE
113	D271 00
114	D271 00
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	D269 00
122	D269 00
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	D269 00
128	D269 00
83P-E001D	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D251 00
6	D251 00
7	D274 00
8	SPARE
9	SPARE
10	D274 00
11	SPARE
12	D274 00
13	D274 00
14	SPARE
15	D274 00
16	SPARE
17	SPARE
18	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D232 00
24	D232 00
25	SPARE
26	SPARE
27	D274 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D269 00
36	D269 00
37	D251 00

REF DESIGNATION PIN DWG.

83P-E001E	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D249 00
6	D249 00
7	D274 00
8	SPARE
9	SPARE
10	D274 00
11	SPARE
12	D274 00
13	D274 00
14	SPARE
15	D274 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D235 00
24	D235 00
25	SPARE
26	SPARE
27	D274 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D269 00
36	D269 00
37	D249 00
83P-E001H	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D143 00
10	D143 00
11	SPARE
12	SPARE
13	SPARE
14	D143 00
15	D143 00
16	D143 00
17	SPARE
18	SPARE
19	D143 00
20	D143 00
21	D143 00

A1-F18AC-WDM-000

R134 00

Change 4

REF DESIGNATION
PIN DWG.

83P-E001K	L111 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D269 00
9	SPARE
10	SPARE
11	SPARE
12	D269 00
13	D269 00
14	SPARE
15	D269 00
16	D269 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D269 00
22	D269 00
23	D269 00
24	D269 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D269 00
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D269 00
45	D269 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE

REF DESIGNATION
PIN DWG.

83P-E001K	CONT
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	D143 00
91	D143 00
92	SPARE
93	SPARE
94	D143 00
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	D143 00
102	D143 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	D269 00
118	D269 00
119	D269 00
120	SPARE
121	D269 00

REF DESIGNATION
PIN DWG.

83P-E005	L111 00
1	D249 00
2	D232 00
3	D232 00
4	SPARE
5	D251 00
6	SPARE
7	D143 00
8	D143 00
9	D143 00
10	D143 00
11	D269 00
12	D269 00
13	D269 00
14	D269 00
15	D251 00
16	D249 00
17	D387 00
18	D387 00
19	D387 00
20	D235 00
21	D235 00
22	D251 00
83P-E021	L111 01
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D269 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D269 00
11	D269 00
12	D269 00
13	D269 00
83P-F002A	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D271 00
18	D271 00
19	D271 00
20	D271 00

A1-F18AC-WDM-000

R135 00

Change 4

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
83P-F002A	CONT	83P-F002A	CONT	83P-F002B	CONT
21	D271 00	82	SPARE	12	D274 00
22	D271 00	83	SPARE	13	D274 00
23	D271 00	84	SPARE		
24	D271 00	85	SPARE	83P-F002C	L214 00
25	D271 00	86	SPARE		
26	D271 00	87	D068 00	1	SPARE
27	SPARE	88	D271 00	2	SPARE
28	SPARE	89	D271 00	3	SPARE
29	SPARE	90	D271 00	4	SPARE
30	SPARE	91	D271 00	5	SPARE
31	D463 00	92	D271 00	6	SPARE
32	D463 00	93	D271 00	7	SPARE
33	D469 00	94	SPARE	8	D463 00
34	D469 00	95	SPARE	9	D463 00
35	SPARE	96	D040 00	10	D463 00
36	SPARE	97	D040 00	11	D463 00
37	SPARE	98	D271 00	12	D463 00
38	SPARE	99	D271 00	13	D463 00
39	SPARE	100	SPARE	14	SPARE
40	D271 00	101	SPARE	15	D463 00
41	D271 00	102	SPARE	16	D463 00
42	D271 00	103	SPARE	17	SPARE
43	D271 00	104	SPARE	18	SPARE
44	D271 00	105	D068 00	19	D463 00
45	D271 00	106	D068 00	20	D463 00
46	D271 00	107	SPARE	21	SPARE
47	D271 00	108	SPARE	22	SPARE
48	D271 00	109	SPARE	23	SPARE
49	D271 00	110	SPARE	24	SPARE
50	D271 00	111	SPARE	25	SPARE
51	D271 00	112	SPARE	26	SPARE
52	SPARE	113	SPARE	27	D469 00
53	D271 00	114	SPARE	28	D469 00
54	D271 00	115	SPARE	29	D469 00
55	SPARE	116	SPARE	30	D469 00
56	SPARE	117	SPARE	31	SPARE
57	SPARE	118	SPARE	32	SPARE
58	SPARE	119	SPARE	33	SPARE
59	SPARE	120	SPARE	34	SPARE
60	SPARE	121	SPARE	35	SPARE
61	SPARE	122	SPARE	36	SPARE
62	SPARE	123	SPARE	37	SPARE
63	D271 00	124	SPARE	38	SPARE
64	SPARE	125	SPARE	39	SPARE
65	SPARE	126	SPARE	40	SPARE
66	SPARE	127	SPARE	41	SPARE
67	SPARE	128	SPARE	42	SPARE
68	SPARE			43	SPARE
69	SPARE	83P-F002B	L214 00	44	SPARE
70	SPARE			45	SPARE
71	SPARE	1	SPARE	46	SPARE
72	SPARE	2	SPARE	47	SPARE
73	SPARE	3	D274 00	48	SPARE
74	SPARE	4	SPARE	49	SPARE
75	D271 00	5	SPARE	50	SPARE
76	D271 00	6	SPARE	51	SPARE
77	D271 00	7	SPARE	52	SPARE
78	SPARE	8	SPARE	53	SPARE
79	SPARE	9	SPARE	54	SPARE
80	SPARE	10	D274 00	55	SPARE
81	SPARE	11	D274 00	56	SPARE
				57	SPARE

A1-F18AC-WDM-000

R136 00

Change 4

REF DESIGNATION
PIN DWG.

83P-F002C	CONT
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	D102 00
76	D097 00
77	D097 00
78	D097 00
79	D097 00
80	D097 00
81	D097 00
82	D102 00
83	D102 00
84	D102 00
85	D102 00
86	D102 00
87	D274 00
88	SPARE
89	D274 00
90	D274 00
91	D274 00
92	SPARE
93	SPARE
94	D274 00
95	D274 00
96	D040 00
97	D040 00
98	SPARE
99	SPARE
100	D274 00
101	D274 00
102	SPARE
103	SPARE
104	D476 00
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	D274 00
114	D274 00
115	SPARE
116	SPARE
117	SPARE
118	SPARE

REF DESIGNATION
PIN DWG.

83P-F002C	CONT
119	SPARE
120	SPARE
121	D476 00
122	D476 00
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	D476 00
128	D476 00
83P-F002D	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D252 00
6	D252 00
7	D252 00
8	SPARE
9	SPARE
10	D252 00
11	SPARE
12	D252 00
13	D252 00
14	SPARE
15	D252 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D233 00
24	D233 00
25	SPARE
26	SPARE
27	D252 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D269 00
36	D269 00
37	D252 00
83P-F002E	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D250 00
6	D250 00
7	D274 00
8	SPARE

REF DESIGNATION
PIN DWG.

83P-F002E	CONT
9	SPARE
10	D274 00
11	SPARE
12	D274 00
13	D274 00
14	SPARE
15	D274 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	D234 00
24	D234 00
25	SPARE
26	SPARE
27	D274 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D269 00
36	D269 00
37	D250 00
83P-F002H	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D469 00
10	D469 00
11	SPARE
12	SPARE
13	SPARE
14	D469 00
15	D469 00
16	D469 00
17	SPARE
18	SPARE
19	D469 00
20	D469 00
21	D469 00
83P-F002K	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE

A1-F18AC-WDM-000

Change 4

R136 01

REF DESIGNATION PIN DWG.

83P-F002K	CONT
7	SPARE
8	D476 00
9	SPARE
10	SPARE
11	SPARE
12	D476 00
13	D476 00
14	SPARE
15	D476 00
16	D476 00
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D476 00
22	D476 00
23	D476 00
24	D476 00
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	D476 00
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	SPARE
44	D476 00
45	D476 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE

REF DESIGNATION PIN DWG.

83P-F002K	CONT
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	SPARE
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	D476 00
118	D476 00
119	D476 00
120	SPARE
121	D476 00
83P-F002L	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE

REF DESIGNATION PIN DWG.

83P-F002L	CONT
6	SPARE
7	SPARE
8	SPARE
9	D469 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D469 00
15	D469 00
16	D470 00
17	D470 00
18	SPARE
19	D468 00
20	D468 00
21	D470 00
83P-F004	L215 00
1	D250 00
2	D233 00
3	D233 00
4	SPARE
5	D252 00
6	SPARE
7	D469 00
8	D469 00
9	D469 00
10	D469 00
11	D269 00
12	D269 00
13	D269 00
14	D269 00
15	D252 00
16	D250 00
17	D387 00
18	D387 00
19	D387 00
20	D234 00
21	D234 00
22	D252 00
83P-F015	L215 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D469 00
6	D469 00
7	D469 00
8	D468 00
9	D468 00
10	D468 00
11	D468 00
12	D469 00
13	D469 00
83P-F018	L209 00
1	D468 00
2	D468 00
3	D468 00

A1-F18AC-WDM-000

Change 4

R136 02

REF DESIGNATION PIN DWG.

83P-F018	CONT
4	D469 00
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D469 00
16	D469 00
17	D469 00
18	D468 00
19	D468 00
20	D468 00
21	D469 00
22	D469 00

83P-F022	L215 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D476 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D476 00
11	D476 00
12	D476 00
13	D476 00

83P-H023A	L405 00
1	D478 00
2	D478 00
3	SPARE
4	D479 00
5	D479 00
6	D479 00
7	D479 00
8	D479 00
9	D479 00
10	D479 00
11	D479 00
12	D479 00
13	D479 00
14	D479 00
15	D479 00
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	D479 00
22	D479 00
23	D479 00

REF DESIGNATION PIN DWG.

83P-H023A	CONT
24	D479 00
25	D472 00
26	D472 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	D478 00
37	D478 00
38	D478 00
39	D478 00
40	D478 00
41	D478 00
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	D478 00
48	D478 00
49	D478 00
50	D478 00
51	D478 00
52	D478 00
53	D478 00
54	D478 00

83P-H023B	L405 00
1	D477 00
2	D477 00
3	SPARE
4	D477 00
5	D477 00
6	D477 00
7	D477 00
8	D477 00
9	D477 00
10	D477 00
11	D477 00
12	D479 00
13	D479 00
14	D479 00
15	D479 00
16	SPARE
17	D477 00
18	D477 00
19	D477 00
20	D477 00
21	D479 00
22	D479 00
23	D479 00
24	D479 00
25	D472 00
26	D472 00
27	D472 00

REF DESIGNATION PIN DWG.

83P-H023B	CONT
28	D472 00
29	D472 00
30	D472 00
31	D472 00
32	D472 00
33	D472 00
34	D472 00
35	D472 00
36	D478 00
37	D478 00
38	D478 00
39	D478 00
40	D478 00
41	D478 00
42	D476 00
43	D476 00
44	D476 00
45	D476 00
46	D472 00
47	D477 00
48	D477 00
49	D476 00
50	D476 00
51	D478 00
52	D478 00
53	D476 00
54	D476 00

84A-D012	L206 00
84A-F001	L208 00
84A-F002	L212 00
84A-F004	L208 00
84A-F005	L210 00
84A-F006	L212 00
84A-F007	L208 00
84A-G035	L305 00
84A-H003	L403 00
84A-J025	L401 00
84A-J037	L400 00
84A-M021	L601 00
84A-M029	L601 00
84A-M110	L601 00
84A-S015	L800 00
84A-S017	L831 00
84A-S063	L809 00

A1-F18AC-WDM-000

Change 4

R136 03

REF DESIGNATION PIN DWG.

84A-T016	L805 00
84A-T018	L827 00
84A-U013	L905 00
84A-U019	L909 00
84A-V014	L955 00
84A-V020	L959 00
84B-C026	L103 00
84CBH008	L406 00
LINE	D151 00
LOAD	D276 00
84CBH009	L406 00
LINE	D151 00
LOAD	D308 00
84CBJ010	L411 00
LINE	D151 00
LOAD	D276 00
84CBJ011	L411 00
LINE	D151 00
LOAD	D308 00
84J-C026B	L101 00
1	SPARE
2	SPARE
3	D026 00

REF DESIGNATION PIN DWG.

84J-C026B	CONT
4	D026 00
5	D366 00
6	D366 00
7	D051 00
8	D366 00
9	D051 00
10	D051 00
11	D366 00
12	D366 00
13	D051 00
14	D366 00
15	SPARE
16	SPARE
17	SPARE
18	D051 00
19	SPARE
20	SPARE
21	SPARE
22	D366 00
84J-C026C	L101 00
1	SPARE
2	SPARE
3	D051 00
4	D051 00
5	D051 00
6	D051 00
7	D051 00
8	D051 00
9	D051 00

REF DESIGNATION PIN DWG.

84J-C026B	CONT
10	D051 00
11	D051 00
12	D051 00
13	D366 00
14	D051 00
15	SPARE
16	SPARE
17	SPARE
18	D051 00
19	SPARE
20	SPARE
21	SPARE
22	D051 00
84J-E041	L301 00
SEE 84P-E041	
84J-E044	L118 00
SEE 84P-E044	
84J-E045	L301 00
SEE 84P-E045	
84P-E048	L118 00
SEE 84P-E048	
84J-F042	L317 00
SEE 84P-F042	
84J-F043	L301 00
SEE 84P-F043	
84J-F046	L317 00
SEE 84P-F046	

A1-F18AC-WDM-000

15 April 1992

R137 00

REF DESIGNATION PIN DWG.

84J-F047 L301 00

SEE 84P-F047

84J-H023 L405 00
L406 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D343 00
8 D343 00
9 D343 00
10 D343 00
11 D343 00
12 D343 00
13 D343 00

84J-H024 L406 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D344 00
8 D344 00
9 D344 00
10 D344 00
11 D344 00
12 D344 00
13 D344 00

84J-H031 L407 00

SEE 84P-C031

84J-H034 L405 00

SEE 84P-C034

84J-H092 L407 00

SEE 84P-C092

84J-J025A L409 00

1 SPARE
2 SPARE
3 D187 00
4 D187 00
5 D187 00
6 D187 00
7 SPARE
8 SPARE

REF DESIGNATION PIN DWG.

84J-J025A CONT

9 D284 00
10 D284 00
11 D284 00
12 D284 00
13 SPARE
14 SPARE
15 D297 00
16 SPARE
17 SPARE
18 D187 00
19 SPARE
20 SPARE
21 SPARE
22 D284 00

84J-J025B L409 00

1 SPARE
2 SPARE
3 D285 00
4 D285 00
5 D285 00
6 D285 00
7 SPARE
8 SPARE
9 D188 00
10 D188 00
11 D188 00
12 D188 00
13 SPARE
14 SPARE
15 D299 00
16 SPARE
17 SPARE
18 D188 00
19 SPARE
20 SPARE
21 SPARE
22 D299 00

84J-J032 L412 00

SEE 84P-D032

84J-J033 L410 00

SEE 84P-D033

84J-J093 L412 00

SEE 84P-D093

84J-J122A L411 00

1 SPARE
2 SPARE
3 D051 00

REF DESIGNATION PIN DWG.

84J-J122A CONT

4 D051 00
5 D026 00
6 D026 00
7 SPARE
8 SPARE
9 D051 00
10 D051 00
11 D366 00
12 D366 00
13 SPARE
14 SPARE
15 D051 00
16 SPARE
17 SPARE
18 D026 00
19 SPARE
20 SPARE
21 SPARE
22 D051 00

84J-J122B L410 00

1 SPARE
2 SPARE
3 D366 00
4 D366 00
5 D051 00
6 D051 00
7 SPARE
8 SPARE
9 D051 00
10 D051 00
11 D051 00
12 D051 00
13 SPARE
14 SPARE
15 D366 00
16 SPARE
17 SPARE
18 D051 00
19 SPARE
20 SPARE
21 SPARE
22 D366 00

84J-M051 L601 00

SEE 84P-M051

84J-M132 L601 00

SEE 84P-M132

84J-M133 L601 00

SEE 84P-M133

A1-F18AC-WDM-000

15 April 1992

R138 00

REF DESIGNATION PIN DWG.

84J-N052	L613 00
SEE 84P-N052	
84J-P053	L712 00
SEE 84P-P053	
84J-P054	L604 00
SEE 84P-P054	
84J-P055	L606 00
SEE 84P-S055	
84J-P059	L604 00
SEE 84P-P059	
84J-P060	L603 00
SEE 84P-P060	
84J-P067	L712 00
SEE 84P-P067	
84J-R056	L713 00
SEE 84P-R056	
84J-R057	L617 00
SEE 84P-R057	
84J-R058	L619 00
SEE 84P-T058	
84J-R064	L617 00
SEE 84P-R064	
84J-R065	L616 00
SEE 84P-R065	
84J-R068	L713 00
SEE 84P-R068	
84J-S063	L809 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE

REF DESIGNATION PIN DWG.

84J-S063	CONT
5	SPARE
6	D335 00
7	D335 00
8	D335 00
9	SPARE
10	SPARE
11	D335 00
12	SPARE
13	SPARE
84J-U049	L906 00
SEE 84P-U049	
84J-V050	L956 00
SEE 84P-V050	
84L-C103	L103 00
BLK	D337 00
RED	D337 00
84L-G036	L312 00
84MTH023	L406 00
84MTH024	L406 00
84P-C026	L103 00
1	SPARE
2	SPARE
3	SPARE
4	D306 00
5	D306 00
6	D306 00
7	D306 00
8	D307 00
9	D288 00
10	D288 00
11	D307 00
12	SPARE
13	SPARE
14	SPARE
15	D302 00
16	D288 00
17	D306 00
18	D302 00
19	D288 00
20	D302 00
21	D302 00
22	D302 00
84P-C026A	L103 00
1	SPARE

REF DESIGNATION PIN DWG.

84P-C026	CONT
2	SPARE
3	SPARE
4	D306 00
5	D306 00
6	D306 00
7	D306 00
8	D307 00
9	D288 00
10	D288 00
11	D307 00
12	SPARE
13	SPARE
14	SPARE
15	D302 00
16	D288 00
17	D306 00
18	D302 00
19	D288 00
20	D302 00
21	D302 00
22	D302 00
84P-C026B	L101 00
SEE 84J-C026B	
84P-C026C	L101 00
SEE 84J-C026C	
84P-C031	L105 00
1	D423 00
2	D423 00
3	D423 00
4	D028 00
5	D051 00
6	D214 00
7	D214 00
8	D214 00
9	D423 00
10	SPARE
11	D051 00
12	D187 00
13	D301 00
14	D187 00
15	D236 00
16	SPARE
17	D423 00
18	D423 00
19	D187 00
20	D051 00
21	D051 00
22	D187 00
23	D051 00
24	SPARE
25	D423 00

A1-F18AC-WDM-000

15 April 1992

R139 00

REF DESIGNATION PIN DWG.

84P-C031	CONT
26	D187 00
27	D051 00
28	D187 00
29	D026 00
30	D187 00
31	D366 00
32	SPARE
33	D423 00
34	D423 00
35	SPARE
36	D026 00
37	D187 00
38	D281 00
39	SPARE
40	SPARE
41	SPARE
42	D187 00
43	D187 00
44	SPARE
45	D281 00
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	D423 00
52	SPARE
53	SPARE
54	SPARE
55	SPARE

84P-C034	L116 00
1	D309 00
2	D309 00
3	D309 00
4	D281 00
5	D246 00
6	D329 00
7	D329 00
8	D026 00
9	D366 00
10	D246 00
11	D246 00
12	D188 00
13	D309 00
14	D188 00
15	D026 00
16	D028 00
17	SPARE
18	D246 00
19	D188 00
20	D366 00
21	D303 00
22	D188 00
23	D366 00
24	SPARE
25	D329 00
26	D188 00
27	D366 00

REF DESIGNATION PIN DWG.

84P-C034	CONT
28	D188 00
29	D051 00
30	D188 00
31	D051 00
32	SPARE
33	D299 00
34	SPARE
35	D301 00
36	D051 00
37	D188 00
38	D051 00
39	SPARE
40	SPARE
41	D051 00
42	D188 00
43	D051 00
44	D051 00
45	D051 00
46	D343 00
47	SPARE
48	D281 00
49	D366 00
50	D051 00
51	D051 00
52	D343 00
53	D343 00
54	D343 00
55	D343 00

84P-C092	L105 00
A	D308 00
B	SPARE
C	D276 00
D	SPARE

84P-D012A	L206 00
1	SPARE
2	SPARE
3	D212 00
4	D212 00
5	SPARE
6	D282 00
7	SPARE
8	D212 00
9	D212 00
10	D212 00
11	D309 00
12	SPARE
13	D309 00
14	SPARE
15	SPARE
16	SPARE
17	D212 00
18	SPARE
19	D212 00
20	D212 00
21	SPARE
22	D282 00

REF DESIGNATION PIN DWG.

84P-D012B	L206 00
1	D239 00
2	D239 00
3	D239 00
4	D239 00
5	SPARE
6	SPARE
7	D239 00
8	SPARE
9	D212 00
10	D212 00
11	SPARE
12	D212 00
13	SPARE
14	D309 00
15	SPARE
16	SPARE
17	D239 00
18	SPARE
19	SPARE
20	D212 00
21	D212 00
22	D239 00

84P-D032	L205 00
1	SPARE
2	D246 00
3	D281 00
4	D028 00
5	D051 00
6	D051 00
7	D026 00
8	D051 00
9	D309 00
10	SPARE
11	D366 00
12	D192 00
13	D192 00
14	SPARE
15	D051 00
16	D309 00
17	D299 00
18	D051 00
19	D192 00
20	D051 00
21	D309 00
22	D282 00
23	D366 00
24	D309 00
25	D366 00
26	D192 00
27	D051 00
28	D284 00
29	D366 00
30	D284 00
31	D366 00
32	SPARE
33	D297 00
34	D051 00

A1-F18AC-WDM-000

15 April 1992

R140 00

REF DESIGNATION PIN DWG.

84P-D032	CONT
35	D282 00
36	D366 00
37	D284 00
38	D281 00
39	D366 00
40	SPARE
41	D214 00
42	D051 00
43	D284 00
44	D284 00
45	D284 00
46	D344 00
47	SPARE
48	D214 00
49	D214 00
50	D214 00
51	D214 00
52	D344 00
53	D344 00
54	D344 00
55	D344 00

84P-D033	L217 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	D028 00
5	D246 00
6	D246 00
7	D051 00
8	D366 00
9	SPARE
10	SPARE
11	D246 00
12	D051 00
13	D301 00
14	D285 00
15	D281 00
16	SPARE
17	SPARE
18	D246 00
19	D051 00
20	D366 00
21	D281 00
22	D285 00
23	SPARE
24	SPARE
25	SPARE
26	D051 00
27	D366 00
28	D285 00
29	D188 00
30	D285 00
31	SPARE
32	SPARE
33	SPARE
34	D246 00
35	D188 00
36	D188 00

REF DESIGNATION PIN DWG.

84P-D033	CONT
37	D285 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D246 00
43	D026 00
44	D026 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE

84P-D093	L205 00
----------	---------

A	D276 00
B	SPARE
C	D308 00
D	SPARE

84P-E041	L302 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D236 00
18	D236 00
19	D315 00
20	D315 00
21	D288 00
22	D288 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D236 00
28	D236 00
29	D236 00
30	D236 00
31	D236 00

REF DESIGNATION PIN DWG.

84P-E041	CONT
32	D236 00
33	D236 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D236 00
39	D236 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D324 00
45	D236 00
46	SPARE
47	SPARE
48	SPARE
49	D236 00
50	D236 00
51	D457 00
52	D327 00
53	D123 00
54	D123 00
55	D390 00
56	D324 00
57	D236 00
58	SPARE
59	SPARE
60	D236 00
61	D236 00
62	D457 00
63	D327 00
64	D327 00
65	D327 00
66	D327 00
67	D390 00
68	D236 00
69	D236 00
70	SPARE
71	SPARE
72	SPARE
73	D279 00
74	D324 00
75	D297 00
76	D297 00
77	D377 00
78	D390 00
79	D236 00
80	D236 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D279 00
86	D324 00
87	D236 00
88	D236 00
89	D390 00
90	D279 00
91	D236 00

A1-F18AC-WDM-000

15 April 1992

R141 00

REF DESIGNATION PIN DWG.

84P-E041	CONT
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D279 00
98	D279 00
99	D279 00
100	D279 00
101	D279 00
102	D315 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	D335 00
110	D335 00
111	SPARE
112	D391 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

84P-E044	L118 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D317 00
18	D317 00
19	D317 00
20	D317 00

REF DESIGNATION PIN DWG.

84P-E044	CONT
21	D278 00
22	D278 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D317 00
28	D296 00
29	D331 00
30	D331 00
31	D331 00
32	D331 00
33	D171 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D317 00
39	D296 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D323 00
45	D171 00
46	SPARE
47	SPARE
48	SPARE
49	D317 00
50	D296 00
51	D287 00
52	D095 00
53	D309 00
54	D309 00
55	D390 00
56	D323 00
57	D171 00
58	SPARE
59	SPARE
60	D317 00
61	D296 00
62	D287 00
63	D095 00
64	D296 00
65	D296 00
66	D095 00
67	D390 00
68	D323 00
69	D171 00
70	SPARE
71	SPARE
72	D300 00
73	D283 00
74	D328 00
75	D418 00
76	D418 00
77	D095 00
78	D390 00
79	D323 00
80	D171 00

REF DESIGNATION PIN DWG.

84P-E044	CONT
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D283 00
86	D328 00
87	D421 00
88	D421 00
89	D390 00
90	D419 00
91	D171 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D283 00
98	D283 00
99	D419 00
100	D419 00
101	D419 00
102	D317 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	D266 00
108	D266 00
109	D266 00
110	D266 00
111	SPARE
112	D391 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

84P-E045	L302 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE

A1-F18AC-WDM-000

15 April 1992

R142 00

REF DESIGNATION PIN DWG.

84P-E045	CONT
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D315 00
18	D315 00
19	D315 00
20	D288 00
21	SPARE
22	D288 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D315 00
28	D324 00
29	D324 00
30	D324 00
31	SPARE
32	D324 00
33	D288 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D315 00
39	D324 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D279 00
45	D288 00
46	SPARE
47	SPARE
48	SPARE
49	D315 00
50	D324 00
51	D390 00
52	D327 00
53	D327 00
54	D420 00
55	D390 00
56	D279 00
57	D279 00
58	SPARE
59	SPARE
60	D315 00
61	D324 00
62	D390 00
63	D327 00
64	D327 00
65	D327 00
66	D420 00
67	D322 00
68	D279 00
69	D279 00

REF DESIGNATION PIN DWG.

84P-E045	CONT
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D324 00
75	D457 00
76	D457 00
77	D420 00
78	D322 00
79	D279 00
80	D279 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D315 00
86	D420 00
87	D322 00
88	D322 00
89	D322 00
90	D279 00
91	D279 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D324 00
98	D279 00
99	D279 00
100	D279 00
101	SPARE
102	D315 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	SPARE
112	D302 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

REF DESIGNATION PIN DWG.

84P-E048	L118 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D319 00
18	D319 00
19	D319 00
20	D314 00
21	SPARE
22	D314 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D319 00
28	D323 00
29	D323 00
30	D321 00
31	SPARE
32	D321 00
33	D278 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D319 00
39	SPARE
40	D457 00
41	D457 00
42	D390 00
43	D390 00
44	D283 00
45	D278 00
46	SPARE
47	SPARE
48	SPARE
49	D319 00
50	D323 00
51	D390 00
52	D295 00
53	D295 00
54	D307 00
55	D390 00
56	D283 00
57	D278 00
58	SPARE
59	D323 00

A1-F18AC-WDM-000

15 April 1992

R143 00

REF DESIGNATION PIN DWG.

84P-E048	CONT
60	D319 00
61	D321 00
62	D390 00
63	D295 00
64	D095 00
65	D095 00
66	D307 00
67	D328 00
68	D293 00
69	D278 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D321 00
75	D287 00
76	D287 00
77	D307 00
78	D328 00
79	D293 00
80	D314 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D319 00
86	D328 00
87	D328 00
88	D328 00
89	D328 00
90	D293 00
91	D314 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D283 00
98	D289 00
99	D289 00
100	D293 00
101	SPARE
102	D266 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	D300 00
108	D391 00
109	SPARE
110	D266 00
111	D266 00
112	D266 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE

REF DESIGNATION PIN DWG.

84P-E048	CONT
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
84P-F001A	L208 00
1	SPARE
2	D279 00
3	D279 00
4	D279 00
5	D279 00
6	SPARE
7	SPARE
8	D282 00
9	D279 00
10	D279 00
11	D281 00
12	D301 00
13	SPARE
14	SPARE
15	D390 00
16	D390 00
17	D327 00
18	D327 00
19	D288 00
20	D288 00
21	D236 00
22	D236 00
23	D315 00
24	D315 00
25	SPARE
26	D239 00
27	D239 00
28	D279 00
29	D279 00
30	D236 00
31	D236 00
32	D324 00
33	D324 00
34	D390 00
35	D390 00
36	SPARE
37	SPARE
38	D297 00
39	D297 00
40	D457 00
41	D457 00
42	SPARE
43	D187 00
44	D187 00
45	D187 00
46	D236 00
47	D236 00
48	D236 00

REF DESIGNATION PIN DWG.

84P-F001A	CONT
49	D236 00
50	D327 00
51	D327 00
52	SPARE
53	D187 00
54	D236 00
55	D236 00
56	D390 00
57	D390 00
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	D423 00
63	D423 00
64	D315 00
65	D187 00
66	D236 00
67	D236 00
68	D239 00
69	D239 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D236 00
75	D236 00
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	D236 00
84	D236 00
85	SPARE
86	D276 00
87	D276 00
88	D236 00
89	D236 00
90	SPARE
91	SPARE
92	D324 00
93	D324 00
94	SPARE
95	SPARE
96	SPARE
97	D236 00
98	D236 00
99	D390 00
100	D390 00
101	D327 00
102	D327 00
103	D236 00
104	D236 00
105	D123 00
106	D123 00
107	SPARE
108	D051 00

A1-F18AC-WDM-000

15 April 1992

R144 00

REF DESIGNATION PIN DWG.

84P-F001A	CONT
109	SPARE
110	SPARE
111	D239 00
112	D239 00
113	D239 00
114	SPARE
115	D236 00
116	D236 00
117	SPARE
118	SPARE
119	D187 00
120	D187 00
121	SPARE
122	D051 00
123	D051 00
124	D051 00
125	D051 00
126	D239 00
127	D239 00
128	D239 00

84P-F001B	L208 00
1	SPARE
2	SPARE
3	D288 00
4	D288 00
5	D322 00
6	D322 00
7	SPARE
8	D236 00
9	SPARE
10	SPARE
11	D279 00
12	D279 00
13	SPARE
14	D214 00
15	SPARE
16	D279 00
17	D279 00
18	D279 00
19	D279 00
20	D324 00
21	D324 00
22	D322 00
23	D322 00
24	D322 00
25	D279 00
26	D279 00
27	SPARE
28	SPARE
29	D288 00
30	D288 00
31	SPARE
32	D051 00
33	D303 00
34	D303 00
35	D051 00
36	D187 00
37	D187 00

REF DESIGNATION PIN DWG.

84P-F001B	CONT
38	D279 00
39	D279 00
40	SPARE
41	SPARE
42	SPARE
43	D051 00
44	D051 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D327 00
51	D327 00
52	D327 00
53	D324 00
54	D055 00
55	D055 00
56	D055 00
57	SPARE
58	D214 00
59	D366 00
60	SPARE
61	D214 00
62	SPARE
63	SPARE
64	D187 00
65	D187 00
66	D279 00
67	D279 00
68	SPARE
69	D315 00
70	D315 00
71	D327 00
72	D327 00
73	SPARE
74	SPARE
75	SPARE
76	D315 00
77	SPARE
78	D324 00
79	D324 00
80	D324 00
81	D324 00
82	D315 00
83	D315 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D315 00
89	D315 00
90	SPARE
91	D390 00
92	D390 00
93	D390 00
94	SPARE
95	SPARE
96	D187 00
97	D187 00

REF DESIGNATION PIN DWG.

84P-F001B	CONT
98	D026 00
99	D026 00
100	SPARE
101	SPARE
102	D315 00
103	D315 00
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	D324 00
109	D324 00
110	SPARE
111	SPARE
112	SPARE
113	D390 00
114	D390 00
115	D303 00
116	D303 00
117	D303 00
118	D303 00
119	D457 00
120	D457 00
121	D027 00
122	D337 00
123	SPARE
124	D420 00
125	D420 00
126	D420 00
127	D390 00
128	D390 00

84P-F001C	L208 00
1	D288 00
2	D288 00
3	SPARE
4	D256 00
5	D256 00
6	D256 00
7	D256 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D231 00
16	D231 00
17	D256 00
18	D256 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D231 00
26	D231 00

A1-F18AC-WDM-000

15 April 1992

R145 00

REF DESIGNATION PIN DWG.

84P-F001C	CONT
27	D256 00
28	D256 00
29	D256 00
30	D256 00
31	SPARE
32	D256 00
33	D256 00
34	D231 00
35	D231 00
36	D231 00
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D231 00
43	D231 00
44	D231 00
45	D231 00
46	D231 00
47	D231 00
48	D231 00
49	D231 00
50	D231 00
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	D256 00
56	D256 00
57	SPARE
58	D256 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

84P-F001D L208 00

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE

REF DESIGNATION PIN DWG.

84P-F001D	CONT
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	D194 00
23	D194 00
24	D194 00
25	SPARE
26	SPARE
27	D194 00
28	D194 00
29	D194 00
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	D214 00
37	D214 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	D391 00
44	D299 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D214 00
54	SPARE
55	SPARE
56	D194 00
57	D194 00
58	D194 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	D194 00
66	SPARE
67	SPARE
68	D423 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE

REF DESIGNATION PIN DWG.

84P-F001D	CONT
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	D423 00
83	D299 00
84	SPARE
85	SPARE
86	D194 00
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D282 00
98	D239 00
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	D028 00
106	D194 00
107	D194 00
108	D194 00
109	D311 00
110	D194 00
111	D194 00
112	D194 00
113	D343 00
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	D281 00
121	SPARE
122	D176 00
123	SPARE
124	D311 00
125	SPARE
126	D177 00
127	SPARE
128	SPARE

84P-F001E L208 00

1	SPARE
2	D288 00
3	D288 00
4	SPARE
5	D299 00
6	D299 00

A1-F18AC-WDM-000

15 April 1992

R146 00

REF DESIGNATION PIN DWG.

84P-F001E	CONT
7	D299 00
8	D299 00
9	D299 00
10	D299 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D299 00
18	SPARE
19	SPARE
20	SPARE
21	D305 00
22	D305 00
23	D305 00
24	D305 00
25	D299 00
26	D299 00
27	SPARE
28	D299 00
29	D305 00
30	D305 00
31	D305 00
32	D305 00
33	SPARE
34	SPARE
35	D299 00
36	SPARE
37	SPARE
38	SPARE
39	D299 00
40	D299 00
41	D305 00
42	D305 00
43	SPARE
44	SPARE
45	D305 00
46	D305 00
47	D299 00
48	SPARE
49	SPARE
50	SPARE
51	D299 00
52	D299 00
53	SPARE
54	SPARE
55	D305 00
56	D305 00
57	SPARE
58	D305 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

REF DESIGNATION PIN DWG.

84P-F001F	L208 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D311 00
G	D306 00
H	D306 00
J	D311 00
K	D311 00
L	SPARE
M	D252 00
N	D252 00
P	D252 00
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D276 00
X	SPARE
Y	SPARE
Z	D276 00
84P-F001H	L208 00
1	D284 00
2	D284 00
3	D303 00
4	D303 00
5	D457 00
6	D457 00
7	D027 00
8	D051 00
9	D291 00
10	D291 00
11	D366 00
12	D366 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	D286 00
18	D286 00
19	D286 00
20	D390 00
21	D390 00
22	D390 00
23	D299 00
24	D051 00
25	D299 00
26	D299 00
27	SPARE
28	SPARE
29	D366 00
30	D303 00
31	D303 00
32	D280 00
33	D280 00

REF DESIGNATION PIN DWG.

84P-F001H	CONT
34	D318 00
35	D318 00
36	D175 00
37	SPARE
38	D214 00
39	D318 00
40	D318 00
41	SPARE
42	D318 00
43	D318 00
44	D320 00
45	D320 00
46	SPARE
47	D214 00
48	SPARE
49	D297 00
50	D055 00
51	D055 00
52	D055 00
53	D344 00
54	SPARE
55	SPARE
56	SPARE
57	D214 00
58	D366 00
59	D292 00
60	D292 00
61	D277 00
62	D277 00
63	SPARE
64	D390 00
65	D275 00
66	D422 00
67	D422 00
68	D422 00
69	D091 00
70	D309 00
71	D309 00
72	SPARE
73	D277 00
74	D277 00
75	SPARE
76	D390 00
77	D292 00
78	D292 00
79	D292 00
80	D299 00
81	D343 00
82	SPARE
83	SPARE
84	D303 00
85	D303 00
86	D312 00
87	D312 00
88	SPARE
89	D172 00
90	D246 00
91	SPARE
92	D051 00
93	D309 00

A1-F18AC-WDM-000

15 April 1992

R147 00

REF DESIGNATION PIN DWG.

84P-F001H	CONT
94	D422 00
95	D422 00
96	D312 00
97	D312 00
98	D214 00
99	SPARE
100	D306 00
101	D306 00
102	D275 00
103	D275 00
104	D275 00
105	SPARE
106	D332 00
107	D332 00
108	D214 00
109	SPARE
110	D309 00
111	D332 00
112	D332 00
113	D320 00
114	D320 00
115	D310 00
116	D310 00
117	D310 00
118	D310 00
119	D312 00
120	D312 00
121	D337 00
122	D344 00
123	D344 00
124	D344 00
125	D066 00
126	D304 00
127	D310 00
128	D310 00
84P-F001J	L208 00
1	D051 00
2	D051 00
3	D051 00
4	D051 00
5	D284 00
6	D284 00
7	SPARE
8	D279 00
9	D279 00
10	SPARE
11	SPARE
12	SPARE
13	D272 00
14	D272 00
15	D270 00
16	D270 00
17	SPARE
18	SPARE
19	D194 00
20	D194 00
21	D194 00
22	D192 00

REF DESIGNATION PIN DWG.

84P-F001J	CONT
23	D192 00
24	D192 00
25	D291 00
26	D291 00
27	D390 00
28	D390 00
29	D290 00
30	D290 00
31	D276 00
32	D276 00
33	D457 00
34	D457 00
35	D390 00
36	D239 00
37	D239 00
38	D239 00
39	D212 00
40	D212 00
41	D212 00
42	D306 00
43	D306 00
44	SPARE
45	D270 00
46	D270 00
47	D390 00
48	SPARE
49	SPARE
50	D192 00
51	SPARE
52	SPARE
53	D284 00
54	D293 00
55	D293 00
56	SPARE
57	D272 00
58	D272 00
59	D283 00
60	D283 00
61	D282 00
62	D312 00
63	D312 00
64	D291 00
65	D270 00
66	D326 00
67	D326 00
68	D273 00
69	D273 00
70	D282 00
71	D280 00
72	D280 00
73	D239 00
74	D408 00
75	D408 00
76	D280 00
77	D099 00
78	D099 00
79	D099 00
80	D099 00
81	D286 00
82	D305 00

REF DESIGNATION PIN DWG.

84P-F001J	CONT
83	D305 00
84	D270 00
85	D270 00
86	D283 00
87	D283 00
88	D408 00
89	D408 00
90	SPARE
91	SPARE
92	D306 00
93	D286 00
94	D194 00
95	D194 00
96	D277 00
97	D277 00
98	SPARE
99	D270 00
100	D270 00
101	D344 00
102	D344 00
103	SPARE
104	D282 00
105	D304 00
106	D304 00
107	D239 00
108	D282 00
109	D390 00
110	D390 00
111	D272 00
112	D272 00
113	D293 00
114	D293 00
115	D308 00
116	D282 00
117	D051 00
118	D281 00
119	D282 00
120	D273 00
121	D273 00
122	D326 00
123	D326 00
124	D282 00
125	D390 00
126	D390 00
127	D272 00
128	D272 00
84P-F001K	L208 00
1	SPARE
2	SPARE
3	SPARE
4	D288 00
5	D288 00
6	D256 00
7	D256 00
8	D256 00
9	D256 00
10	D256 00
11	D256 00

A1-F18AC-WDM-000

15 April 1992

R148 00

REF DESIGNATION PIN DWG.

84P-F001K	CONT
12	SPARE
13	SPARE
14	D256 00
15	SPARE
16	D329 00
17	SPARE
18	SPARE
19	D329 00
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D329 00
26	D329 00
27	D329 00
28	SPARE
29	SPARE
30	D256 00
31	D329 00
32	D256 00
33	D256 00
34	D329 00
35	D329 00
36	SPARE
37	D329 00
38	SPARE
39	SPARE
40	SPARE
41	D256 00
42	D256 00
43	D256 00
44	D256 00
45	SPARE
46	SPARE
47	D329 00
48	SPARE
49	SPARE
50	D256 00
51	D256 00
52	D256 00
53	D329 00
54	SPARE
55	D256 00
56	D256 00
57	SPARE
58	D256 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
84P-F001L	L208 00
1	SPARE
2	SPARE

REF DESIGNATION PIN DWG.

84P-F001L	CONT
3	SPARE
4	SPARE
5	D051 00
6	SPARE
7	D026 00
8	SPARE
9	SPARE
10	SPARE
11	D311 00
12	D212 00
13	D212 00
14	SPARE
15	D366 00
16	D308 00
17	D212 00
18	D212 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D308 00
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D308 00
39	D311 00
40	D284 00
41	SPARE
42	SPARE
43	D311 00
44	SPARE
45	SPARE
46	SPARE
47	D309 00
48	SPARE
49	D282 00
50	D006 00
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	D366 00
58	D309 00
59	SPARE
60	SPARE
61	D051 00
62	SPARE

REF DESIGNATION PIN DWG.

84P-F001L	CONT
63	SPARE
64	SPARE
65	D194 00
66	SPARE
67	SPARE
68	D173 00
69	SPARE
70	SPARE
71	D282 00
72	SPARE
73	D366 00
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	D239 00
84	D281 00
85	D282 00
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	D282 00
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	D028 00
99	D423 00
100	SPARE
101	D343 00
102	SPARE
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	D051 00
109	D239 00
110	D239 00
111	D239 00
112	D239 00
113	D239 00
114	D239 00
115	D194 00
116	D194 00
117	D194 00
118	SPARE
119	D174 00
120	D306 00
121	D391 00
122	D239 00

A1-F18AC-WDM-000

15 April 1992

R149 00

REF DESIGNATION PIN DWG.

84P-F001L	CONT
123	D239 00
124	D239 00
125	D194 00
126	D194 00
127	D194 00
128	D423 00
84P-F001M	L208 00
1	D288 00
2	D288 00
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D329 00
8	SPARE
9	SPARE
10	D231 00
11	D231 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D329 00
18	D329 00
19	D329 00
20	D329 00
21	D231 00
22	D329 00
23	SPARE
24	D231 00
25	D231 00
26	D231 00
27	D231 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	D329 00
33	D329 00
34	D329 00
35	D329 00
36	D329 00
37	D329 00
38	SPARE
39	SPARE
40	D231 00
41	D329 00
42	D329 00
43	D231 00
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	D329 00
50	D329 00
51	D329 00

REF DESIGNATION PIN DWG.

84P-F001M	CONT
52	SPARE
53	D329 00
54	D231 00
55	D329 00
56	D329 00
57	SPARE
58	D329 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
84P-F001P	L208 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D308 00
G	D306 00
H	D306 00
J	D311 00
K	D311 00
L	SPARE
M	D249 00
N	D249 00
P	D249 00
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D308 00
X	SPARE
Y	SPARE
Z	D308 00
84P-F002A	L212 00
1	SPARE
2	D294 00
3	D294 00
4	D294 00
5	D294 00
6	SPARE
7	SPARE
8	D301 00
9	D294 00
10	D294 00
11	D281 00
12	D301 00
13	SPARE
14	SPARE
15	D390 00
16	D390 00

REF DESIGNATION PIN DWG.

84P-F002A	CONT
17	D290 00
18	D290 00
19	D313 00
20	D313 00
21	D408 00
22	D408 00
23	D316 00
24	D316 00
25	SPARE
26	D246 00
27	D246 00
28	D294 00
29	D294 00
30	D322 00
31	D322 00
32	D276 00
33	D276 00
34	D390 00
35	D390 00
36	SPARE
37	SPARE
38	D420 00
39	D420 00
40	D287 00
41	D287 00
42	SPARE
43	D188 00
44	D188 00
45	D188 00
46	D316 00
47	D316 00
48	D316 00
49	D316 00
50	D298 00
51	D298 00
52	SPARE
53	D313 00
54	D277 00
55	D277 00
56	D390 00
57	D390 00
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	D246 00
63	D246 00
64	D188 00
65	D285 00
66	D322 00
67	D322 00
68	D246 00
69	D246 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D313 00
75	D313 00
76	SPARE

A1-F18AC-WDM-000

15 April 1992

R150 00

REF DESIGNATION PIN DWG.

84P-F002A	CONT
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	D277 00
84	D277 00
85	SPARE
86	D276 00
87	D276 00
88	D316 00
89	D316 00
90	SPARE
91	SPARE
92	D294 00
93	D294 00
94	SPARE
95	SPARE
96	SPARE
97	D294 00
98	D294 00
99	D390 00
100	D390 00
101	D420 00
102	D420 00
103	D294 00
104	D294 00
105	D290 00
106	D290 00
107	SPARE
108	D051 00
109	SPARE
110	SPARE
111	D246 00
112	D246 00
113	D246 00
114	SPARE
115	D294 00
116	D294 00
117	SPARE
118	SPARE
119	D285 00
120	D285 00
121	SPARE
122	D366 00
123	D366 00
124	D026 00
125	D026 00
126	D231 00
127	D231 00
128	D231 00
84P-F002B	L212 00
1	SPARE
2	SPARE
3	D422 00
4	D422 00
5	D296 00

REF DESIGNATION PIN DWG.

84P-F002B	CONT
6	D296 00
7	SPARE
8	D246 00
9	SPARE
10	SPARE
11	D422 00
12	D422 00
13	SPARE
14	D246 00
15	SPARE
16	D292 00
17	D292 00
18	D292 00
19	D292 00
20	D322 00
21	D322 00
22	D294 00
23	D294 00
24	D294 00
25	D292 00
26	D292 00
27	SPARE
28	SPARE
29	D313 00
30	D313 00
31	SPARE
32	D051 00
33	D303 00
34	D303 00
35	D051 00
36	SPARE
37	SPARE
38	D292 00
39	D292 00
40	SPARE
41	SPARE
42	SPARE
43	D366 00
44	D366 00
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	D298 00
51	D298 00
52	D298 00
53	D313 00
54	D055 00
55	D055 00
56	D055 00
57	SPARE
58	D246 00
59	D366 00
60	SPARE
61	D246 00
62	SPARE
63	SPARE
64	D316 00
65	D313 00

REF DESIGNATION PIN DWG.

84P-F002B	CONT
66	D313 00
67	D313 00
68	SPARE
69	D316 00
70	D316 00
71	D298 00
72	D298 00
73	SPARE
74	SPARE
75	SPARE
76	D316 00
77	SPARE
78	D322 00
79	D322 00
80	D276 00
81	D276 00
82	D316 00
83	D316 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D316 00
89	D316 00
90	SPARE
91	D390 00
92	D390 00
93	D390 00
94	SPARE
95	SPARE
96	D285 00
97	D285 00
98	D051 00
99	D051 00
100	SPARE
101	SPARE
102	D316 00
103	D316 00
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	D322 00
109	D322 00
110	SPARE
111	SPARE
112	SPARE
113	D390 00
114	D390 00
115	D303 00
116	D303 00
117	D303 00
118	D303 00
119	D287 00
120	D287 00
121	SPARE
122	D306 00
123	SPARE
124	D421 00
125	D421 00

A1-F18AC-WDM-000

15 April 1992

R151 00

REF DESIGNATION PIN DWG.

84P-F002B	CONT
126	D421 00
127	D390 00
128	D390 00
84P-F002C	L212 00
1	D288 00
2	D288 00
3	SPARE
4	D305 00
5	D305 00
6	D305 00
7	D305 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D299 00
16	D299 00
17	D305 00
18	D305 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D299 00
26	D299 00
27	D305 00
28	D305 00
29	D305 00
30	D305 00
31	SPARE
32	D305 00
33	D305 00
34	D299 00
35	D299 00
36	D299 00
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	D299 00
43	D299 00
44	D299 00
45	D299 00
46	D299 00
47	D299 00
48	D299 00
49	D299 00
50	D299 00
51	SPARE
52	SPARE
53	SPARE
54	SPARE

REF DESIGNATION PIN DWG.

84P-F002C	CONT
55	D305 00
56	D305 00
57	SPARE
58	D305 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
84P-F002D	L212 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	D214 00
23	D214 00
24	D214 00
25	SPARE
26	SPARE
27	D214 00
28	D214 00
29	D214 00
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	D214 00
37	D214 00
38	SPARE
39	SPARE
40	SPARE
41	SPARE
42	SPARE
43	D391 00
44	D299 00
45	SPARE

REF DESIGNATION PIN DWG.

84P-F002D	CONT
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D214 00
54	SPARE
55	SPARE
56	D214 00
57	D214 00
58	D214 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	D214 00
66	SPARE
67	SPARE
68	D423 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	D309 00
81	SPARE
82	D423 00
83	D231 00
84	SPARE
85	SPARE
86	D214 00
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D239 00
98	D214 00
99	SPARE
100	SPARE
101	SPARE
102	SPARE
103	SPARE
104	SPARE
105	D028 00

A1-F18AC-WDM-000

15 April 1992

R152 00

REF DESIGNATION PIN DWG.

84P-F002D	CONT
106	D214 00
107	D214 00
108	D214 00
109	SPARE
110	D214 00
111	D214 00
112	D214 00
113	D343 00
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	D281 00
121	SPARE
122	D173 00
123	SPARE
124	D231 00
125	SPARE
126	D174 00
127	SPARE
128	SPARE

84P-F002E	L212 00
-----------	---------

1	SPARE
2	D288 00
3	D288 00
4	SPARE
5	D231 00
6	D231 00
7	D231 00
8	D231 00
9	D231 00
10	D231 00
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D231 00
18	SPARE
19	SPARE
20	SPARE
21	D256 00
22	D256 00
23	D256 00
24	D256 00
25	D231 00
26	D231 00
27	SPARE
28	D231 00
29	D256 00
30	D256 00
31	D256 00
32	D256 00
33	SPARE

REF DESIGNATION PIN DWG.

84P-F002E	CONT
34	SPARE
35	D231 00
36	SPARE
37	SPARE
38	SPARE
39	D231 00
40	D231 00
41	D256 00
42	D256 00
43	SPARE
44	SPARE
45	D256 00
46	D256 00
47	D231 00
48	SPARE
49	SPARE
50	SPARE
51	D231 00
52	D231 00
53	SPARE
54	SPARE
55	D256 00
56	D256 00
57	SPARE
58	D256 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

84P-F002F	L212 00
-----------	---------

A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D276 00
G	D333 00
H	D333 00
J	D333 00
K	D333 00
L	SPARE
M	D252 00
N	D252 00
P	D252 00
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D276 00
X	SPARE
Y	SPARE
Z	D276 00

REF DESIGNATION PIN DWG.

84P-F002H	L212 00
1	D188 00
2	D188 00
3	D303 00
4	D303 00
5	D287 00
6	D287 00
7	SPARE
8	D366 00
9	D319 00
10	D319 00
11	D051 00
12	D051 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	D307 00
18	D307 00
19	D307 00
20	D390 00
21	D390 00
22	D390 00
23	D299 00
24	D366 00
25	D329 00
26	D299 00
27	SPARE
28	SPARE
29	D366 00
30	D303 00
31	D303 00
32	D280 00
33	D280 00
34	D319 00
35	D319 00
36	D175 00
37	SPARE
38	D329 00
39	D319 00
40	D319 00
41	SPARE
42	D319 00
43	D319 00
44	D321 00
45	D321 00
46	SPARE
47	D329 00
48	SPARE
49	D299 00
50	D077 00
51	D077 00
52	D077 00
53	D343 00
54	SPARE
55	SPARE
56	SPARE
57	D246 00
58	D051 00
59	D328 00

A1-F18AC-WDM-000

15 April 1992

R153 00

REF DESIGNATION PIN DWG.

84P-F002H	CONT
60	D328 00
61	D314 00
62	D314 00
63	SPARE
64	D314 00
65	D266 00
66	D295 00
67	D295 00
68	D295 00
69	D091 00
70	D309 00
71	D309 00
72	SPARE
73	D293 00
74	D293 00
75	SPARE
76	D314 00
77	D328 00
78	D328 00
79	D328 00
80	D299 00
81	D343 00
82	SPARE
83	SPARE
84	D303 00
85	D303 00
86	D314 00
87	D314 00
88	SPARE
89	D172 00
90	D246 00
91	SPARE
92	D051 00
93	D309 00
94	D095 00
95	D095 00
96	D278 00
97	D278 00
98	D246 00
99	SPARE
100	D307 00
101	D307 00
102	D266 00
103	D266 00
104	D266 00
105	SPARE
106	D321 00
107	D321 00
108	D246 00
109	SPARE
110	D309 00
111	D323 00
112	D323 00
113	D323 00
114	D323 00
115	D289 00
116	D289 00
117	D293 00
118	D293 00
119	D278 00

REF DESIGNATION PIN DWG.

84P-F002H	CONT
120	D278 00
121	D337 00
122	D343 00
123	D343 00
124	D343 00
125	D066 00
126	D304 00
127	D283 00
128	D283 00
84P-F002J	L212 00
1	D051 00
2	D051 00
3	D051 00
4	D051 00
5	D188 00
6	D188 00
7	SPARE
8	D419 00
9	D419 00
10	SPARE
11	SPARE
12	SPARE
13	D095 00
14	D095 00
15	D317 00
16	D317 00
17	SPARE
18	SPARE
19	D212 00
20	D212 00
21	D212 00
22	D188 00
23	D188 00
24	D188 00
25	D328 00
26	D328 00
27	D390 00
28	D390 00
29	D421 00
30	D421 00
31	D276 00
32	D276 00
33	D287 00
34	D287 00
35	D390 00
36	D246 00
37	D246 00
38	D246 00
39	D239 00
40	D239 00
41	D239 00
42	D288 00
43	D288 00
44	D288 00
45	D317 00
46	D317 00
47	D390 00
48	SPARE

REF DESIGNATION PIN DWG.

84P-F002J	CONT
49	SPARE
50	D188 00
51	SPARE
52	SPARE
53	D188 00
54	D296 00
55	D296 00
56	SPARE
57	D296 00
58	D296 00
59	D283 00
60	D283 00
61	D239 00
62	D171 00
63	D171 00
64	D188 00
65	D266 00
66	D323 00
67	D323 00
68	D266 00
69	D266 00
70	D282 00
71	D280 00
72	D280 00
73	D246 00
74	D331 00
75	D331 00
76	D280 00
77	D171 00
78	D171 00
79	D171 00
80	D171 00
81	D418 00
82	D419 00
83	D419 00
84	D317 00
85	D317 00
86	D283 00
87	D283 00
88	D331 00
89	D331 00
90	D239 00
91	D239 00
92	D288 00
93	D418 00
94	D212 00
95	D212 00
96	D278 00
97	D278 00
98	SPARE
99	D317 00
100	D317 00
101	D343 00
102	D343 00
103	SPARE
104	D308 00
105	D280 00
106	D280 00
107	D246 00
108	D282 00

A1-F18AC-WDM-000

15 April 1992

R154 00

REF DESIGNATION PIN DWG.

84P-F002J	CONT
109	D390 00
110	D390 00
111	D309 00
112	D309 00
113	D296 00
114	D296 00
115	D308 00
116	D239 00
117	D051 00
118	D281 00
119	D301 00
120	D266 00
121	D266 00
122	D323 00
123	D323 00
124	D303 00
125	D390 00
126	D390 00
127	D095 00
128	D095 00

84P-F002K	L212 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	D288 00
5	D288 00
6	D329 00
7	D329 00
8	D329 00
9	D329 00
10	D329 00
11	D329 00
12	SPARE
13	SPARE
14	D329 00
15	SPARE
16	D329 00
17	SPARE
18	SPARE
19	D231 00
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D231 00
26	D231 00
27	D231 00
28	SPARE
29	SPARE
30	D329 00
31	D231 00
32	D329 00
33	D329 00
34	D231 00
35	D231 00
36	SPARE
37	D231 00

REF DESIGNATION PIN DWG.

84P-F002K	CONT
38	SPARE
39	SPARE
40	SPARE
41	D329 00
42	D329 00
43	D329 00
44	D329 00
45	SPARE
46	SPARE
47	D231 00
48	SPARE
49	SPARE
50	D329 00
51	D329 00
52	D329 00
53	D231 00
54	SPARE
55	D329 00
56	D329 00
57	SPARE
58	D329 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

84P-F002L	L212 00
-----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	D366 00
6	SPARE
7	D026 00
8	SPARE
9	SPARE
10	SPARE
11	D304 00
12	D212 00
13	D212 00
14	SPARE
15	D366 00
16	D309 00
17	D212 00
18	D212 00
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	D308 00
26	SPARE
27	SPARE
28	SPARE

REF DESIGNATION PIN DWG.

84P-F002L	CONT
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D309 00
39	D311 00
40	SPARE
41	SPARE
42	SPARE
43	D311 00
44	SPARE
45	SPARE
46	SPARE
47	D309 00
48	SPARE
49	D304 00
50	D308 00
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	D051 00
58	SPARE
59	SPARE
60	SPARE
61	D026 00
62	SPARE
63	SPARE
64	SPARE
65	D212 00
66	SPARE
67	SPARE
68	D176 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	D051 00
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	D246 00
84	D281 00
85	D301 00
86	SPARE
87	SPARE
88	SPARE

A1-F18AC-WDM-000

15 April 1992

R155 00

REF DESIGNATION PIN DWG.

84P-F002L	CONT
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	D304 00
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	D028 00
99	D423 00
100	SPARE
101	D343 00
102	SPARE
103	SPARE
104	D301 00
105	SPARE
106	SPARE
107	SPARE
108	D051 00
109	D212 00
110	D212 00
111	D212 00
112	D212 00
113	D212 00
114	D212 00
115	D212 00
116	D212 00
117	D212 00
118	SPARE
119	D177 00
120	D337 00
121	D391 00
122	D212 00
123	D212 00
124	D212 00
125	D212 00
126	D212 00
127	D212 00
128	D423 00

84P-F002M	L212 00
1	D288 00
2	D288 00
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D329 00
8	SPARE
9	SPARE
10	D329 00
11	D329 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D256 00

REF DESIGNATION PIN DWG.

84P-F002M	CONT
18	D256 00
19	D256 00
20	D256 00
21	D329 00
22	D256 00
23	SPARE
24	D329 00
25	D329 00
26	D329 00
27	D329 00
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	D256 00
33	D256 00
34	D256 00
35	D256 00
36	D256 00
37	D256 00
38	SPARE
39	SPARE
40	D329 00
41	D256 00
42	D256 00
43	D329 00
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	D256 00
50	D256 00
51	D256 00
52	SPARE
53	D256 00
54	D329 00
55	D256 00
56	D256 00
57	SPARE
58	D256 00
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE

84P-F002P	L212 00
A	SPARE
B	SPARE
C	SPARE
D	SPARE
E	SPARE
F	D308 00
G	D333 00
H	D333 00

REF DESIGNATION PIN DWG.

84P-F002P	CONT
J	D333 00
K	D333 00
L	SPARE
M	D250 00
N	D250 00
P	D250 00
R	SPARE
S	SPARE
T	SPARE
U	SPARE
V	SPARE
W	D308 00
X	SPARE
Y	SPARE
Z	D308 00

84P-F004A	L208 00
1	SPARE
2	SPARE
3	D194 00
4	D194 00
5	D239 00
6	D239 00
7	D299 00
8	D311 00
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D194 00
16	D194 00
17	D239 00
18	D194 00
19	SPARE
20	D194 00
21	D194 00
22	D299 00

84P-F004B	L208 00
1	D194 00
2	D194 00
3	D194 00
4	D194 00
5	D194 00
6	D194 00
7	D282 00
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D194 00
16	D194 00
17	D194 00

A1-F18AC-WDM-000

15 April 1992

R156 00

REF DESIGNATION PIN DWG.

84P-F004B CONT
18 D194 00
19 SPARE
20 D194 00
21 D194 00
22 D282 00

84P-F005A L210 00
1 SPARE
2 SPARE
3 D214 00
4 D214 00
5 D231 00
6 D231 00
7 D231 00
8 D231 00
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 D214 00
16 D214 00
17 D231 00
18 D214 00
19 SPARE
20 D214 00
21 D214 00
22 D231 00

84P-F005B L210 00
1 D212 00
2 D212 00
3 D212 00
4 D212 00
5 D212 00
6 D212 00
7 D304 00
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 D212 00
16 D212 00
17 D212 00
18 D212 00
19 SPARE
20 D212 00
21 D212 00
22 D304 00

84P-F006A L212 00
1 SPARE

REF DESIGNATION PIN DWG.

84P-F006A CONT
2 SPARE
3 D246 00
4 D246 00
5 D246 00
6 D246 00
7 SPARE
8 SPARE
9 D214 00
10 D246 00
11 D246 00
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 D214 00
20 D214 00
21 D214 00
22 D214 00
23 D214 00
24 D214 00
25 D246 00
26 D214 00
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 D214 00
32 D214 00
33 D214 00
34 SPARE
35 SPARE
36 D214 00
37 D214 00

84P-F006B L212 00
1 SPARE
2 SPARE
3 D304 00
4 SPARE
5 D246 00
6 D246 00
7 SPARE
8 SPARE
9 D246 00
10 D246 00
11 D246 00
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 D212 00
20 D212 00
21 D212 00

REF DESIGNATION PIN DWG.

84P-F006B CONT
22 D212 00
23 D212 00
24 D212 00
25 D246 00
26 D304 00
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 D212 00
32 D212 00
33 D212 00
34 SPARE
35 SPARE
36 D212 00
37 D304 00

84P-F007A L208 00
1 SPARE
2 SPARE
3 D239 00
4 D239 00
5 D239 00
6 D239 00
7 SPARE
8 SPARE
9 D194 00
10 D239 00
11 D239 00
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 D194 00
20 D194 00
21 D194 00
22 D194 00
23 D194 00
24 D194 00
25 D239 00
26 D239 00
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 D194 00
32 D194 00
33 D194 00
34 SPARE
35 SPARE
36 D194 00
37 D239 00

84P-F007B L208 00
1 SPARE

A1-F18AC-WDM-000

15 April 1992

R157 00

REF DESIGNATION PIN DWG.

84P-F007B	CONT
2	SPARE
3	D311 00
4	SPARE
5	D239 00
6	D239 00
7	SPARE
8	SPARE
9	D239 00
10	D239 00
11	D239 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	D239 00
20	D239 00
21	D239 00
22	D239 00
23	D239 00
24	D239 00
25	D239 00
26	D282 00
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	D239 00
32	D239 00
33	D239 00
34	SPARE
35	SPARE
36	D239 00
37	D311 00

84P-F042	L219 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D270 00
18	D270 00
19	D270 00
20	D270 00
21	D277 00

REF DESIGNATION PIN DWG.

84P-F042	CONT
22	D277 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D270 00
28	D293 00
29	D408 00
30	D408 00
31	D408 00
32	D408 00
33	D312 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D270 00
39	D293 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D326 00
45	D312 00
46	SPARE
47	SPARE
48	D300 00
49	D270 00
50	D293 00
51	D457 00
52	D272 00
53	D272 00
54	D272 00
55	D390 00
56	D326 00
57	D099 00
58	SPARE
59	SPARE
60	D270 00
61	D293 00
62	D457 00
63	D272 00
64	D272 00
65	D272 00
66	D272 00
67	D390 00
68	D326 00
69	D099 00
70	SPARE
71	SPARE
72	SPARE
73	D283 00
74	D291 00
75	D286 00
76	D286 00
77	D272 00
78	D390 00
79	D326 00
80	D099 00
81	SPARE

REF DESIGNATION PIN DWG.

84P-F042	CONT
82	SPARE
83	SPARE
84	SPARE
85	D283 00
86	D291 00
87	D290 00
88	D290 00
89	D390 00
90	D279 00
91	D099 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D283 00
98	D283 00
99	D305 00
100	D305 00
101	D279 00
102	D272 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	D273 00
108	D273 00
109	D273 00
110	D273 00
111	D301 00
112	D391 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

84P-F043	L302 00
----------	---------

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE

A1-F18AC-WDM-000

15 April 1992

R158 00

REF DESIGNATION PIN DWG.

84P-F043	CONT
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D316 00
18	D316 00
19	D316 00
20	D316 00
21	D313 00
22	D313 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D316 00
28	D294 00
29	D322 00
30	D322 00
31	D322 00
32	D322 00
33	D313 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D316 00
39	D294 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D276 00
45	D313 00
46	SPARE
47	SPARE
48	SPARE
49	D316 00
50	D294 00
51	D287 00
52	D420 00
53	D290 00
54	D290 00
55	D390 00
56	D276 00
57	D277 00
58	SPARE
59	SPARE
60	D316 00
61	D294 00
62	D287 00
63	D420 00
64	D298 00
65	D298 00
66	D290 00
67	D390 00
68	D408 00
69	D277 00

REF DESIGNATION PIN DWG.

84P-F043	CONT
70	SPARE
71	SPARE
72	SPARE
73	D294 00
74	D294 00
75	D420 00
76	D420 00
77	D290 00
78	D390 00
79	D408 00
80	D277 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D294 00
86	D294 00
87	D294 00
88	D294 00
89	D390 00
90	D294 00
91	D277 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D294 00
98	D294 00
99	D294 00
100	D294 00
101	D294 00
102	D313 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE
109	SPARE
110	SPARE
111	D391 00
112	D391 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE

REF DESIGNATION PIN DWG.

84P-F046	L219 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D318 00
18	D291 00
19	D291 00
20	D277 00
21	SPARE
22	D277 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D318 00
28	D320 00
29	D320 00
30	D332 00
31	SPARE
32	D332 00
33	D312 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D318 00
39	D332 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D310 00
45	D312 00
46	SPARE
47	SPARE
48	SPARE
49	D318 00
50	D332 00
51	D390 00
52	D422 00
53	D422 00
54	D286 00
55	D390 00
56	D310 00
57	D312 00
58	SPARE
59	SPARE

A1-F18AC-WDM-000

15 April 1992

R159 00

REF DESIGNATION PIN DWG.

84P-F046	CONT
60	D318 00
61	D320 00
62	D390 00
63	D422 00
64	D422 00
65	D422 00
66	D286 00
67	D292 00
68	D310 00
69	D312 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D320 00
75	D457 00
76	D457 00
77	D286 00
78	D292 00
79	D310 00
80	D312 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D318 00
86	D422 00
87	D292 00
88	D292 00
89	D292 00
90	D277 00
91	D312 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D320 00
98	D310 00
99	D310 00
100	D277 00
101	SPARE
102	D275 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	D300 00
108	SPARE
109	SPARE
110	D275 00
111	D275 00
112	D275 00
113	SPARE
114	SPARE
115	SPARE
116	SPARE
117	SPARE
118	SPARE
119	SPARE

REF DESIGNATION PIN DWG.

84P-F046	CONT
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
84P-F047	L302 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	D316 00
18	D316 00
19	D316 00
20	D313 00
21	SPARE
22	D313 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D316 00
28	D322 00
29	D322 00
30	D322 00
31	SPARE
32	D322 00
33	D422 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	D316 00
39	D276 00
40	D390 00
41	D390 00
42	D390 00
43	D390 00
44	D292 00
45	D422 00
46	SPARE
47	SPARE
48	SPARE

REF DESIGNATION PIN DWG.

84P-F047	CONT
49	D316 00
50	D276 00
51	D390 00
52	D298 00
53	D298 00
54	D421 00
55	D390 00
56	D292 00
57	D422 00
58	SPARE
59	SPARE
60	D316 00
61	D322 00
62	D390 00
63	D298 00
64	D298 00
65	D298 00
66	D421 00
67	D296 00
68	D292 00
69	D422 00
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	D322 00
75	D287 00
76	D287 00
77	D421 00
78	D296 00
79	D292 00
80	D313 00
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	D316 00
86	D287 00
87	D294 00
88	D294 00
89	D294 00
90	D292 00
91	D313 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	D276 00
98	D292 00
99	D292 00
100	D292 00
101	SPARE
102	D313 00
103	SPARE
104	SPARE
105	SPARE
106	SPARE
107	SPARE
108	SPARE

A1-F18AC-WDM-000

Change 4

R160 00

REF DESIGNATION		REF DESIGNATION		REF DESIGNATION	
PIN	DWG.	PIN	DWG.	PIN	DWG.
84P-F047	CONT	84P-G036	CONT	84P-H003B	CONT
109	SPARE	5	SPARE	16	D246 00
110	SPARE	6	D360 00	17	D246 00
111	SPARE			18	D188 00
112	SPARE	84P-H003A	L406 00	19	D188 00
113	SPARE			20	D188 00
114	SPARE	1	SPARE	21	D423 00
115	SPARE	2	SPARE	22	SPARE
116	SPARE	3	D299 00	23	SPARE
117	SPARE	4	D299 00	24	SPARE
118	SPARE	5	SPARE	25	SPARE
119	SPARE	6	SPARE	26	D329 00
120	SPARE	7	D192 00	27	SPARE
121	SPARE	8	D423 00	28	SPARE
122	SPARE	9	D192 00	29	D246 00
123	SPARE	10	D192 00	30	SPARE
124	SPARE	11	D192 00	31	SPARE
125	SPARE	12	D214 00	32	SPARE
126	SPARE	13	D423 00	33	SPARE
127	SPARE	14	SPARE	34	SPARE
128	SPARE	15	D187 00	35	SPARE
		16	D423 00	36	D423 00
84P-G035A	L305 00	17	D423 00	37	SPARE
		18	D187 00		
1	D304 00	19	D187 00	84P-J037	L405 00
2	D304 00	20	D187 00		
3	D280 00	21	D423 00	1	D010 00
4	D280 00	22	SPARE	2	D051 00
5	SPARE	23	SPARE	3	D051 00
6	D280 00	24	SPARE	4	D026 00
7	D280 00	25	SPARE	5	D051 00
8	D280 00	26	D214 00	6	D366 00
9	D280 00	27	SPARE	7	D051 00
10	D304 00	28	SPARE	8	D366 00
11	D304 00	29	D236 00	9	D051 00
12	D304 00	30	SPARE	10	D051 00
13	D280 00	31	SPARE	11	D366 00
		32	SPARE	12	D051 00
84P-G035B	L306 00	33	SPARE	13	D051 00
		34	SPARE	14	D051 00
1	D280 00	35	SPARE	15	D026 00
2	D280 00	36	D423 00	16	D026 00
3	SPARE	37	SPARE	17	D026 00
4	D280 00			18	D051 00
5	D280 00	84P-H003B	L406 00	19	D366 00
6	SPARE			20	D051 00
7	D304 00	1	D329 00	21	D026 00
8	D304 00	2	D083 00	22	D026 00
9	D304 00	3	D083 00	23	D026 00
10	SPARE	4	D329 00	24	D051 00
11	D304 00	5	SPARE	25	D051 00
12	SPARE	6	SPARE	26	D366 00
13	D280 00	7	D188 00	27	D051 00
		8	D423 00	28	D051 00
84P-G036	L312 00	9	D188 00	29	D051 00
		10	D188 00	30	D051 00
1	D336 00	11	D188 00	31	D051 00
2	SPARE	12	D329 00	32	D026 00
3	D360 00	13	D423 00	33	D051 00
4	SPARE	14	SPARE	34	D026 00
		15	D188 00	35	D051 00

A1-F18AC-WDM-000

15 April 1992

R161 00

REF DESIGNATION PIN DWG.

84P-J037	CONT
36	D051 00
37	D366 00
38	D051 00
39	D051 00
40	D051 00
41	D051 00
42	D026 00
43	D051 00
44	D366 00
45	D026 00
46	D051 00
47	D051 00
48	D051 00
49	D366 00
50	D051 00
51	D366 00
52	D051 00
53	D051 00
54	D366 00
55	D026 00
56	SPARE
57	D051 00
58	D366 00
59	SPARE
60	D026 00
61	D051 00
62	D366 00
68	D026 00
64	D051 00
65	D051 00
66	D366 00
67	SPARE
68	D366 00
69	D051 00
70	D366 00
71	D051 00
72	SPARE
73	D051 00
74	D366 00
75	D051 00
76	D051 00
77	D051 00
78	D051 00
79	SPARE
84P-J104	L402 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	D028 00
7	D028 00
8	D028 00
9	D028 00
10	D281 00
11	D281 00
12	D281 00
13	D281 00

REF DESIGNATION PIN DWG.

84P-J122A	L411 00
SEE 84J-J122A	
84P-J122B	L410 00
SEE 84J-J122B	
84P-M021A	L601 00
1	D390 00
2	D390 00
3	D390 00
4	SPARE
5	D390 00
6	D390 00
7	D390 00
8	SPARE
9	D390 00
10	D390 00
11	D390 00
12	D390 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	SPARE
18	SPARE
19	D390 00
20	D390 00
21	SPARE
22	SPARE
84P-M021B	L601 00
1	D390 00
2	D390 00
3	D390 00
4	SPARE
5	D390 00
6	D390 00
7	D390 00
8	SPARE
9	D390 00
10	D390 00
11	D390 00
12	D390 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	SPARE
18	SPARE
19	D390 00
20	D390 00
21	SPARE
22	SPARE
84P-M021C	L601 00
1	D390 00

REF DESIGNATION PIN DWG.

84P-M021C	CONT
2	D390 00
3	D390 00
4	SPARE
5	D390 00
6	SPARE
7	D390 00
8	SPARE
9	D390 00
10	D390 00
11	D390 00
12	D390 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	SPARE
18	SPARE
19	D390 00
20	D390 00
21	SPARE
22	SPARE
84P-M021D	L601 00
1	D390 00
2	D390 00
3	D390 00
4	SPARE
5	D390 00
6	SPARE
7	D390 00
8	SPARE
9	D390 00
10	D390 00
11	D390 00
12	D390 00
13	D390 00
14	D390 00
15	D390 00
16	D390 00
17	SPARE
18	SPARE
19	D390 00
20	D390 00
21	SPARE
22	SPARE
84P-M029A	L601 00
1	D457 00
2	SPARE
3	D457 00
4	D457 00
5	D457 00
6	SPARE
7	SPARE
8	SPARE
9	SPARE

A1-F18AC-WDM-000

15 April 1992

R162 00

REF DESIGNATION PIN DWG.

84P-M029A CONT
10 SPARE
11 SPARE
12 SPARE
13 D457 00

84P-M029B L601 00

1 D457 00
2 SPARE
3 D457 00
4 D457 00
5 D457 00
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 D457 00

84P-M029C L601 00

1 D287 00
2 SPARE
3 D287 00
4 D287 00
5 D287 00
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 D287 00

84P-M029D L601 00

1 D287 00
2 SPARE
3 D287 00
4 D287 00
5 D287 00
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 D287 00

84P-M051 L601 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE

REF DESIGNATION PIN DWG.

84P-M051 CONT
6 SPARE
7 SPARE
8 SPARE
g SPARE
10 SPARE
11 D420 00
12 D327 00
13 D327 00
14 D123 00
15 SPARE
16 SPARE
17 SPARE
18 D302 00
19 D327 00
20 D327 00
21 D327 00
22 D123 00
23 SPARE
24 SPARE
25 SPARE
26 D327 00
27 D327 00
28 D327 00
29 D327 00
30 D297 00
31 SPARE
32 SPARE
33 SPARE
34 D391 00
35 D327 00
36 D327 00
37 D297 00
38 SPARE
39 SPARE
40 SPARE
41 SPARE
42 D420 00
43 D420 00
44 D420 00
45 SPARE
46 SPARE
47 SPARE
48 SPARE
49 SPARE
50 SPARE
51 SPARE
52 SPARE
53 SPARE
54 SPARE
55 SPARE

84P-M110A L601 00

1 D390 00
2 D390 00
3 D390 00
4 SPARE
s D390 00
6 D390 00
7 D390 00

REF DESIGNATION PIN DWG.

84P-M110A CONT
8 SPARE
9 D390 00
10 D390 00
11 D390 00
12 D390 00
13 D390 00
14 D390 00
15 D390 00
16 D390 00
17 SPARE
18 SPARE
19 D390 00
20 D390 00
21 SPARE
22 SPARE

84P-M110B L601 00

1 D390 00
2 D390 00
3 D390 00
4 SPARE
5 D390 00
6 D390 00
7 D390 00
8 SPARE
9 D390 00
10 D390 00
11 D390 00
12 D390 00
13 D390 00
14 D390 00
15 D390 00
16 D390 00
17 SPARE
18 SPARE
19 D390 00
20 D390 00
21 SPARE
22 SPARE

84P-M132 L601 00

1 D390 00
2 D390 00
3 D390 00
4 SPARE
5 D390 00
6 D390 00
7 D390 00
8 SPARE
9 D390 00
10 D390 00
11 D390 00
12 D390 00
13 D390 00
14 D390 00
15 D390 00
16 D390 00

A1-F18AC-WDM-000

15 April 1992

R163 00

REF DESIGNATION PIN DWG.

84P-M132 CONT
17 SPARE
18 SPARE
19 D390 00
20 D390 00
21 SPARE
22 SPARE

84P-M133 L601 00
1 D390 00
2 D390 00
3 D390 00
4 SPARE
5 D390 00
6 D390 00
7 D390 00
8 SPARE
9 D390 00
10 D390 00
11 D390 00
12 D390 00
13 D390 00
14 D390 00
15 D390 00
16 D390 00
17 SPARE
18 SPARE
19 D390 00
20 D390 00
21 SPARE
22 SPARE

84P-N052 L614 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 D272 00
7 D301 00
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 D422 00
13 D422 00
14 D391 00
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 D272 00
20 D422 00
21 D272 00
22 D286 00
23 SPARE
24 SPARE
25 SPARE
26 D272 00

REF DESIGNATION PIN DWG.

84P-N052 CONT
27 D422 00
28 D422 00
29 D272 00
30 D286 00
31 SPARE
32 SPARE
33 SPARE
34 D272 00
35 D272 00
36 D272 00
37 D286 00
38 SPARE
39 SPARE
40 SPARE
41 SPARE
42 D272 00
43 D286 00
44 D286 00
45 SPARE
46 SPARE
47 SPARE
48 SPARE
49 SPARE
50 SPARE
51 SPARE
52 SPARE
53 SPARE
54 SPARE
55 SPARE

84P-P053 L722 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 D319 00
10 D319 00
11 D319 00
12 D319 00
13 D319 00
14 SPARE
15 SPARE
16 D319 00
17 D323 00
18 D419 00
19 D419 00
20 D419 00
21 D419 00
22 D293 00
23 D317 00
24 SPARE
25 SPARE
26 D319 00
27 D323 00
28 D328 00

REF DESIGNATION PIN DWG.

84P-P053 CONT
29 D328 00
30 D421 00
31 D421 00
32 D331 00
33 D293 00
34 D317 00
35 SPARE
36 SPARE
37 SPARE
38 D323 00
39 D328 00
40 D309 00
41 D418 00
42 D418 00
43 D307 00
44 D331 00
45 D293 00
46 D317 00
47 SPARE
48 D319 00
49 D323 00
50 D328 00
51 D309 00
52 D296 00
53 D296 00
54 D095 00
55 D307 00
56 D331 00
57 SPARE
58 D317 00
59 D317 00
60 D323 00
61 D328 00
62 D095 00
63 D295 00
64 D295 00
65 D295 00
66 D095 00
67 D307 00
68 D331 00
69 D293 00
70 SPARE
71 SPARE
72 D317 00
73 D323 00
74 D328 00
75 D095 00
76 D095 00
77 D095 00
78 D296 00
79 D321 00
80 D283 00
81 D391 00
82 SPARE
83 D319 00
84 D317 00
85 D323 00
86 D328 00
87 D296 00
88 D296 00

A1-F18AC-WDM-000

Change 4

R164 00

REF DESIGNATION
PIN DWG.

84P-P053	CONT
89	D296 00
90	SPARE
91	D283 00
92	D391 00
93	SPARE
94	SPARE
95	D300 00
96	D317 00
97	D323 00
98	D295 00
99	D321 00
100	D321 00
101	D321 00
102	D283 00
103	D266 00
104	SPARE
105	SPARE
106	D300 00
107	D317 00
108	D289 00
109	D289 00
110	D283 00
111	D283 00
112	D283 00
113	D266 00
114	SPARE
115	SPARE
116	D266 00
117	D266 00
118	D266 00
119	D266 00
120	D266 00
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
84P-P054	L724 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D293 00
10	SPARE
11	D293 00
12	D293 00
13	D293 00
14	SPARE
15	SPARE
16	SPARE
17	D283 00

REF DESIGNATION
PIN DWG.

84P-P054	CONT
18	D283 00
19	D283 00
20	D419 00
21	D419 00
22	D328 00
23	SPARE
24	SPARE
25	SPARE
26	D283 00
27	D283 00
28	D331 00
29	D331 00
30	D331 00
31	D419 00
32	D328 00
33	SPARE
34	SPARE
35	SPARE
36	D283 00
37	D283 00
38	D323 00
39	D266 00
40	D266 00
41	D331 00
42	D419 00
43	D328 00
44	SPARE
45	SPARE
46	D289 00
47	D321 00
48	D323 00
49	D266 00
50	D266 00
51	D266 00
52	D323 00
53	D421 00
54	D328 00
55	SPARE
56	SPARE
57	D289 00
58	SPARE
59	D328 00
60	D266 00
61	D266 00
62	D323 00
63	D421 00
64	D328 00
65	SPARE
66	SPARE
Z67	SPARE
68	SPARE
69	D321 00
70	D328 00
71	D300 00
72	D300 00
73	D296 00
74	D323 00
75	SPARE
76	SPARE
77	SPARE

REF DESIGNATION
PIN DWG.

84P-P054	CONT
78	SPARE
79	D321 00
80	D296 00
81	D296 00
82	D296 00
83	D323 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D321 00
89	D323 00
90	D323 00
91	D323 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
84P-P059	L724 00
1	D481 00
2	D391 00
3	D391 00
4	D481 00
5	D317 00
6	D317 00
7	D317 00
8	D317 00
9	SPARE
10	D481 00
11	D319 00
12	D095 00
13	D095 00
14	D317 00
15	D317 00
16	SPARE
17	D481 00
18	SPARE
19	D095 00
20	D295 00
21	D095 00
22	D307 00
23	D317 00
24	SPARE
25	D481 00
26	D095 00
27	D295 00
28	D295 00
29	D095 00
30	D307 00
31	D317 00
32	D481 00
33	D319 00
34	D309 00

A1-F18AC-WDM-000

Change 4

R165 00

REF DESIGNATION PIN DWG.

84P-P059	CONT
35	D296 00
36	D296 00
37	D307 00
38	D319 00
39	SPARE
40	D481 00
41	D319 00
42	D309 00
43	D418 00
44	D418 00
45	D319 00
46	SPARE
47	D481 00
48	D319 00
49	D319 00
50	D319 00
51	D319 00
52	SPARE
53	D481 00
54	D481 00
55	SPARE

84P-P060 L727 00

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D318 00
21	D318 00
22	D318 00
23	D291 00
24	D291 00
25	D318 00
26	SPARE
27	D318 00
28	D318 00
29	D318 00
30	D270 00
31	D270 00
32	D270 00
33	D270 00
34	D270 00
35	D270 00
36	D270 00

REF DESIGNATION PIN DWG.

84P-P060	CONT
37	D270 00

84P-P067 L722 00

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	D318 00
21	D318 00
22	D318 00
23	D291 00
24	D291 00
25	D318 00
26	SPARE
27	D318 00
28	D318 00
29	D318 00
30	D270 00
31	D270 00
32	D270 00
33	D270 00
34	D270 00
35	D270 00
36	D270 00
37	D270 00

84P-R056 L734 00

1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE

REF DESIGNATION PIN DWG.

84P-R056	CONT
----------	------

17	D310 00
18	D310 00
19	D292 00
20	D292 00
21	D292 00
22	D292 00
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	D277 00
28	D312 00
29	D305 00
30	D305 00
31	D288 00
32	D283 00
33	D292 00
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	D312 00
40	D293 00
41	D293 00
42	D293 00
43	D293 00
44	D283 00
45	D320 00
46	SPARE
47	SPARE
48	SPARE
49	D277 00
50	D277 00
51	D290 00
52	D326 00
53	D300 00
54	D300 00
55	D291 00
56	D283 00
57	D320 00
58	SPARE
59	D320 00
60	SPARE
61	D290 00
62	D326 00
63	D275 00
64	D275 00
65	D275 00
66	D273 00
67	D291 00
68	D279 00
69	D332 00
70	SPARE
71	D310 00
72	D277 00
73	D277 00
74	D326 00
75	D273 00
76	D273 00

A1-F18AC-WDM-000

Change 4

R166 00

REF DESIGNATION PIN DWG.

84P-R056	CONT
77	D273 00
78	D408 00
79	D279 00
80	D332 00
81	SPARE
82	SPARE
83	D310 00
84	D326 00
85	D277 00
86	D326 00
87	D408 00
88	D408 00
89	D408 00
90	D099 00
91	D320 00
92	SPARE
93	SPARE
94	SPARE
95	D310 00
96	D312 00
97	D312 00
98	D312 00
99	D099 00
100	D099 00
101	D099 00
102	D320 00
103	SPARE
104	SPARE
105	SPARE
106	D310 00
107	D312 00
108	D312 00
109	D312 00
110	D332 00
111	SPARE
112	D332 00
113	SPARE
114	SPARE
115	SPARE
116	D310 00
117	SPARE
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
84P-R057	L735 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE

REF DESIGNATION PIN DWG.

84P-R057	CONT
6	SPARE
7	SPARE
8	SPARE
9	D810 00
10	D277 00
11	SPARE
12	D277 00
13	D310 00
14	SPARE
15	SPARE
16	SPARE
17	D310 00
18	D283 00
19	D283 00
20	D283 00
21	D283 00
22	D310 00
23	SPARE
24	SPARE
25	SPARE
26	D310 00
27	D305 00
28	D408 00
29	D408 00
30	D326 00
31	D279 00
32	D292 00
33	SPARE
34	SPARE
35	SPARE
36	D310 00
37	D305 00
38	D408 00
39	D273 00
40	D273 00
41	D326 00
42	D279 00
43	D292 00
44	SPARE
45	SPARE
46	D292 00
47	D332 00
48	D408 00
49	D273 00
50	D275 00
51	D275 00
52	D326 00
53	D290 00
54	D292 00
55	SPARE
56	SPARE
57	D273 00
58	SPARE
59	D291 00
60	D273 00
61	D275 00
62	D326 00
63	D290 00
64	D292 00
65	SPARE

REF DESIGNATION PIN DWG.

84P-R057	CONT
66	SPARE
67	SPARE
68	SPARE
69	D332 00
70	D291 00
71	D300 00
72	D300 00
73	D293 00
74	D292 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D320 00
80	D293 00
81	D293 00
82	D293 00
83	D320 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D320 00
89	D832 00
90	D332 00
91	D320 00
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
84P-R064	L735 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D202 00
11	D202 00
12	D202 00
13	D202 00
14	D482 00
15	D482 00
16	D482 00
17	D482 00
18	D482 00
19	D482 00
20	D312 00
21	D312 00
22	D312 00

A1-F18AC-WDM-000

15 April 1992

R167 00

REF DESIGNATION PIN DWG.

84P-R064 CONT
23 D312 00
24 D312 00
25 D277 00
26 SPARE
27 D277 00
28 D312 00
29 D312 00
30 D099 00
31 D099 00
32 D099 00
33 D099 00
34 D312 00
35 D312 00
36 D277 00
37 D277 00

84P-R065 L738 00

1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 D314 00
21 D278 00
22 D278 00
23 D278 00
24 D278 00
25 D314 00
26 SPARE
27 D314 00
28 D314 00
29 D314 00
30 D171 00
31 D171 00
32 D171 00
33 D171 00
34 D171 00
35 D171 00
36 D278 00
37 D278 00

84P-R068 L734 00

1 SPARE
2 SPARE
3 SPARE

REF DESIGNATION PIN DWG.

84P-R068 CONT
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 D314 00
21 D278 00
22 D278 00
23 D278 00
24 D278 00
25 D314 00
26 SPARE
27 D314 00
28 D314 00
29 D314 00
30 D171 00
31 D171 00
32 D171 00
33 D171 00
34 D171 00
35 D171 00
36 D278 00
37 D278 00

84P-S015A L800 00

1 D324 00
2 D236 00
3 D236 00
4 SPARE
5 D324 00
6 SPARE
7 D324 00
8 D324 00
9 D236 00
10 D324 00
11 D324 00
12 D324 00
13 D324 00
14 D324 00
15 D236 00
16 D236 00
17 SPARE
18 D324 00
19 D236 00
20 D324 00
21 SPARE
22 SPARE

REF DESIGNATION PIN DWG.

84P-S015B L800 00

1 D320 00
2 D408 00
3 D408 00
4 SPARE
5 D332 00
6 SPARE
7 D332 00
8 D332 00
9 D326 00
10 D320 00
11 D320 00
12 D320 00
13 D326 00
14 D326 00
15 D408 00
16 D408 00
17 SPARE
18 D332 00
19 D326 00
20 D320 00
21 SPARE
22 SPARE

84P-S015C L800 00

1 D322 00
2 D322 00
3 D322 00
4 SPARE
5 D322 00
6 SPARE
7 D322 00
8 D276 00
9 D408 00
10 D322 00
11 D322 00
12 D322 00
13 D276 00
14 D276 00
15 D322 00
16 D322 00
17 SPARE
18 D276 00
19 D408 00
20 D322 00
21 SPARE
22 SPARE

84P-S015D L800 00

1 D321 00
2 D331 00
3 D331 00
4 SPARE
5 D321 00
6 SPARE
7 D321 00
8 D323 00
9 D323 00

A1-F18AC-WDM-000

15 April 1992

R168 00

REF DESIGNATION PIN DWG.

84P-S015D CONT
10 D321 00
11 D323 00
12 D323 00
13 D323 00
14 D323 00
15 D331 00
16 D331 00
17 SPARE
18 D323 00
19 D323 00
20 D321 00
21 SPARE
22 SPARE

84P-S017A L831 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D322 00
8 D236 00
9 SPARE
10 D236 00
11 D236 00
12 D236 00
13 D236 00
14 D322 00
15 D322 00
16 D322 00
17 D236 00
18 D236 00
19 D322 00
20 D322 00
21 D324 00
22 D324 00

84P-S017B L831 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D328 00
8 D296 00
9 SPARE
10 D296 00
11 D296 00
12 D296 00
13 D296 00
14 D328 00
15 D328 00
16 D328 00
17 D421 00
18 D421 00
19 D328 00

REF DESIGNATION PIN DWG.

84P-S017B CONT
20 D328 00
21 D328 00
22 D328 00
84P-S055 L808 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE
23 SPARE
24 SPARE
25 SPARE
26 SPARE
27 SPARE
28 SPARE
29 SPARE
30 SPARE
31 D289 00
32 D289 00
33 D293 00
34 D283 00
35 D283 00
36 D293 00
37 SPARE
38 D293 00
39 D293 00
40 D293 00
41 D419 00
42 D328 00
43 D328 00
44 D328 00
45 D328 00
46 D328 00
47 D323 00
48 D323 00
49 D323 00
50 D323 00
51 D321 00
52 D321 00
53 D321 00
54 SPARE

REF DESIGNATION PIN DWG.

84P-S055 CONT
55 D321 00
56 D283 00
57 D283 00
58 D283 00
59 D283 00
60 D419 00
61 D419 00
62 D419 00
63 D419 00
64 D421 00
65 D421 00
66 D296 00
67 D296 00
68 D296 00
69 D296 00
70 D328 00
71 D328 00
72 D323 00
73 D328 00
74 D331 00
75 D331 00
76 D331 00
77 D331 00
78 D323 00
79 D323 00

84P-T016A L805 00
1 D279 00
2 D279 00
3 D279 00
4 SPARE
5 D279 00
6 SPARE
7 D279 00
8 D279 00
9 D279 00
10 D279 00
11 D279 00
12 D279 00
13 D279 00
14 D279 00
15 D279 00
16 D279 00
17 SPARE
18 D279 00
19 D279 00
20 D279 00
21 SPARE
22 SPARE

84P-T016B L805 00
1 D310 00
2 D283 00
3 D283 00
4 SPARE
5 D277 00
6 SPARE
7 D277 00

A1-F18AC-WDM-000

15 April 1992

R169 00

REF DESIGNATION PIN DWG.

84P-T016B	CONT
8	D310 00
9	D305 00
10	D310 00
11	D310 00
12	D310 00
13	D279 00
14	D279 00
15	D283 00
16	D288 00
17	SPARE
18	D310 00
19	D305 00
20	D310 00
21	SPARE
22	SPARE

84P-T016C	L805 00
1	D292 00
2	D294 00
3	D294 00
4	SPARE
5	D292 00
6	SPARE
7	D292 00
8	D292 00
9	D294 00
10	D292 00
11	D292 00
12	D292 00
13	D294 00
14	D294 00
15	D294 00
16	D294 00
17	SPARE
18	D292 00
19	D294 00
20	D292 00
21	SPARE
22	SPARE

84P-T016D	L805 00
1	D289 00
2	D283 00
3	D283 00
4	SPARE
5	D293 00
6	SPARE
7	D293 00
8	D283 00
9	D419 00
10	D289 00
11	D293 00
12	D293 00
13	D419 00
14	D419 00
15	D283 00
16	D283 00
17	SPARE

REF DESIGNATION PIN DWG.

84P-T016D	CONT
18	D283 00
19	D419 00
20	D289 00
21	SPARE
22	SPARE

84P-T018A	L827 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D296 00
8	D296 00
9	SPARE
10	D294 00
11	D294 00
12	D294 00
13	D294 00
14	D294 00
15	D294 00
16	D294 00
17	D294 00
18	D294 00
19	D296 00
20	D296 00
21	D294 00
22	D294 00

84P-T018B	L827 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D291 00
8	D292 00
9	SPARE
10	D293 00
11	D293 00
12	D293 00
13	D293 00
14	D292 00
15	D292 00
16	D292 00
17	D290 00
18	D290 00
19	D292 00
20	D292 00
21	D291 00
22	D291 00

84P-T058	L806 00
1	SPARE

REF DESIGNATION PIN DWG.

84P-T058	CONT
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	D310 00
10	D277 00
11	SPARE
12	D277 00
13	D310 00
14	SPARE
15	SPARE
16	SPARE
17	D310 00
18	D283 00
19	D283 00
20	D283 00
21	D283 00
22	D310 00
23	SPARE
24	SPARE
25	SPARE
26	D310 00
27	D305 00
28	D408 00
29	D408 00
30	D326 00
31	D279 00
32	D292 00
33	SPARE
34	SPARE
35	SPARE
36	D310 00
37	D305 00
38	D408 00
39	D273 00
40	D273 00
41	D326 00
42	D279 00
43	D292 00
44	SPARE
45	SPARE
46	D292 00
47	D332 00
48	D408 00
49	D273 00
50	D275 00
51	D275 00
52	D326 00
53	D290 00
54	D292 00
55	SPARE
56	SPARE
57	D332 00
58	SPARE
59	D291 00
60	D273 00
61	D275 00

A1-F18AC-WDM-000

15 April 1992

R170 00

REF DESIGNATION PIN DWG.

84P-T058	CONT
62	D326 00
63	D290 00
64	D292 00
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	D332 00
70	D291 00
71	D300 00
72	D300 00
73	D293 00
74	D292 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	D320 00
80	D293 00
81	D293 00
82	D293 00
83	D320 00
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D320 00
89	D332 00
90	D332 00
91	D320 00
92	SPARE
98	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE

84P-U013A	L905 00
1	D315 00
2	D236 00
3	D326 00
4	SPARE
5	D315 00
6	SPARE
7	D315 00
8	D315 00
9	D236 00
10	D315 00
11	D315 00
12	D315 00
13	D315 00
14	D315 00
15	D236 00
16	D236 00
17	SPARE
18	D315 00

REF DESIGNATION PIN DWG.

84P-U013A	CONT
19	D236 00
20	D315 00
21	SPARE
22	SPARE
84P-U013B	L905 00
1	D270 00
2	D270 00
3	D270 00
4	SPARE
5	D318 00
6	SPARE
7	D318 00
8	D291 00
9	D270 00
10	D318 00
11	D318 00
12	D318 00
13	D270 00
14	D270 00
15	D270 00
16	D270 00
17	SPARE
18	D291 00
19	D270 00
20	D318 00
21	SPARE
22	SPARE
84P-U013C	L905 00
1	D316 00
2	D316 00
3	D316 00
4	SPARE
5	D316 00
6	SPARE
7	D316 00
8	D316 00
9	D316 00
10	D316 00
11	D316 00
12	D316 00
13	D316 00
14	D316 00
15	D316 00
16	D316 00
17	SPARE
18	D316 00
19	D316 00
20	D316 00
21	SPARE
22	SPARE
84P-U013D	L905 00
1	D319 00
2	D317 00
3	D317 00

REF DESIGNATION PIN DWG.

84P-U013D	CONT
4	SPARE
5	D319 00
6	SPARE
7	D319 00
8	D319 00
9	D317 00
10	D319 00
11	D319 00
12	D319 00
13	D317 00
14	D317 00
15	D317 00
16	D317 00
17	SPARE
18	D319 00
19	D317 00
20	D319 00
21	SPARE
22	SPARE
84P-U019A	L909 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D327 00
8	D123 00
9	SPARE
10	D123 00
11	D123 00
12	D327 00
13	D327 00
14	D327 00
15	D327 00
16	D327 00
17	D327 00
18	D327 00
19	D327 00
20	D327 00
21	D327 00
22	D327 00
84P-U019B	L910 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D295 00
8	D296 00
9	SPARE
10	D309 00
11	D309 00
12	D095 00

A1-F18AC-WDM-000

15 April 1992

R171 00

REF DESIGNATION PIN DWG.

84P-U019B CONT
13 D095 00
14 D295 00
15 D295 00
16 D295 00
17 D095 00
18 D095 00
19 D095 00
20 D095 00
21 D296 00
22 D296 00

84P-U027A L909 00
1 D321 00
2 D302 00
3 D420 00
4 D420 00
5 D420 00
6 D420 00
7 D297 00
8 D297 00
9 D302 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE

84P-U027B L909 00
1 D391 00
2 D391 00
3 D307 00
4 D307 00
5 D307 00
6 D307 00
7 D418 00
8 D418 00
9 D391 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE

REF DESIGNATION PIN DWG.

84P-U049 L906 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 D295 00
18 D391 00
19 D391 00
20 D307 00
21 D307 00
22 D307 00
23 D418 00
24 D418 00
25 D309 00
26 D309 00
27 D095 00
28 D095 00
29 D095 00
30 D095 00
31 D095 00
32 D095 00
33 D296 00
34 D296 00
35 D295 00
36 D295 00
37 D295 00

84P-V014A L955 00
1 D288 00
2 D236 00
3 D236 00
4 SPARE
5 D288 00
6 SPARE
7 D288 00
8 D279 00
9 D236 00
10 D279 00
11 D288 00
12 D288 00
13 D288 00
14 D288 00
15 D236 00
16 D236 00
17 SPARE
18 D279 00
19 D236 00

REF DESIGNATION PIN DWG.

84P-V014A CONT
20 D279 00
21 SPARE
22 SPARE
84P-V014B L955 00

1 D312 00
2 D099 00
3 D099 00
4 SPARE
5 D277 00
6 SPARE
7 D277 00
8 D312 00
9 D312 00
10 D312 00
11 D312 00
12 D312 00
13 D277 00
14 D277 00
15 D099 00
16 D099 00
17 SPARE
18 D312 00
19 D312 00
20 D312 00
21 SPARE
22 SPARE

84P-V014C L955 00
1 D313 00
2 D277 00
3 D277 00
4 SPARE
5 D313 00
6 SPARE
7 D313 00
8 D422 00
9 D313 00
10 D313 00
11 D422 00
12 D422 00
13 D313 00
14 D313 00
15 D277 00
16 D277 00
17 SPARE
18 D422 00
19 D313 00
20 D313 00
21 SPARE
22 SPARE

84P-V014D L955 00
1 D314 00
2 D171 00
3 D171 00

A1-F18AC-WDM-000

15 April 1992

R172 00

REF DESIGNATION PIN DWG.

84P-V014D CONT
4 SPARE
5 D314 00
6 SPARE
7 D314 00
8 D278 00
9 D171 00
10 D314 00
11 D278 00
12 D278 00
13 D278 00
14 D278 00
15 D171 00
16 D171 00
17 SPARE
18 D278 00
19 D171 00
20 D314 00
21 SPARE
22 SPARE

84P-V020A L960 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D298 00
8 D298 00
9 SPARE
10 D290 00
11 D290 00
12 D290 00
13 D290 00
14 D298 00
15 D298 00
16 D298 00
17 D420 00
18 D420 00
19 D298 00
20 D298 00
21 D298 00
22 D298 00

84P-V020B L959 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 D272 00
8 D422 00
9 SPARE
10 D272 00
11 D272 00
12 D272 00
13 D272 00

REF DESIGNATION PIN DWG.

84P-V020B CONT
14 D422 00
15 D422 00
16 D422 00
17 D272 00
18 D272 00
19 D422 00
20 D422 00
21 D272 00
22 D272 00

84P-V028A L959 00
1 D301 00
2 D391 00
3 D286 00
4 D286 00
5 D286 00
6 D286 00
7 D286 00
8 D286 00
9 D301 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE

84P-V028B L959 00
1 D391 00
2 D391 00
3 D421 00
4 D421 00
5 D421 00
6 D421 00
7 D420 00
8 D420 00
9 D420 00
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 SPARE
18 SPARE
19 SPARE
20 SPARE
21 SPARE
22 SPARE

REF DESIGNATION PIN DWG.

84P-V050 L956 00
1 SPARE
2 SPARE
3 SPARE
4 SPARE
5 SPARE
6 SPARE
7 SPARE
8 SPARE
9 SPARE
10 SPARE
11 SPARE
12 SPARE
13 SPARE
14 SPARE
15 SPARE
16 SPARE
17 D421 00
18 D391 00
19 D391 00
20 D421 00
21 D421 00
22 D421 00
23 D420 00
24 D420 00
25 D290 00
26 D290 00
27 D290 00
28 D290 00
29 D298 00
30 D298 00
31 D420 00
32 D420 00
33 D298 00
34 D298 00
35 D298 00
36 D298 00
37 D298 00

84S-J022 L411 00
1 D281 00
2 D281 00
3 SPARE
4 D281 00
5 D281 00
6 SPARE
7 D281 00
8 D281 00
9 SPARE
10 D281 00
11 D281 00
12 SPARE

85A-F001 L214 00
85A-F007 L211 00
85A-G003 L309 00

A1-F18AC-WDM-000

15 April 1992

R173 00

REF DESIGNATION PIN DWG.

85A-N002	L613 00
85M-F019	L317 00
A	D258 00
B	D258 00
C	D258 00
D	D258 00
85N-S011	L801 00
A	D265 00
B	D265 00
C	D265 00
D	D265 00
85M-S013	L800 00
A	D258 00
B	D258 00
C	D258 00
D	D258 00
85M-T010	L804 00
A	D265 00
B	D265 00
C	D265 00
D	D265 00
85M-T012	L805 00
A	D258 00
B	D258 00
C	D258 00
D	D258 00
85M-U020	L902 00
A	D412 00
B	D412 00
C	D412 00
D	D412 00
85N-U021	L912 00
A	D247 00
B	D247 00
C	D247 00
D	D247 00
85P-F001A	L214 00
1	SPARE
2	SPARE
3	SPARE
4	D244 00
5	D244 00
6	D123 00
7	D225 00

REF DESIGNATION PIN DWG.

85P-F001A	CONT
8	D225 00
9	D242 00
10	D244 00
11	SPARE
12	D455 00
13	D455 00
14	D254 00
15	D455 00
16	D455 00
17	D455 00
18	D455 00
19	D455 00
20	D455 00
21	D455 00
22	D254 00
23	D254 00
24	D152 00
25	D152 00
26	D152 00
27	D142 00
28	D142 00
29	D455 00
30	D455 00
31	D455 00
32	D080 00
33	D152 00
34	D152 00
35	D243 00
36	D243 00
37	D243 00
38	D243 00
39	D243 00
40	D243 00
41	D225 00
42	SPARE
43	D243 00
44	D243 00
45	D243 00
46	D243 00
47	D243 00
48	D243 00
49	D243 00
50	D243 00
51	D243 00
52	SPARE
53	SPARE
54	SPARE
55	D196 00
56	D196 00
57	D196 00
58	D196 00
59	D337 00
60	D160 00
61	D160 00
62	D160 00
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	D160 00

REF DESIGNATION PIN DWG.

85P-F001A	CONT
68	D060 00
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	D265 00
82	SPARE
83	SPARE
84	D265 00
85	SPARE
86	SPARE
87	D265 00
88	SPARE
89	D243 00
90	D243 00
91	D243 00
92	D243 00
93	D243 00
94	D265 00
95	D265 00
96	SPARE
97	SPARE
98	D132 00
99	SPARE
100	SPARE
101	SPARE
102	D243 00
103	D243 00
104	SPARE
105	D244 00
106	D244 00
107	D244 00
108	D244 00
109	D225 00
110	D225 00
111	D225 00
112	D225 00
113	D225 00
114	D225 00
115	SPARE
116	D225 00
117	D244 00
118	D244 00
119	D225 00
120	D225 00
121	D152 00
122	SPARE
123	D103 00
124	D242 00
125	SPARE
126	SPARE

A1-F18AC-WDM-000

Change 4

R174 00

REF DESIGNATION PIN DWG.

85P-F001A	CONT
127	SPARE
128	SPARE
85P-F001B	L214 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	D242 00
9	D242 00
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	D252 00
15	D252 00
16	D249 00
17	D249 00
18	SPARE
19	SPARE
20	D242 00
21	D242 00
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	SPARE
40	SPARE
41	D242 00
42	D249 00
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE

REF DESIGNATION PIN DWG.

85P-F001B	CONT
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
85P-F007	L211 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	D265 00
16	D243 00
17	D243 00
18	D243 00
19	D243 00
20	D243 00
21	D243 00
22	D243 00
23	D243 00
24	D243 00
25	D243 00
26	D243 00
27	D243 00
28	D265 00
29	D243 00
30	D243 00
31	D243 00
32	D243 00
33	D243 00

REF DESIGNATION PIN DWG.

85P-F007	CONT
34	D243 00
35	D243 00
36	D243 00
37	D243 00
85P-G003A	L309 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	D225 00
8	D225 00
9	SPARE
10	SPARE
11	SPARE
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	D244 00
20	SPARE
21	D244 00
22	D244 00
23	D244 00
24	D242 00
25	D244 00
26	D244 00
27	D244 00
28	D244 00
29	D242 00
30	D242 00
31	D242 00
32	D242 00
33	D242 00
34	D244 00
35	D244 00
36	D242 00
37	D242 00
85P-K040A	L501 00
1	D469 00
2	D468 00
3	D468 00
4	SPARE
5	SPARE
6	D468 00
7	SPARE
8	SPARE
9	D469 00
10	D469 00
11	D469 00
12	D468 00

A1-F18AC-WDM-000

Change 4

R174 01

REF DESIGNATION
PIN DWG.

85P-K040B	L501 00
1	SPARE
2	SPARE
3	SPARE
4	SPARE
5	SPARE
6	SPARE
7	SPARE
8	SPARE
9	SPARE
10	D077 00

REF DESIGNATION
PIN DWG.

85P-N002A	L613 00
1	SPARE
2	SPARE
3	SPARE
4	D265 00
5	D265 00
4	D265 00
5	D265 00
6	D265 00
7	D265 00
8	D121 00

REF DESIGNATION
PIN DWG.

85P-N002A	CONT
9	D121 00
8	D121 00
9	D121 00
10	D121 00
11	D121 00
12	D123 00
13	D254 00



A1-F18AC-WDM-000

Change 2 - 15 October 1993

R175 00

REF DESIGNATION PIN DWG.

85P-N002A	CONT
14	D117 00
15	D117 00
16	D001 00
17	D021 00
18	D021 00
19	D021 00
20	D425 00
21	D265 00
22	D045 00
23	D045 00
24	D020 00
25	D021 00
26	D045 00
27	D045 00
28	D045 00
29	D045 00
30	D045 00
31	D045 00
32	D045 00
33	D268 00
34	D045 00
35	D045 00
36	D268 00
37	D039 00
38	D118 00
39	D118 00
40	D003 00
41	SPARE
42	SPARE
43	D029 00
44	D028 00
45	D003 00
46	D466 00
47	D003 00
48	D003 00
49	D268 00
50	D268 00
51	D425 00
52	SPARE
53	SPA
54	SPARE
55	D265 00
56	SPARE
57	D068 00
58	D268 00
59	D180 00
60	D162 00
61	D162 00
62	D342 00
63	SPARE
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	D430 00
69	D430 00
70	SPARE
71	D245 00
72	D245 00
73	D268 00
74	SPARE

REF DESIGNATION PIN DWG.

85P-N002A	CONT
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	D170 00
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	D109 00
100	D110 00
101	D110 00
102	D109 00
103	D109 00
104	SPARE
105	SPARE
106	D100 00
107	D100 00
108	D112 00
109	D112 00
110	SPARE
111	SPARE
112	D170 00
113	D170 00
114	D112 00
115	D112 00
116	SPARE
117	SPARE
118	D342 00
119	D121 00
120	D023 00
121	D265 00
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	D225 00
127	D225 00
128	SPARE
85P-N002B	L613 00
1	SPARE
2	SPARE
3	SPARE
4	D113 00

REF DESIGNATION PIN DWG.

85P-N002B	CONT
5	D113 00
6	D113 00
7	D113 00
8	D179 00
9	D179 00
10	D179 00
11	D179 00
12	SPARE
13	SPARE
14	SPARE
15	SPARE
16	SPARE
17	SPARE
18	SPARE
19	SPARE
20	SPARE
21	SPARE
22	SPARE
23	SPARE
24	SPARE
25	SPARE
26	SPARE
27	SPARE
28	SPARE
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	SPARE
34	SPARE
35	SPARE
36	SPARE
37	SPARE
38	SPARE
39	D242 00
40	D179 00
41	D113 00
42	SPARE
43	SPARE
44	SPARE
45	SPARE
46	SPARE
47	SPARE
48	SPARE
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	SPARE
54	SPARE
55	SPARE
56	SPARE
57	SPARE
58	SPARE
59	SPARE
60	SPARE
61	SPARE
62	SPARE
63	SPARE

A1-F18AC-WDM-000

15 April 1992

R176 00

REF DESIGNATION PIN DWG.

85P-N002B	CONT
64	SPARE
65	SPARE
66	SPARE
67	SPARE
68	SPARE
69	SPARE
70	SPARE
71	SPARE
72	SPARE
73	SPARE
74	SPARE
75	SPARE
76	SPARE
77	D242 00
78	D242 00
79	SPARE
80	SPARE
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	D242 00
100	D242 00

85P-N002C	L613 00
1	D111 00
2	D113 00
3	D114 00
4	D106 00
5	D105 00
6	D268 00
7	D268 00
8	D004 00
9	D004 00
10	D394 00
11	D268 00
12	D268 00
13	D105 00
14	D011 00
15	D093 00
16	D268 00
17	D268 00
18	D094 00
19	D094 00
20	D268 00

REF DESIGNATION PIN DWG.

85P-N002C	CONT
21	D268 00
22	D268 00
23	D268 00
24	D268 00
25	D268 00
26	D118 00
27	D116 00
28	D116 00
29	D114 00
30	D106 00
31	D268 00
32	D094 00
33	D039 00
34	D268 00
35	D016 00
36	D016 00
37	D006 00
38	D031 00
39	SPARE
40	SPARE
41	SPARE
42	D347 00
43	D029 00
44	D358 00
45	D045 00
46	D152 00
47	D152 00
48	D152 00
49	SPARE
50	SPARE
51	SPARE
52	SPARE
53	D152 00
54	D253 00
55	D006 00
56	D261 00
57	D261 00
58	D014 00
59	D173 00
60	SPARE
61	SPARE
62	SPARE
63	D123 00
64	D360 00
65	D431 00
66	D358 00
67	D358 00
68	D358 00
69	D345 00
70	D345 00
71	D358 00
72	D358 00
73	D358 00
74	D358 00
75	SPARE
76	SPARE
77	SPARE
78	SPARE
79	SPARE
80	SPARE

REF DESIGNATION PIN DWG.

85P-N002C	CONT
81	SPARE
82	SPARE
83	SPARE
84	SPARE
85	SPARE
86	SPARE
87	SPARE
88	SPARE
89	SPARE
90	SPARE
91	SPARE
92	SPARE
93	SPARE
94	SPARE
95	SPARE
96	SPARE
97	SPARE
98	SPARE
99	SPARE
100	SPARE
85P-N002D	L613 00
1	D101 00
2	D101 00
3	D112 00
4	D112 00
5	D100 00
6	D100 00
7	D264 00
8	D264 00
9	D424 00
10	D424 00
11	D264 00
12	D264 00
13	D267 00
14	D267 00
15	D113 00
16	D113 00
17	D267 00
18	D267 00
19	D113 00
20	D113 00
21	D160 00
22	D160 00
23	D160 00
24	D160 00
25	D424 00
26	D424 00
27	D264 00
28	D264 00
29	SPARE
30	SPARE
31	SPARE
32	SPARE
33	D101 00
34	D101 00
35	D112 00
36	D112 00
37	SPARE

A1-F18AC-WDM-000

Change 4

R177 00/(R178 00 blank)

REF DESIGNATION PIN DWG.

85P-N002D	CONT
38	SPARE
39	SPARE
40	SPARE
41	D267 00
42	D267 00
43	D170 00
44	D170 00
45	D170 00
46	SPARE
47	SPARE
48	D113 00
49	D113 00
50	D113 00
51	D265 00
52	D412 00
53	D265 00
54	D170 00
55	D412 00
56	D412 00
57	D412 00
58	D412 00
59	D247 00
60	D247 00
61	D247 00
62	D247 00
63	D225 00
64	SPARE
65	SPARE
66	SPARE
67	D258 00
68	D258 00
69	D258 00
70	D258 00
71	D258 00
72	D258 00

REF DESIGNATION PIN DWG.

85P-N002D	CONT
73	D258 00
74	D258 00
75	SPARE
76	SPARE
77	SPARE
78	D258 00
79	D258 00
80	D258 00
81	D258 00
82	D265 00
83	D265 00
84	D265 00
85	D265 00
86	SPARE
87	SPARE
88	SPARE
89	D265 00
90	D265 00
91	D265 00
92	D265 00
93	SPARE
94	D067 00
95	D067 00
96	SPARE
97	SPARE
98	D067 00
99	D067 00
100	SPARE
101	SPARE
102	SPARE
103	D225 00
104	D225 00
105	D067 00
106	D067 00
107	SPARE

REF DESIGNATION PIN DWG.

85P-N002D	CONT
108	SPARE
109	D067 00
110	D067 00
111	SPARE
112	SPARE
113	D225 00
114	D225 00
115	D225 00
116	D225 00
117	D265 00
118	SPARE
119	SPARE
120	SPARE
121	SPARE
122	SPARE
123	SPARE
124	SPARE
125	SPARE
126	SPARE
127	SPARE
128	SPARE
91CRG008	L309 00
91E-R002	L609 00
91J-G009	L309 00
91P-R002	L609 00
91S-G007	L309 00

THIS PAGE INTENTIONALLY LEFT BLANK.

INTRODUCTION**ORGANIZATIONAL MAINTENANCE****WIRING DIAGRAMS****NAVY MODEL F/A-18A 161353 THRU 163175**

1. PURPOSE.

2. This manual is one of a series that provides information and maintenance instructions for the Navy model F/A-18A aircraft serial numbers 161353 THRU 163175. This manual contains wiring diagrams of all aircraft systems and subsystems and shows the location of all electrical components with reference designators. Figure 1 shows the relationship between the manuals of the organizational maintenance set.

3. REQUISITIONING AND DISTRIBUTION OF NAVAIR TECHNICAL PUBLICATIONS.

4. Procedures to be used by naval activities and other Department of Defense activities requiring NAVAIR technical manuals are defined in NAVAIR 00-25-100 and NAVAIRINST 5605.5. To automatically receive future changes and revisions to NAVAIR technical manuals, an activity must be established on the Automatic Distribution Requirements List (ADRL) maintained by the Naval Air Technical Services Facility (NAVAIRTECHSERVFAC). To become established on the ADRL, notify your activity central technical publications librarian. If your activity does not have a library, you may establish your automatic distribution requirements by contacting the Commanding Officer, NAVAIRTECHSERVFAC, Attn: Code 321,700 Robbins Avenue, Philadelphia, PA 19111-5097. Annual reconfirmation of these requirements is necessary to remain on automatic distribution. Please use your NAVAIR-TECHSERVFAC assigned account number whenever referring to automatic distribution requirements.

If additional or replacement copies of this manual are required with no attendant changes in the ADRL, they may be ordered by submitting requisitions directly to the Commanding Officer, Naval Aviation Supply Office, Naval Publications and Forms Directorate, 5801 Tabor Road, Philadelphia, PA 19120-5099.

5. MANUAL ISSUE DATE.

6. The date on the title page is the copy freeze date. No additions, deletions, or changes are made after the manual issue date except last minute safety of flight or required maintenance changes. Data collected after the manual issue date will be included in later changes or revisions of the manual.

7. ABBREVIATIONS AND SYMBOLS.

8. Each non-standard abbreviation, graphic symbol, code and acronym used in this manual is explained in the glossary. See Figure 2 for non-standard electrical symbols.

GLOSSARY

A - An upper case pin letter with a line under it denotes a lower case pin letter.

EXC - Exciter

REG - Regulation

REGLG - Regulating

WRA - Weapons Replaceable Assembly

9. EFFECTIVITY NOTATIONS.

10. Effectivity notations are required only when data presented in the body of the manual is not applicable to all aircraft affected by the publication. These differences may be the result of model configuration, engineering changes incorporated in production, or modifications incorporated by Technical Directives. Effectivity notations limit aircraft or equipment configuration by aircraft serial number and Technical Directive number when applicable.

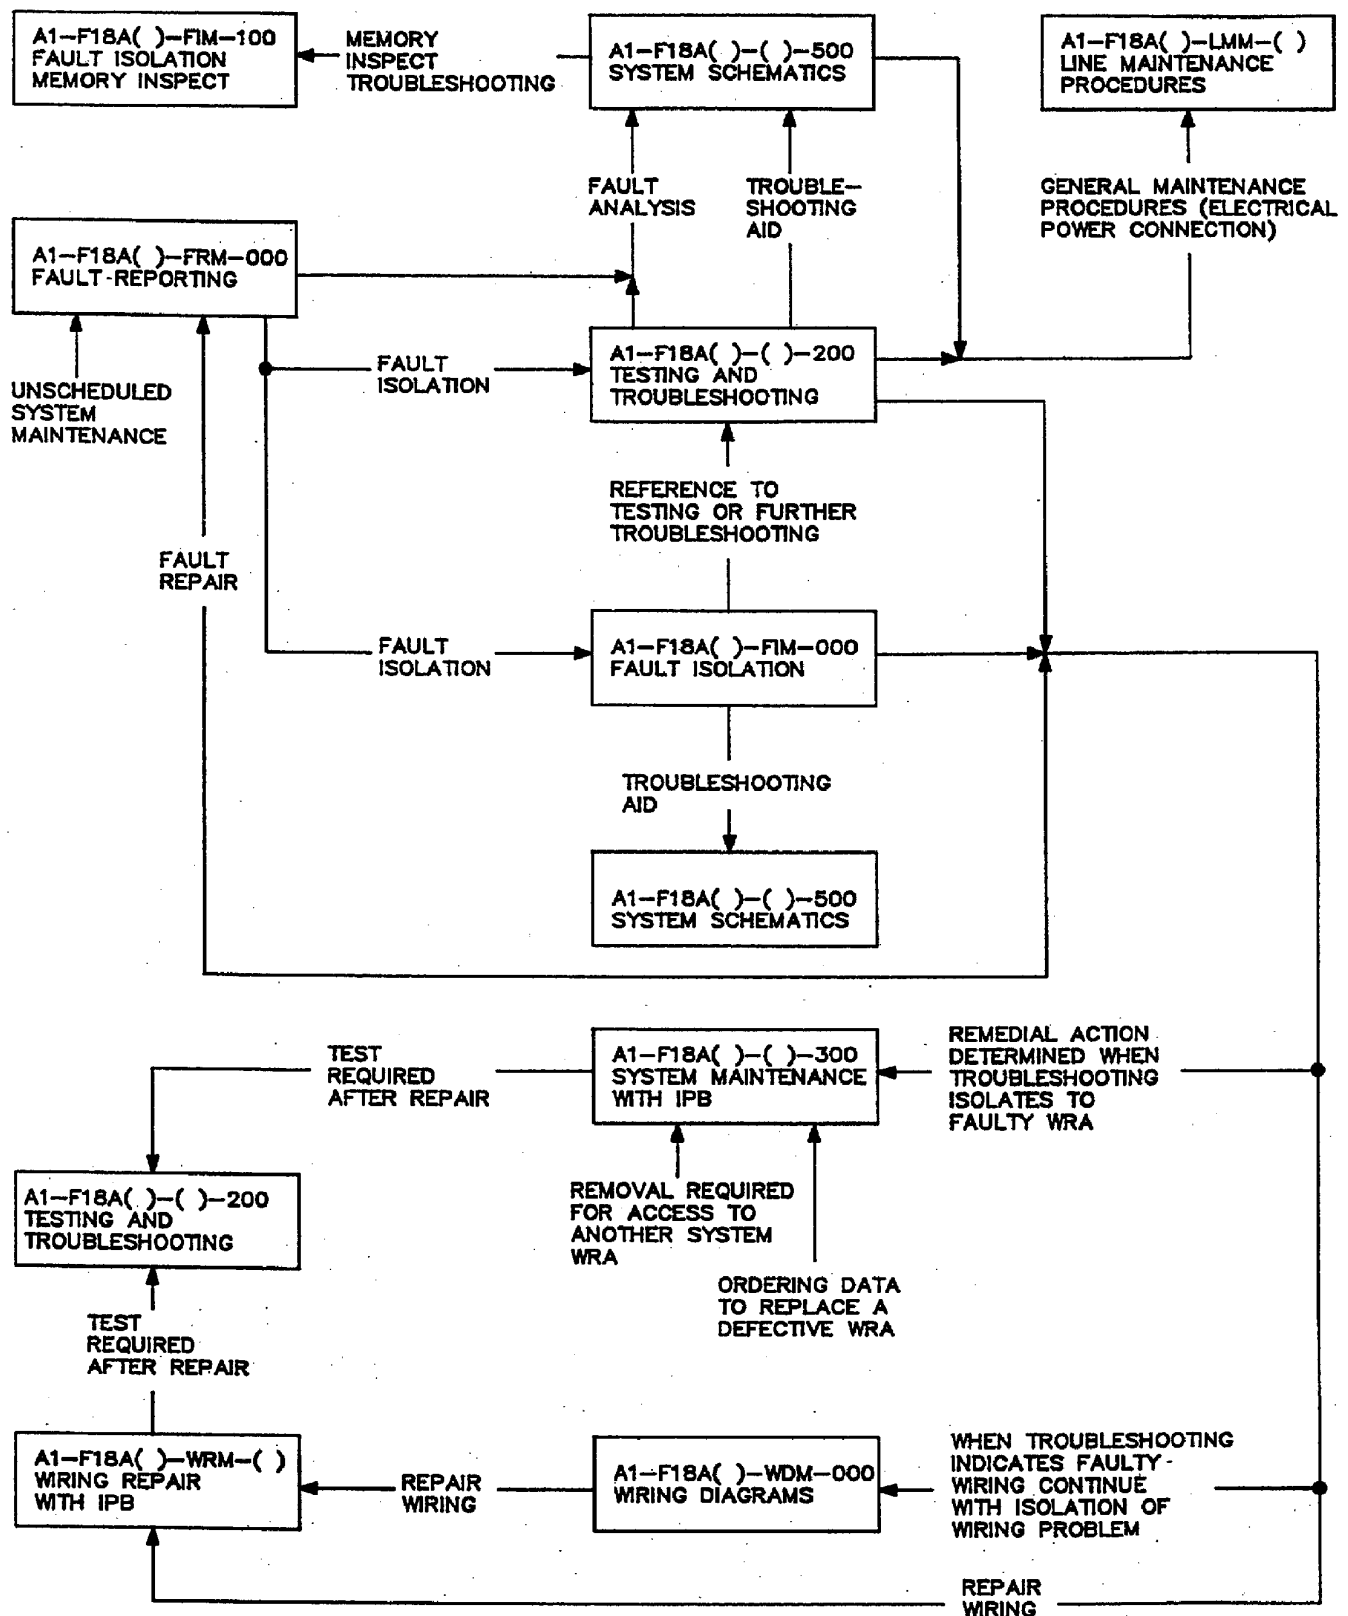


Figure 1. Organizational Maintenance Manual Relationship



CABLE
CONTINUATION




EXPLANATORY OR
APPLICABILITY
NOTATION




SPLICE AREA
IDENTIFICATION




PLUG HANGING OFF
OF UNIT, BUT PART
OF UNIT AND MATING
RECEPTACLE



LIGHTNING ARRESTER
GAS FILLED. GROUNDED
TO STRUCTURE



POSITION TRANSDUCER




CURRENT TRANSFORMER

COAXIAL CONNECTOR




SHIELDED COAX

COAXIAL PANEL CONNECTIONS




COAX
PLUG

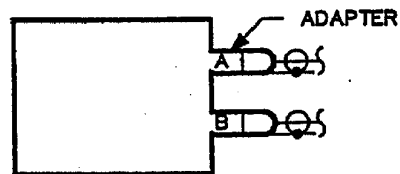

ADAPTER



TRIAx DISCONNECT

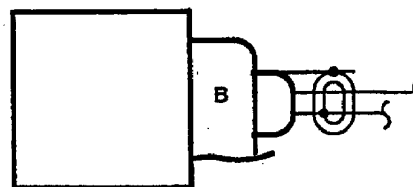

TRIAx PANEL CONNECTION

Figure 2. Non-Standard Electrical Symbols

11. When the effectivity of a complete drawing differs from the publication's, the effectivity is noted at the bottom of the page. When the effectivity of one or more sheets of a multi-sheet drawing differs from the publication's, the effectivity of each sheet is noted at the bottom of each page. When the effectivity of a particular item of information differs from that of the drawing, the difference is indicated by a numerical flag note explained under legend.

12. When a notation is made to a drawing, a legend is created for that specific drawing.

13. HOW TO USE MANUAL.

14. This manual must be used in conjunction with the troubleshooting diagrams contained in the systems maintenance manual. When a maintenance problem has been isolated to aircraft wiring, this manual is used to isolate the problem with the wiring.

15. To troubleshoot wiring proceed as follows:

a. Using the systems maintenance manuals, isolate the problem down to an electrical connector and pin on a WRA. Note the connector and the pin letter (number) of the malfunctioning circuit.

NOTE

Items other than connectors such as switches, terminal blocks, relays, etc., and their termination points, found outside of panels may also be noted.

b. Find the reference designator and pin letter (number or termination point) in the reference designation index section of the manual. The reference designators are in alphanumeric order. Note the drawing number listed for the termination point.

c. Find the drawing in the wiring diagrams section of the manual. Locate the reference designator and termination point having the problem. The complete wiring hook-up for that circuit from WRA to WRA will be shown on the drawing. See figure 3, How To Use Wiring Diagrams Manual.

**IF THE REF DES IS KNOWN,
TO FIND REF DES ON WIRING DIAGRAM**

**DO
THIS**

A1-F18AC-WDM-000

R001 00

INDEX	
WIRING DIAGRAMS	
Title	Page No.
Area Location Index	R000-00
Equipment Location Index	R001-00
Installation Index	INTHO 1
Reference Designation Index	R001-00
Splice Area List	
Wiring Diagrams	

1 See REFERENCE DESIGNATION INDEX List. Ref Des are listed in ALPHANUMERICAL order.

2 Locate REF DES in list

3 Locate PIN NUMBER or LETTER and note DRAWING NUMBER

4 Turn to WIRING DIAGRAMS

5 Locate desired DRAWING NUMBER

A1-F18AC-WDM-000

R062 00

REF DESIGNATION PIN	REF DESIGNATION PIN	REF DESIGNATION PIN
52P-C037C	52P-C037C	52P-C037C
118 D223 00	118 D223 00	118 D223 00
119 D223 00	119 D223 00	119 D223 00
120 D223 00	120 D223 00	120 D223 00
121 SPARE	121 SPARE	121 SPARE
122 SPARE	122 SPARE	122 SPARE
123 D142 00	123 D142 00	123 D142 00
124 D142 00	124 D142 00	124 D142 00
125 SPARE	125 SPARE	125 SPARE
126 SPARE	126 SPARE	126 SPARE
127 SPARE	127 SPARE	127 SPARE
128 SPARE	128 SPARE	128 SPARE
52P-C037A L100 00	52P-C037A L100 00	52P-C037A L100 00
A D151 00	A D151 00	A D151 00
B D151 00	B D151 00	B D151 00
C D151 00	C D151 00	C D151 00
D SPARE	D SPARE	D SPARE
52P-C037E L100 00	52P-C037E L100 00	52P-C037E L100 00
11 D142 00	11 D142 00	11 D142 00
12 D142 00	12 D142 00	12 D142 00
13 SPARE	13 SPARE	13 SPARE
14 SPARE	14 SPARE	14 SPARE
15 D142 00	15 D142 00	15 D142 00
16 SPARE	16 SPARE	16 SPARE
17 SPARE	17 SPARE	17 SPARE
18 D142 00	18 D142 00	18 D142 00
19 D142 00	19 D142 00	19 D142 00
20 D142 00	20 D142 00	20 D142 00

NOTE


To find the SPLICE AREAS, turn to the front of REF DES list. By using the same steps, the complete Hook-ups of the SPLICE AREAS may be found.

Diagram drawing will show REF DES PIN LETTER, and WIRE NUMBER of wire from one WRA to the next WRA

Note EFFECTIVITY of page if any

A1-F18AC-WDM-010

D142 00

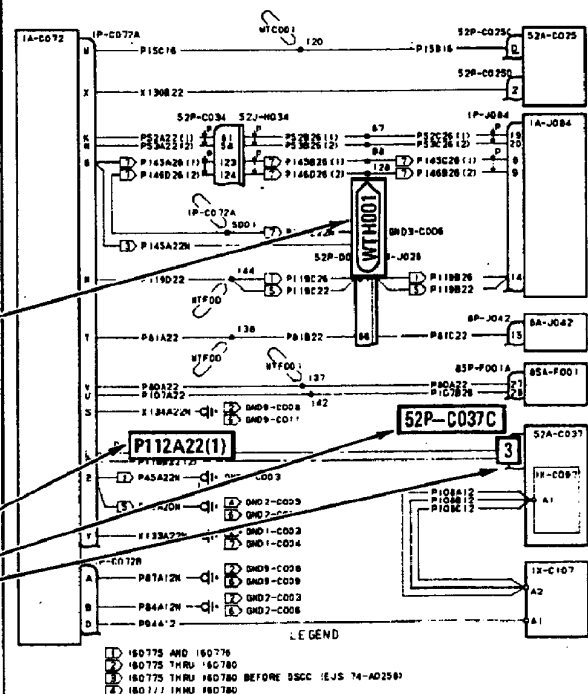

161353 AND UP

Figure 3. How to Use Wiring Diagrams Manual (Sheet 1)

IF THE REF DES IS KNOWN,
TO FIND THE LOCATION OF REF DES

DO
THIS

A1-F18AC-WDM-000

R001 00

INDEX

WIRING DIAGRAMS

Title Page No.
Area Location Index 1.000-00
Equipment Location Figures 1.001-00
Reference Designation Index
Splice Area List
Wiring Diagrams

1 See REFERENCE DESIGNATION INDEX
List. Ref Des are listed in
ALPHANUMERICAL order.

A1-F18AC-WDM-000

R062 00

2 Locate REF DES in List

3 Note LOCATION DRAWING
NUMBER of the Ref Des

4 Turn to EQUIPMENT LOCATION
and IDENTIFICATION DRAWINGS

5 Locate desired DRAWING NUMBER

REF DESIGNATION PIN	DWG	REF DESIGNATION PIN	DWG	REF DESIGNATION PIN	DWG
52P-C037C		L100 00			
118 0223 00	1	SPARE	20	0181 00	
118 0223 00	2	SPARE	21	0182 00	
120 0223 00	3	SPARE	22	0183 00	
121 SPARE	4	SPARE	23	0184 00	
122 SPARE	5	SPARE	24	0185 00	
123 0182 00	6	SPARE	25	0186 00	
124 0182 00	7	SPARE	26	0187 00	
125 SPARE	8	SPARE	27	0188 00	
126 SPARE	9	SPARE	28	0189 00	
127 SPARE	10	SPARE	29	0190 00	
128 SPARE	11	SPARE	30	0191 00	
129 SPARE	12	SPARE			
130 SPARE	13	SPARE			
131 SPARE	14	SPARE			
132 SPARE	15	SPARE			
133 SPARE	16	SPARE			
134 SPARE	17	SPARE			
135 SPARE	18	SPARE			
136 SPARE	19	SPARE			
137 SPARE	20	SPARE			
138 SPARE		SPARE			
139 SPARE		SPARE			
140 SPARE		SPARE			
141 SPARE		SPARE			
142 SPARE		SPARE			
143 SPARE		SPARE			
144 SPARE		SPARE			
145 SPARE		SPARE			
146 SPARE		SPARE			
147 SPARE		SPARE			
148 SPARE		SPARE			
149 SPARE		SPARE			
150 SPARE		SPARE			
151 SPARE		SPARE			
152 SPARE		SPARE			
153 SPARE		SPARE			
154 SPARE		SPARE			
155 SPARE		SPARE			
156 SPARE		SPARE			
157 SPARE		SPARE			
158 SPARE		SPARE			
159 SPARE		SPARE			
160 SPARE		SPARE			
161 SPARE		SPARE			
162 SPARE		SPARE			
163 SPARE		SPARE			
164 SPARE		SPARE			
165 SPARE		SPARE			
166 SPARE		SPARE			
167 SPARE		SPARE			
168 SPARE		SPARE			
169 SPARE		SPARE			
170 SPARE		SPARE			
171 SPARE		SPARE			
172 SPARE		SPARE			
173 SPARE		SPARE			
174 SPARE		SPARE			
175 SPARE		SPARE			
176 SPARE		SPARE			
177 SPARE		SPARE			
178 SPARE		SPARE			
179 SPARE		SPARE			
180 SPARE		SPARE			
181 SPARE		SPARE			
182 SPARE		SPARE			
183 SPARE		SPARE			
184 SPARE		SPARE			
185 SPARE		SPARE			
186 SPARE		SPARE			
187 SPARE		SPARE			
188 SPARE		SPARE			
189 SPARE		SPARE			
190 SPARE		SPARE			
191 SPARE		SPARE			
192 SPARE		SPARE			
193 SPARE		SPARE			
194 SPARE		SPARE			
195 SPARE		SPARE			
196 SPARE		SPARE			
197 SPARE		SPARE			
198 SPARE		SPARE			
199 SPARE		SPARE			
200 SPARE		SPARE			

A1-F18AC-WDM-000

L100 00

8 ACCESS of the Ref Des will
be called out in the Locator View

NOTE

CABLE ASSEMBLY ROUTING may be
traced from one view to another
by use of the continuation callouts
(Sub WORK PKG NUMBERS have been omitted)

7 Location drawing will show desired
LOCATION of Ref Des from the view-
point of the user

6 Note EFFECTIVITY of page if any


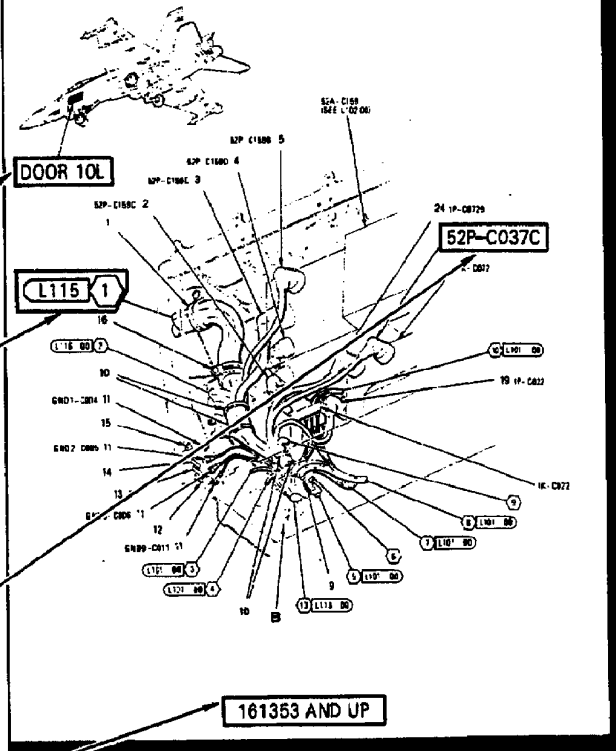


Figure 3. How to Use Wiring Diagrams Manual (Sheet 2)

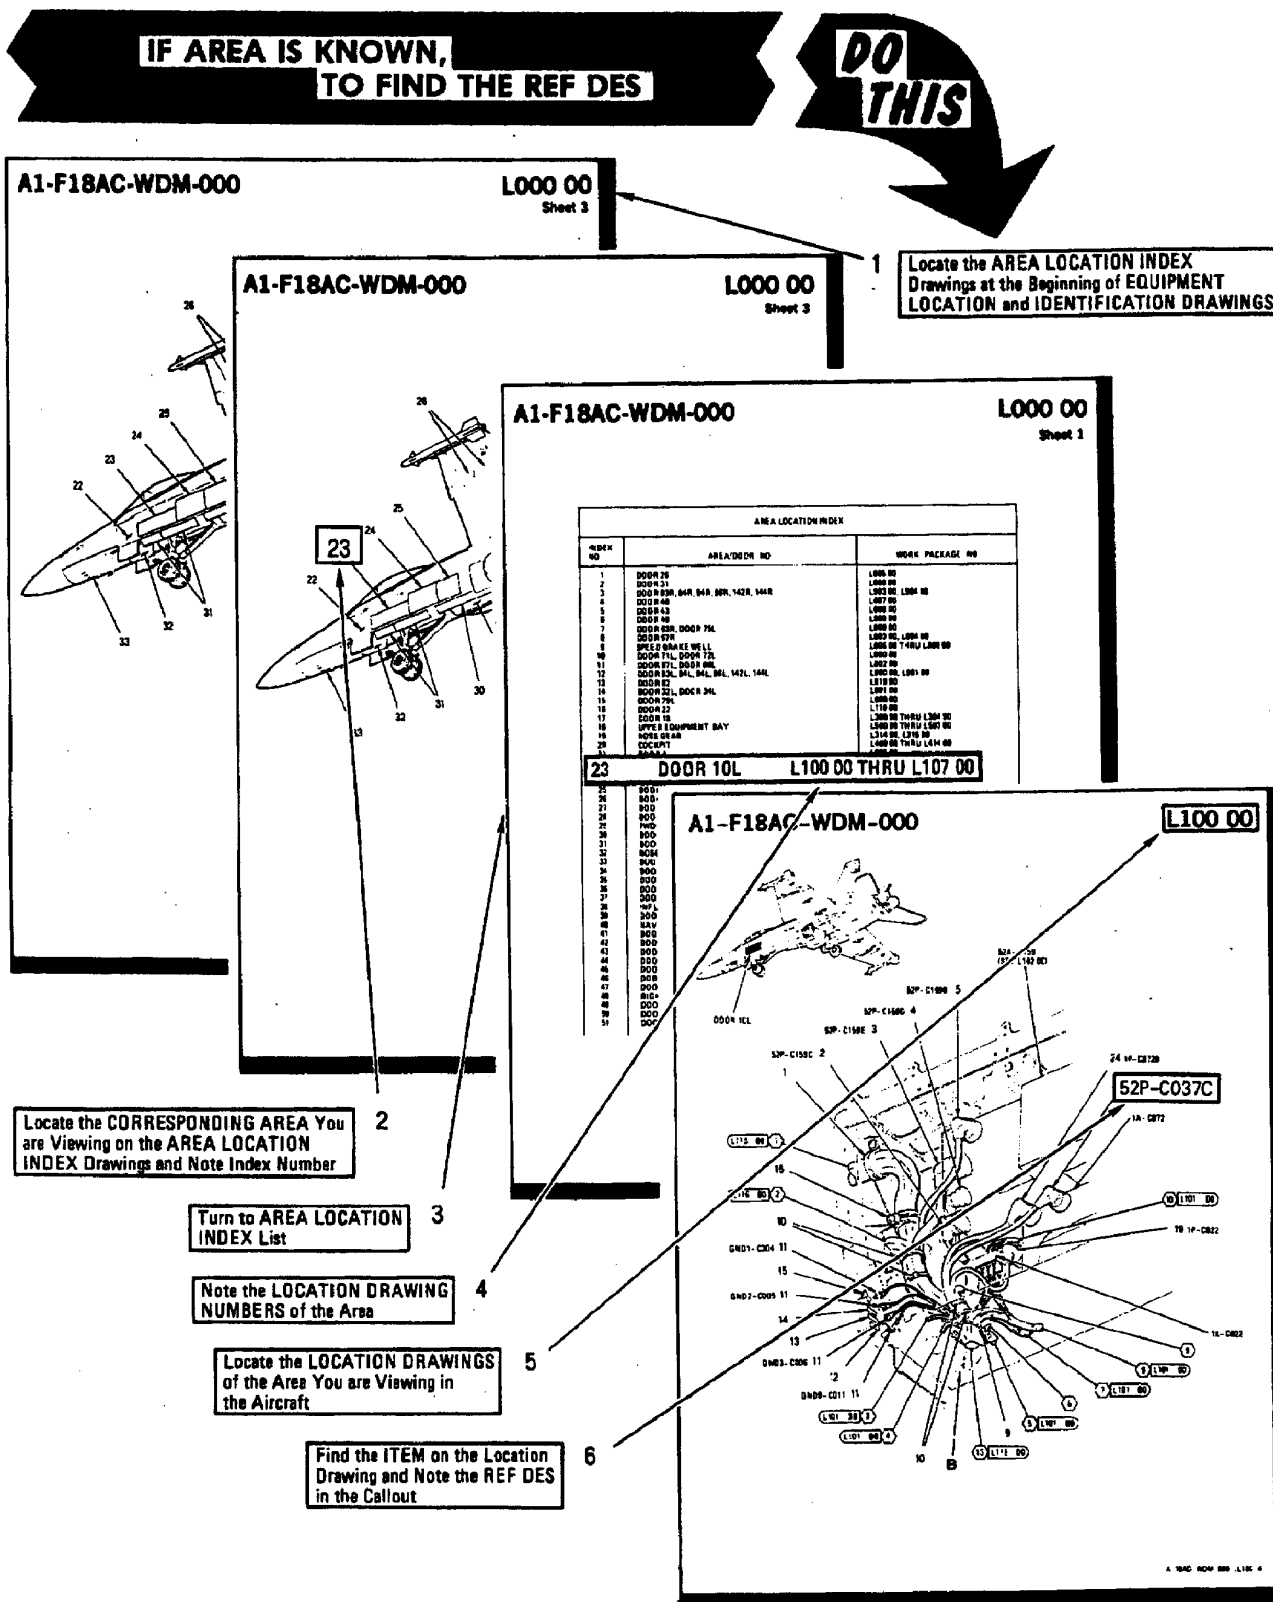

16. REFERENCE DESIGNATION INDEX.

17. The reference designation index is an alphanumeric list containing the reference designator of each WRA switch, ground, terminal block, splice area and connector in the aircraft.

18. The index lists the equipment location and identification drawing that contains the item and the wiring diagram(s) showing all its termination points.

19. The pages are numbered consecutively R001 00, R002 00, R003 00, etc.

20. EQUIPMENT LOCATION FIGURES WITH ILLUSTRATED PARTS BREAKDOWN.

21. The equipment location and identification drawings section of this manual contains the aircraft location of all items in the reference designation index. Illustrated Parts Breakdown data is provided with the equipment location figures for all electrical connectors, ground points, splice points, clamps and miscellaneous electrical installation items. Drawings are indexed in increasing number order and by aircraft section beginning at the nose and proceeding aft through the fuselage and

empennage, then from the wing roots to the tips. The work package and page number are the one in the same and are numbered L001 00, L002 00, L003 00, etc. The area shown on each figure is oriented as seen by the technician when working on the aircraft. In order to view the items as shown and/or gain access to the wire bundles, connectors, grounds, splices and other electrical items, some WRA's may have to be removed. Removal and installation procedures for the WRA's can be found by using the reference designator of the WRA and the Organizational Maintenance Parts List Index Manual A1-F18AC-IPB-450.


22. The tracing of complete cable assembly (wire bundle) routing from component to component throughout the aircraft is possible by the use of a series of hexagons and referenced drawing numbers. To trace the routing of a specific bundle, match the hex numbers with referenced drawing numbers. See figure 3, How To Use Wiring Diagrams Manual.

NOTE

Yellow paint stripes on wire bundles indicate critical wire bundle clamping areas. Clamps must be centered in yellow stripe area. These critical clamping areas are indicated in the field of the drawing.

(EXAMPLES)

Indicates point of cable routing break and is continued on the same drawing.



Indicates point of cable routing break and is continued on another drawing.

23. ILLUSTRATED PARTS BREAKDOWN.

24. Each equipment location figure in this manual has a parts list and illustration for the requisition, storage, authority for use and identification of parts.

25. **PART NUMBER COLUMN.** Footnote symbols in the part number column are defined following the last

part listed in each parts list (also see converted part numbers, this WP).

26. **COMMON NAMES.** The official nomenclature in the description column may not be the name commonly used for an item. If different from the official nomenclature, the common name is shown in parentheses in the description column immediately following the official nomenclature.

27. COMMERCIAL AND GOVERNMENT ENTITY CODES. Manufacturer's code or manufacturer's name and address are shown in the description column in parentheses after the nomenclature for the item. The codes are per the Commercial and Government Entity (CAGE) Handbook H4/H8 Series. No code or name indicates the item is a government standard part.

28. ATTACHING PARTS. Attaching parts are identified by (AP) after the nomenclature of the item in the description column. Attaching parts are listed immediately following the part they attach.

29. CONVERTED PART NUMBER. Some part numbers appear in the Part Number column which are different than the manufacturers part number. These are converted part numbers. The unconverted manufacturers part number is shown in the Description column following the manufacturers code. Always use the part number in the Part Number column when ordering parts. If an item is not available under the listing in the Part Number column, it may be ordered using the unconverted part number found in the Description column or by using the number found on the part. Examples of special characters as they may appear in the Part Number and Description columns are shown below:

Part Number Column	Description Column
PORM	± (Plus or Minus)
DEG	° (Degree)
E	e (Lower case letter)
2	II (Roman Numeral)
0.001	.001 (Decimal)

30. SUPERSEDED PARTS. Superseded part numbers have been removed from the Part Number column and placed in the Description column of the superseding part (for example - supersedes 74A582090- 1003). This indicates that the superseded part is usable if available through salvage, but should not be requisitioned or made.

31. REDESIGNED PARTS. When the design of a part is changed to the extent that interchangeability is affected, the new part number will state in the description column, Replaces 74AXXXXX-XXXX. If the old

part has continued application it will remain in the part number column following the new part. Usable on codes will be used to show usability. In addition the explanatory notes ("Use until exhausted") for procurable parts and (Replaced by XXXXX) for nonprocurable parts will be in the description column of the old part.

32. NEXT HIGHER ASSEMBLY. Next higher assembly (NHA) data is not shown using indention. Next higher procurable assembly (NHPA) data is shown for part numbers that have a procurable NHA. The NHPA and its assigned Source, Maintenance and Recoverability (SM&R) code are in parentheses as the last entry in the Description column. Requisition the NHPA when the part listed in the Part Number column is not available from supply.

33. UNITS PER ASSEMBLY COLUMN (UPA). This column lists the total number of each part required per assembly or subassembly and are not necessarily the total number used in the end item of equipment. The letters AR (As Required) are used for items such as shims when the requirement may vary.

34. USABLE-ON CODES. Applicable usable-on codes are identified on the final sheet of each parts list. No entry in the Use On column indicates parts are applicable to all configurations supported by this parts list.

35. ALTERNATE OR EQUIVALENT PARTS. An asterisk (*), in the Use On column identifies alternate parts or equivalent parts that are interchangeable. When a letter code is followed by an asterisk in the Use On column, only the parts with the same letter code are interchangeable. An alternate part may be used when preferred part is not available. The asterisk is omitted for the preferred part(s). Equivalent parts are fully interchangeable. No equivalent part is preferred over another. All equivalent parts are identified by asterisks.

36. SOURCE, MAINTENANCE AND RECOVERABILITY (SM&R) CODE COLUMN. The codes used in this column are assigned per NAVAIRINST 4423.3 SERIES and NAVSUPINST 4423.14 SERIES which contain definitions. A dash (-) is shown in the SM&R code column when no code has been assigned. The

Aviation Supply Office P2300 series publication is to be used for the most current SM&R code assignment information if doubt exists as to the validity of any SM&R code listed in an IPB. Refer to figure 4 for SM&R code explanations.

37. **PARTS LIST INDEX MANUAL A1-F18AC-IPB-450.** This manual has a numerical index of part numbers and a reference designation index for use with aircraft organizational maintenance manuals. When reference designations or part numbers are known, the index locates specific maintenance instructions and parts data.


38. GROUND POINTS. In the location drawing figures of this manual, the index no. identifying the ground point reference designator is used in conjunction with the Group Assembly Parts List to identify the attaching parts needed for the electrical connection of the ground wire. For removal and installation of the MIL-T-83454 Terminal Ground Stud, refer to the A1-F18AC-SRM-200 series manual.

39. WIRING DIAGRAMS.

40. The wiring diagrams section of this manual provides complete aircraft wiring of all connections, splices, shielding, etc., between components. Internal wiring of components will be found in associated systems maintenance manuals. Each drawing contains the complete hook-up for the circuit and termination points. See figure 3, How To Use Wiring Diagrams Manual. All diagram components - switches, relays and contactors are shown in their position with the aircraft on the ground, landing gear down and locked, weight on the wheels, speed brake closed, arresting hook and launch bar up and all electrical power off. Any variance in these conditions will be stipulated on the affected diagram.

41. When necessary to reference a wire from one drawing to another to complete a circuit, wires are referenced by a solid line and drawing number or by mating connector and drawing number.

(EXAMPLES)

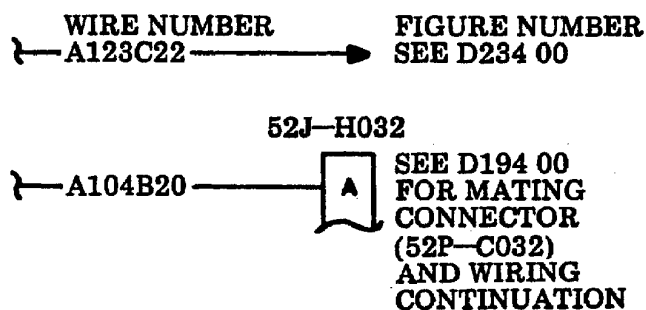

42. The diagrams drawing numbers and page numbers are one in the same and are numbered consecutively D001 00, D002 00, D003 00, etc.

43. SPLICE AREA LIST.

44. The splice area wire list section of this manual contains tabulated lists of all wires spliced in the aircraft splice areas. The lists provide the wire number,

gage, cable assembly, pin and effectivity of each wire in a splice. The pin number is for reference only, indicating those wires splicing together and does not appear on the aircraft.

45. The splice list is in alphanumerical order. The drawing numbers and page numbers are one in the same and are numbered consecutively S001 00, S002 00, S003 00, etc.

SOURCE (D012)				MAINTENANCE			
1st POSITION		2nd POSITION		3rd POSITION		4th POSITION	
P	PROCURE	A	REPLENISH	O	REPLACE OR USE AT ORGANIZATIONAL LEVEL	Z	NO REPAIR (CONSUMABLE)
		B	INSURANCE				
		C	CURE-DATED				
		D	INITIAL	F H G	REPLACE OR USE AT IMA LEVEL	B	RECONDITION BY ADJUSTMENT, CALIBRATION, LUBRICATION, PLATING, ETC.
		E	END ITEM GSE/STOCKED				
		F	GSE/NOT STOCKED				
K	REPAIR KIT COMPONENT	F	ORGANIZATIONAL /IMA	L	REPLACE OR USE AT SPECIALIZED IMA	O	REPAIR AT ORGANIZATIONAL LEVEL
		D	DEPOT				
		B	BOTH KITS				
M A	MANUFACTURE ASSEMBLE	O	ORGANIZATIONAL	D	REPLACE OR USE AT DEPOT	F H G	REPAIR AT IMA LEVEL
		F	AFLOAT				
		H	ASHORE				
		G	BOTH				
		D	DEPOT				
X	MISCELLANEOUS	A	REQUEST NHA	Z	NOT REQUIRED THIS APPLICATION	D	REPAIR AT DEPOT OR COMMERCIAL
		B	OBTAIN FROM SALVAGE OR ONE TIME BUY				
		C	DIAGRAM-SCHEMATICS, INSTALLATION DRAWINGS				


RECOVERABILITY (D013C)		SERVICE OPTION (D012A)	
5th POSITION		6th POSITION	
O	REPAIRABLE ITEM. CONDEMN AT ORGANIZATIONAL LEVEL.	1 2 3	APPLIES TO ENGINES ONLY. IDENTIFIES THE HIGHEST (1) TO LOWEST (3) LEVEL OF MAINTENANCE WHICH CAN REPLACE (3rd POSITION OF SMR CODE) THE ITEM.
		4 5 7	SAME AS ABOVE. IN ADDITION, ITEM IS FLR WITH A UNIT COST OF OVER 5000. THESE CODES ARE NO LONGER ASSIGNED TO NEW, NON-FAMILY RELATED ITEMS.
		6	NORMALLY PROCURED AND STOCK NUMBERED BUT ORGANIC CAPABILITY EXISTS FOR EMERGENCY STOP GAP REQUIREMENTS.
F G H	REPAIRABLE ITEM. CONDEMN AT INTERMEDIATE LEVEL INDICATED.	E	END-TO-END TEST REQUIRED BY IMA PRIOR TO BCM ACTION.
		J	FLR OR CONSUMABLE ITEM. CHANGE 5th POSITION OF SMR CODE TO "D" UNDER PICA/SICA. NAVAIR APPROVAL REQUIRED.
L	REPAIRABLE ITEM. CONDEMN AT SPECIALIZED INTERMEDIATE LEVEL.	8	SAME AS "J" ABOVE EXCEPT USED FOR ENGINES ONLY. APPLIES TO 2nd LEVEL OF IMA.
		9	SAME AS "J" ABOVE EXCEPT USED FOR ENGINES ONLY. APPLIES TO 3rd LEVEL OF IMA.
D	REPAIRABLE ITEM. CONDEMN AT DEPOT OR CONTACTOR FACILITY.	M	ITEM IS A FLR WITH A UNIT COST OF OVER 5000. THE CODE IS NO LONGER ASSIGNED TO NEW NON-FAMILY RELATED ITEMS.
		N	ASSIGNED TO XB SOURCE CODE AND INDICATES ITEM IS PROCURED LOCALLY. NOT STOCKED IN THE SUPPLY SYSTEM.
A	SPECIAL HANDLING REQUIRED. CONTACT ITEM MANAGER FOR DISPOSAL INSTRUCTIONS.		
Z	NON-REPAIRABLE ITEM. CONDEMN AT LEVEL INDICATED IN 3rd POSITION.	T	ASSIGNED TO TRAINING DEVICES WITH SOURCE CODE OF "PD." INDICATES ITEM IS NOT A PROCURABLE SPARE. WSN IS ASSIGNED ONLY TO PERMIT VISIBILITY OF REPAIR PART RELATIONSHIP.

Figure 4. SM&R Code Explanations

(INTRO-1)07-CAT1

46. WIRE IDENTIFICATION.

47. Each wire in the aircraft is coded with a number to identify the wire. Explanation of wire coding is as follows:

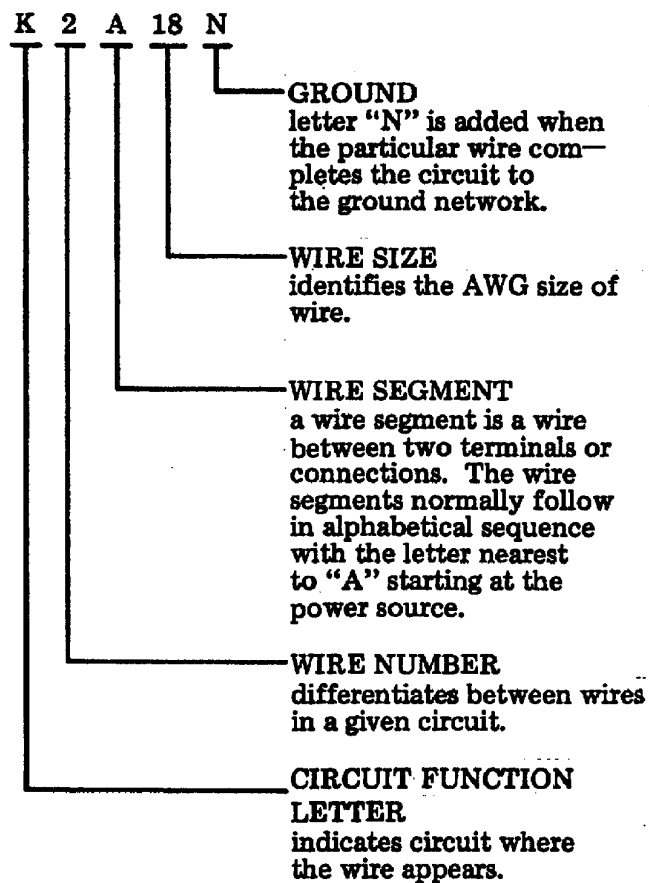

48. The circuit function letters and the corresponding circuits are as follows:

**Circuit
Function
Letter**

Circuits

A	ARMAMENT
B	PHOTOGRAPHIC
C	CONTROL SURFACE
D	INSTRUMENT (other than flight or engine instruments)
E	ENGINE INSTRUMENT
F	FLIGHT INSTRUMENT
G	LANDING GEAR, WING, FOLDING
H	HEATING, VENTILATING, AND DE-ICING
I	In order to avoid confusion with the numeral one, the letter “q” shall not be used for circuit or cable identification.
J	IGNITION
K	ENGINE CONTROL
L	LIGHTING
M	MISCELLANEOUS ELECTRIC
N	UNASSIGNED
O	In order to avoid confusion with the numeral zero, the letter “O” shall not be used for circuit or cable identification.
P	DC POWER: Wiring in the DC power or power-control system shall be identified by the circuit function letter “P”.
Q	FUEL AND OIL
R	RADIO (navigation and communication)
S	RADAR
T	SPECIAL ELECTRONIC
U	MISCELLANEOUS ELECTRONIC: Electronic wiring for which no “R”, “S”, or “T” designation has been assigned by the procuring activity shall have the circuit function letter “U” assigned. Examples of wiring for which the circuit function letter “U” will be assigned are common leads to electronic equipments and systems interconnection wiring such as antenna or power circuits common to more than one equipment or system.
V	DC POWER and dc control cables for AC systems, shall be identified by the circuit function letter “V”.
W	WARNING AND EMERGENCY (in addition to those listed under other circuit functions)
X	AC POWER: Wiring in the AC power system shall be identified by the circuit function letter “X”.
Y	ARMAMENT SPECIAL SYSTEMS
Z	UNASSIGNED

49. For an explanation of number in parenthesis following aircraft wire number see Circumferential Band Identification Marking in A1-F18AC-WRM-000.

(EXAMPLE)



50. TECHNICAL PUBLICATIONS DEFICIENCY REPORT (TPDR).

51. The TPDR (OPNAV FORM 4790/66) is the form for reporting errors and suspected omissions in the technical manuals. Reporting procedures are in OPNAVINST 4790.2 SERIES.

52. TECHNICAL DIRECTIVES.

53. Technical directives are documents which direct the accomplishment and recording of a retrofit configuration or inspection to delivered aircraft, or aircraft components.

54. AIRFRAME CHANGE (AFC) AND AIRBORNE TACTICAL SOFTWARE CHANGE (ACS). Technical directives which change configuration of aircraft structure or equipment installation, i.e. AFC, will list aircraft bureau numbers in effectivity notes and show before and after the AFC. Technical directives which

change configuration of operational flight programs (OFP), i.e. ASC, will list the OFP CONFIG/IDENT NUMBER in effectivity notes and show the latest two authorized OFP programs.

55. AIRCRAFT COMPONENT CHANGES. Technical directives which change configuration of aircraft components, i.e. AAC, ACC, AVC, AYC, and PPC will list part numbers in the effectivities.

56. RECORD OF APPLICABLE TECHNICAL DIRECTIVES.

57. The technical directives affecting this manual are listed in the Record of Applicable Technical Directives. When a technical directive is rescinded, it is removed from the Record of Applicable Technical Directives, and the before condition is removed from the manual. All references to the after condition of the applicable technical directive are removed from the manual.

Record of Applicable Technical Directives

Type/ Number	Date	Title and ECP No.	Date Incorp.	Remarks
F18 AFC 08	31 May 86	F/A-18 changes to Power Lever Control Acuator Circuit (WUC 42400) (ECP MDA-F/A-18-00041)	1 Mar 86	-
F18 AFC 19	18 Oct 85	Addition of a Second Shoot Light Power Supply Connector (ECP MDA-F18 00052C1)	15 Sep 84	-
F18 AFC 20	15 Sep 86	Electronic Boresighting of Radar	15 Mar 85	-
F18 AFC 26	-	Air Turbine Starter Speed Control System (ECP MDA-F18-00068)	15 Jun 86	-
F18 AFC 27	-	Leading Edge Flap/Control Stick Changes (ECP 00044)	15 Jun 86	-

Record of Applicable Technical Directives (Continued)

Type/ Number	Date	Title and ECP No.	Date Incorp.	Remarks
F18 IAFC 031	10 Jan 84	Fuel System, Fuel Boost Pressure Switch, Removal of (ECP MDA-F18-00158)	1 Sep 83	-
F18 IAFC 037	16 Feb 84	Deletion of Landing Gear Handle Logic from AN/AWW-4 Electrical Fuzing System (ECP MDA-F18-00113)	15 Jun 86	-
F18 AFC 38	30 Aug 85	Spin Recovery Light-Circuit, Modification of (ECP MDA-F18-00126)	15 Sep 84	-
F18 AFC 39	-	No. 1 Fuel Tank Interconnect Valve Replacement and Fuel Sequencing Modification (ECP MDA-F18-0072C1)	15 Nov 86	-
F18 IAFC 040	10 Apr 84	Landing Gear System, MLG Sidebrace Actuator Interim P/N Restrictions (ECP MDA-F18-00142R2)	1 Jul 84	-
F18 AFC 41	-	Throttle System Sensitivity Improvement (ECP MDA-F18-00054)	15 Nov 86	-
F18 AFC 48	-	Incorporation of Automatic AC Bus Isolation (ECP-MDA-F18-00121R1)	15 Nov 86	-
F18 AFC 49	-	Addition of Sealed Lead Acid Battery (ECP MDA-F18-00074)	15 Nov 86	-
F18 AFC 50	16 Oct 84	ALR-67 Countermeasures System, Modification of (ECP 3R1C2)	1 Jul 84	-
F/A-18 AFC 52	-	Cockpit Avionics Cooling Fan Thermal Protector Change	15 Mar 88	-
F18 AFC 53	-	Elimination of Tanks 1 and 4 Sneak Circuit, Tank 4 Motive Flow Shutoff Valve, and Raised Inverted Baffle (ECP MDA-F/A-18-00055/C1)	15 Jun 86	-
F18 AFC 54	-	Incorporation of Video Recording Set	1 Feb 87	-
F/A-18 IAFC 056 AMEND 2	14 Oct 86	Fuel Systems Components Replacement and System Inspection: Cancellation of Change (Purpose: To Effect Cancellation of Refs A and B) (ECP MDA-F/A-18-00158R1 and ECP MDA-F/A-18-00160)	15 Mar 88	-
F18 AFC 57	-	Improved Aircraft Monitor and Control (AMAC), Installation of (ECP MDA-F/A-18-00087)	1 Feb 87	-

Record of Applicable Technical Directives (Continued)

Type/ Number	Date	Title and ECP No.	Date Incorp.	Remarks
F18 AFC 60	25 Mar 85	F/TF/A-18 Engine Derichment Circuit, Deactivation of (ECP RAMEC-NORIS-10-84)	1 Dec 85	RAMEC NORIS- 10-84
F18 AFC 64	24 Jul 85	Center Fuselage Cable Assembly, P/N 74A760213, Inspection/Modification of (Purpose: To inspect Connector 1P-R002 branch of Center Fuselage Cable Assembly, PIN 74A760213, in R/H Amad Bay for chafing, install grommets, and reclock connector 1P-R002) (ECP RAMEC-NORIS-11-84)	1 Dec 85	-
F/A-18 AFC 70	-	Motive Flow Fuel Boost Pump Pressure Switch Installation of (ECP MDA-F/A-18-00158R2 and ECP MDA-F/A-18-00160)	15 Mar 88	-
F/A-18 AFC 74	-	Installation of Aircraft Wiring Provisions for Additional Weapons Capability	15 Mar 88	-
F18 AFC 86	-	Flight Control System - Deletion of Longitudinal Control Stick Stop at 25 lbs. Aft Position	15 Nov 86	-
F/A-18 AFC 90	-	Automatic Battery Cutoff (ECP MDA-F/A-18-00165R1)	1 Mar 90	-
F/A-18 AFC 93	-	Right Hand Primary A.C. Power Wires, Relocation of	1 Mar 90	-
F/A-18 AFC 81	-	Secondary Power System, APU Surge Control Valve, Aircraft Wiring, Modification of (ECP MDA-F/A-18-00231)	15 Nov 91	-
F/A-18 AFC 122	-	Environmental Control System, Wiring Modification (ECP 91145/F/A-18/742/F)	15 Nov 91	-
F/A-18 AFC 158	-	Correction of AN/ALR-67 and AN/ALQ-126E Wiring (ECP RAMEC-NORIS-22-90)	1 Sep 92	-
F/A-18 AFC 253	-	U.S. Naval Reserves A+ Avionics Upgrade, Incorporation of (ECP MDA-F/A-18 0560R1)	1 Nov 01	-
F/A-18 AFC 292	-	U.S. Marine Corps Reserves A+ Avionics Upgrade, Incorporation of (ECP MDA-F/A-18 0583R1)	1 Nov 01	-

AREA LOCATION BY ACCESS DOOR		
AREA/DOOR NO.	INDEX NO.	WORK PACKAGE NO.
CHEEK AREA - L. CENTER FUSELAGE	143	L701 00, L702 00
CHEEK AREA - R. CENTER FUSELAGE	153	L707 00, L708 00
COCKPIT	36	L400 00 THRU L415 00
INNER WING - LEFT	24	L900 00 THRU L908 00
INNER WING - RIGHT	83	L950 00 THRU L958 00
MAIN LANDING GEAR - LEFT	144	L717 00, L718 00
MAIN LANDING GEAR - RIGHT	127	L729 00, L730 00
MAIN LANDING GEAR WHEELWELL AREA - LEFT	169	L719 00 THRU L727 00
MAIN LANDING GEAR WHEELWELL AREA - RIGHT	126	L731 00 THRU L738 00
NAVIGATION LIGHT ACCESS	76	L221 00
NOSE GEAR	32	L305 00, L306 00
NOSE WHEELWELL AREA	137	L116 00, L217 00, L307 00 THRU L313 00
SPEED BRAKE	21	L822 00, L823 00, L825 00
UPPER EQUIPMENT BAY	37	L500 00 THRU L502 00
VERTICAL STABILIZER - LEFT	19	L830 00 THRU L833 00
VERTICAL STABILIZER - RIGHT	8	L826 00 THRU L829 00
DOOR 1	34	L025 00
DOOR 3	138	L001 00 THRU L004 00, L008 00, L009 00, L025 00, L026 00, L027 00
DOOR 4	35	L005 00
DOOR 7L	39	L300 00, L301 00
DOOR 7R	71	L300 00, L301 00
DOOR 9	33	L115 00
DOOR 10L	140	L100 00 THRU L107 00
DOOR 10R	156	L200 00 THRU L207 00
DOOR 11L	139	L115 00
DOOR 11R	157	L216 00
DOOR 12L	167	L700 00
DOOR 12R	130	L709 00
DOOR 13L	141	L108 00 THRU L111 00
DOOR 13R	155	L208 00 THRU L211 00
DOOR 14L	142	L112 00 THRU L114 01
DOOR 14R	154	L212 00 THRU L215 00
DOOR 16	161	L314 00 THRU L317 00
DOOR 17L	38	L300 00, L301 00
DOOR 17R	72	L300 00, L301 00
DOOR 18	41	L302 00, L303 00, L304 00
DOOR 22	31	L119 00
DOOR 23	74	L220 00
DOOR 25L	136	L117 00
DOOR 25R	158	L218 00
DOOR 26	42	L607 00
DOOR 27	163	L701 00 THRU L704 00, L707 00, L708 00
DOOR 29L	30	L600 00
DOOR 29R	77	L612 00
DOOR 30L	135	L117 00
DOOR 30R	159	L218 00
DOOR 31	43	L608 00
DOOR 32L	29	L600 00, L601 00
DOOR 32R	79	L613 00
DOOR 33	162	L314 00 THRU L317 00
DOOR 34L	28	L601 00, L902 00
DOOR 34R	80	L614 00, L952 00
DOOR 35L	134	L118 00
DOOR 35R	160	L219 00
DOOR 36	164	L701 00, L702 00, L705 00 THRU L708 00
DOOR 37L	165	L700 00
DOOR 37R	133	L709 00
DOOR 39L	166	L700 00

AREA LOCATION BY ACCESS DOOR		
AREA/DOOR NO.	INDEX NO.	WORK PACKAGE NO.
DOOR 39R	131	L709 00
DOOR 40	1	L609 00
DOOR 41L	26	L602 00, L603 00
DOOR 41R	81	L615 00, L616 00
DOOR 42	129	L710 00, L711 00
DOOR 43	2	L610 00
DOOR 44L	27	L603 00
DOOR 44R	82	L616 00
DOOR 45L	111	L728 00
DOOR 45R	150	L739 00
DOOR 46L	113	L728 00
DOOR 46R	148	L739 00
DOOR 47	128	L712 00, L713 00, L714 00
DOOR 48L	25	L604 00
DOOR 48R	84	L617 00
DOOR 49	3	L611 00
DOOR 52	117	L715 00, L716 00
DOOR 53L	115	L740 00 THRU L743 00
DOOR 53R	125	L744 00 THRU L746 00
DOOR 55L	69	L606 00
DOOR 55R	4	L619 00
DOOR 56L	116	L605 00
DOOR 56R	146	L618 00
DOOR 57L	112	L603 00, L604 00
DOOR 57R	149	L616 00, L617 00
DOOR 62	22	L807 00
DOOR 63L	68	L808 00
DOOR 63R	5	L806 00, L806 01
DOOR 64L	118	L810 00 THRU L813 01
DOOR 64R	124	L813 00, L814 00, L815 00
DOOR 66	119	L813 00
DOOR 67L	65	L801 00, L802 00
DOOR 67R	13	L803 00, L804 00
DOOR 68L	120	L813 01, L816 00 THRU L818 00, L824 00
DOOR 68R	123	L819 00, L820 00, L821 00, L824 00
DOOR 71L	17	L800 00
DOOR 71R	86	L805 00
DOOR 72L	16	L800 00
DOOR 72R	87	L805 00
DOOR 75L	67	L809 00
DOOR 75R	12	L806 00, L806 01
DOOR 76L	62	L903 00
DOOR 76R	107	L953 00
DOOR 77L	61	L904 00
DOOR 77R	106	L954 00
DOOR 78L	44	L905 00
DOOR 78R	108	L955 00
DOOR 79L	45	L906 00, L907 00, L908 00
DOOR 79R	105	L956 00, L957 00, L958 00
DOOR 82L	46	L908 00
DOOR 82R	104	L958 00
DOOR 83L	47	L909 00, L910 00
DOOR 83R	103	L959 00, L960 00
DOOR 84L	50	L910 00, L911 00
DOOR 84R	101	L960 00, L961 00
DOOR 86L	109	L809 00
DOOR 86R	6	L804 00, L806 00
DOOR 88L	20	L801 00
DOOR 91L	58	L909 00
DOOR 91R	92	L959 00


AREA LOCATION BY ACCESS DOOR		
AREA/DOOR NO.	INDEX NO.	WORK PACKAGE NO.
DOOR 93L	57	L909 00
DOOR 93R	94	L959 00
DOOR 94	78	L612 00, L612 01
DOOR 95L	53	L911 00
DOOR 95R	98	L961 00
DOOR 96	40	L300 00, L301 00
DOOR 99L	66	L833 00
DOOR 99R	7	L829 00
DOOR 100L	18	L831 00
DOOR 100R	11	L827 00
DOOR 103	21	L825 00
DOOR 104	70	L006 00, L007 00
DOOR 116L	23	L605 00
DOOR 116R	85	L618 00
DOOR 119L	60	L901 00
DOOR 119R	91	L951 00
DOOR 122L	14	L833 00
DOOR 122R	9	L829 00
DOOR 123	73	L220 00, L221 00
DOOR 124L	15	L831 00
DOOR 124R	10	L827 00
DOOR 125L	51	L911 00
DOOR 125R	100	L961 00
DOOR 127	75	L221 00
DOOR 129L	168	L700 00
DOOR 129R	132	L709 00
DOOR 136L	114	L604 00
DOOR 136R	147	L617 00
DOOR 142L	49	L909 00
DOOR 142R	93	L959 00
DOOR 144L	54	L911 00
DOOR 144R	97	L961 00
DOOR 159L	110	L912 00
DOOR 159R	151	L962 00
DOOR 164	121	L824 00
DOOR 165	122	L824 00, L825 00
DOOR 187L	52	L911 00
DOOR 187R	99	L961 00
DOOR 188L	55	L910 00
DOOR 188R	96	L960 00
DOOR 189L	56	L909 00
DOOR 189R	95	L959 00
DOOR 190L	48	L909 00
DOOR 190R	102	L959 00
DOOR 191L	59	L901 00
DOOR 191R	90	L951 00
DOOR 192L	63	L900 00
DOOR 192R	89	L950 00
DOOR 193L	64	L900 00
DOOR 193R	88	L950 00
DOOR 195L	145	L901 00
DOOR 195R	152	L951 00

AREA LOCATION BY INDEX NUMBER		
INDEX NO.	AREA/DOOR NO.	WORK PACKAGE NO.
1	DOOR 40	L609 00
2	DOOR 43	L610 00
3	DOOR 49	L611 00
4	DOOR 55R	L619 00
5	DOOR 63R	L806 00, L806 01
6	DOOR 86R	L804 00
7	DOOR 99R	L829 00
8	VERTICAL STABILIZER - RIGHT	L826 00 THRU L829 00
9	DOOR 122R	L829 00
10	DOOR 124R	L827 00
11	DOOR 100R	L827 00
12	DOOR 75R	L806 00, L806 01
13	DOOR 67R	L803 00, L804 00
14	DOOR 122L	L833 00
15	DOOR 124L	L831 00
16	DOOR 72L	L800 00
17	DOOR 71L	L800 00
18	DOOR 100L	L831 00
19	VERTICAL STABILIZER - LEFT	L830 00 THRU L833 00
20	DOOR 88L	L801 00
21	SPEED BRAKE, DOOR 103	L822 00, L823 00, L825 00
22	DOOR 62	L807 00
23	DOOR 116L	L605 00
24	INNER WING - LEFT	L900 00 THRU L908 00
25	DOOR 48L	L604 00
26	DOOR 41L	L602 00, L603 00
27	DOOR 44L	L603 00
28	DOOR 34L	L601 00, L902 00
29	DOOR 32L	L600 00, L601 00
30	DOOR 29L	L600 00
31	DOOR 22	L119 00
32	NOSE GEAR	L305 00, L306 00
33	DOOR 9	L115 00
34	DOOR 1	L025 00
35	DOOR 4	L005 00
36	COCKPIT	L400 00 THRU L415 00
37	UPPER EQUIPMENT BAY	L500 00 THRU L502 00
38	DOOR 17L	L300 00, L301 00
39	DOOR 7L	L300 00, L301 00
40	DOOR 96	L300 00, L301 00
41	DOOR 18	L302 00, L303 00, L304 00
42	DOOR 26	L607 00
43	DOOR 31	L608 00
44	DOOR 78L	L905 00
45	DOOR 79L	L906 00, L907 00, L908 00
46	DOOR 82L	L908 00
47	DOOR 83L	L909 00, L910 00
48	DOOR 190L	L909 00
49	DOOR 142L	L909 00
50	DOOR 84L	L910 00, L911 00
51	DOOR 125L	L911 00
52	DOOR 187L	L911 00
53	DOOR 95L	L911 00
54	DOOR 144L	L911 00
55	DOOR 188L	L910 00
56	DOOR 189L	L909 00
57	DOOR 93L	L909 00
58	DOOR 91L	L909 00
59	DOOR 191L	L901 00
60	DOOR 119L	L901 00


AREA LOCATION BY INDEX NUMBER		
INDEX NO.	AREA/DOOR NO.	WORK PACKAGE NO.
61	DOOR 77L	L904 00
62	DOOR 76L	L903 00
63	DOOR 192L	L900 00
64	DOOR 193L	L900 00
65	DOOR 67L	L801 00, L802 00
66	DOOR 99L	L833 00
67	DOOR 75L	L809 00
68	DOOR 63L	L808 00
69	DOOR 55L	L606 00
70	DOOR 104	L006 00, L007 00
71	DOOR 7R	L300 00, L301 00
72	DOOR 17R	L300 00, L301 00
73	DOOR 123	L220 00, L221 00
74	DOOR 23	L220 00
75	DOOR 127	L221 00
76	NAVIGATION LIGHT ACCESS	L221 00
77	DOOR 29R	L612 00
78	DOOR 94	L612 00, L612 01
79	DOOR 32R	L613 00
80	DOOR 34R	L614 00, L952 00
81	DOOR 41R	L615 00, L616 00
82	DOOR 44R	L616 00
83	INNER WING - RIGHT	L950 00 THRU L958 00
84	DOOR 48R	L617 00
85	DOOR 116R	L618 00
86	DOOR 71R	L805 00
87	DOOR 72R	L805 00
88	DOOR 193R	L950 00
89	DOOR 192R	L950 00
90	DOOR 191R	L951 00
91	DOOR 119R	L951 00
92	DOOR 91R	L959 00
93	DOOR 142R	L959 00
94	DOOR 93R	L959 00
95	DOOR 189R	L959 00
96	DOOR 188R	L960 00
97	DOOR 144R	L961 00
98	DOOR 95R	L961 00
99	DOOR 187R	L961 00
100	DOOR 125R	L961 00
101	DOOR 84R	L960 00, L961 00
102	DOOR 190R	L959 00
103	DOOR 83R	L959 00, L960 00
104	DOOR 82R	L958 00
105	DOOR 79R	L956 00, L957 00, L958 00
106	DOOR 77R	L954 00
107	DOOR 76R	L953 00
108	DOOR 78R	L955 00
109	DOOR 86L	L809 00
110	DOOR 159L	L912 00
111	DOOR 45L	L728 00
112	DOOR 57L	L603 00, L604 00
113	DOOR 46L	L728 00
114	DOOR 136L	L604 00
115	DOOR 53L	L740 00 THRU L743 00
116	DOOR 56L	L605 00
117	DOOR 52	L715 00, L716 00
118	DOOR 64L	L810 00 THRU L813 01
119	DOOR 66	L813 00
120	DOOR 68L	L813 01, L816 00 THRU L818 00, L824 00
121	DOOR 164	L824 00
122	DOOR 165	L824 00, L825 00
123	DOOR 68R	L819 00, L820 00, L821 00, L824 00



AREA LOCATION BY INDEX NUMBER		
INDEX NO.	AREA/DOOR NO.	WORK PACKAGE NO.
124	DOOR 64R	L813 00, L814 00, L815 00
125	DOOR 53R	L744 00 THRU L746 00
126	MAIN LANDING GEAR WHEELWELL - AREA - RIGHT	L731 00 THRU L738 00
127	MAIN LANDING GEAR - RIGHT	L729 00, L730 00
128	DOOR 47	L712 00, L713 00, L714 00
129	DOOR 42	L710 00, L711 00
130	DOOR 12R	L709 00
131	DOOR 39R	L709 00
132	DOOR 129R	L709 00
133	DOOR 37R	L709 00
134	DOOR 35L	L118 00
135	DOOR 30L	L117 00
136	DOOR 25L	L117 00
137	NOSE WHEELWELL AREA	L116 00, L217 00, L307 00 THRU L313 00
138	DOOR 3	L001 00 THRU L004 00, L008 00, L009 00, L025 00, L026 00, L027 00
139	DOOR 11L	L115 00
140	DOOR 10L	L100 00 THRU L107 00
141	DOOR 13L	L108 00 THRU L111 00
142	DOOR 14L	L112 00 THRU L114 01
143	CHEEK AREA - L. CENTER FUSELAGE	L701 00, L702 00
144	MAIN LANDING GEAR - LEFT	L717 00, L718 00
145	DOOR 195L	L901 00
146	DOOR 56R	L618 00
147	DOOR 136R	L617 00
148	DOOR 46R	L739 00
149	DOOR 57R	L616 00, L617 00
150	DOOR 45R	L739 00
151	DOOR 159R	L962 00
152	DOOR 195R	L951 00
153	CHEEK AREA - R. CENTER FUSELAGE	L707 00, L708 00
154	DOOR 14R	L212 00 THRU L215 00
155	DOOR 13R	L208 00 THRU L211 00
156	DOOR 10R	L200 00 THRU L207 00
157	DOOR 11R	L216 00
158	DOOR 25R	L218 00
159	DOOR 30R	L218 00
160	DOOR 35R	L219 00
161	DOOR 16	L314 00 THRU L317 00
162	DOOR 33	L314 00 THRU L317 00
163	DOOR 27	L701 00 THRU L704 00, L707 00, L708 00
164	DOOR 36	L701 00, L702 00, L705 00 THRU L708 00
165	DOOR 37L	L700 00
166	DOOR 39L	L700 00
167	DOOR 12L	L700 00
168	DOOR 129L	L700 00
169	MAIN LANDING GEAR WHEELWELL AREA - LEFT	L719 00 THRU L727 00

**UPPER FUSELAGE,
LEX AND VERTICAL
STABILIZER
ACCESS AREAS**

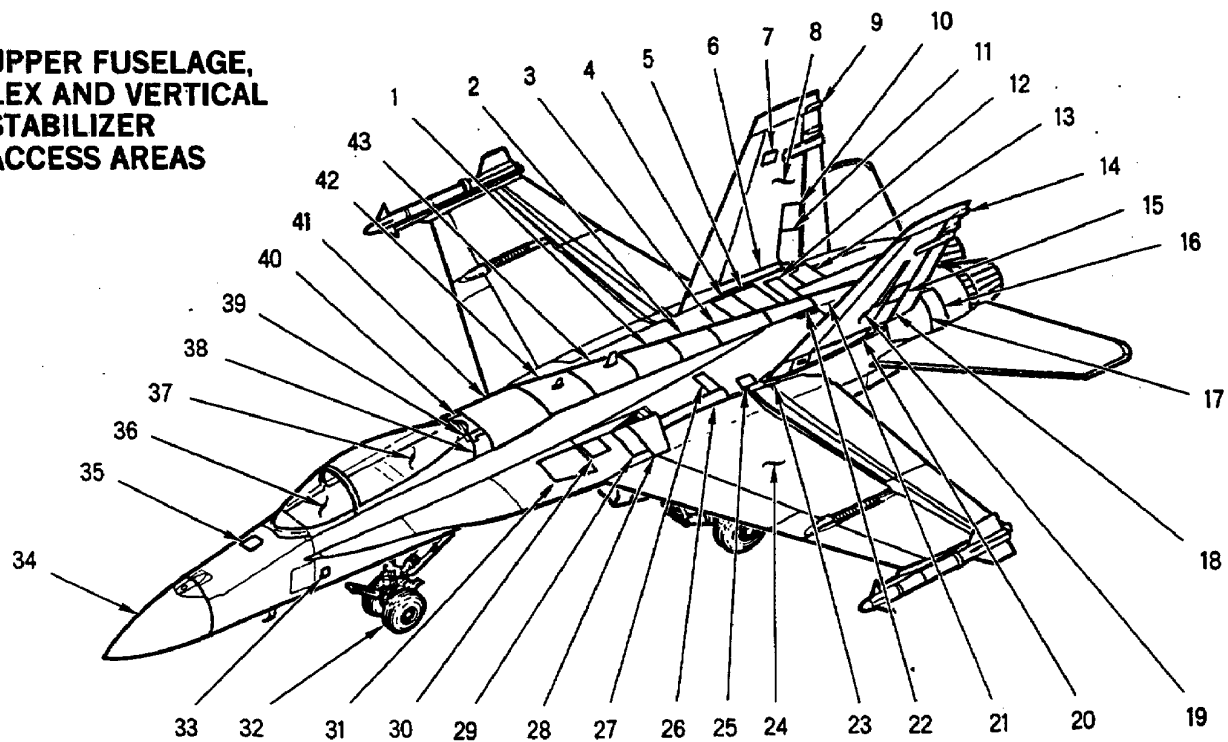


**LEFT WING
ACCESS AREAS**

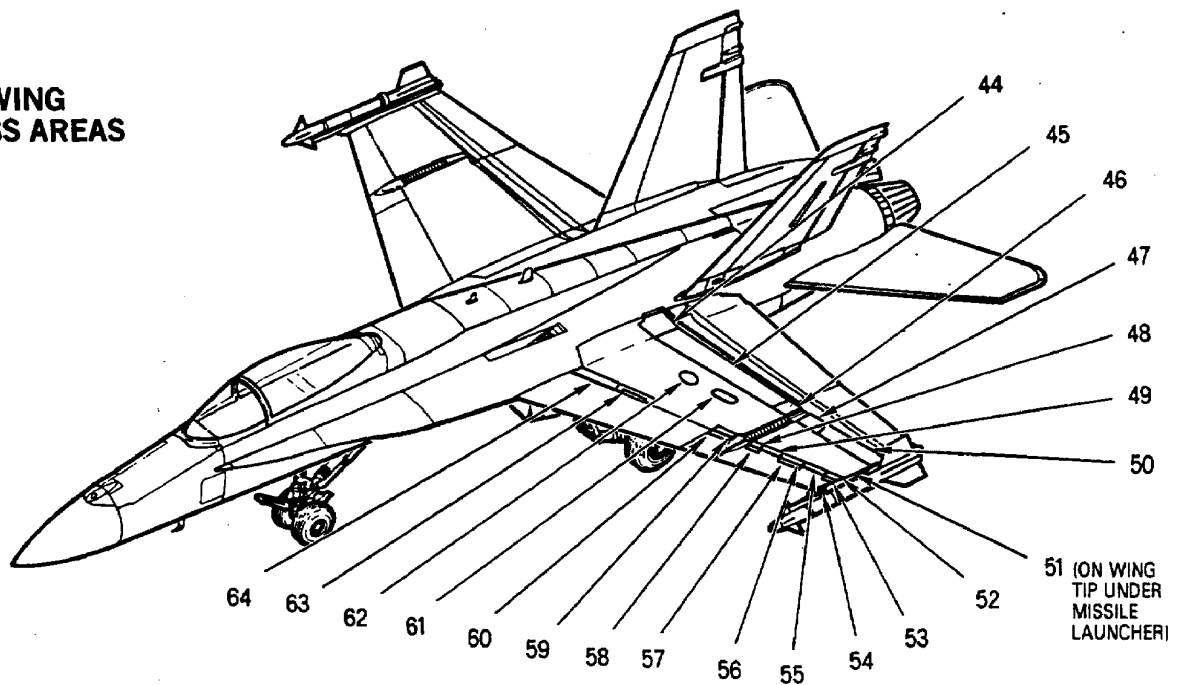


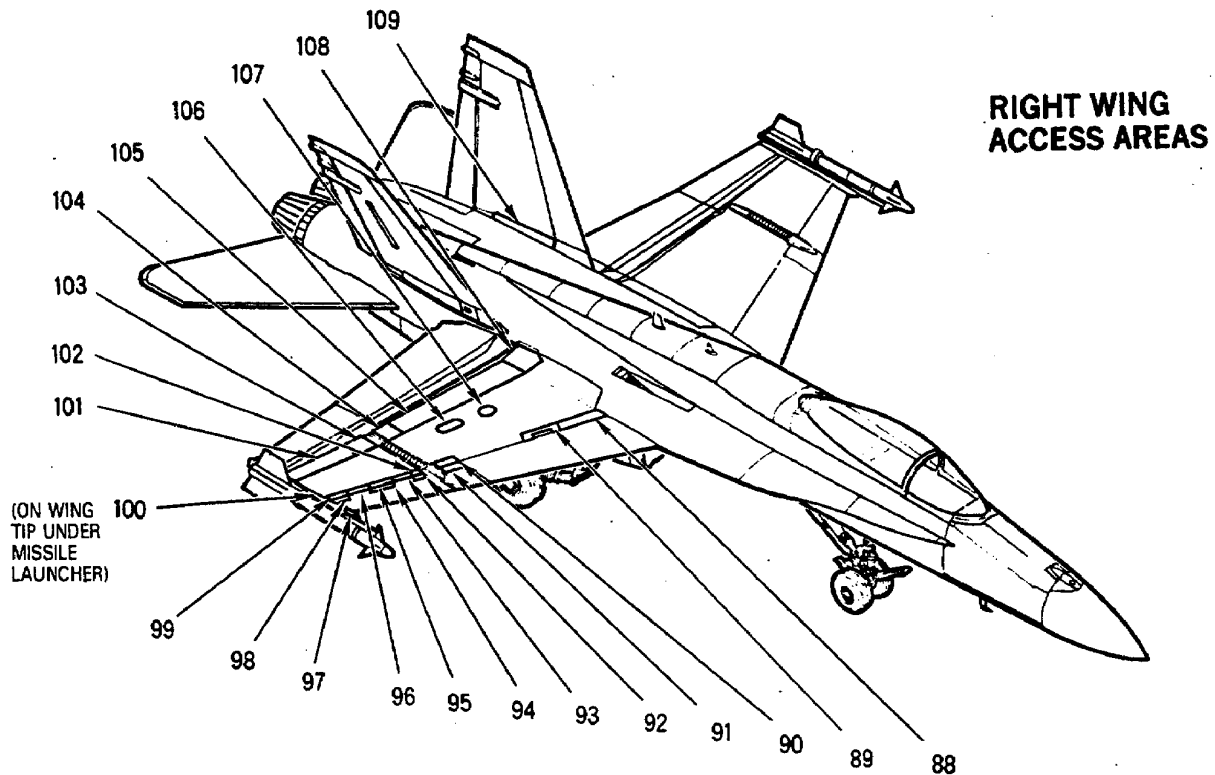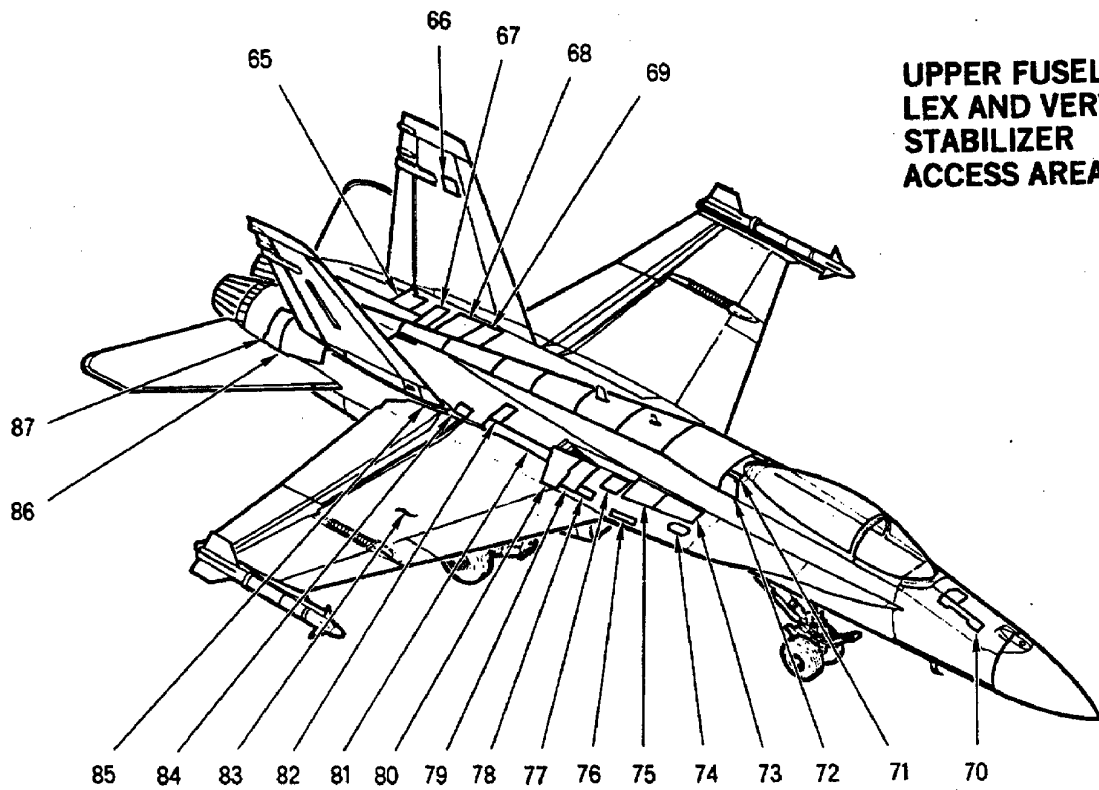



**LOWER FUSELAGE
ACCESS AREAS**

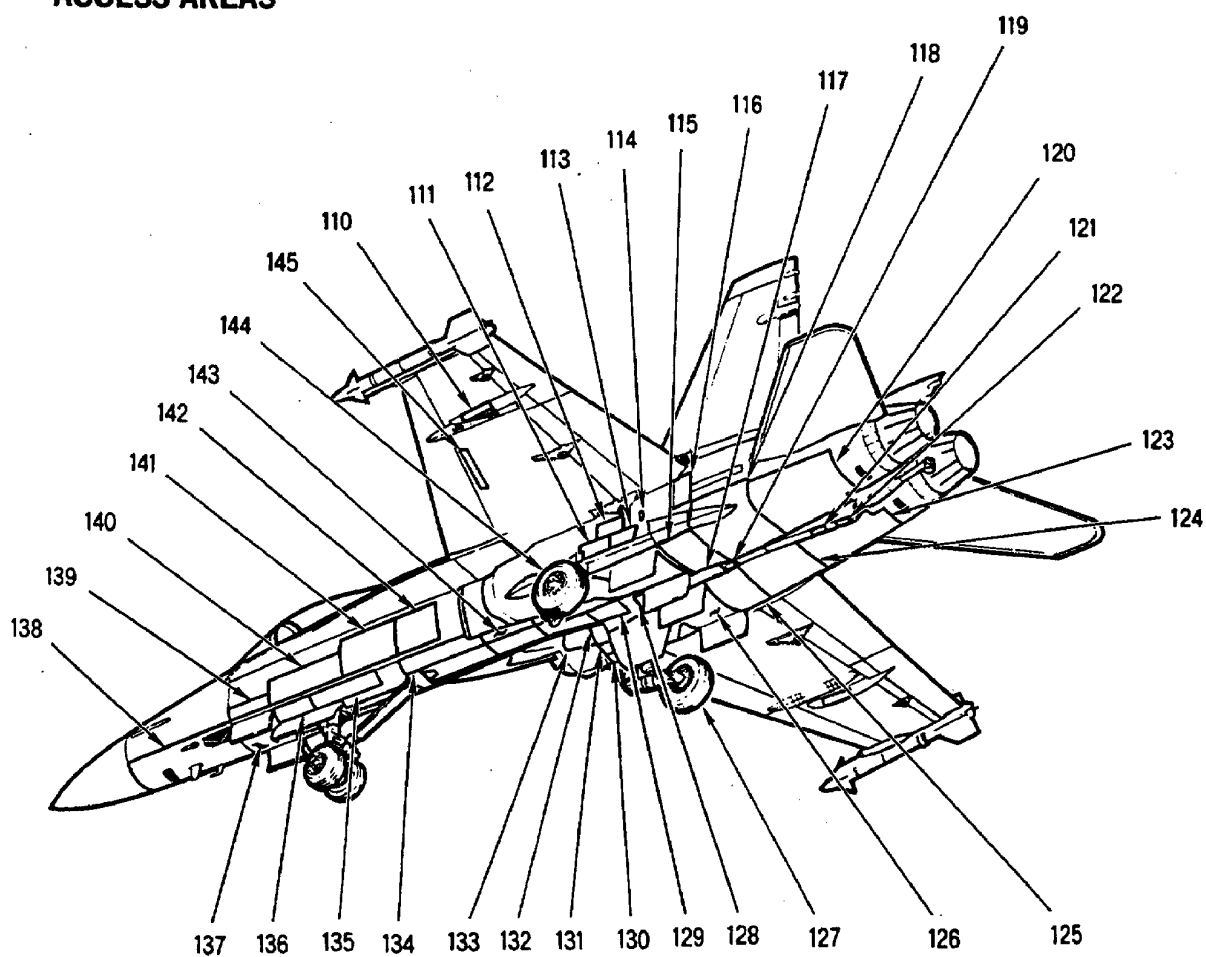


**LOWER FUSELAGE
ACCESS AREAS**

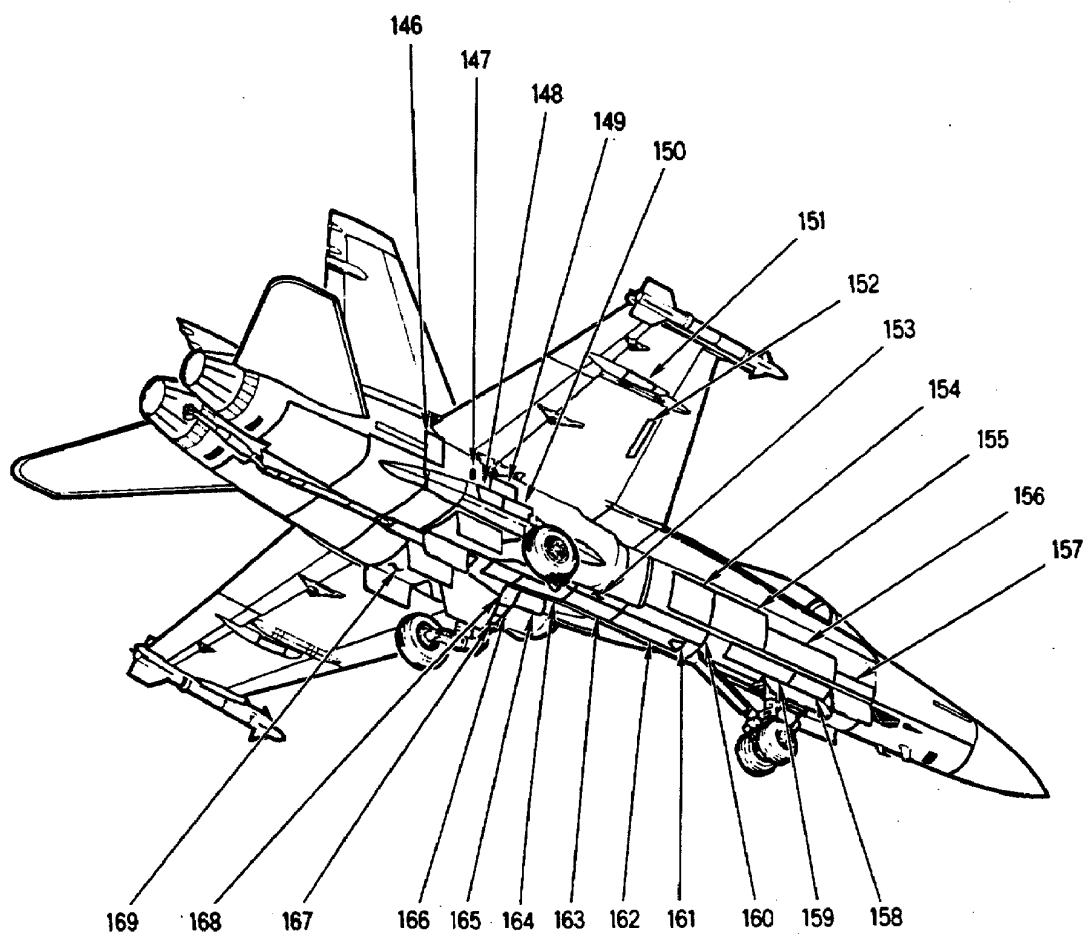

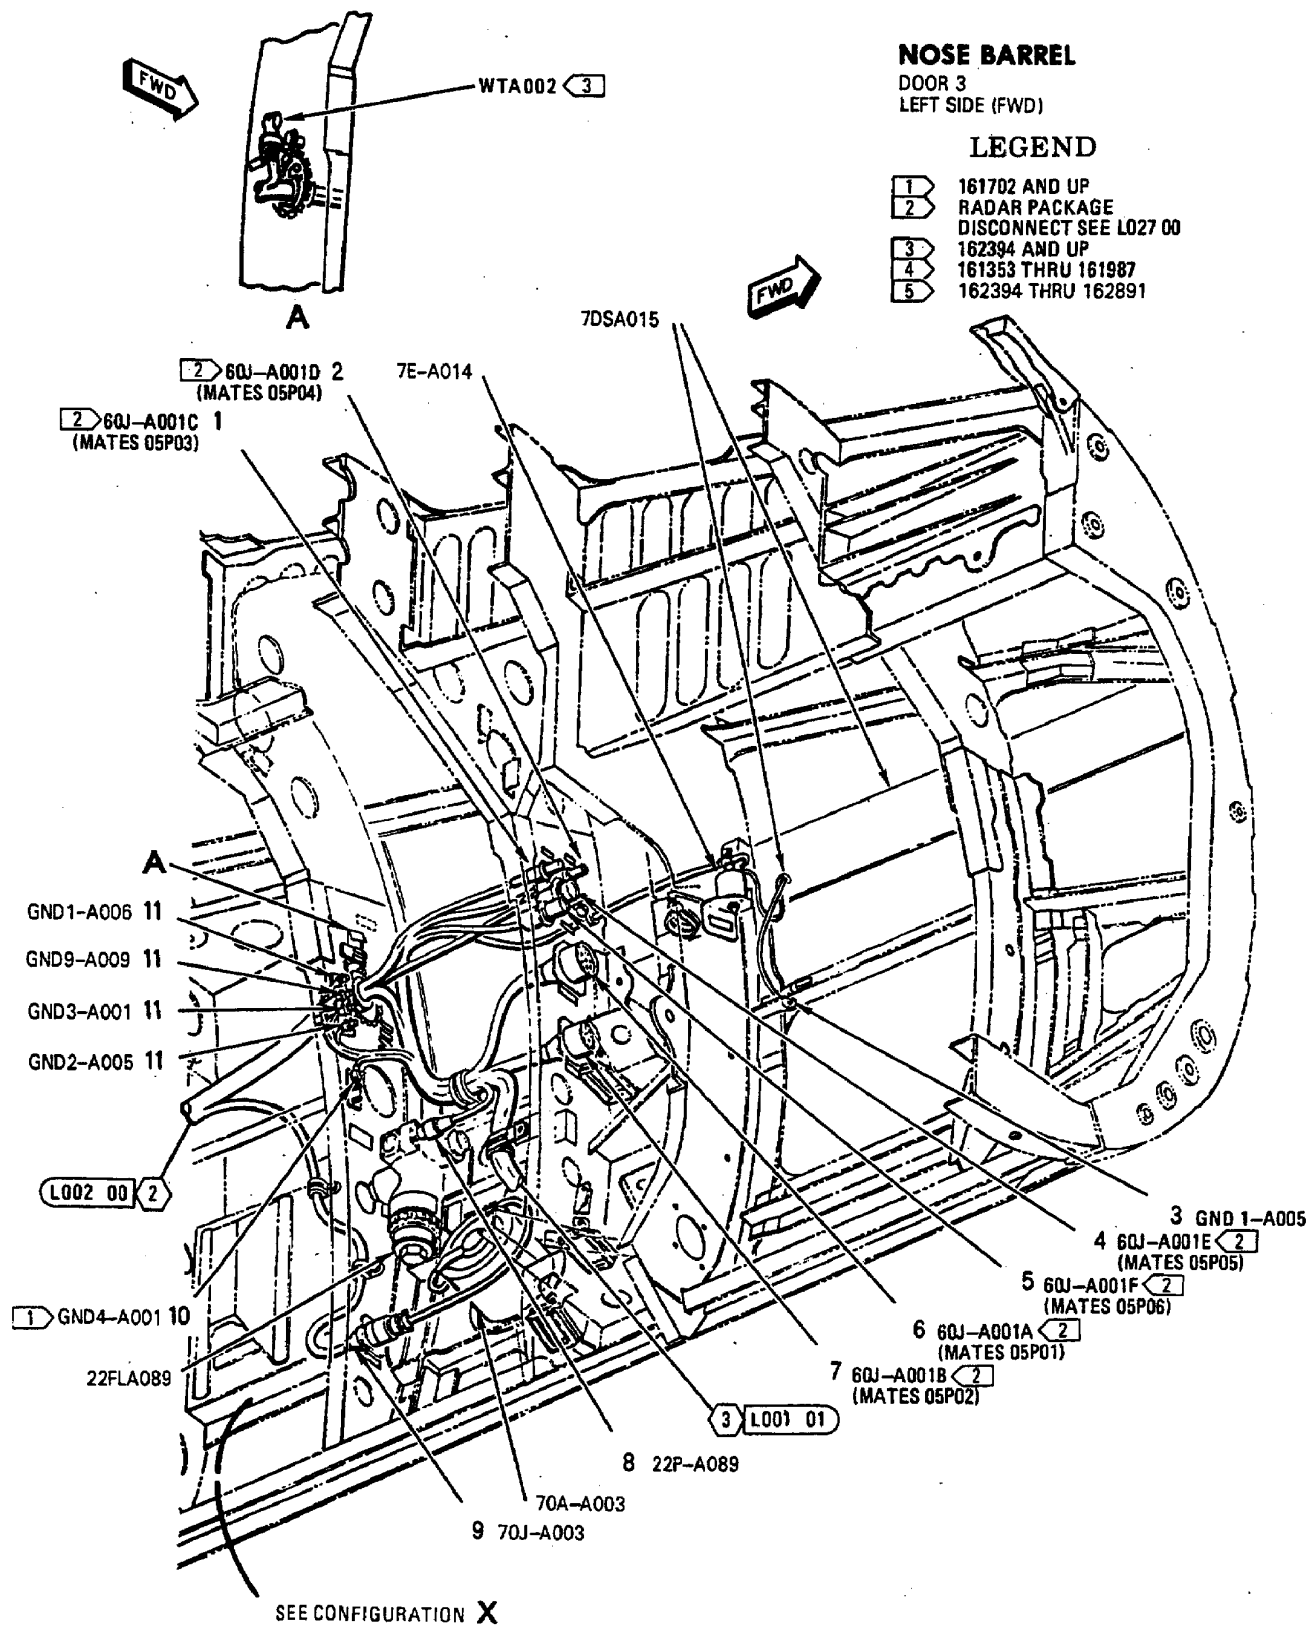

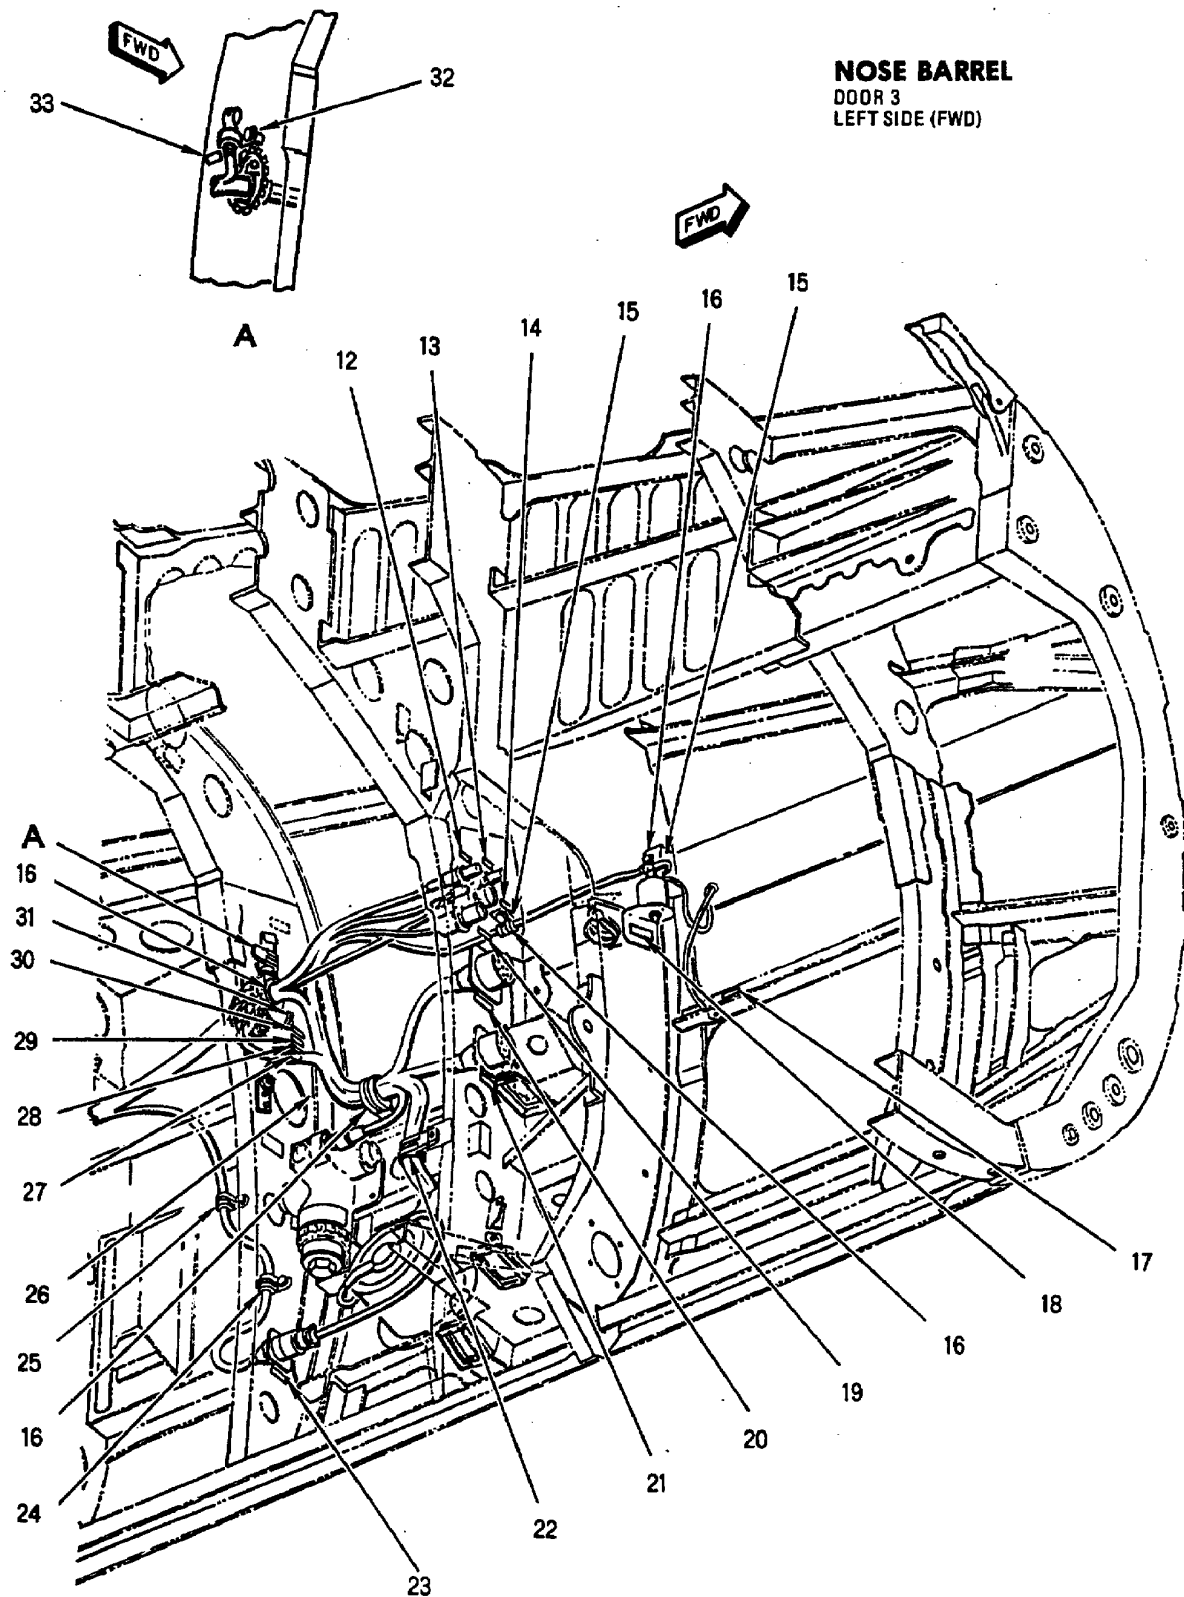

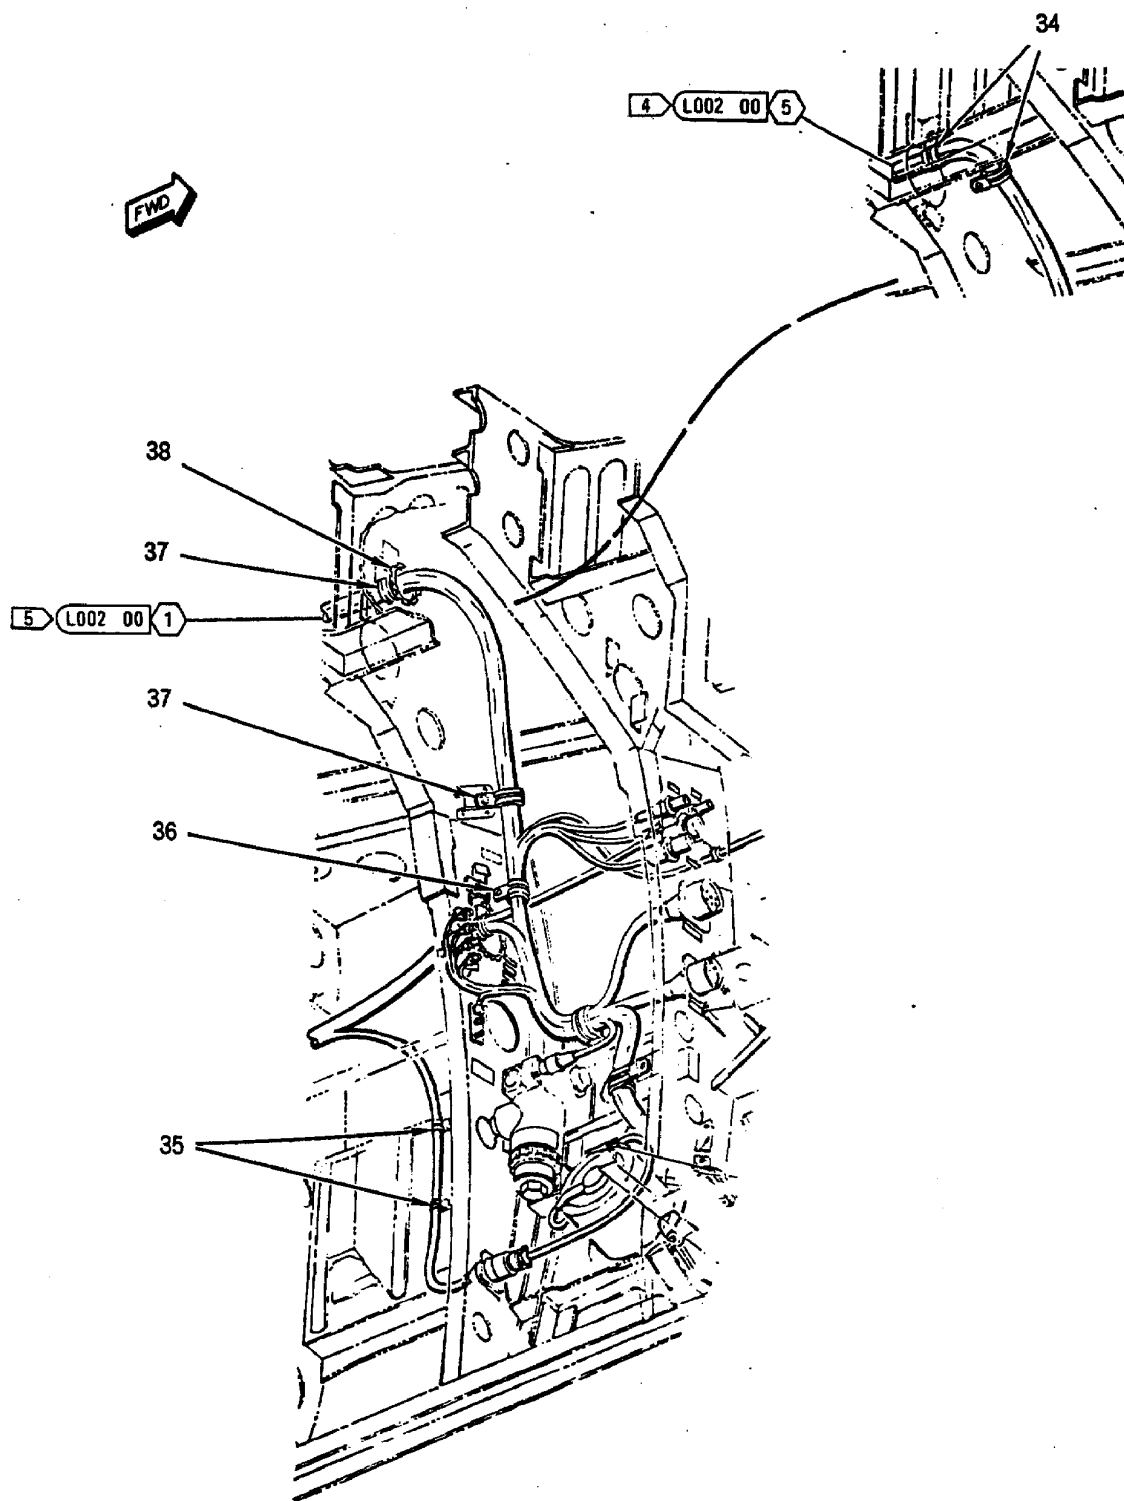

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	31-33247-14	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344JS3B) (60J-A001C)	1	*	PAOZZ
	4846-0903	SEE ABOVE (95077)	1	*	PAOZZ
2	31-33247-15	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344JS5B) (60J-A001D)	1	*	PAOZZ
	4846-0905	SEE ABOVE (95077)	1	*	PAOZZ
3	NAS603-5P	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	1		PAOZZ
4	M39012/03-0501	CONNECTOR, RECEPTACLE (60J-A001E)	1		PAOZZ
5	M39012/28-0018	CONNECTOR, RECEPTACLE (60J-A001F)	1		PAOZZ
6	MS27656T25B29S	CONNECTOR, RECEPTACLE (60J-A001A)	1		PAOZZ
	NAS601-()P #	SCREW (AP)	4		-
	AN960JD10L	WASHER (AP)	4		PAOZZ
	MS27663B24-1	ADAPTER (USE WITH INDEX 6)	1		PAOZZ
	S951-24A	PLATE, RETAINING, ELECTRICAL CONNECTOR (19904) (MCDONNELL SPEC ST3M546A10) (USE WITH INDEX 6)	1	*	PAOZZ
	1009-25	SEE ABOVE (04967)	1	*	PAOZZ
7	MS27656T23B35S	CONNECTOR, RECEPTACLE (60J-A001B)	1		PAOZZ
	NAS601-()P #	SCREW (AP)	4		-
	AN960JD10L	WASHER (AP)	4		PAOZZ
	MS27663B22-1	ADAPTER (USE WITH INDEX 7)	1		PAOZZ
	1009-24	PLATE, RETAINING, ELECTRICAL CONNECTOR (04967) (MCDONNELL SPEC ST3M546B9) (USE WITH INDEX 7)	1		PAOZZ
8	MS27467T9B35S	CONNECTOR, PLUG (22P-A089)	1		PAOZZ
9	MS27656T15B35S	CONNECTOR, RECEPTACLE (70J-A003)	1		PAOZZ
	NAS600-()P #	SCREW (AP)	4		-
	AN960JD4L	WASHER (AP)	4		PAOZZ
10	MS21042L3	NUT	1	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	1	A	PAOZZ
11	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	4		PAOZZ
12	74A890601-2090	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-A001C)	1		MGOZZ
13	74A890601-2091	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-A001D)	1		MGOZZ
14	74A890601-2092	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-A001E)	1		MGOZZ
15	MS35489-4	GROMMET	2		PAOZZ
16	MS21919WDG #	CLAMP	4		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	74A890601-2426	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-A005)	1		MGOZZ
18	74A890601-2537	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 7E-A014)	1		MGOZZ
19	74A890601-2519	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 60J-A001F)	1		MGOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
20	74A890601-2088	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-A001A)	1		MGOZZ
21	74A890601-2089	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-A001B)	1		MGOZZ
22	MS21919WDG #	CLAMP	1	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
23	74A890601-2123	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 70J-A003)	1		MGOZZ
24	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
25	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
26	74A890601-2616	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-A001)	1	A	MGOZZ
27	74A890601-2417	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-A005)	1		MGOZZ
28	74A890601-2416	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-A001)	1		MGOZZ
29	74A890601-2418	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-A009)	1		MGOZZ
30	74A890601-2419	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-A006)	1		MGOZZ
31	MS21266-2N	GROMMET	AR	B	PAOZZ
32	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V7	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	B	PAOZZ
33	74A890601-2916	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTA002)	1	B	MGOZZ
34	MS21919WDG #	CLAMP	2	C	-
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
35	MS21919WDG #	CLAMP	2	D	-
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
36	MS21919WDG #	CLAMP	1	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
37	MS21919WDG16	CLAMP	2	E	PAOZZ
	NAS673V3	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	E	PAOZZ
38	MS21266-2N	GROMMET	AR	E	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


CODE	USABLE ON
A	161702 & UP
B	162394 & UP
C	161353 THRU 161987 BEFORE F/A-18 AFC 48
D	161353 THRU 161528
E	162394 THRU 162891; ALSO 161353 THRU 161987 AFTER F/A-18 AFC 48

NOSE BARREL DOOR 3 LEFT SIDE (FWD)

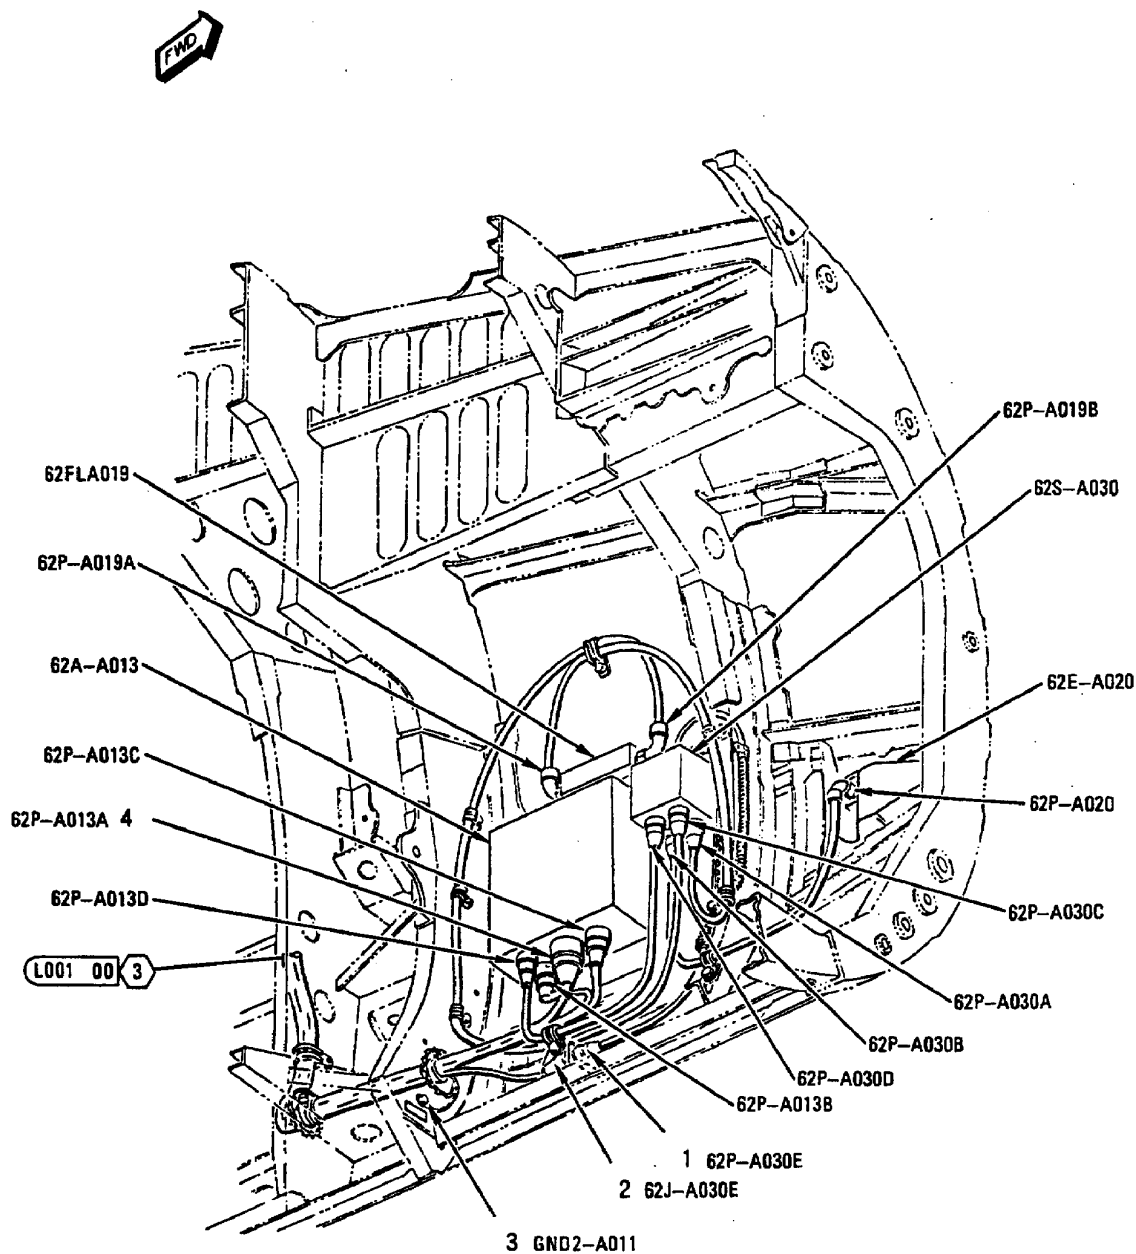

161702 AND UP

NOSE BARREL
DOOR 3
LEFT SIDE (FWD)

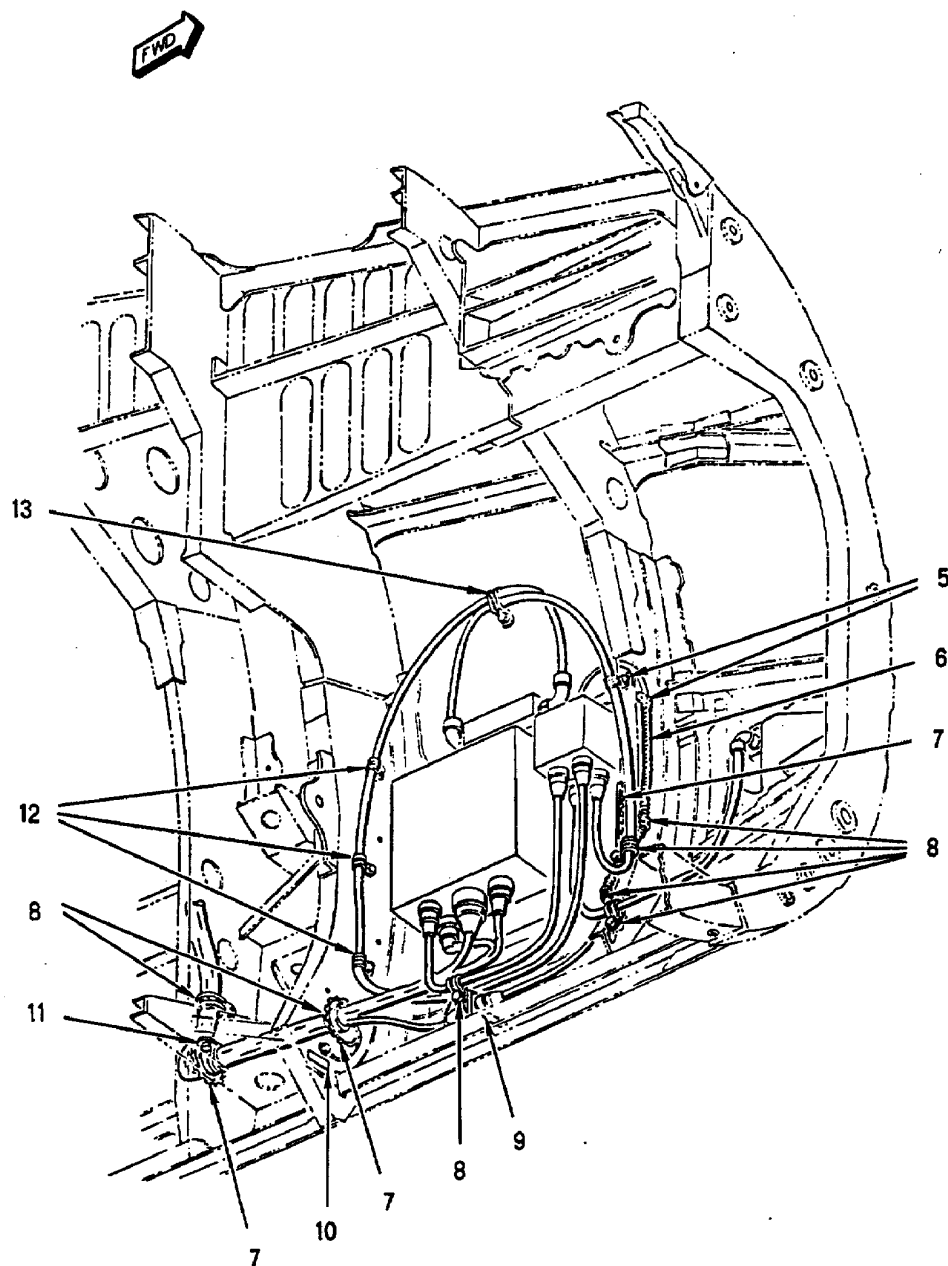

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B35P	CONNECTOR, PLUG (62P-A030E)	1	A	PAOZZ
2	MS27656T9B35S	CONNECTOR, RECEPTACLE (62J-A030E)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
3	MS21042L3	NUT	1	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	1	A	PAOZZ
4	MS27467T13B35S	CONNECTOR, PLUG (62P-A013A)	1	A	PAOZZ
5	MS21919WDG #	CLAMP	2	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
6	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ
7	MS21266-2N	GROMMET	AR	A	PAOZZ
8	MS21919WDG #	CLAMP	7	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
9	74A890601-2329	MARKER, IDENTIFICATION -	1	A	MGOZZ
		ELECTRICAL (76301) (FOR REF DES 62J-A030E)			
10	74A890601-2166	MARKER, IDENTIFICATION -	1	A	MGOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-A011)			
11	MS21919WDG #	CLAMP	1	A	-
	NAS673V10	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
12	MS21919WDG #	CLAMP	3	A	-
	NAS673V7	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	A	PAOZZ
13	TA519WD7-12	CLAMP, LOOP (84971) (MCDONNELL	1	A*	PAOZZ
		SPEC ST9M633WD7-12)			
	487WD7-12	CLAMP, LOOP (83930) (MCDONNELL	1	A*	PAOZZ
		SPEC ST9M633WD7-12)			
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON MODEL


A 161702 & UP

LEGEND

- 1 161702 AND UP
- 2 161702 THRU 161987, BEFORE F18 AFC 48
- 3 162394 THRU 162891,
ALSO 161353 THRU 161528 AFTER F18 AFC 49,
161702 THRU 161987 AFTER F18 AFC 48
- 4 162394 AND UP; ALSO 161353 THRU 161528
AFTER F18 AFC 49, 161702 THRU 161987 AFTER
F18 AFC 48
- 5 162394 AND UP; ALSO 161553 THRU 161987
AFTER F18 AFC 48


NOSE BARREL
DOOR 3
LEFT SIDE AFT





SEE CONFIGURATION Y

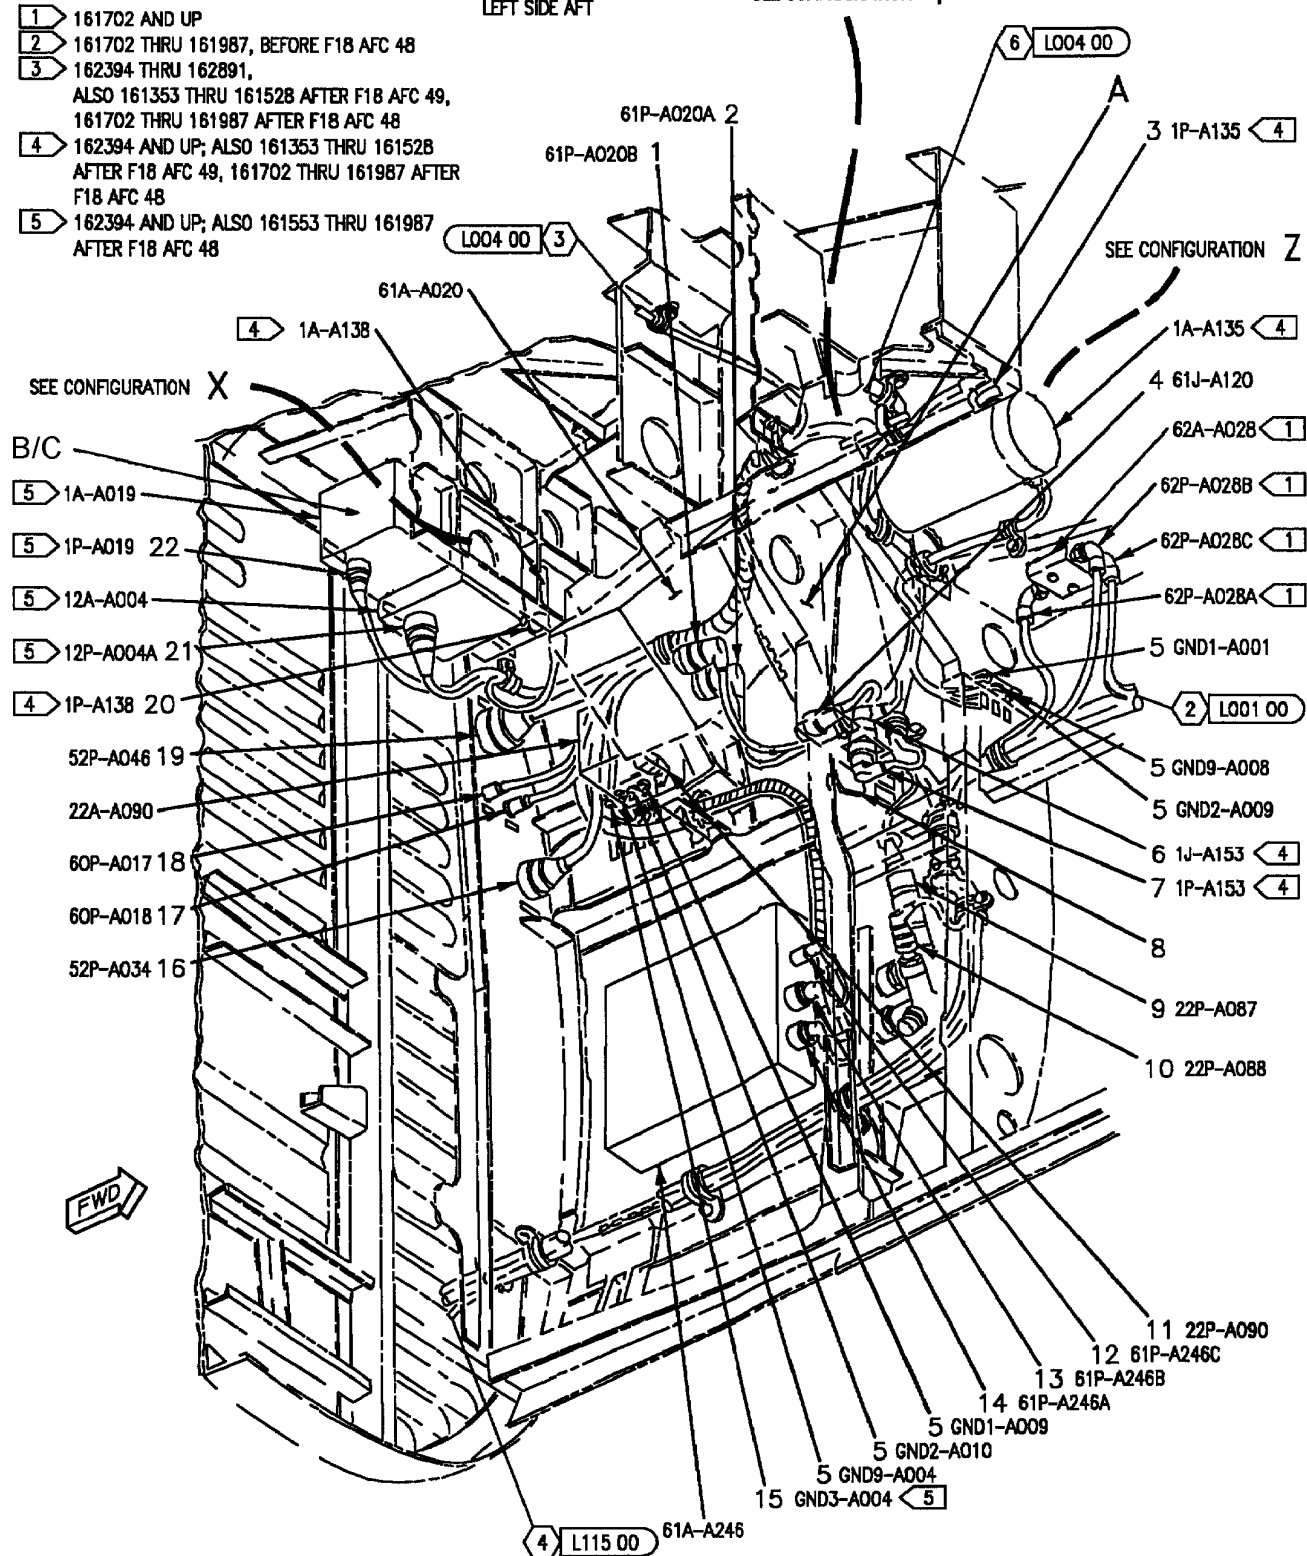


NOSE BARREL

DOOR 3
LEFT SIDE AFT

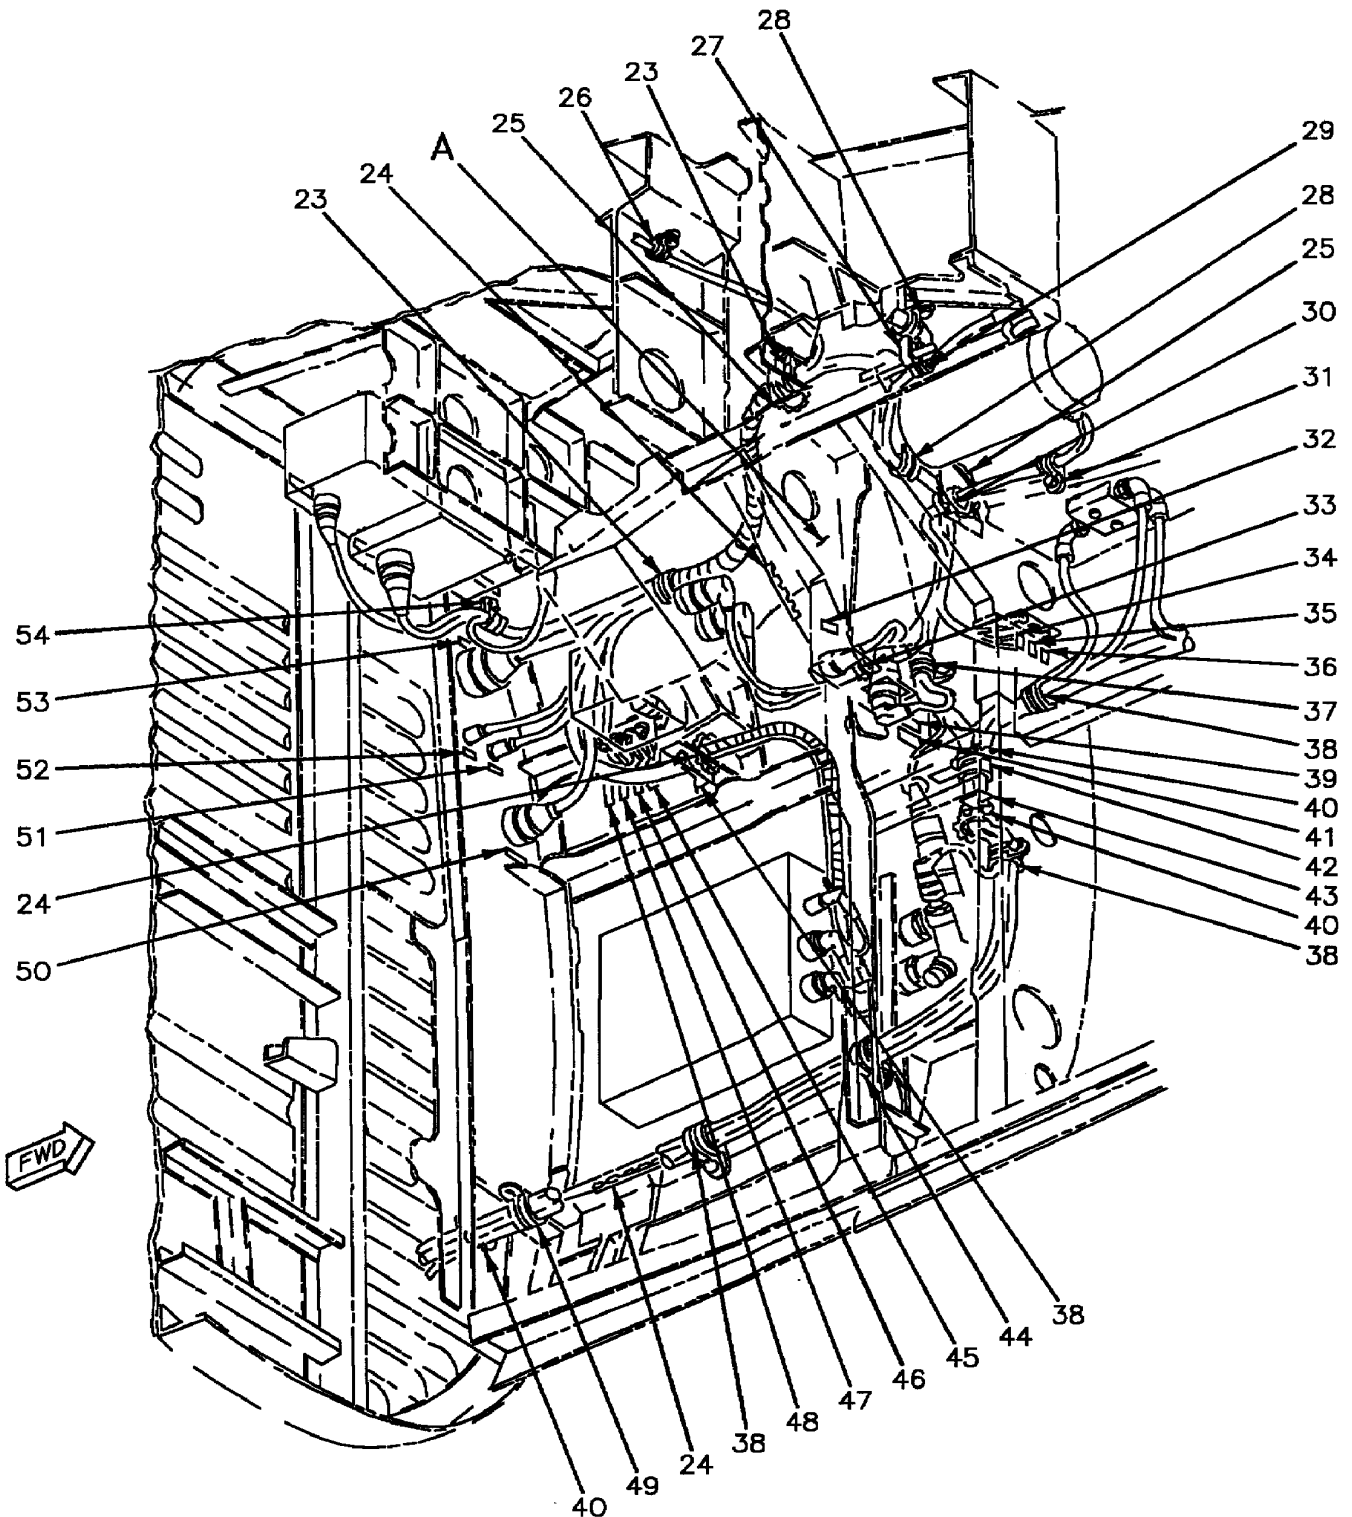


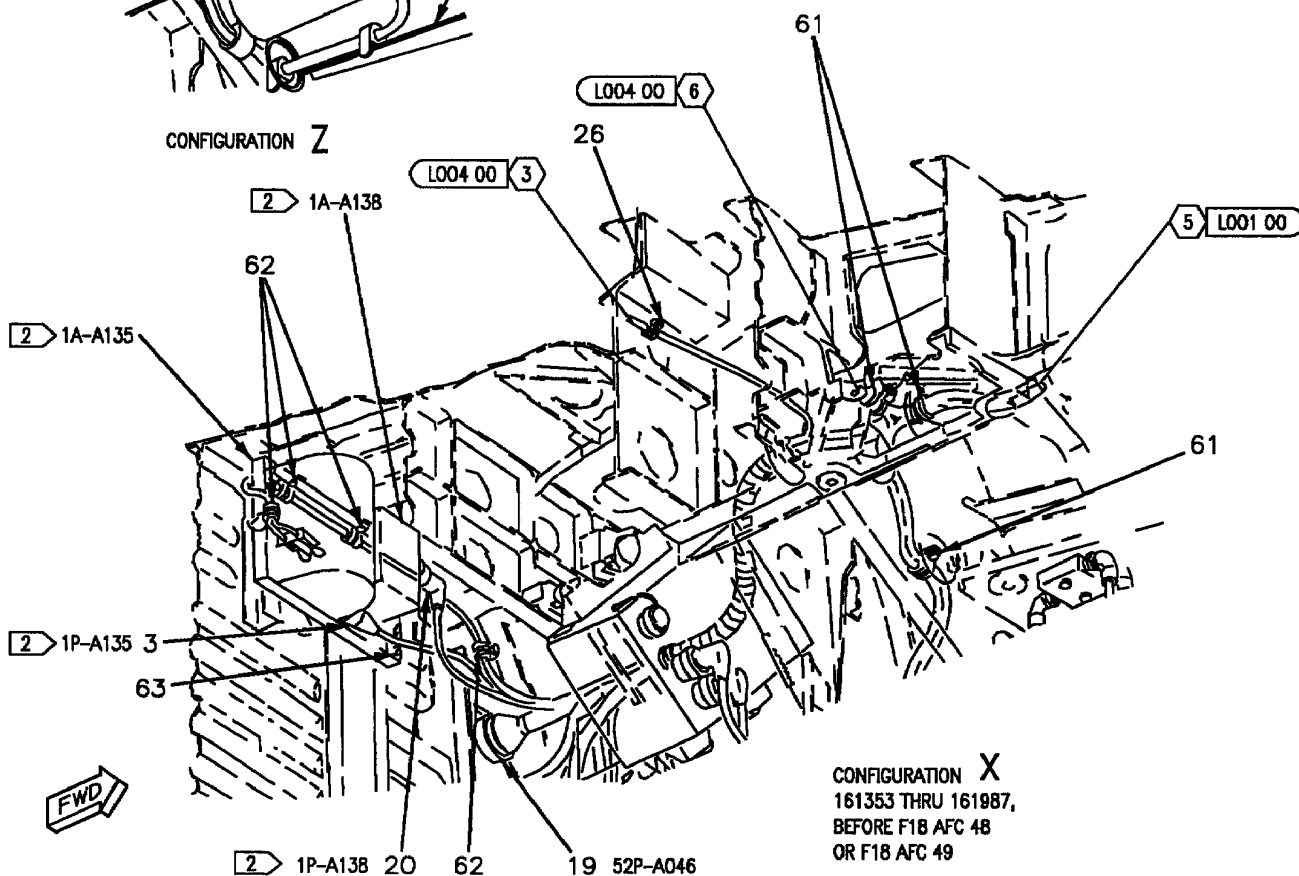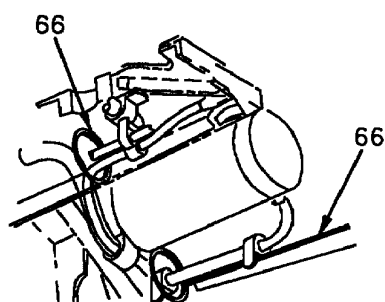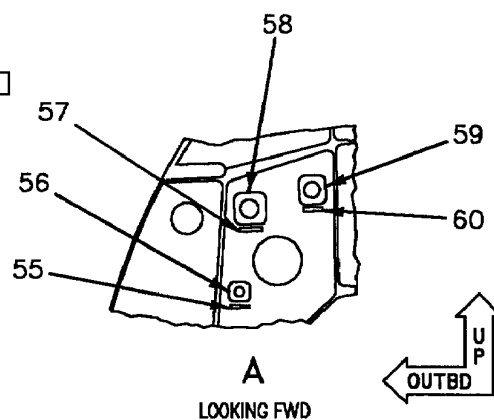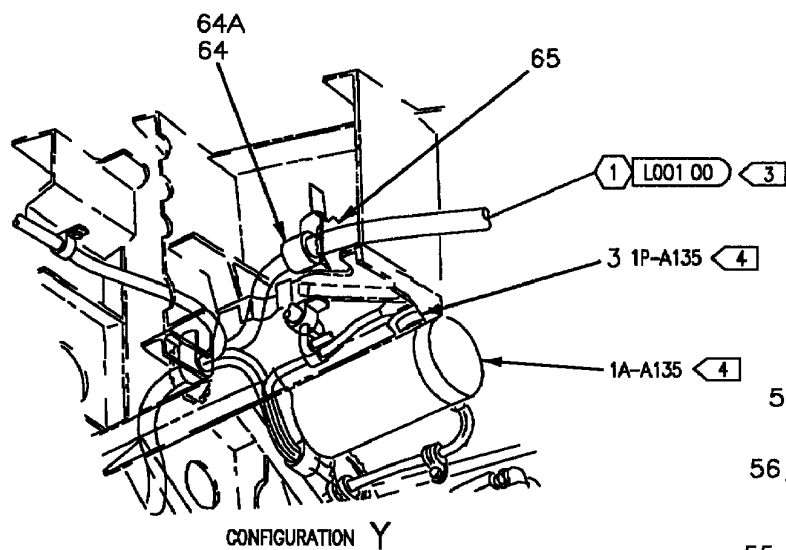

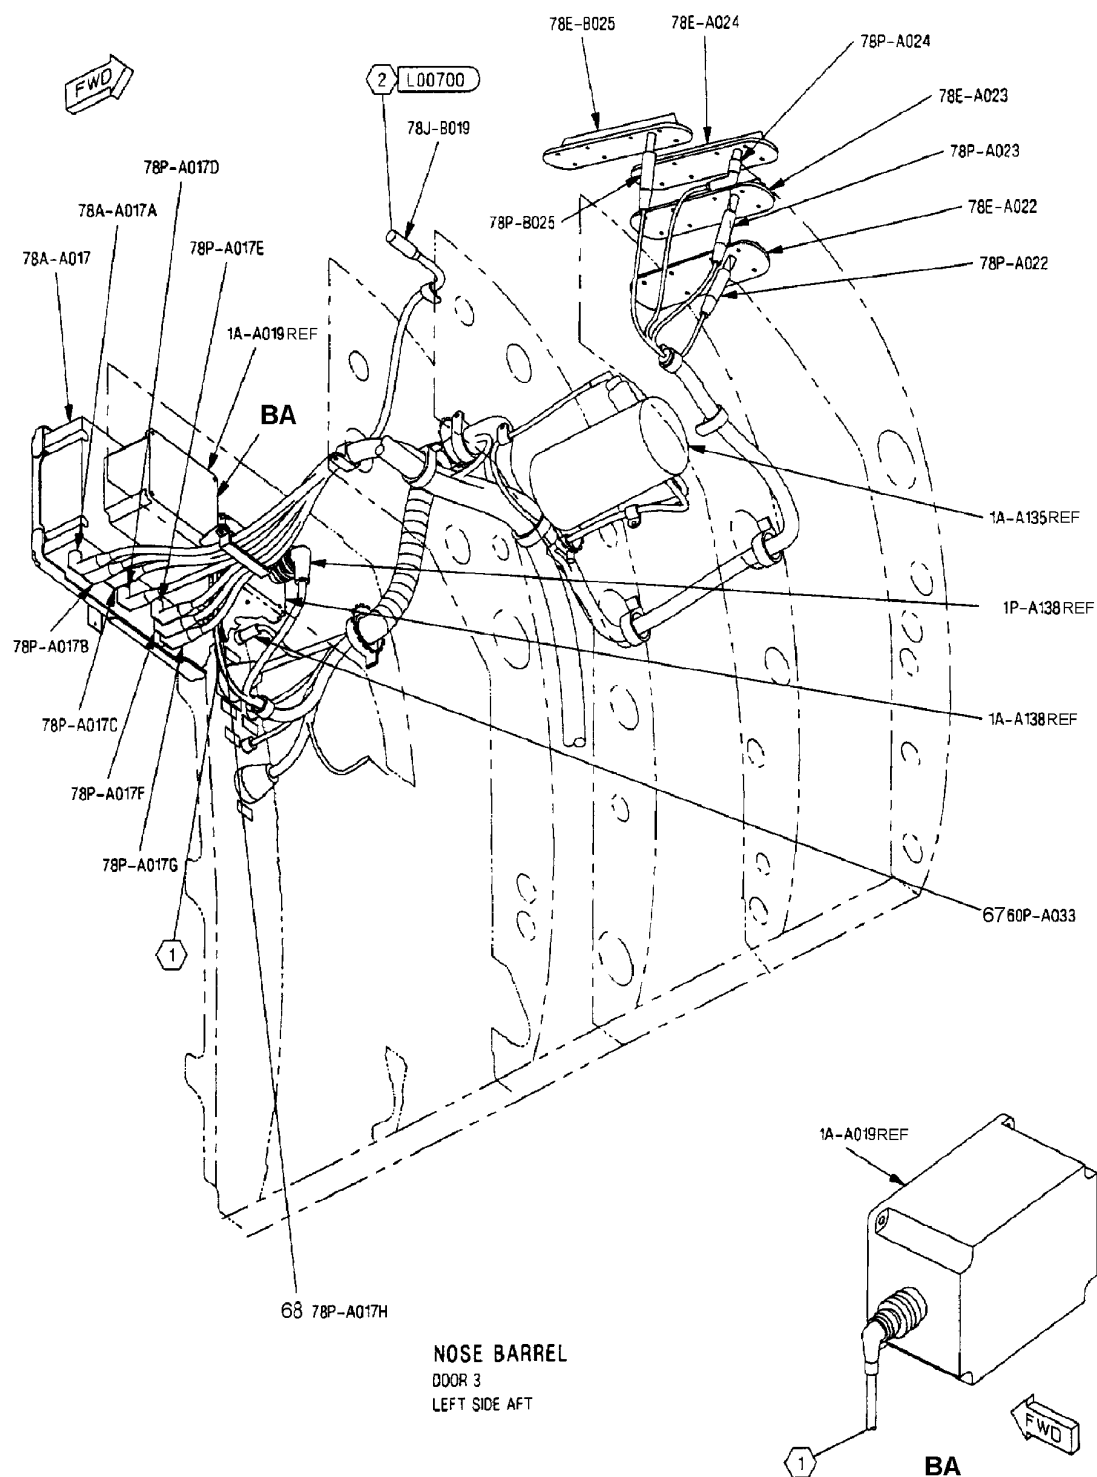

162394 THRU 163175 AFTER F/A-18 AFC 292

B

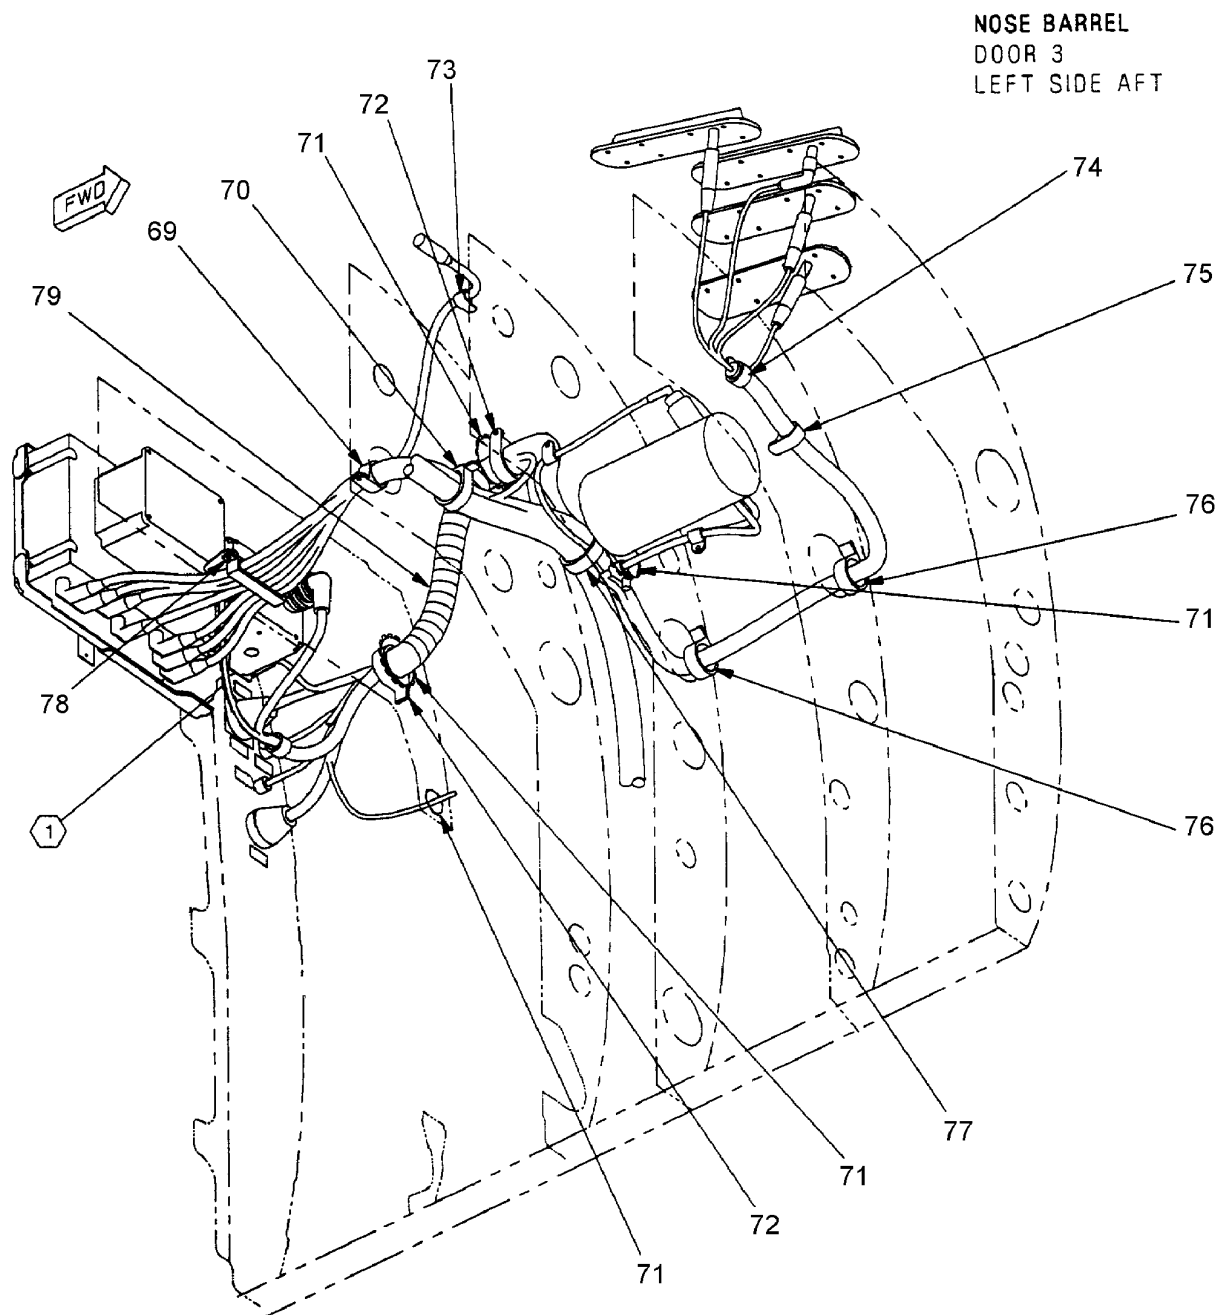

162394 THRU 163175 AFTER F/A-18 AFC 292

C

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B97S	CONNECTOR, PLUG (61P-A020B)	1		PAOZZ
2	MS27467T15B35P	CONNECTOR, PLUG (61P-A020A)	1		PAOZZ
3	MS3459W16S8S	CONNECTOR, PLUG (1P-A135)	1	K	PAOZZ
4	NS27656T17B99S	CONNECTOR, RECEPTACLE (61J-A120)	1		PAOZZ
	NAS600-()P #	SCREW (AP)	4		-
	AN960JD4L	WASHER (AP)	4		PAOZZ
5	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	6		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	6		PAOZZ
6	MS27656T17B6P	CONNECTOR, RECEPTACLE (1J-A153)	1	K	PAOZZ
	NAS600-()P #	SCREW (AP)	4	K	-
	AN960JD4L	WASHER (AP)	4	K	PAOZZ
	NAS679A04W	NUT	4	K	PAOZZ
7	MS27467T17B6S	CONNECTOR, PLUG (1P-A153)	1	K	PAOZZ
8	10-427405-179	DUMMY CONNECTOR, RECEPTACLE (77820)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1402-17)			
	650FS001NF17	DUMMY CONNECTOR, RECEPTACLE (06324)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1402-17)			
	1107-001-17	DUMMY CONNECTOR, RECEPTACLE (59976)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1502-17)			
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	1009-18	PLATE, RETAINING, ELECTRICAL CONNEC-	1		PAOZZ
		TOR (04967) (MCDONNELL SPEC ST3M546B6)			
		(USE WITH INDEX 8)			
	MS27502B17C	COVER (USE WITH INDEX 8)	1		PAOZZ
9	MS27467T9B35S	CONNECTOR, PLUG (22P-A087)	1		PAOZZ
10	MS27467T9B98S	CONNECTOR, PLUG (22P-A088)	1		PAOZZ
11	MS27467T13B35S	CONNECTOR, PLUG (22P-A090)	1		PAOZZ
12	SF4592-6005	CONNECTOR, PLUG, ELECTRICAL (95077)	1		PAOZZ
		(MCDONNELL SPEC ST5M1396-0R)(61P-A246C)			
13	MS27467T13B35S	CONNECTOR, PLUG (61P-A246B)	1		PAOZZ
14	MS27467T11B35S	CONNECTOR, PLUG (61P-A246A)	1		PAOZZ
15	MS21042L3	NUT	1	L	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 15)	1	L	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 15)	1	L	PAOZZ
16	MS27467T25B35S	CONNECTOR, PLUG (52P-A034)	1		PAOZZ
17	31-30240-32	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1344SS5B) (60P-A018)			
	4806-0905	SEE ABOVE (95077)	1	*	PAOZZ
18	31-30240-37	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1344SS3B) (60P-A017)			
	4806-0903	SEE ABOVE (95077)	1	*	PAOZZ
19	MS27467T25B35S	CONNECTOR, PLUG (52P-A046)	1	B	PAOZZ
	MS27467T25B35SA	CONNECTOR, PLUG (52P-A046)	1	A	PAOZZ
20	MS27467T21B11S	CONNECTOR, PLUG (1P-A138)	1	K	PAOZZ
21	MS27467T25B35S	CONNECTOR, PLUG (12P-A004A)	1	L	PAOZZ
22	MS3147E7-50S	CONNECTOR, PLUG (1P-A019)	1	L	PAOZZ
23	MS21919WDG21	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
24	MS21266-2N	GROMMET	AR		PAOZZ
25	MS21266-2N	GROMMET	AR	C	PAOZZ
26	MS21919WDG #	CLAMP	1		-
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
27	M85052/1-4	CLAMP	1		PAOZZ
28	MS21919WDG6	CLAMP	2	L	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
29	NAS673V #	BOLT (AP)	1	L	-
	AN960JD10L	WASHER (AP)	1	L	PAOZZ
	MS21919WDG #	CLAMP	1	C	-
30	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-36	SPACER (AP)	1	C	PAOZZ
31	MS21919WDG6	CLAMP	1	L	PAOZZ
	NAS673V3	BOLT (AP)	1	L	PAOZZ
	AN960JD10L	WASHER (AP)	1	L	PAOZZ
32	MS21919WDG6	CLAMP	1	L	PAOZZ
	NAS673V2	BOLT (AP)	1	L	PAOZZ
	AN960JD10L	WASHER (AP)	1	L	PAOZZ
33	74A890601-2335	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 61P-A120)			
		(FWD SIDE OF SUPPORT)			
34	74A890601-2562	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 61J-A120)			
		(AFT SIDE OF SUPPORT)			
35	MS21919WDG5	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	NAS673V7	BOLT (AP)	1	G	PAOZZ
36	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1	G	PAOZZ
	74A890601-2503	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
37		(76301) (FOR REF DES GND1-A001)			
	74A890601-2582	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND2-A009)			
38	74A890601-2420	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-A008)			
	MS21919WDG #	CLAMP	1	D	-
39	NAS673V13	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	D	PAOZZ
40	MS21919WDG #	CLAMP	4		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
41	74A890601-2923	MARKER, IDENTIFICATION - ELECTRICAL	1	K	MDOZZ
		(76301) (FOR REF DES 1J-A153)			
	MS21266-3N	GROMMET	AR		PAOZZ
42	74A890601-2865	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (STOWAGE RECP FOR 61P-A120)			
	MS21919WDG #	CLAMP	1		-
43	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
44	MS21919WDG #	CLAMP	1	B	-
	NAS673V13	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
45	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
46	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A890601-2868	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND1-A009)			
47	74A890601-2691	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND2-A010)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
47	74A890601-2423	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-A004)	1		MGOZZ
48	74A890601-2915	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-A004)	1	L	MGOZZ
49	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
50	74A890601-2070	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H034)	1		MGOZZ
51	74A890601-2097	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-H018)	1		MGOZZ
52	74A890601-2096	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-H017)	1		MGOZZ
53	74A890601-2074	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H046)	1		MGOZZ
54	MS21919WDG14	CLAMP	1	L	PAOZZ
	NAS673V3	BOLT (AP)	1	L	PAOZZ
	AN960JD10L	WASHER (AP)	1	L	PAOZZ
55	74A890601-2885	MARKER, IDENTIFICATION - ELECTRICAL (76301) (STOWAGE RECP FOR 61P-A246C)	1		MGOZZ
56	150292-0004	DUMMY CONNECTOR, RECEPTACLE (71468) (MCDONNELL SPEC ST5M1417-001)	1	*	PAOZZ
	A79-32-2	DUMMY CONNECTOR, RECEPTACLE (91836) (MCDONNELL SPEC ST5M1417-001)	1	*	PAOZZ
	31-4522	DUMMY CONNECTOR, RECEPTACLE (74868) (MCDONNELL SPEC ST5M1417-001)	1	*	PAOZZ
	1263000A090	DUMMY CONNECTOR, RECEPTACLE (00795) (MCDONNELL SPEC ST5M1417-001)	1	*	PAOZZ
57	74A890601-2884	MARKER, IDENTIFICATION - ELECTRICAL (76301) (STOWAGE RECP FOR 61P-A246B)	1		MGOZZ
58	10-427405-139	DUMMY CONNECTOR, RECEPTACLE (77820) (MCDONNELL SPEC ST5M1402-13)	1	*	PAOZZ
	650FS001NF13	DUMMY CONNECTOR, RECEPTACLE (06324) (MCDONNELL SPEC ST5M1402-13)	1	*	PAOZZ
	1107-001-13	DUMMY CONNECTOR, RECEPTACLE (59976) (MCDONNELL SPEC ST5M1402-13)	1	*	PAOZZ
59	10-427405-119	DUMMY CONNECTOR, RECEPTACLE (77820) (MCDONNELL SPEC ST5M1402-11)	1	*	PAOZZ
	650ES001NF11	DUMMY CONNECTOR, RECEPTACLE (06324) (MCDONNELL SPEC ST5M1402-11)	1	*	PAOZZ
	1107-001-11	DUMMY CONNECTOR, RECEPTACLE (59976) (MCDONNELL SPEC ST5M1402-11)	1	*	PAOZZ
60	74A890601-2883	MARKER, IDENTIFICATION - ELECTRICAL (76301) (STOWAGE RECP FOR 61P-A246A)	1		MGOZZ
61	MS21919WDG #	CLAMP	3	M	-
	NAS673V2	BOLT (AP)	1	M	PAOZZ
	AN960JD10L	WASHER (AP)	1	M	PAOZZ
62	MS21919WDG4	CLAMP	4	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
63	MS21266-2N	GROMMET	AR	E	PAOZZ
64	MS21919WDG16	CLAMP	1	H	PAOZZ
	NAS673V3	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
64A	MS21919WDG16	CLAMP	1	J	PAOZZ
	NAS673V11	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	NAS43DD3-26N	SPACER (AP)	1	J	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	J	PAOZZ
65	MS21266-2N	GROMMET	AR	H	PAOZZ
66	MS21266-2N	GROMMET	AR	J	PAOZZ
67	82-3223-1	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1348NS1A) (60P-A033)			
	1205-1-1	SEE ABOVE (91836)	1	*	PAOZZ
	1103-097-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
68	MS27467T13B35S	CONNECTOR, PLUG (78P-A017H)	1	N	PAOZZ
69	MS21919WDG16	CLAMP	1	N	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
70	MS21919WDG22	CLAMP	1	N	PAOZZ
	NAS673V11	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
71	MS21266-2N	GROMMET	AR		PAOZZ
72	MS21919WDG21	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
73	MS21919WDG #	CLAMP	1	N	PAOZZ
	NAS673V #	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
74	MS21919WDG12	CLAMP	1	N	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
75	MS21919WDG14	CLAMP	2	N	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
76	MS21919WDG21	CLAMP	2	N	PAOZZ
	NAS673V9	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
77	MS21919WDG28	CLAMP	1	N	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
78	NAS1677D7-48T	CLAMP	1	N	PAOZZ
	NAS673V2	BOLT (AP)	2		PAOZZ
	NAS1149D0316J	WASHER (AP)	2	*	PAOZZ
	AN960JD10LL	WASHER (AP)	2	*	PAOZZ
79	500024-3	TUBING, PLASTIC, SPIRAL (0TSH7)	AR	*	MGOZZ
		(MCDONNELL SPEC 14M912TB8)			
	95349	SEE ABOVE (78570)	AR	*	MGOZZ
	T0008	SEE ABOVE (66794)	AR	*	MGOZZ



LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	162394 & UP
D	161353 THRU 161987
E	161702 THRU 161987 BEFORE F18 AFC 48
F	161353 THRU 162414
G	162415 & UP
H	162394 THRU 162981 BEFORE F18 AFC 48 PT2; ALSO 161353 THRU 161987 AFTER F18 AFC 48
J	162394 THRU 162909 AFTER F18 AFC 48 PT2
K	162394 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 49, 161702 THRU 161987 AFTER F18 AFC 48
L	162394 AND UP; ALSO 161353 THRU 161987 AFTER F18 AFC 48
M	161353 THRU 161987 BEFORE F18 AFC 48
N	162394 THRU 163175 AFTER F/A-18 AFC 292

NOSE BARREL DOOR 3 RIGHT SIDE (FWD)

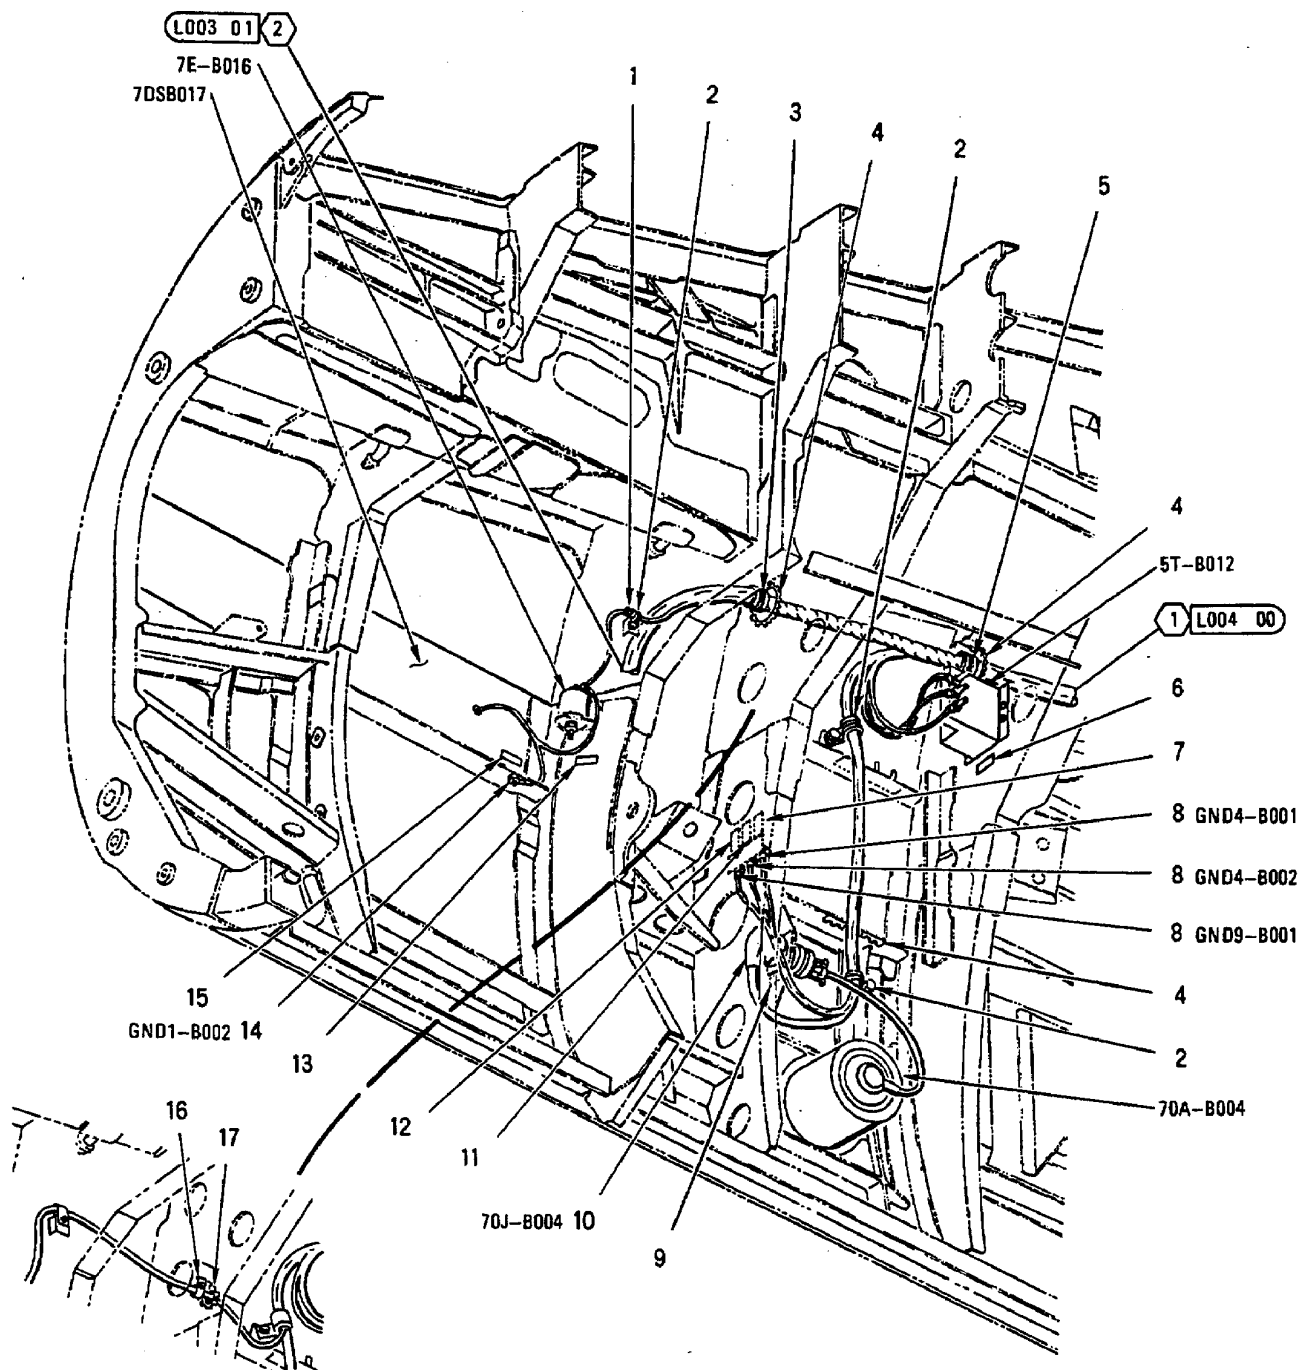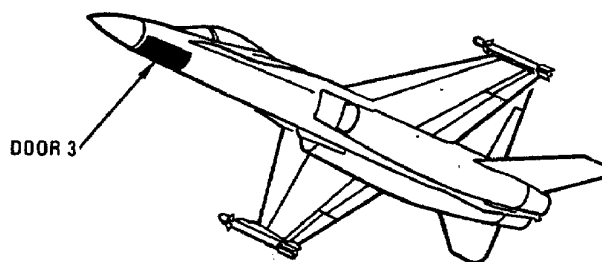



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS35489-4	GROMMET	1		PAOZZ
2	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
4	MS21266-2N	GROMMET	AR		PAOZZ
5	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1056C6-375	SPACER (AP)	1		PAOZZ
6	74A890601-2738	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 5T-B012)	1		MGOZZ
7	74A890601-2465	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-B001)	1		MGOZZ
8	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 8)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 8)	3		PAOZZ
9	74A890601-2124	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 70J-B004)	1		MGOZZ
10	MS27656T15B35S	CONNECTOR, RECEPTACLE (70J-B004)	1		PAOZZ
	NAS600-()P #	SCREW (AP)	4		-
	AN960JD4L	WASHER (AP)	4		PAOZZ
11	74A890601-2414	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-B002)	1		MGOZZ
12	74A890601-2413	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-B001)	1		MGOZZ
13	74A890601-2536	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 7E-B016)	1		MGOZZ
14	NAS603-5P	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 14)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 14)	2		PAOZZ
15	74A890601-2425	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-B002)	1		MGOZZ
16	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
17	MS35489-4	GROMMET	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528



NOSE BARREL

DOOR 3
RIGHT SIDE (FWD)

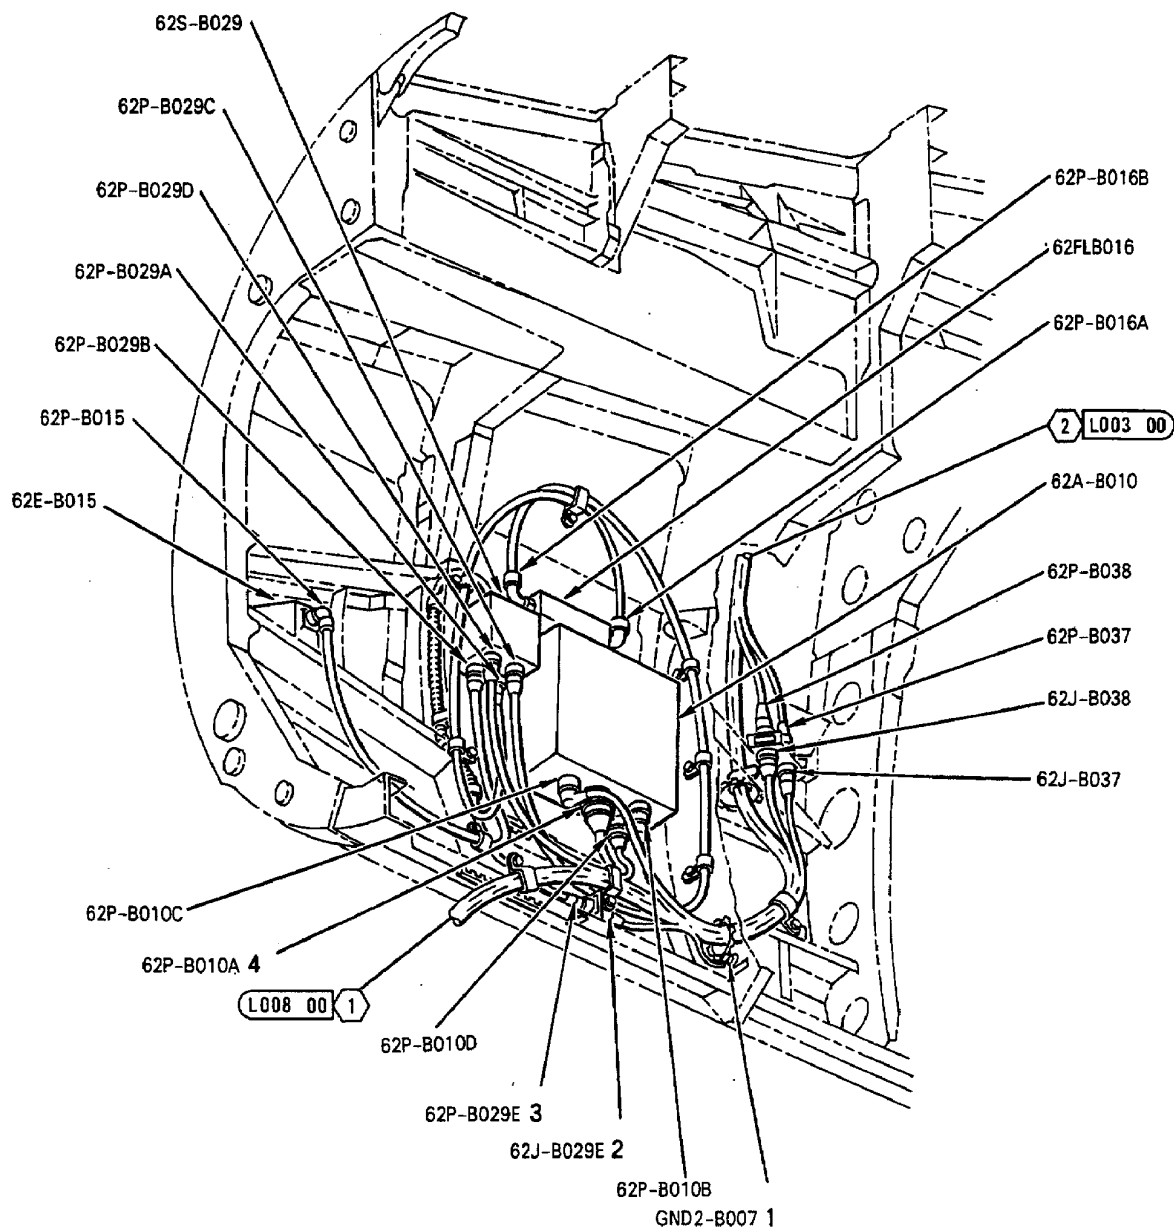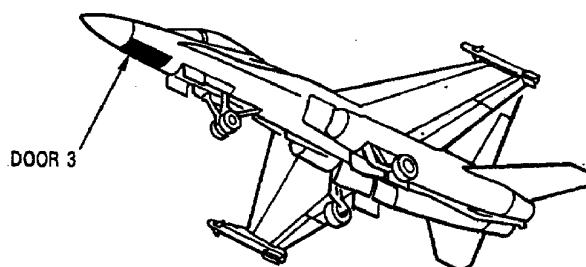

161702 AND UP

NOSE BARREL
RIGHT SIDE (FWD)
DOOR 3

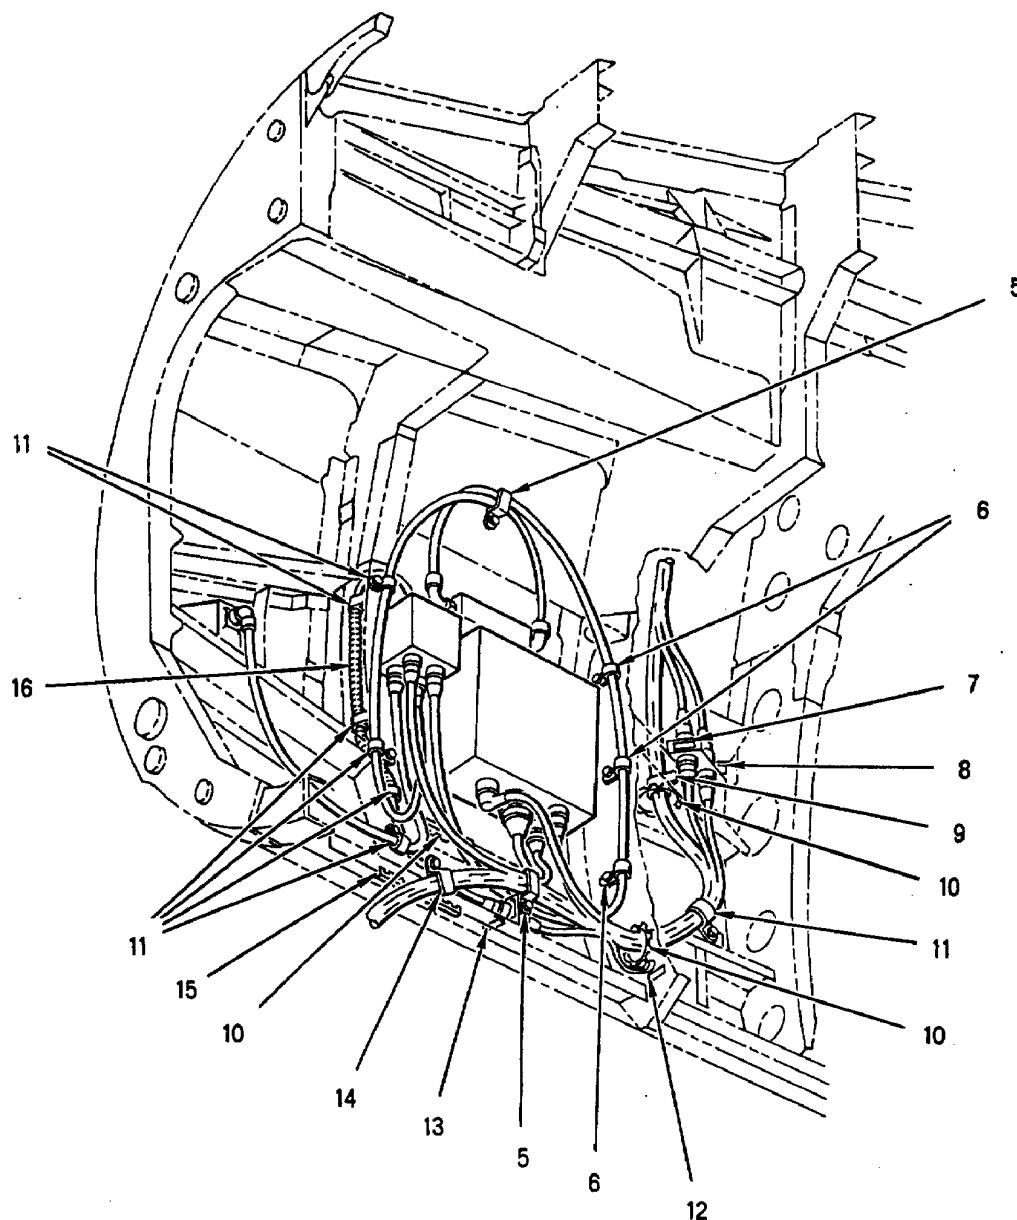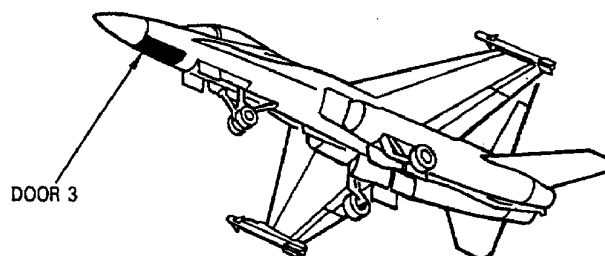

161702 AND UP

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	1	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	1	A	PAOZZ
2	MS27656T9B35S	CONNECTOR, RECEPTACLE (62J-B029E)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
3	MS27467T9B35P	CONNECTOR, PLUG (62P-B029E)	1	A	PAOZZ
4	MS27467T13B35S	CONNECTOR, PLUG (62P-B010A)	1	A	PAOZZ
5	TA519WD7-12	CLAMP, LOOP (84971) (MCDONNELL SPEC ... ST9M633WD7-12)	2	A*	PAOZZ
	487WD7-12	CLAMP, LOOP (83930) (MCDONNELL SPEC ... ST9M633WD7-12)	2	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
6	MS21919WDG #	CLAMP	3	A	-
	NAS673V7	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	A	PAOZZ
7	74A890601-2838	MARKER, IDENTIFICATION - ELECTRI-	1	A	MGOZZ
		CAL (76301) (FOR REF DES 62J-B038)			
8	74A890601-2812	MARKER, IDENTIFICATION - ELECTRI-	1	A	MGOZZ
		CAL (76301) (FOR REF DES 62J-B037)			
9	MS21919WDG #	CLAMP	1	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
10	MS21266-2N	GROMMET	AR	A	PAOZZ
11	MS21919WDG #	CLAMP	7	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
12	74A890601-2167	MARKER, IDENTIFICATION - ELECTRI-	1	A	MGOZZ
		CAL (76301) (FOR REF DES GND2-B007)			
13	74A890601-2331	MARKER, IDENTIFICATION - ELECTRI-	1	A	MGOZZ
		CAL (76301) (FOR REF DES 62J-B029E)			
14	M85052/1-10	CLAMP	1	A	PAOZZ
	NAS673V6	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	A	PAOZZ
15	MS21266-2N	GROMMET	AR	A	PAOZZ
16	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)




CODE USABLE ON

A 161702 & UP

NOSE BARREL

DOOR 3
RIGHT SIDE (AFT)

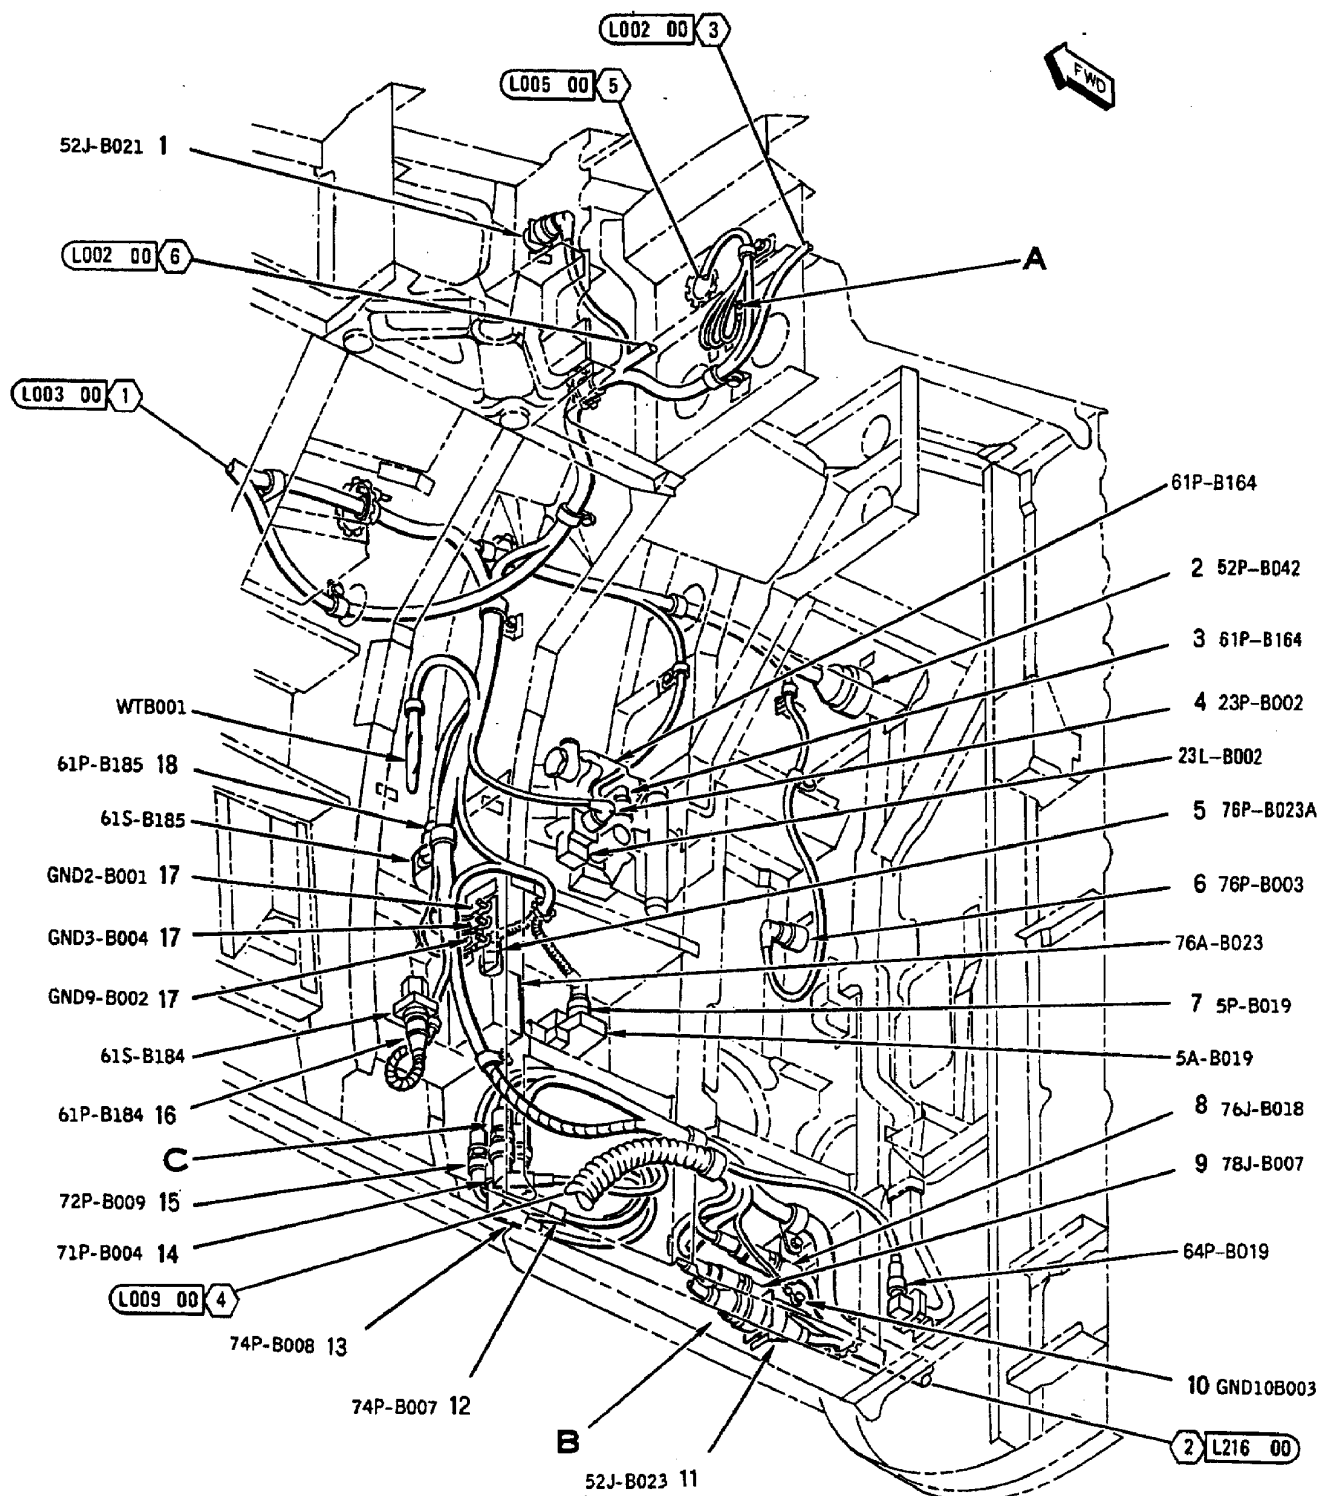


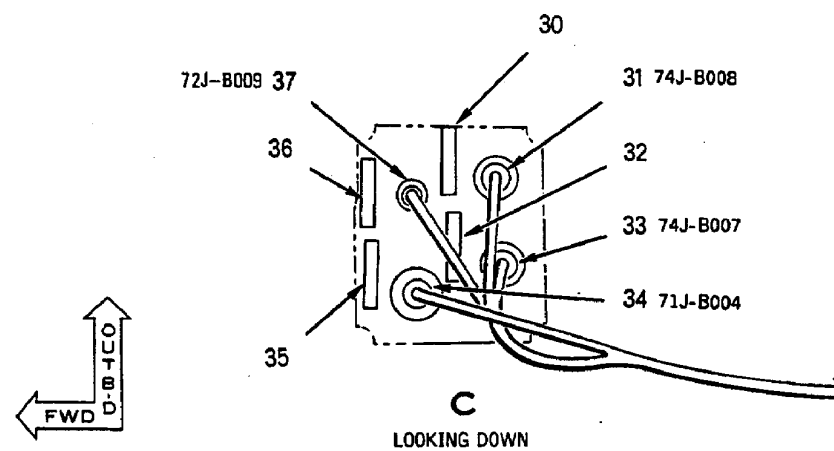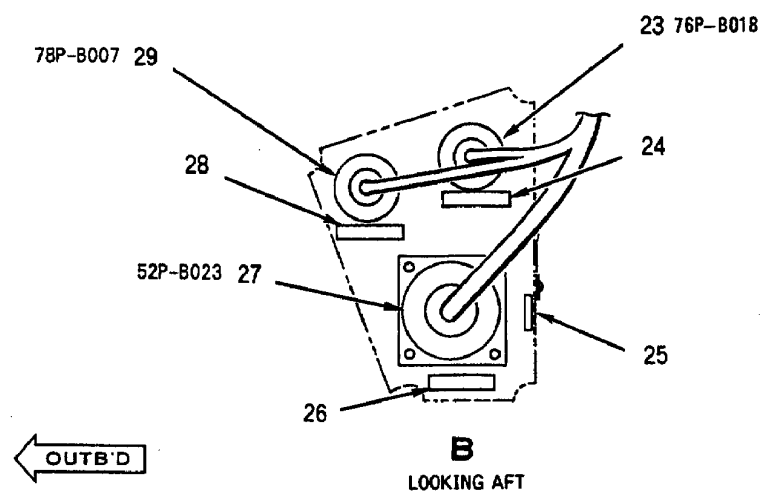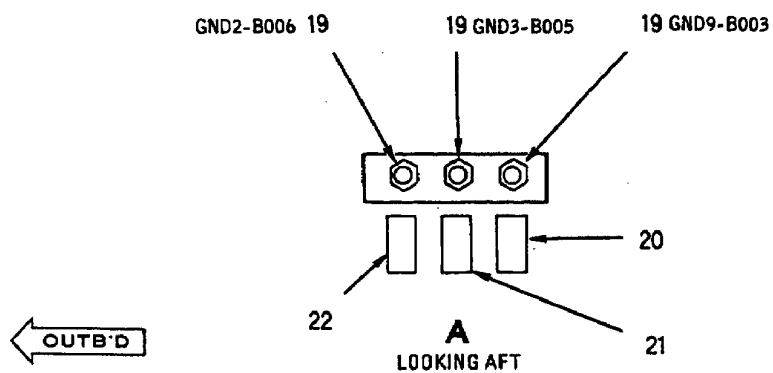

NOSE BARREL

DOOR 3

RIGHT SIDE (AFT)

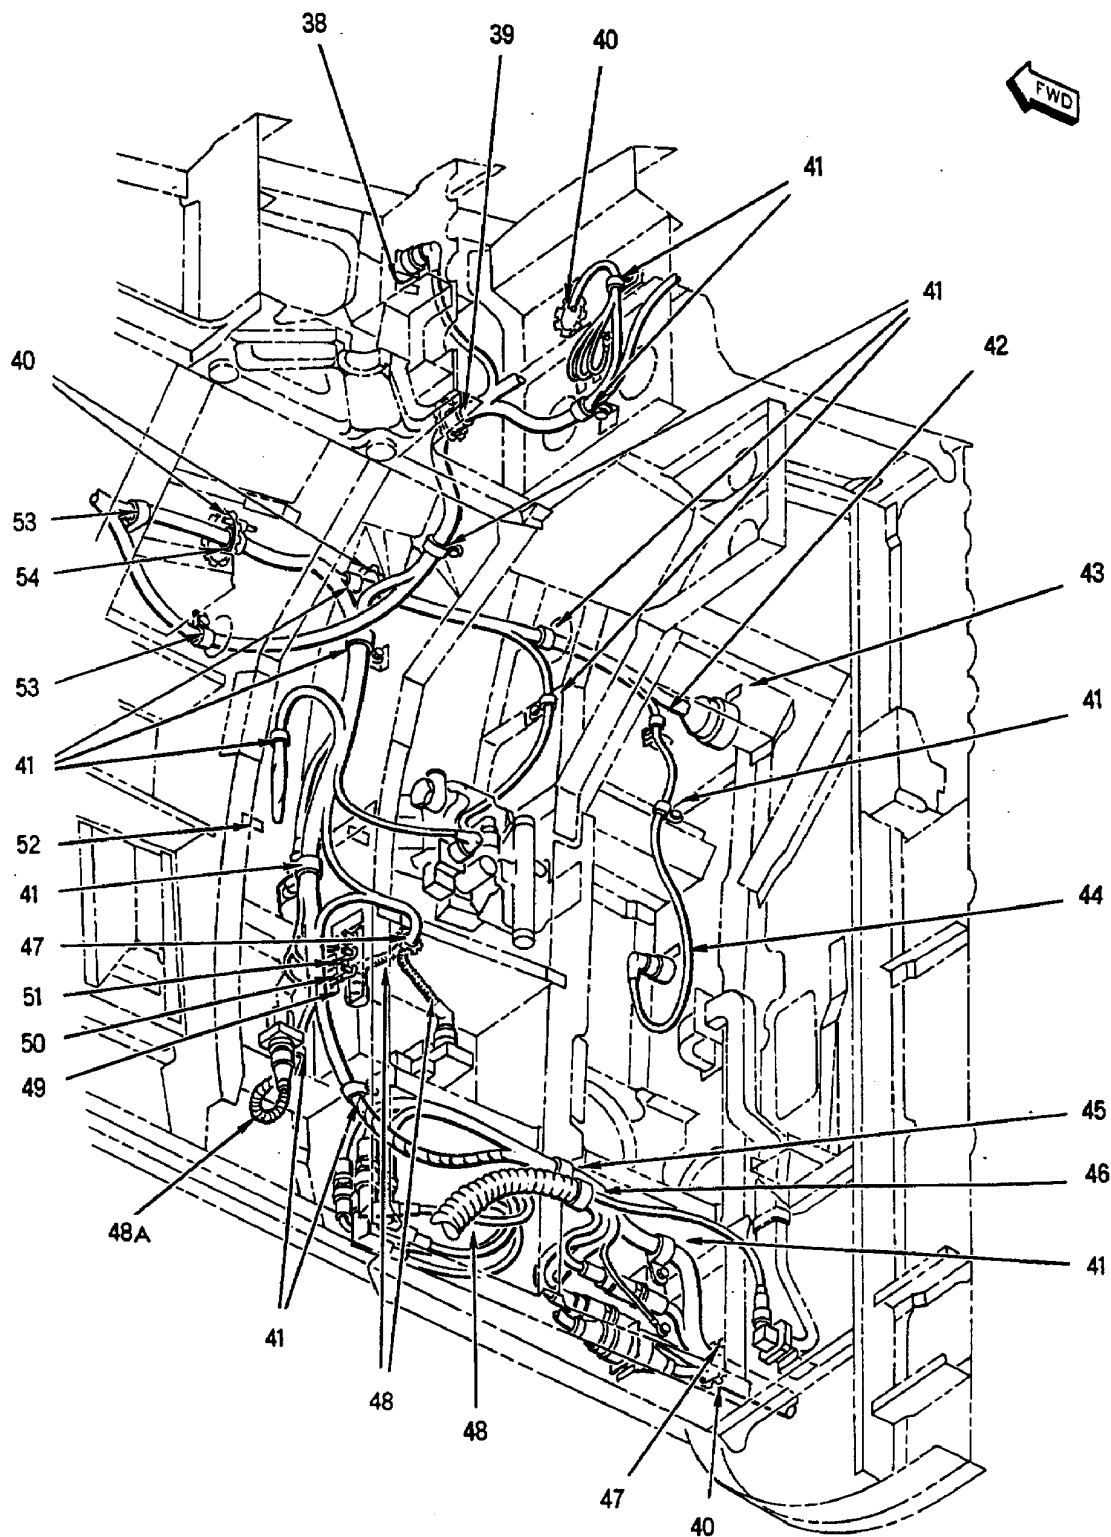

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T13B35S	CONNECTOR, RECEPTACLE (52J-B021)	1		PAOZZ
	NAS601-6P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
2	MS27467T25B35S	CONNECTOR, PLUG (52P-B042)	1		PAOZZ
3	MS27467T11B98S	CONNECTOR, PLUG (61P-B164)	1		PAOZZ
4	MS27467T11B98S	CONNECTOR, PLUG (23P-B002)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (76P-B023A)	1		PAOZZ
6	MS27467T11B35P	CONNECTOR, PLUG (76P-B003)	1		PAOZZ
7	MS27467T11B35SA	CONNECTOR, PLUG (5P-B019)	1		PAOZZ
8	150311-1350	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1544-0001)			
		(76J-B018)			
	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(91836) (MCDONNELL SPEC ST5M1544-0001)			
		(76J-B018)			
	150393-0003	ADAPTER, CABLE CLAMP TO CONNECTOR	1	*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1377N10)			
		(USE WITH INDEX 8)			
	KN-89-61-M07	ADAPTER, CABLE CLAMP TO CONNECTOR	1	*	PAOZZ
		(91836) (MCDONNELL SPEC ST5M1377N10)			
		(USE WITH INDEX 8)			
	1161-000-A000-1	SEE ABOVE (00795)	1	*	PAOZZ
	MS16624-4059	RETAINER (USE WITH INDEX 8)	1		-
9	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL	1		PAOZZ
		(91836) (MCDONNELL SPEC ST5M1544-0001)			
		(78J-B007)			
	150393-0004	ADAPTER, CABLE CLAMP TO CONNECTOR	1	*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1377N20)			
		(USE WITH INDEX 9)			
	KN-89-62-M07	ADAPTER, CABLE CLAMP TO CONNECTOR	1	*	PAOZZ
		(91836) (MCDONNELL SPEC ST5M1377N20)			
		(USE WITH INDEX 9)			
	1161-000-A000-2	SEE ABOVE (00795)	1	*	PAOZZ
	MS16624-4059	RETAINER (USE WITH INDEX 9)	1		-
10	NAS1802-3-14	SCREW (SUPERSEDES NAS1802-3-12)	1		PAOZZ
	NAS1802-3-12	SCREW	1	*	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	1		PAOZZ
	AN960C10L	WASHER (USE WITH INDEX 10)	1		PAOZZ
11	MS27656T21B35S	CONNECTOR, RECEPTACLE (52J-B023)	1		PAOZZ
	NAS600-()P #	SCREW (AP)	4		-
	AN960JD4L	WASHER (AP)	4		PAOZZ
12	31-3229-1001	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TR1B)			
		(74P-B007)			
	126-1-1	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TR1B)			
		(74P-B007)			
	1207-034-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
13	31-3229-1002	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TR2B)			
		(74P-B008)			
	126-1-2	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TR2B)			
		(74P-B008)			
	1207-034-A00E-2	SEE ABOVE (00795)	1	*	PAOZZ
14	82-5676-1	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NR1B)			
		(71P-B004)			
	1206-2-1	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NR1B)			
		(71P-B004)			
	1107-034-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
15	1211-422	CONNECTOR, PLUG, ELECTRICAL (13556)	1		PAOZZ
		(MCDONNELL SPEC ST5M1305-422P)			
		(72P-B009)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
16	MS27467T9B35S	CONNECTOR, PLUG (61P-B184)	1		PAOZZ
17	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 17)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 17)	3		PAOZZ
18	MS3476W8-33S	CONNECTOR, PLUG (61P-B185)	1		PAOZZ
19	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 19)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 19)	3		PAOZZ
20	74A890601-2412	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-B003)			
21	74A890601-2688	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND3-B005)			
23	82-5627-1	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NS1B)			
		(76P-B018)			
	1205-2-1	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NS1B)			
		(76P-B018)			
	1103-034-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
24	74A890601-2823	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 76J-B018)			
25	74A890601-2829	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND10B003)			
26	74A890601-2830	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 52J-B023)			
27	MS27467T21B35P	CONNECTOR, PLUG (52P-B023)	1		PAOZZ
28	74A890601-2824	MARKER, IDENTIFICATION - ELECTRICAL	2		MGOZZ
		(76301) (FOR REF DES 78J-B007)			
29	82-5627-2	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NS2B)			
		(78P-B007)			
	1205-2-2	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348NS2B)			
		(78P-B007)			
	1103-034-A00E-2	SEE ABOVE (00795)	1	*	PAOZZ
30	74A890601-2822	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 74J-B008)			
31	M39012/28-0503	CONNECTOR, RECEPTACLE (74J-B008)	1		PAOZZ
32	74A890601-2821	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 74J-B007)			
33	M39012/28-0503	CONNECTOR, RECEPTACLE (74J-B007)	1		PAOZZ
	150290-0074	ADAPTER, CABLE CLAMP TO CONNECTOR	1	A*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1377T10)			
		(USE WITH INDEX 33)			
	KA-89-64-M07	ADAPTER, CABLE CLAMP TO CONNECTOR	1	A*	PAOZZ
		(91836) (MCDONNELL SPEC ST5M1377T10)			
		(USE WITH INDEX 33)			
	1261-000-A00M-1	SEE ABOVE (00795)	1	A*	PAOZZ
	MS16624-4043	RETAINER (USE WITH INDEX 33)	1	A	-
34	150311-1350	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1544-0001)			
		(71J-B004)			
	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(91836) (MCDONNELL SPEC ST5M1544-0001)			
		(71J-B004)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
35	74A890601-2825	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 71J-B004)	1		MGOZZ
36	74A890601-2826	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 72J-B009)	1		MGOZZ
37	M25516/19-04-14	CONNECTOR, RECEPTACLE (72J-B009)	1		PAOZZ
38	74A890601-2062	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-B021)	2		MGOZZ
39	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
40	MS21266-2N	GROMMET	AR		PAOZZ
41	MS21919WDG #	CLAMP	13		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
42	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
43	74A890601-2073	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J042)	1		MGOZZ
44	74A890601-2128	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 76J-J003)	1		MGOZZ
45	MS21919WDG #	CLAMP	1		-
46	MS21919WDG #	CLAMP	1		-
	NAS673V21	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-64	SPACER (AP)	1		PAOZZ
47	MS21266-1N	GROMMET	AR		PAOZZ
48	500024-1	TUBING, PLASTIC, SPIRAL (13577 (MCDONNELL SPEC 14M912TN4)	AR	*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
48A	500024-0	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TB3)	AR	D	PAOZZ
49	74A890601-2409	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-B002)	1		MGOZZ
50	74A890601-2410	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-B004)	1		MGOZZ
51	74A890601-2411	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-B001)	1		MGOZZ
52	74A890601-2002	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTB001)	1		MGOZZ
53	MS21919WDG #	CLAMP	2	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
54	MS21919WDG #	CLAMP	1		-
	NAS673V13	BOLT (AP)	1	C	PAOZZ
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1	C	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161750 & UP
B	161702 & UP
C	161353 THRU 161528
D	162884 & UP

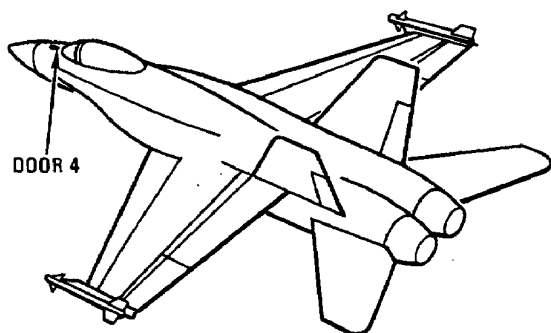

NOSE BARREL



DOOR 4
WEB CLOSURE
PRESSURE DECK
WINDSHIELD

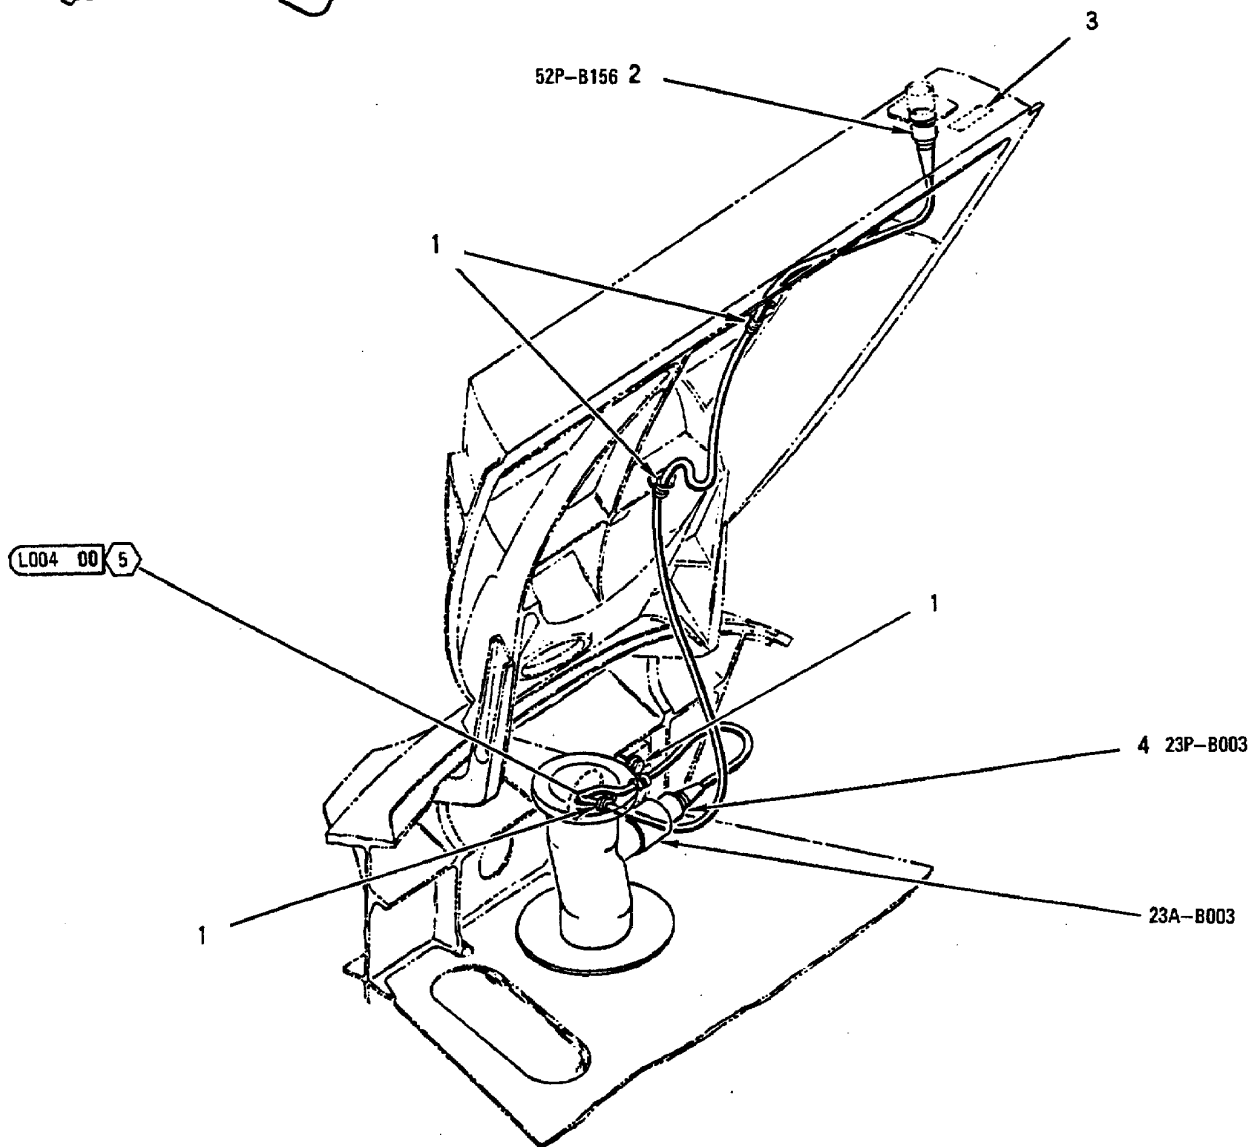


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	4		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27467T9B35S	CONNECTOR, PLUG (52P-B156)	1		PAOZZ
3	74A890601-2813	MARKER, IDENTIFICATION -	1		MGOZZ
		ELECTRICAL (76301) (FOR REF DES 52J-J156)			
4	MS27467T9B35S	CONNECTOR, PLUG (23P-B003)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

NOSE BARREL DOOR 104

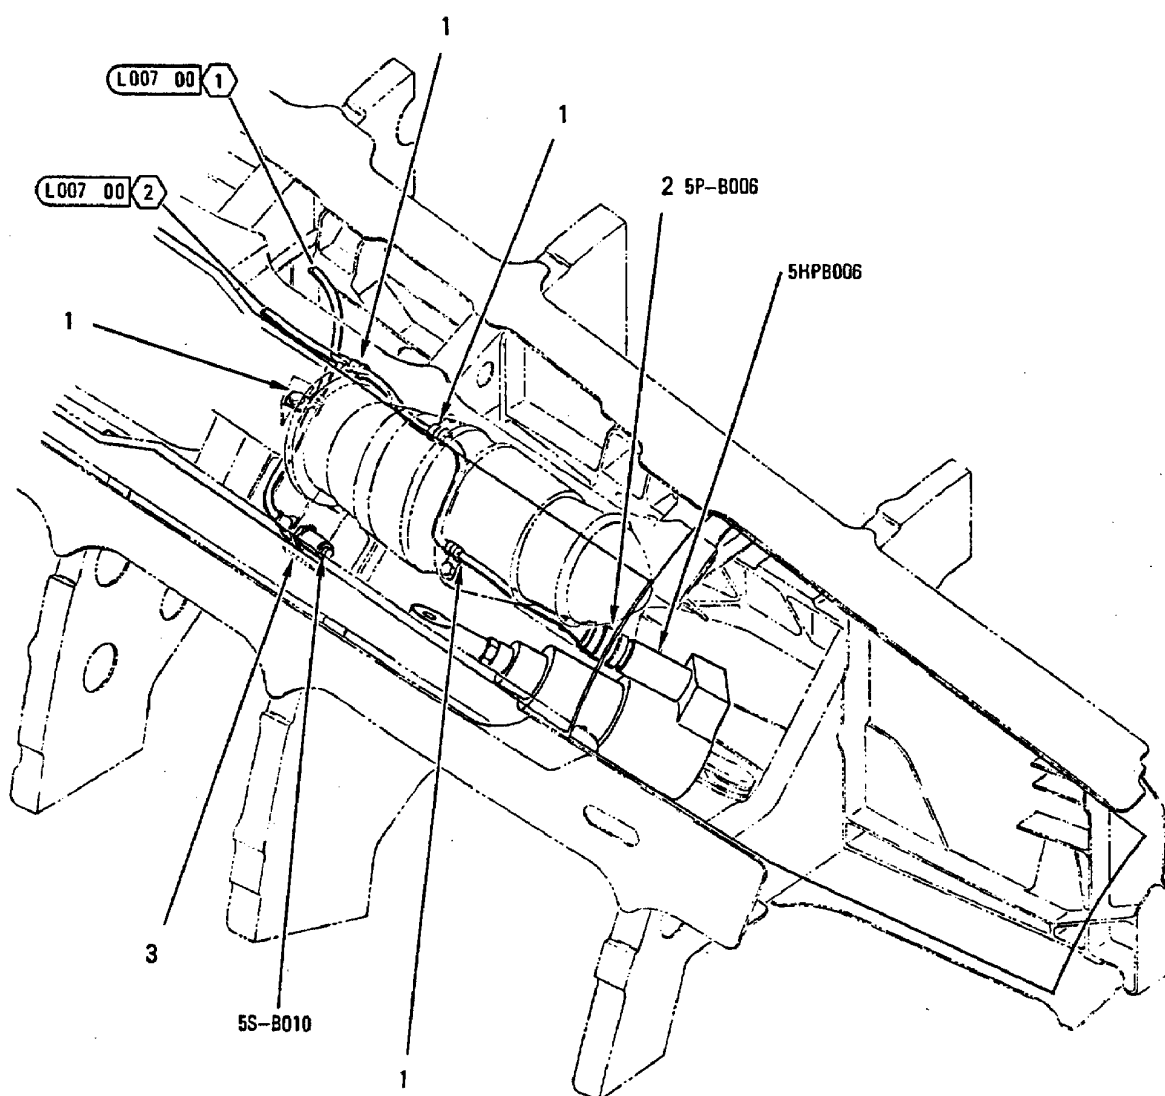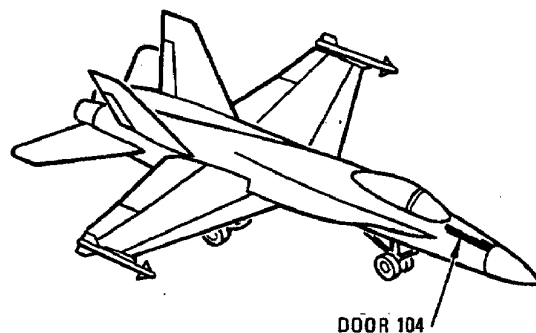


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG4	CLAMP	4		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27467T11B35S	CONNECTOR, PLUG (5P-B006)	1		PAOZZ
3	74A890601-2168	MARKER, IDENTIFICATION -	1		MGOZZ
		ELECTRICAL (76301) (FOR REF DES 5S-B010)			

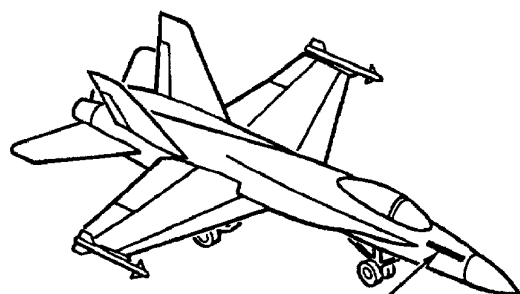


DOOR 104

NOSE BARREL


DOOR 104

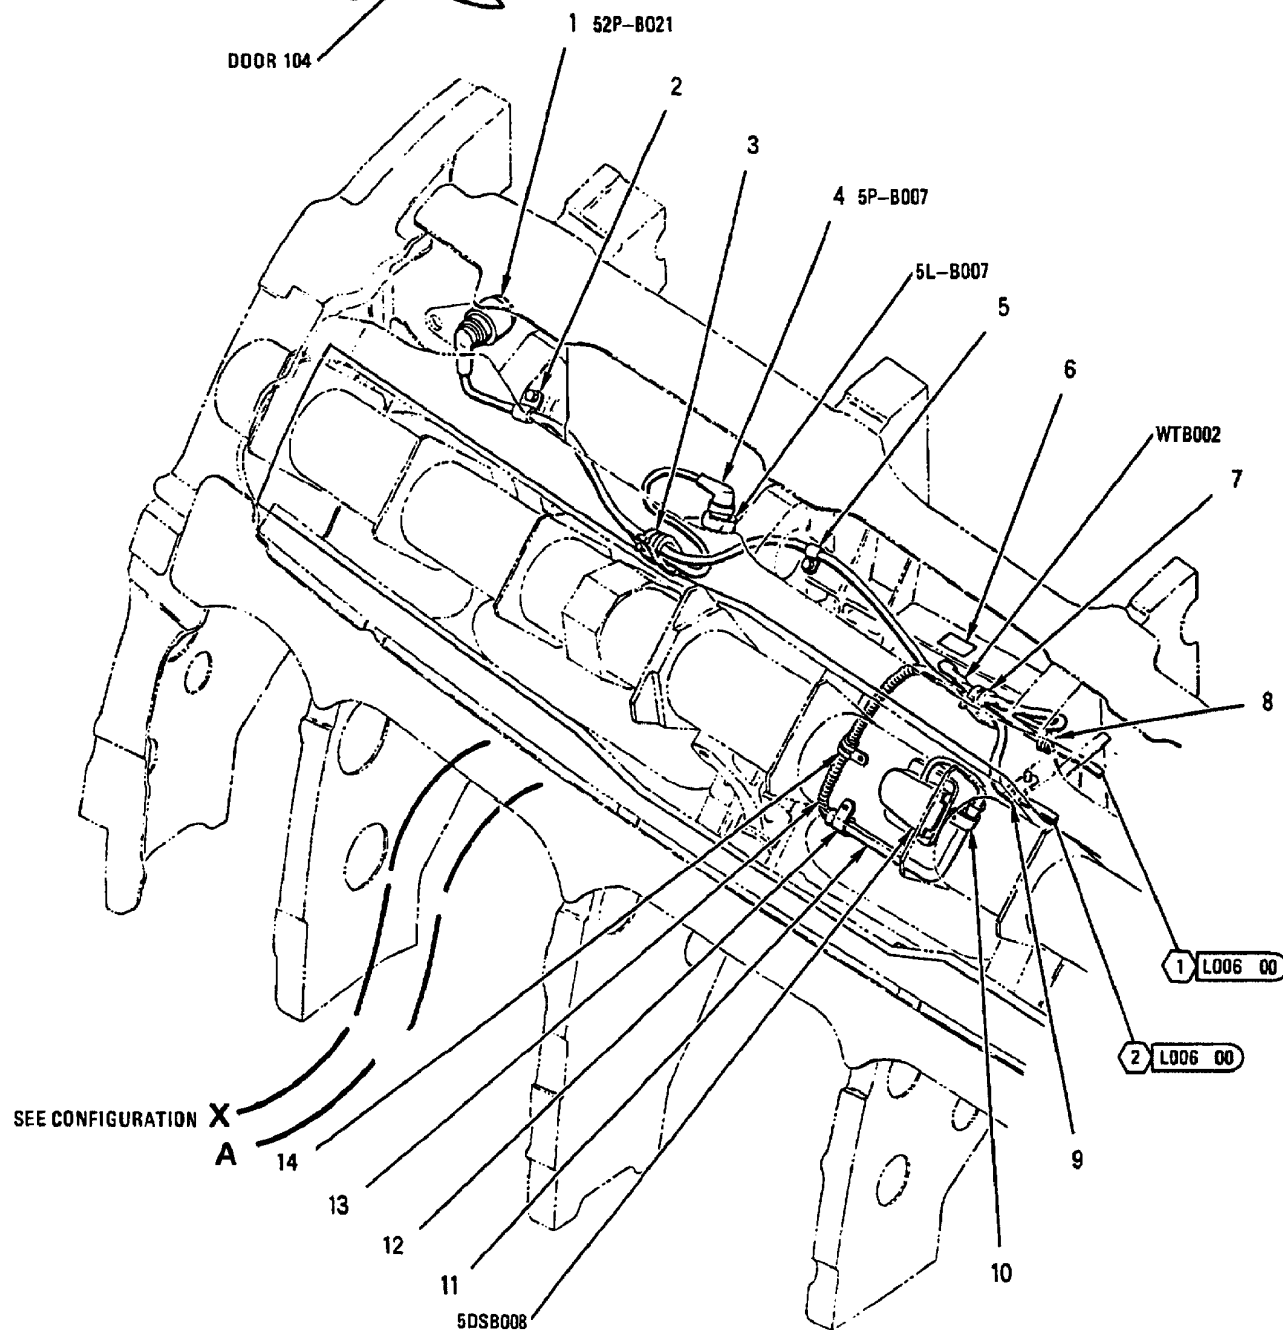

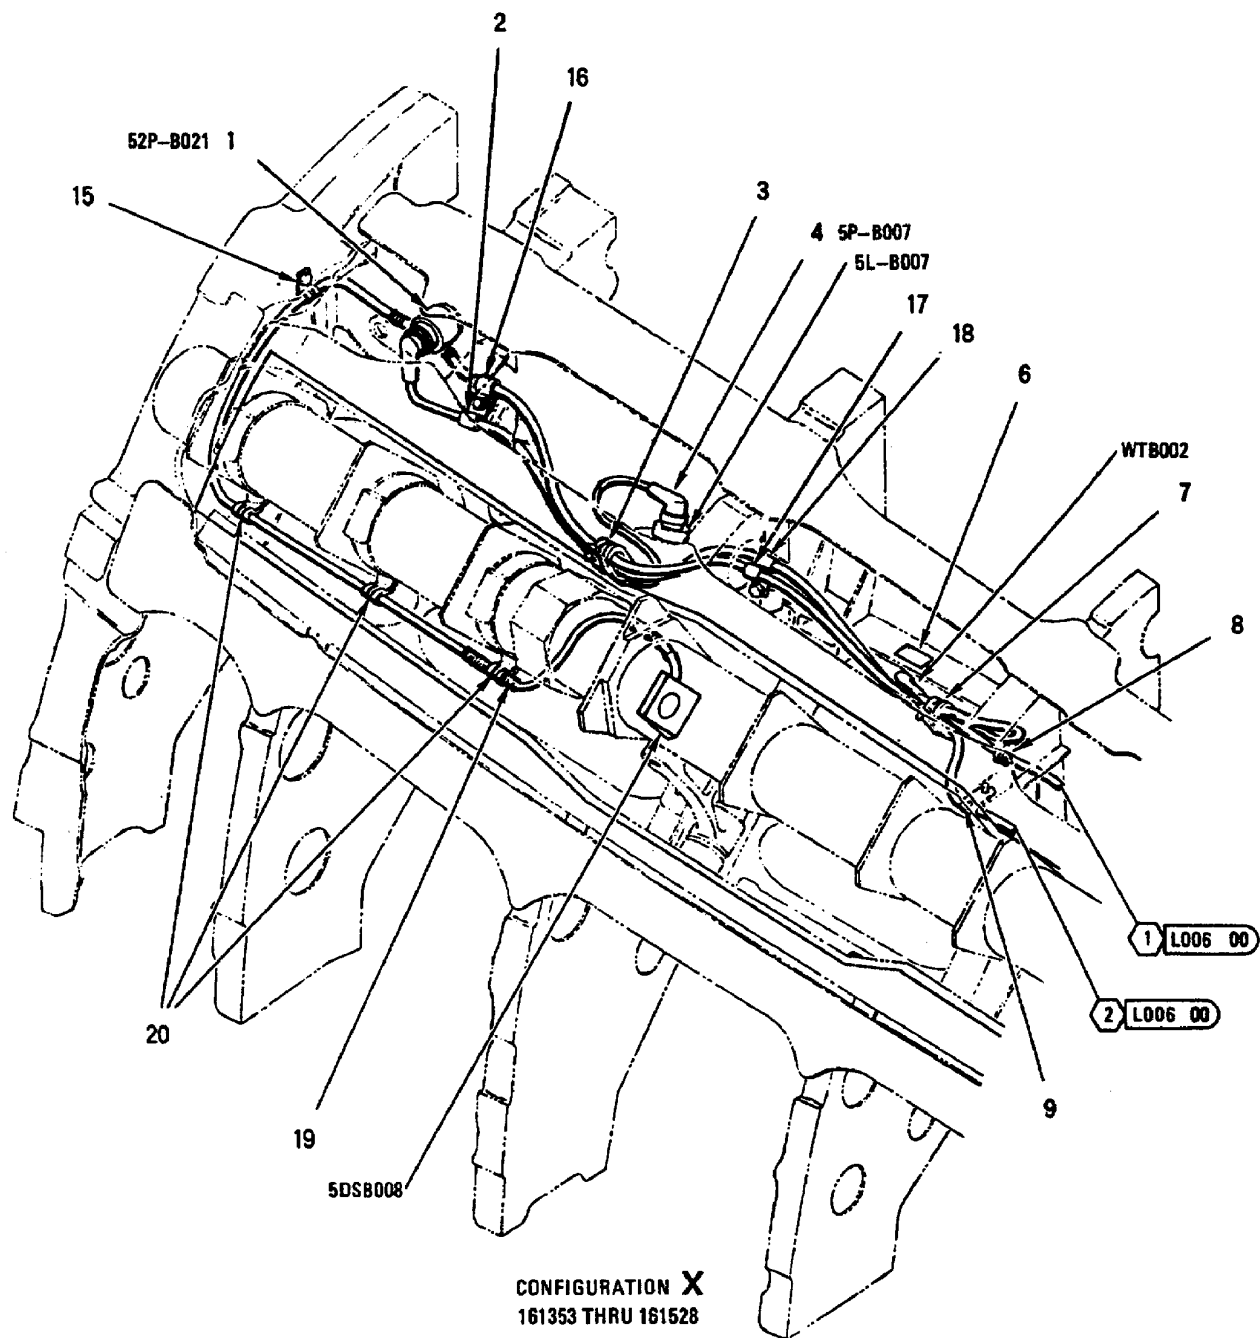

NOSE BARREL


DOOR 104

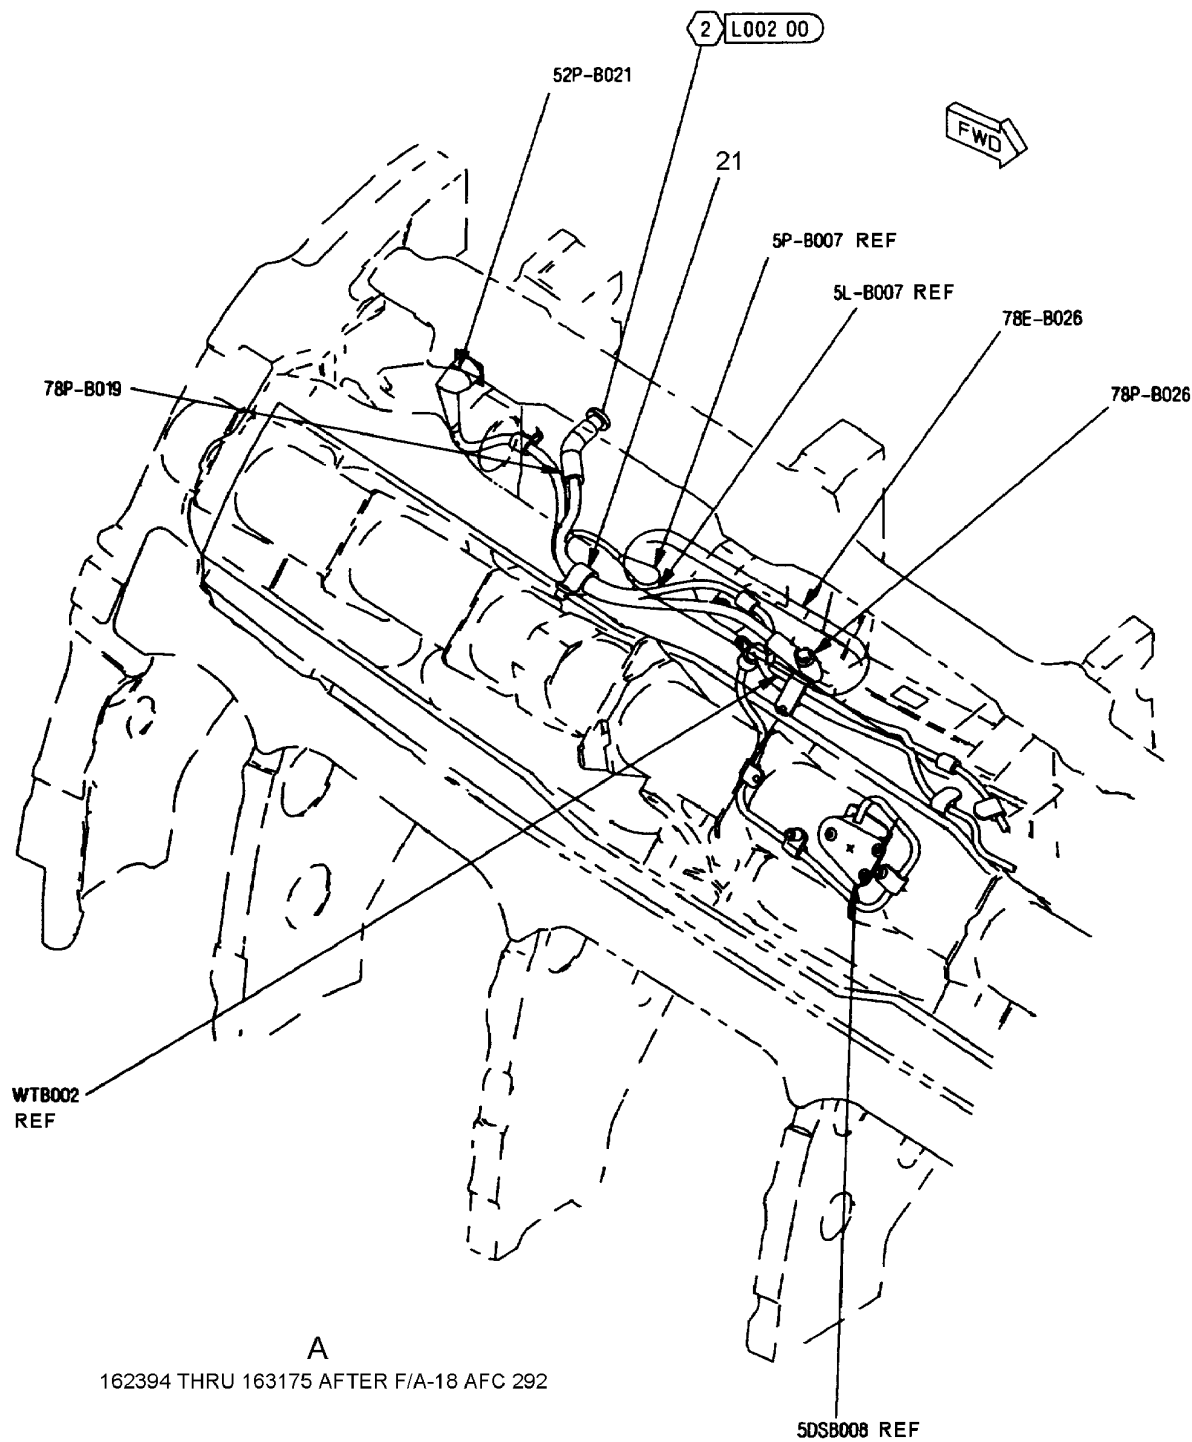


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35P	CONNECTOR, PLUG (52P-B021)	1		PAOZZ
2	MS21919WDG5	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	NAS1714D2-8NW	CLAMP	1	B	PAOZZ
	MS21919WDG4	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS27467T13B98S	CONNECTOR, PLUG (5P-B007)	1		PAOZZ
5	MS21919WDG4	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
6	74A890601-2003	MARKER, IDENTIFICATION -ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES WTB002)			
7	NAS1714D2-8NW	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	AN735D4	CLAMP	1	A	PAOZZ
	NAS583-9	SCREW (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	A	PAOZZ
	MS21042L3	NUT (AP)	1	A	PAOZZ
11	74A661273-1003	TUBE, BENT, METALLIC - ELECTRICAL	1	A	PAOZZ
		CONDUIT (76301) (REPLACES 74A661273-1001)			
	74A661273-1001	TUBE, BENT, METALLIC - ELECTRICAL	1	A	XBOZZ
		CONDUIT (76301) (USE UNTIL EXHAUSTED)			
		(REPLACE WITH 74A661273-1003)			
12	AN735D4	CLAMP	1	A	PAOZZ
	NAS583-15	SCREW (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-36	SPACER (AP)	1	A	PAOZZ
	MS21042L3	NUT (AP)	1	A	PAOZZ
13	M81914/4-1202	TUBING	AR	A	PAOZZ
14	MS21919WDF6	CLAMP	1	A	PAOZZ
	NAS6303U20D	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP) (UNDER BOLT HEAD)	1	A	PAOZZ
	AN960JD10L	WASHER (AP) (UNDER NUT)	1	A	PAOZZ
	MS17825-3	NUT (AP)	1	A	PAOZZ
	MS24665-153	PIN, COTTER (AP)	1	A	PAOZZ
15	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
16	MS21919WDG4	CLAMP	1	B	PAOZZ
17	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-31	SPACER (AP)	1	B	PAOZZ
18	MS21919WDG4	CLAMP	1	B	PAOZZ
19	M81914/4-1202	TUBING	AR	B	PAOZZ
20	MS21919WDF6	CLAMP	3	B	PAOZZ
	MS21042L3	NUT (AP)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
21	AN960JD10	WASHER (AP)							1	B	PAOZZ
	MS21919WDG8	CLAMP							1	C	PAOZZ
	NAS673V8	BOLT (AP)							1		PAOZZ
	NAS1149D0316J	WASHER (AP)							1	*	PAOZZ
	AN960JD10LL	WASHER (AP)							1	*	PAOZZ
	NAS42DD6-16	SPACER (AP)							1		PAOZZ

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	162394 THRU 163175 AFTER F/A-18 AFC 292

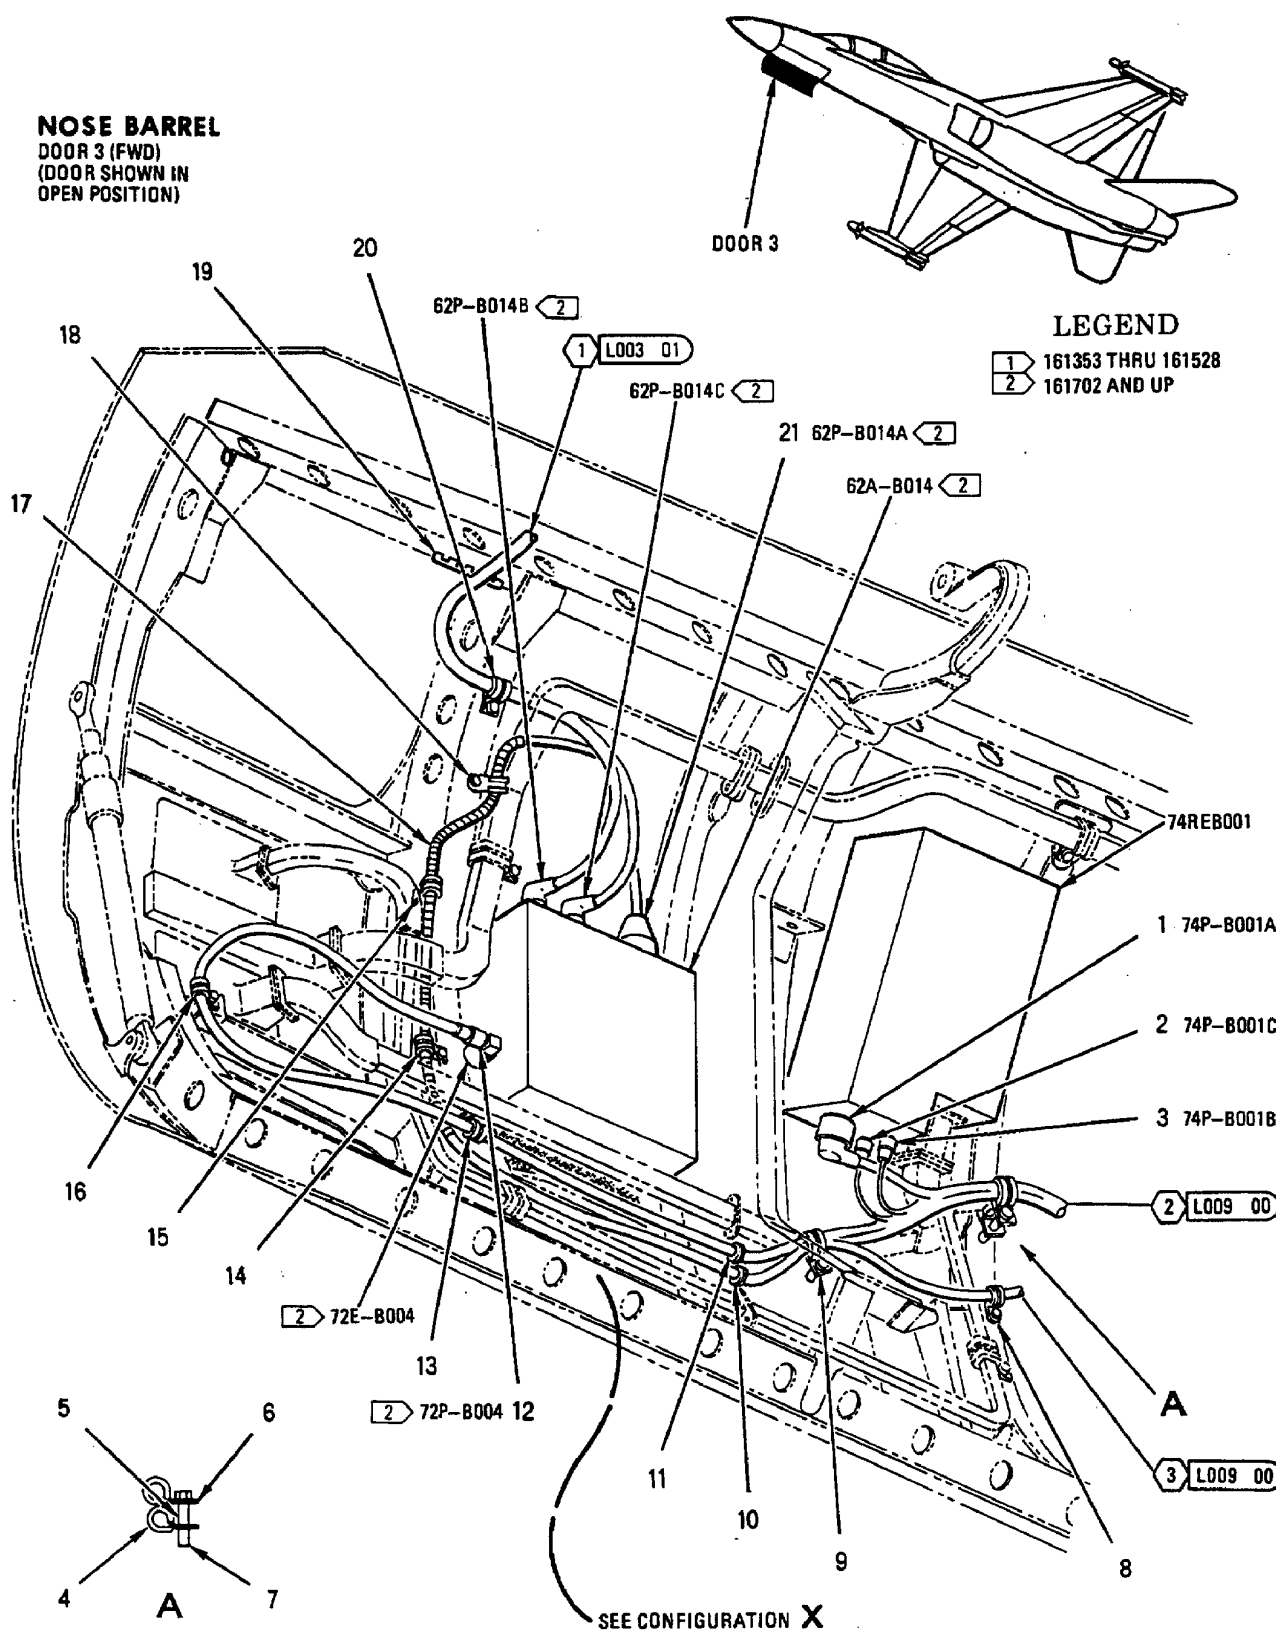

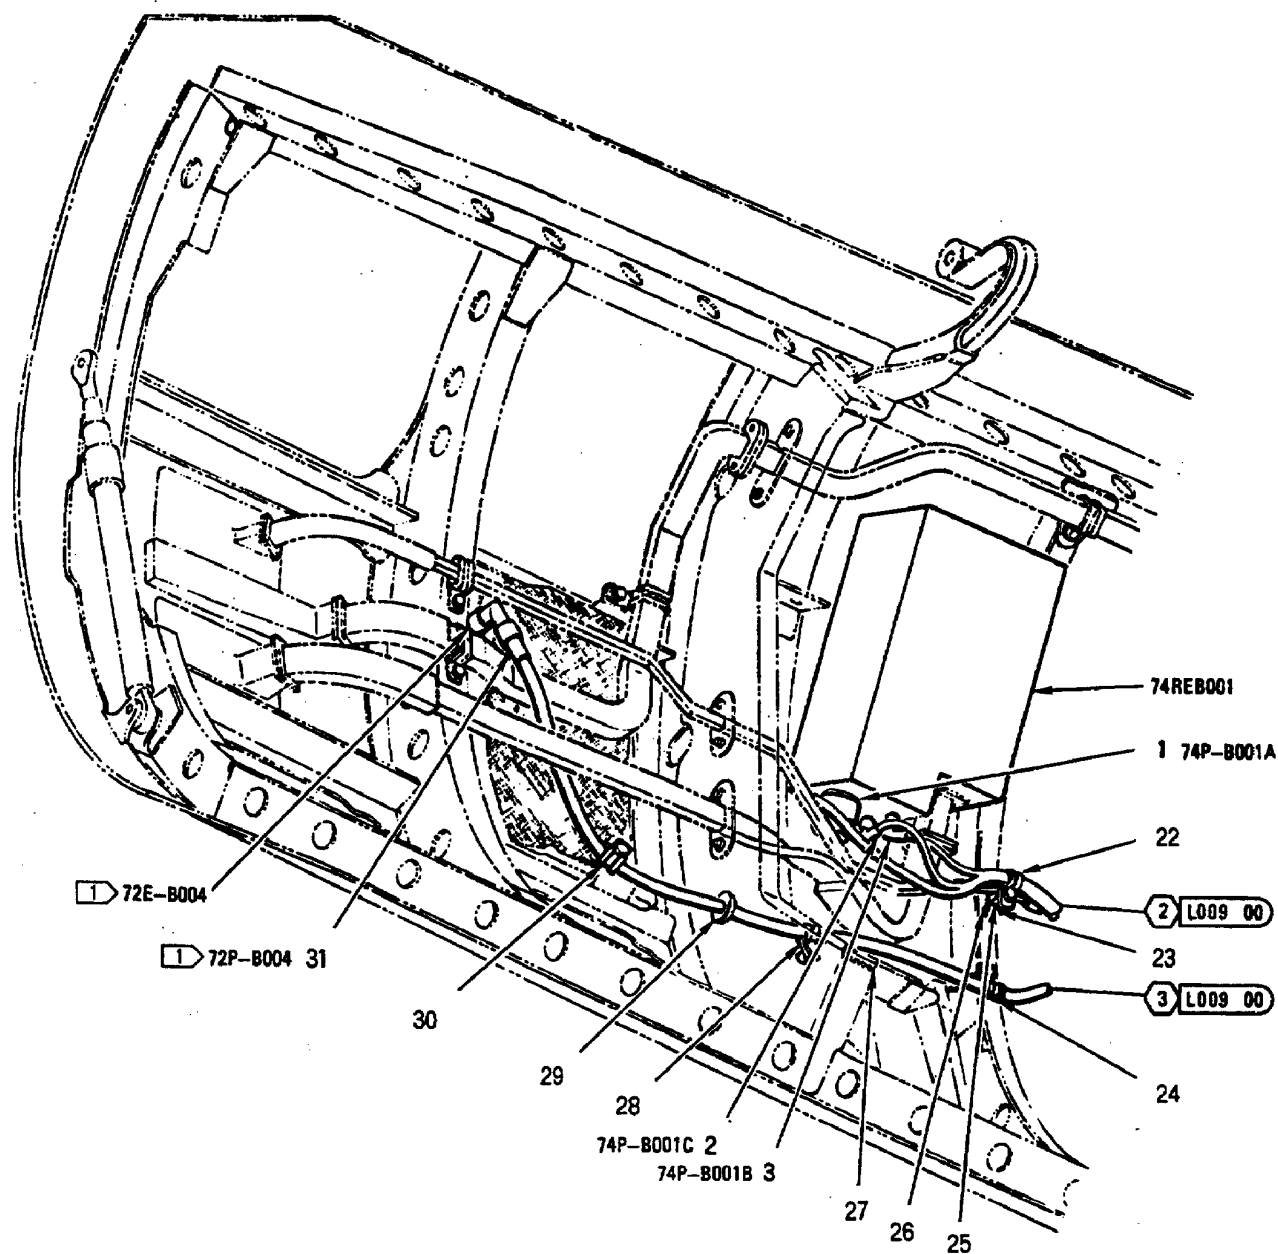



CONFIGURATION X
161353 THRU 161528

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M81511-56WD01S1	CONNECTOR, PLUG (74P-B001A)	1		PAOZZ
2	M39012/56-4502	CONNECTOR, PLUG (74P-B001C)	1		PAOZZ
3	M39012/56-4502	CONNECTOR, PLUG (74P-B001B)	1		PAOZZ
4	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V13	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
5	NAS42DD6-24	SPACER	1	B	PAOZZ
6	MS21919WDG9	CLAMP	1	B	PAOZZ
7	NAS42DD6-16	SPACER	1	B	PAOZZ
8	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
9	MS21919HDD15	CLAMP	1	B	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
10	MS35489-16SX	GROMMET	1	B	PAOZZ
11	MS35489-13SX	GROMMET	1	B	PAOZZ
12	M39012-05-0501	CONNECTOR, PLUG (72P-B004)	1	B	PAOZZ
	M55339-07-00029	ADAPTER (USE WITH INDEX 12)	1	B	PAOZZ
13	MS21919WDG7	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-8	SPACER (AP)	1	C	PAOZZ
14	MS21919WDG9	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
15	MS21919WDG9	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
16	MS21919WDG7	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
17	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	PAOZZ
		(MCDONNELL SPEC 14N912TN4)			
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
18	MS21919WDG9	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
19	NS21266-2N	GROMMET	AR	B	PAOZZ
20	TA519HD6-12	CLAMP, LOOP (84971) (MCDONNELL	1	B*	PAOZZ
		ST9M633WD6-12)			
	487WD6-12	CLAMP, LOOP (83930) (MCDONNELL SPEC	1	B*	PAOZZ
		ST9M633WD6-12)			
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	NS27467T15B35S	CONNECTOR, PLUG (62P-B014A)	1	B	PAOZZ
	M85049/57-14W	CLAMP (SUPERSEDES MS27669B14) (USE WITH	1	B	PAOZZ
		INDEX 21)			
	MS27669B14	CLAMP (USE WITH INDEX 21)	1	B*	PAOZZ
22	MS21919WDG9	CLAMP	1	A	PAOZZ
	NAS673V13	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
23	MS21919WDG6	CLAMP	1	A	PAOZZ
24	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V10	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
25	NAS42DD6-38	SPACER	1	A	PAOZZ
26	NAS42DD6-24	SPACER	1	A	PAOZZ
27	MS21266-1N	GROMMET	AR	A	PAOZZ
28	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V10	BOLT (AP)	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
29	MS35489-13SX	GROMMET	1	A	PAOZZ
30	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V19	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	A	PAOZZ
31	M39012/05-0501	CONNECTOR, PLUG (72P-B004)	1	A	PAOZZ
	M55339-07-00029	ADAPTER (USE WITH INDEX 31)	1	A	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	162398 & UP

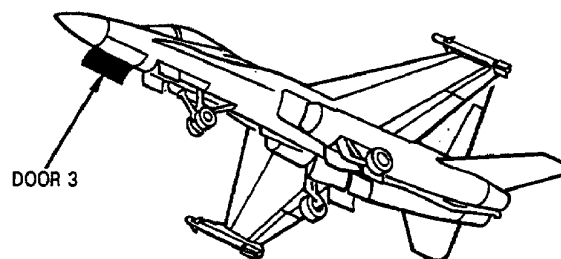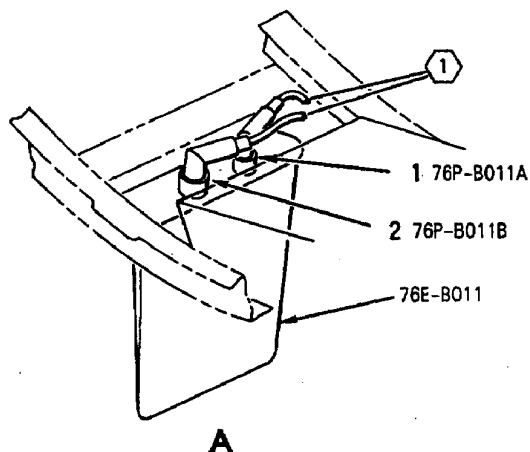



NOSE BARREL

DOOR 3 (AFT)
(DOOR SHOWN IN
OPEN POSITION)

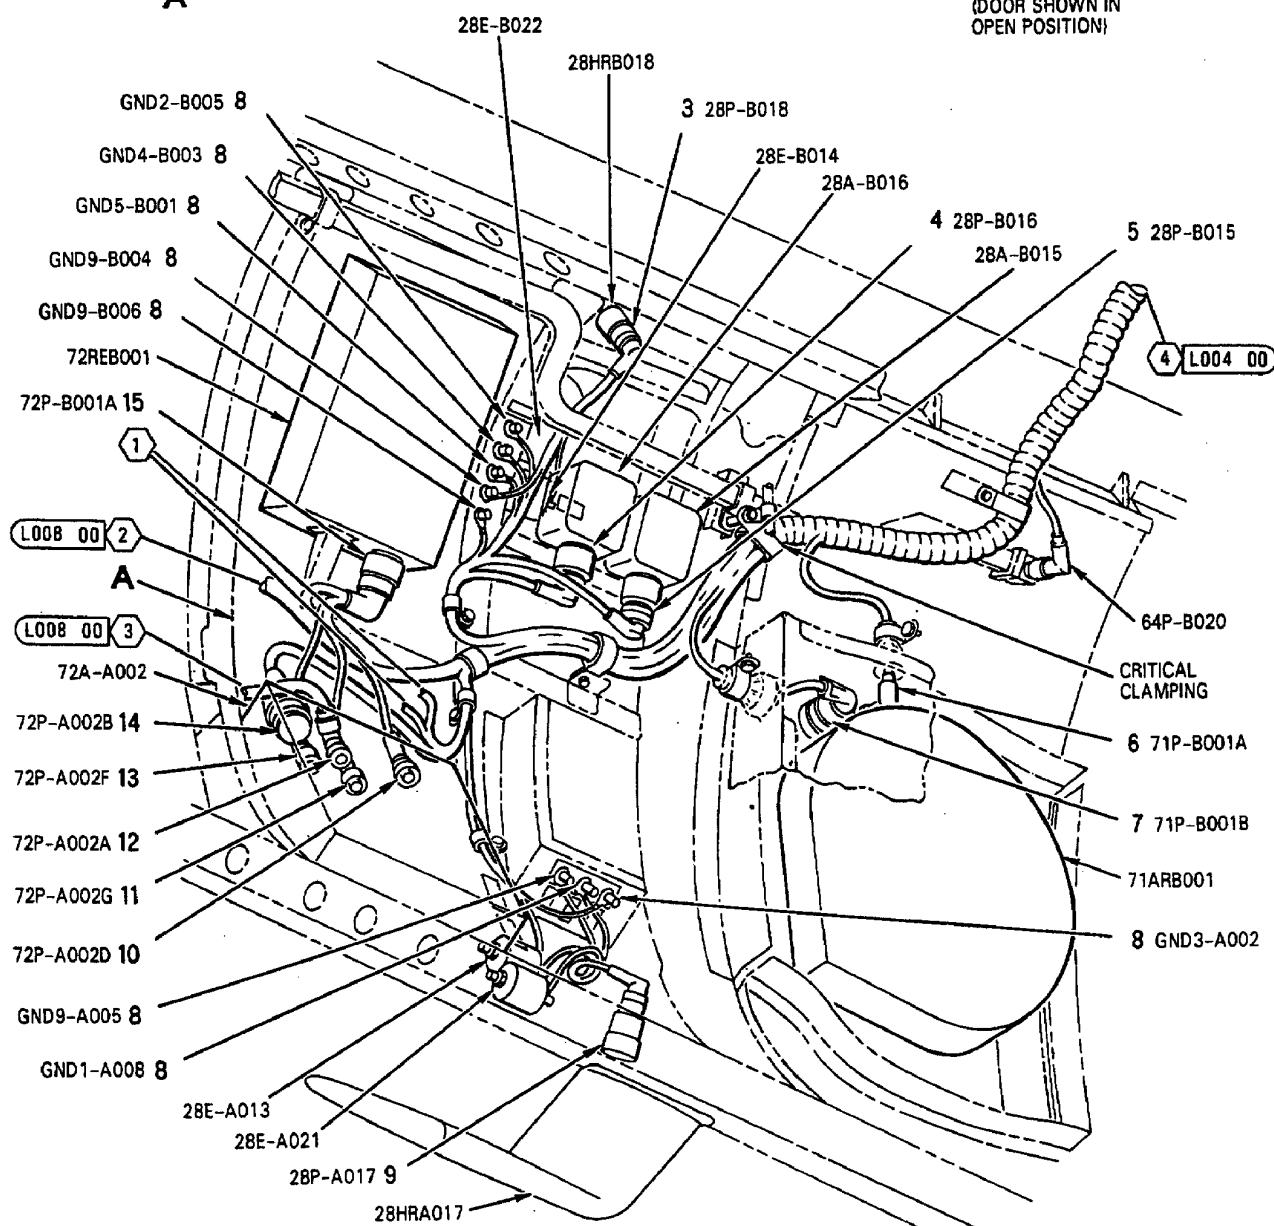

NOSE BARREL


DOOR 3 (AFT)
(DOOR SHOWN IN
OPEN POSITION)

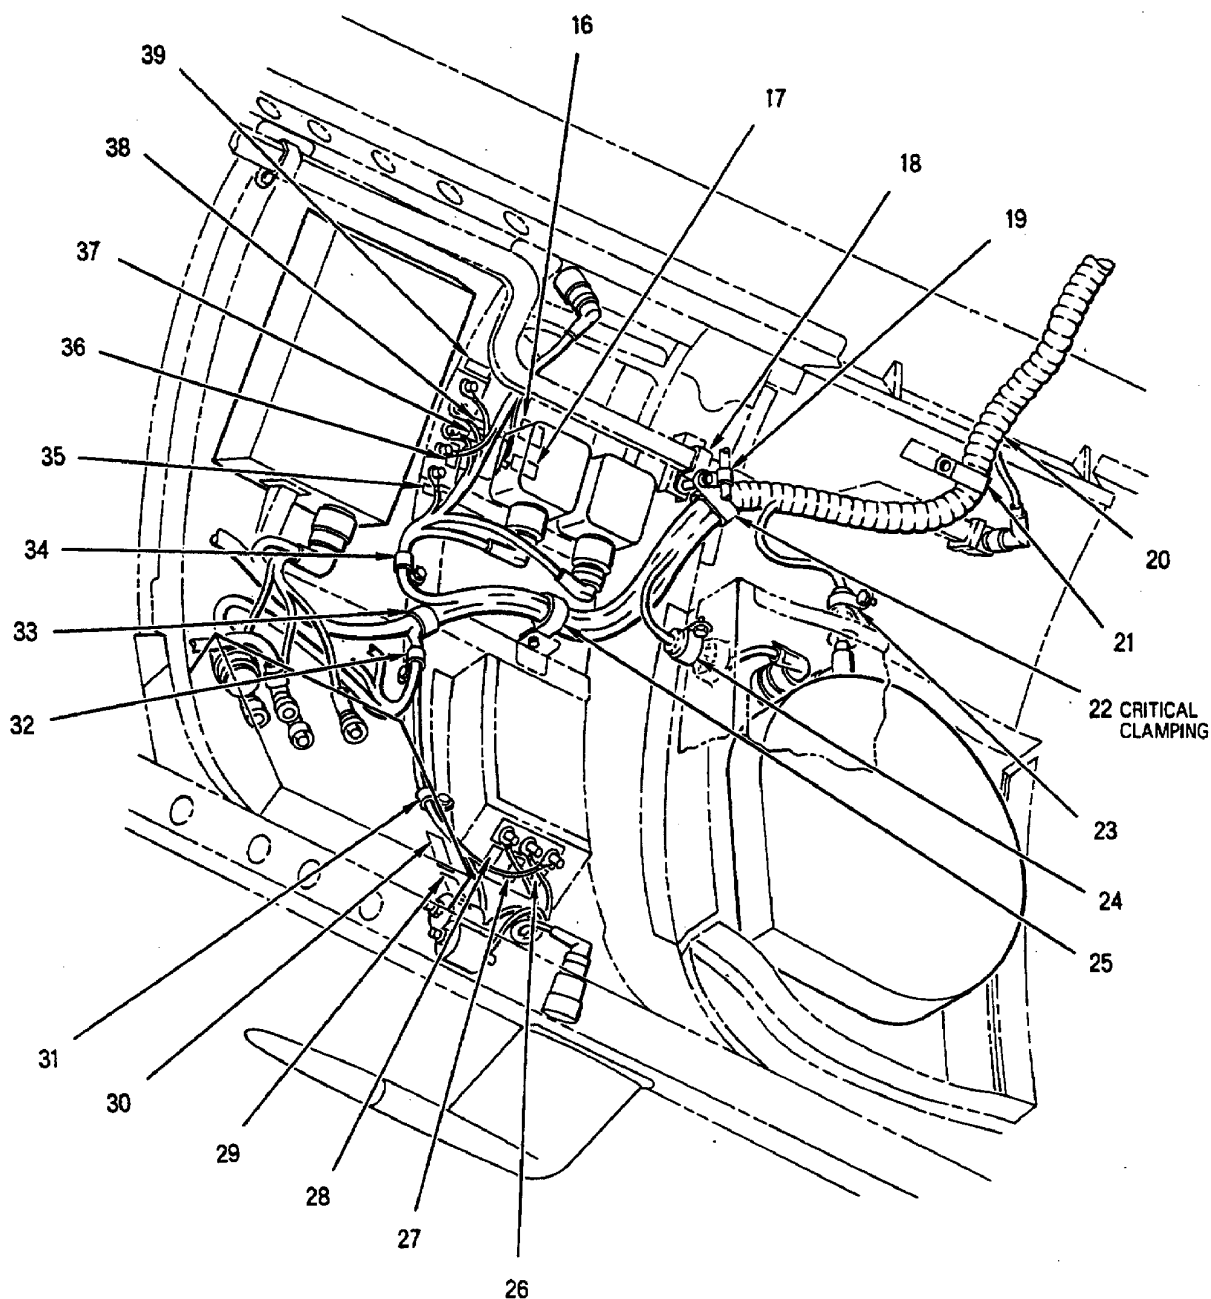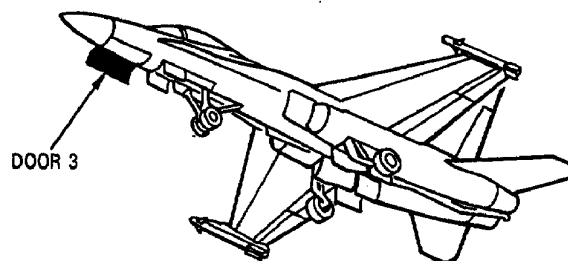


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M39012/30-0503	CONNECTOR, PLUG (76P-B001A)	1		PAOZZ
2	M39012/39-0503	CONNECTOR, PLUG (76P-B001B)	1		PAOZZ
3	MS27467T11B98S	CONNECTOR, PLUG (28P-B018)	1		PAOZZ
4	MS27467T13B98S	CONNECTOR, PLUG (28P-B016)	1		PAOZZ
5	MS27467T13B98S	CONNECTOR, PLUG (28P-B015)	1		PAOZZ
6	M39012/05-0503	CONNECTOR, PLUG (71P-B001A)	1		PAOZZ
7	MS3476W16-26S	CONNECTOR, PLUG (71P-B001B)	1		PAOZZ
8	MS21042L3	NUT	8		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 8)	8		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 8)	8		PAOZZ
9	MS27467T11B98S	CONNECTOR, PLUG (28P-A017)	1		PAOZZ
10	31-4229-1001	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1348TS1E) (72P-A002D)	1	*	PAOZZ
	125-4-1	CONNECTOR, PLUG, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1348TS1E) (72P-A002D)	1	*	PAOZZ
	1203-041-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
11	M39012/26-0502	CONNECTOR, PLUG (72P-A002G)	1		PAOZZ
12	1207-079-A00E	CONNECTOR, PLUG, ELECTRICAL (00795) (MCDONNELL SPEC ST5M1332-001) (72P-A002A)	1	*	PAOZZ
	31-4371-3009	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1332-001) (72P-A002A)	1	*	PAOZZ
	126-6	CONNECTOR, PLUG, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1332-001) (72P-A002A)	1	*	PAOZZ
13	31-4229-1002	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1348TS2E) (72P-A002F)	1	*	PAOZZ
	125-4-2	CONNECTOR, PLUG, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1348TS2E) (72P-A002F)	1	*	PAOZZ
	1203-041-A00E-2	SEE ABOVE (00795)	1	*	PAOZZ
14	MS3476W14-19S	CONNECTOR, PLUG (72P-A002B)	1		PAOZZ
15	DS07-27-13S1006	CONNECTOR, PLUG, ELECTRICAL (11139) (MCDONNELL SPEC ST5M1465H1S1) (72P-B001A)	1		PAOZZ
16	74A890007-2045	PLATE, IDENTIFICATION - NOSE EQUIP (76301) (FOR REF DES 28E-B022)	1		MDOZZ
17	74A890007-2015	PLATE, IDENTIFICATION - NOSE EQUIP (76301) (FOR REF DES 28E-B014)	1		MDOZZ
18	NAS1677D7-13N	STRAP	1		PAOZZ
19	NMC-ST9M529-6	CLAMP, LOOP (03296) (MCDONNELL SPEC ST9M529-6)	1		PAOZZ
20	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
21	MS21919WDG14	CLAMP	1		PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
23	MS21919WDG8	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
24	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS1291C3M	NUT (AP)	1		PAOZZ
25	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	74A890601-2493	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-A002)			
27	74A890601-2703	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND1-A008)			
28	74A890601-2702	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-A005)			
29	74A890007-2043	PLATE, IDENTIFICATION - NOSE EQUIP (76301)	1		MDOZZ
		(FOR REF DES 28E-A021)			
30	74A890007-2013	PLATE, IDENTIFICATION - NOSE EQUIP (76301)	1		MDOZZ
		(FOR REF DES 28E-A013)			
31	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
32	MS21919WDG7	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
33	MS21919WDG8	CLAMP	1		PAOZZ
	NAS673V14	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
34	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
35	74A890601-2400	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-B006)			
36	74A890601-2398	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-B004)			
37	74A890601-2396	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND5-B001)			
38	74A890601-2701	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-B003)			
39	74A890601-2399	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND2-B005)			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

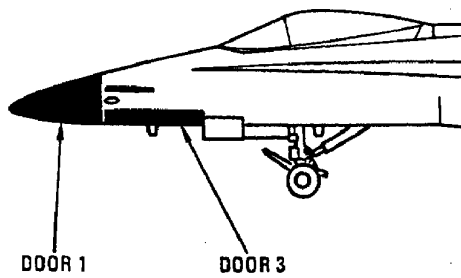


NOSE BARREL DOOR 1 AND DOOR 3

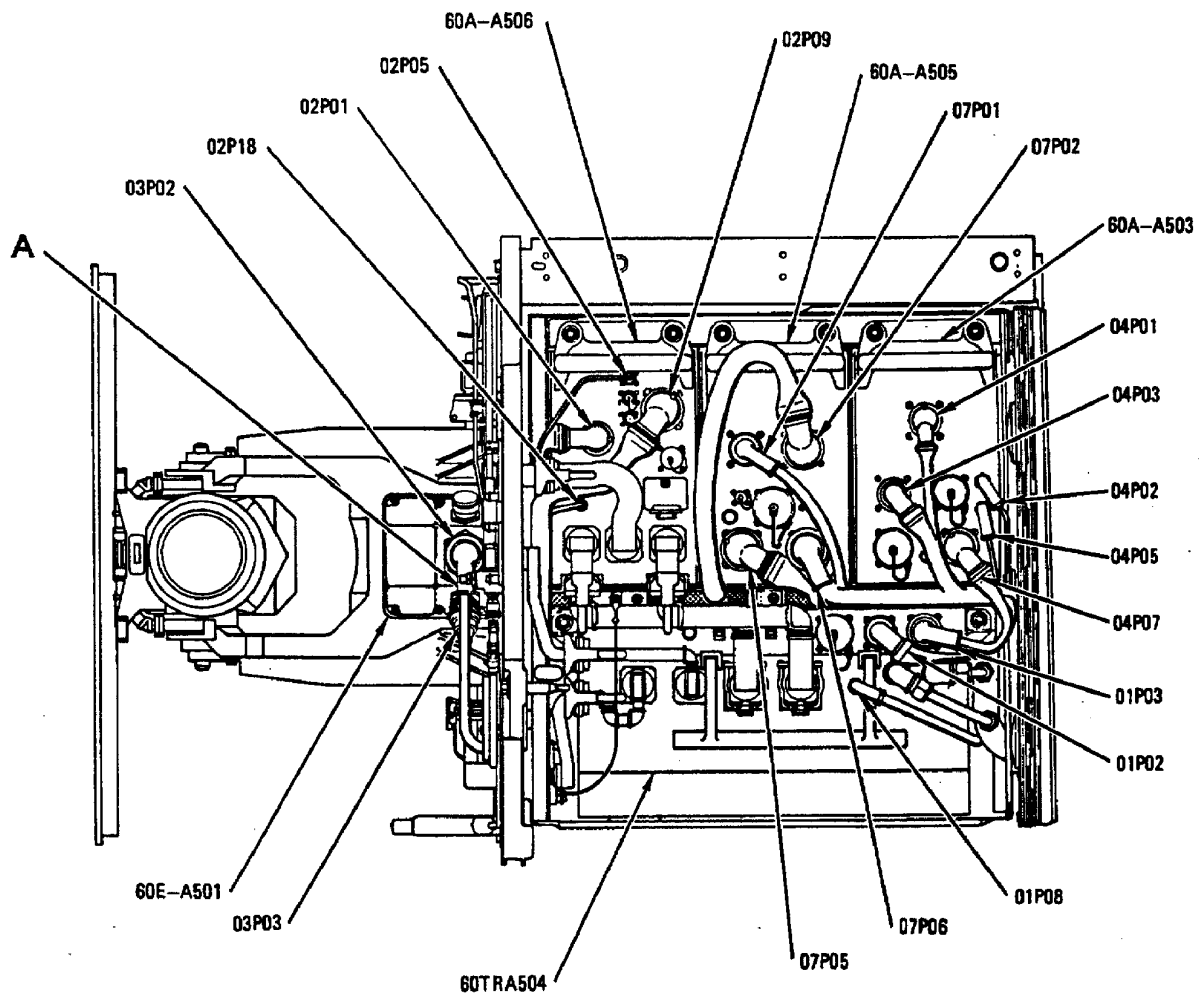

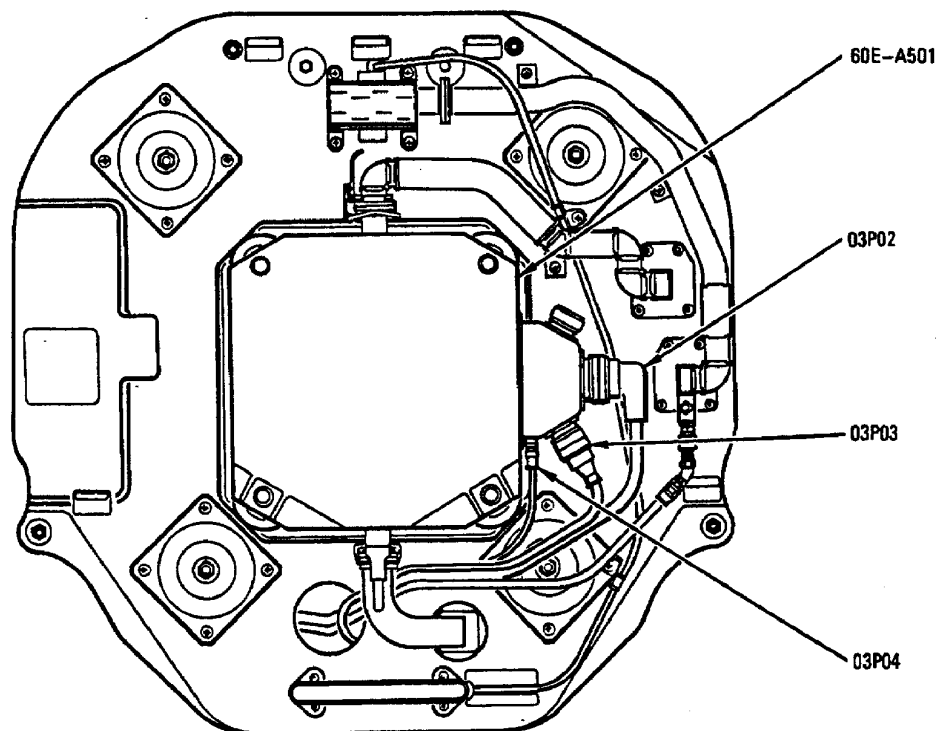

A
VIEW LOOKING AFT
(ANTENNA REMOVED
FOR CLARITY)

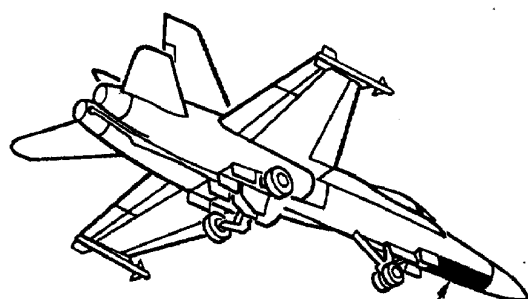

DOOR 3


NOSE BARREL DOOR 3

RADAR PACKAGE


PANTOGRAPH
ASSEMBLY

AIRCRAFT
BULKHEAD

L027 00 1

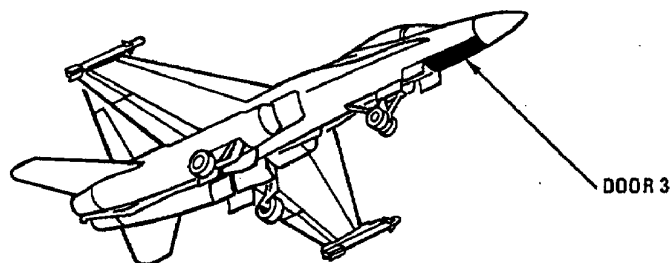


NOSE BARREL DOOR 3

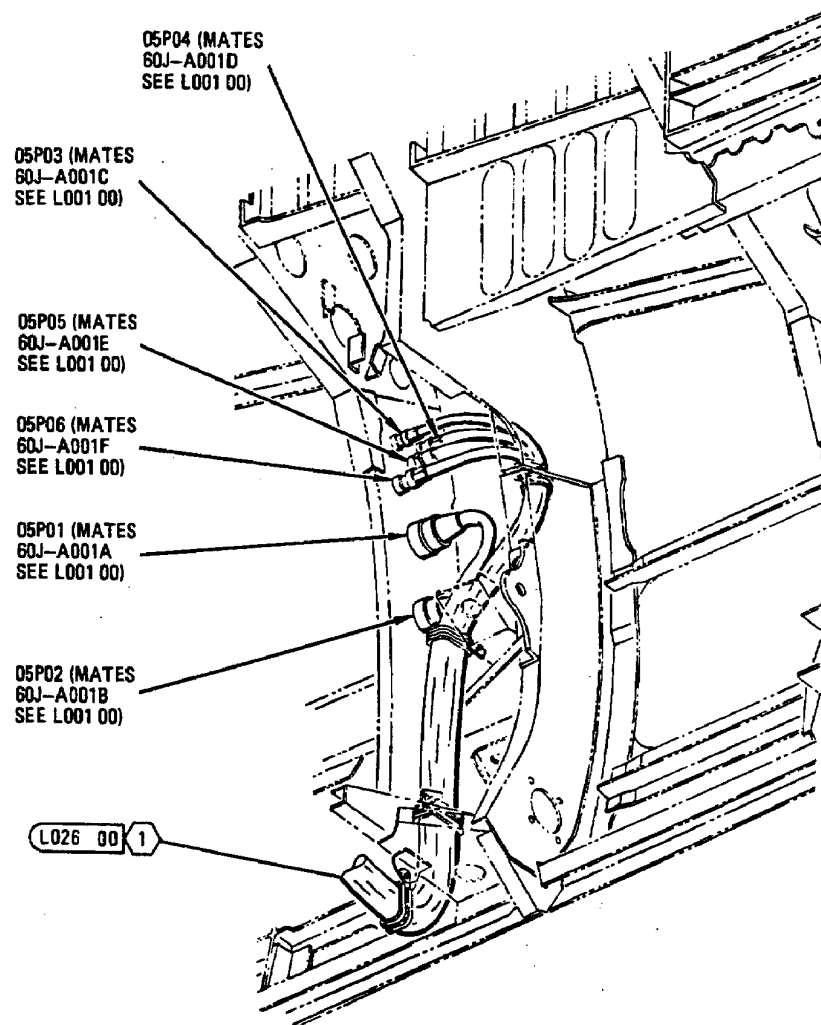


FWD FUSELAGE DOOR 10L (FWD) EQUIPMENT INSTALLED


LEGEND


- 1 161353 THRU 161528
BEFORE F18 AFC 49
- 2 161353 THRU 161987
BEFORE F18 AFC 48
- 3 162394 THRU 162431;
ALSO 161353 THRU
161987 AFTER F18 AFC 48
- 4 162432 AND UP

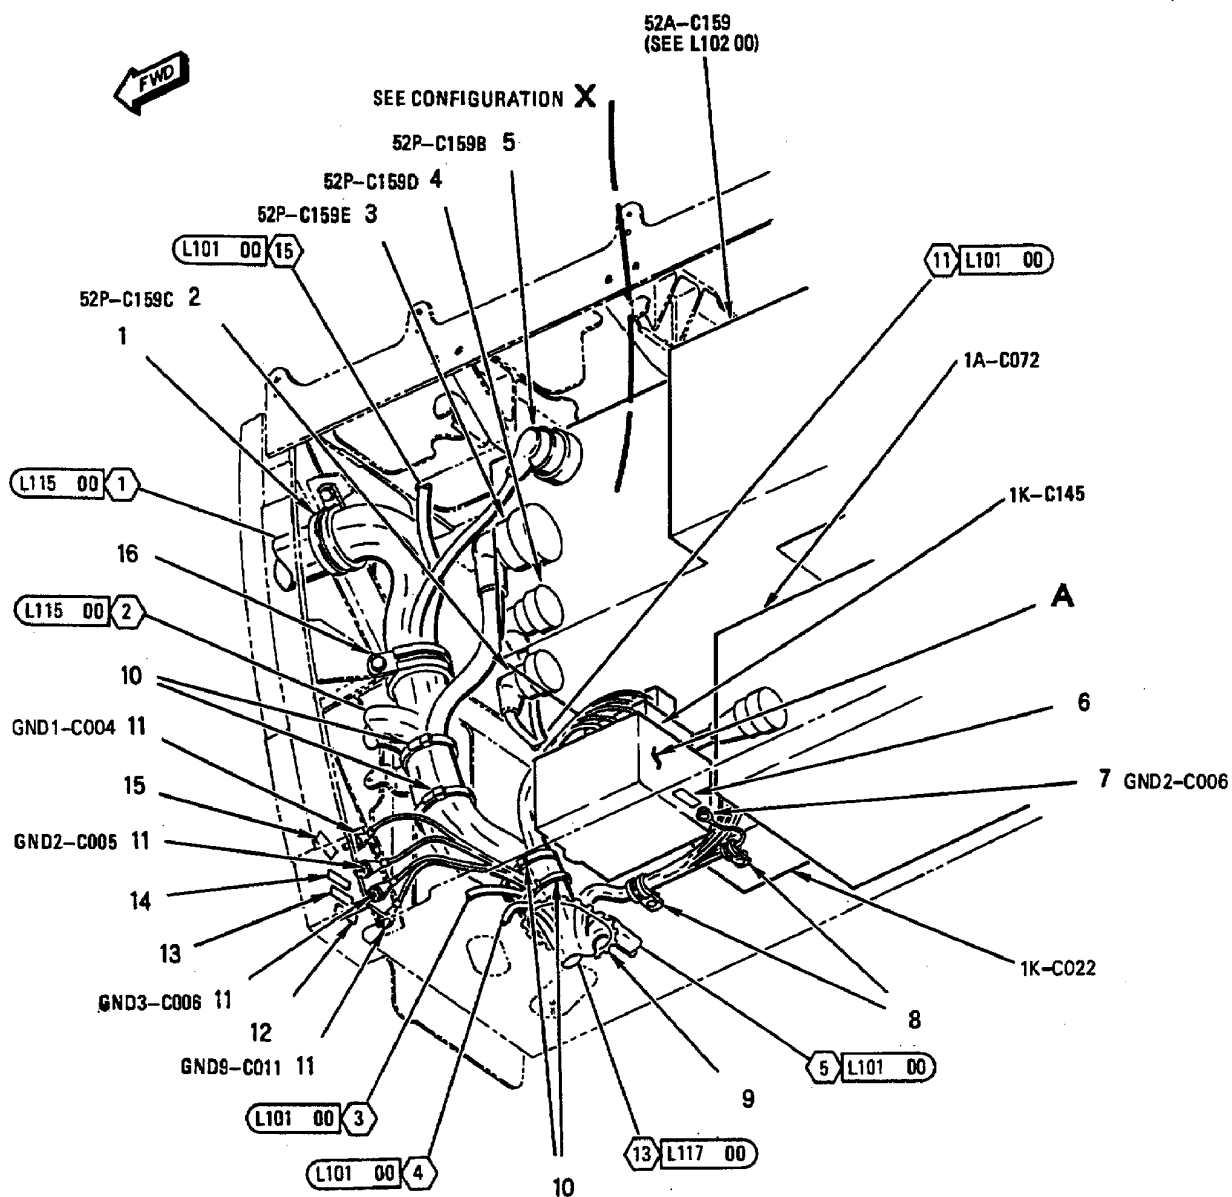

162394 AND UP; ALSO 161353 THRU
161987 AFTER F18 AFC 48

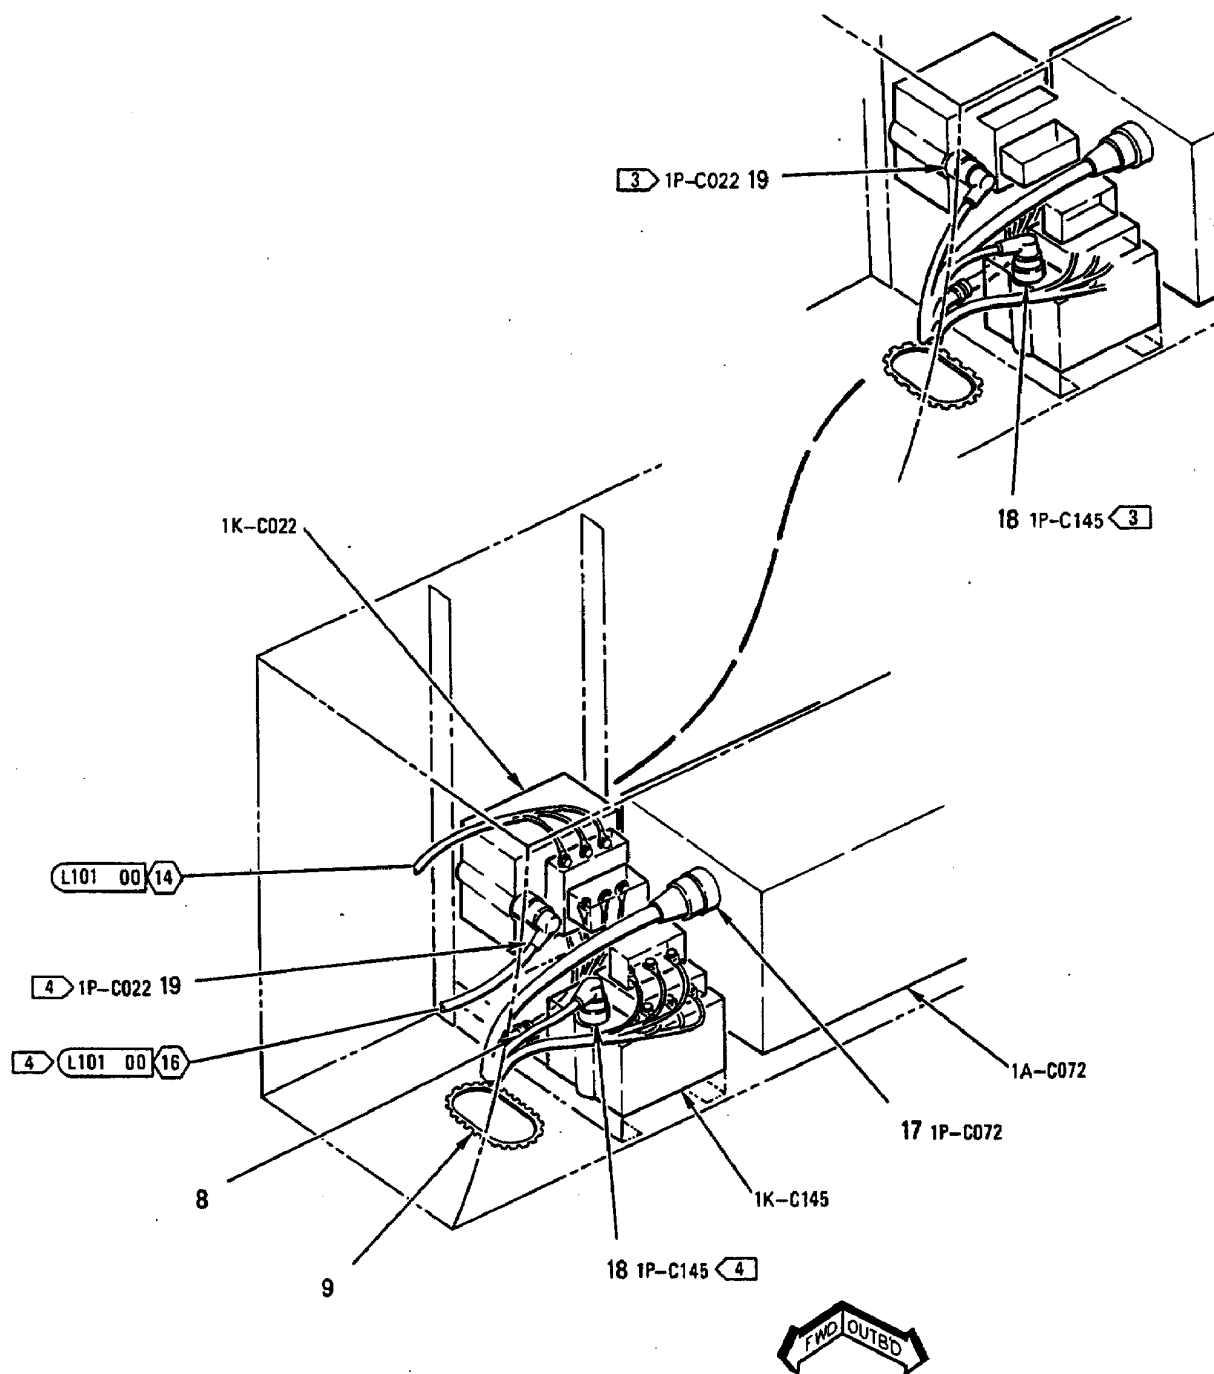

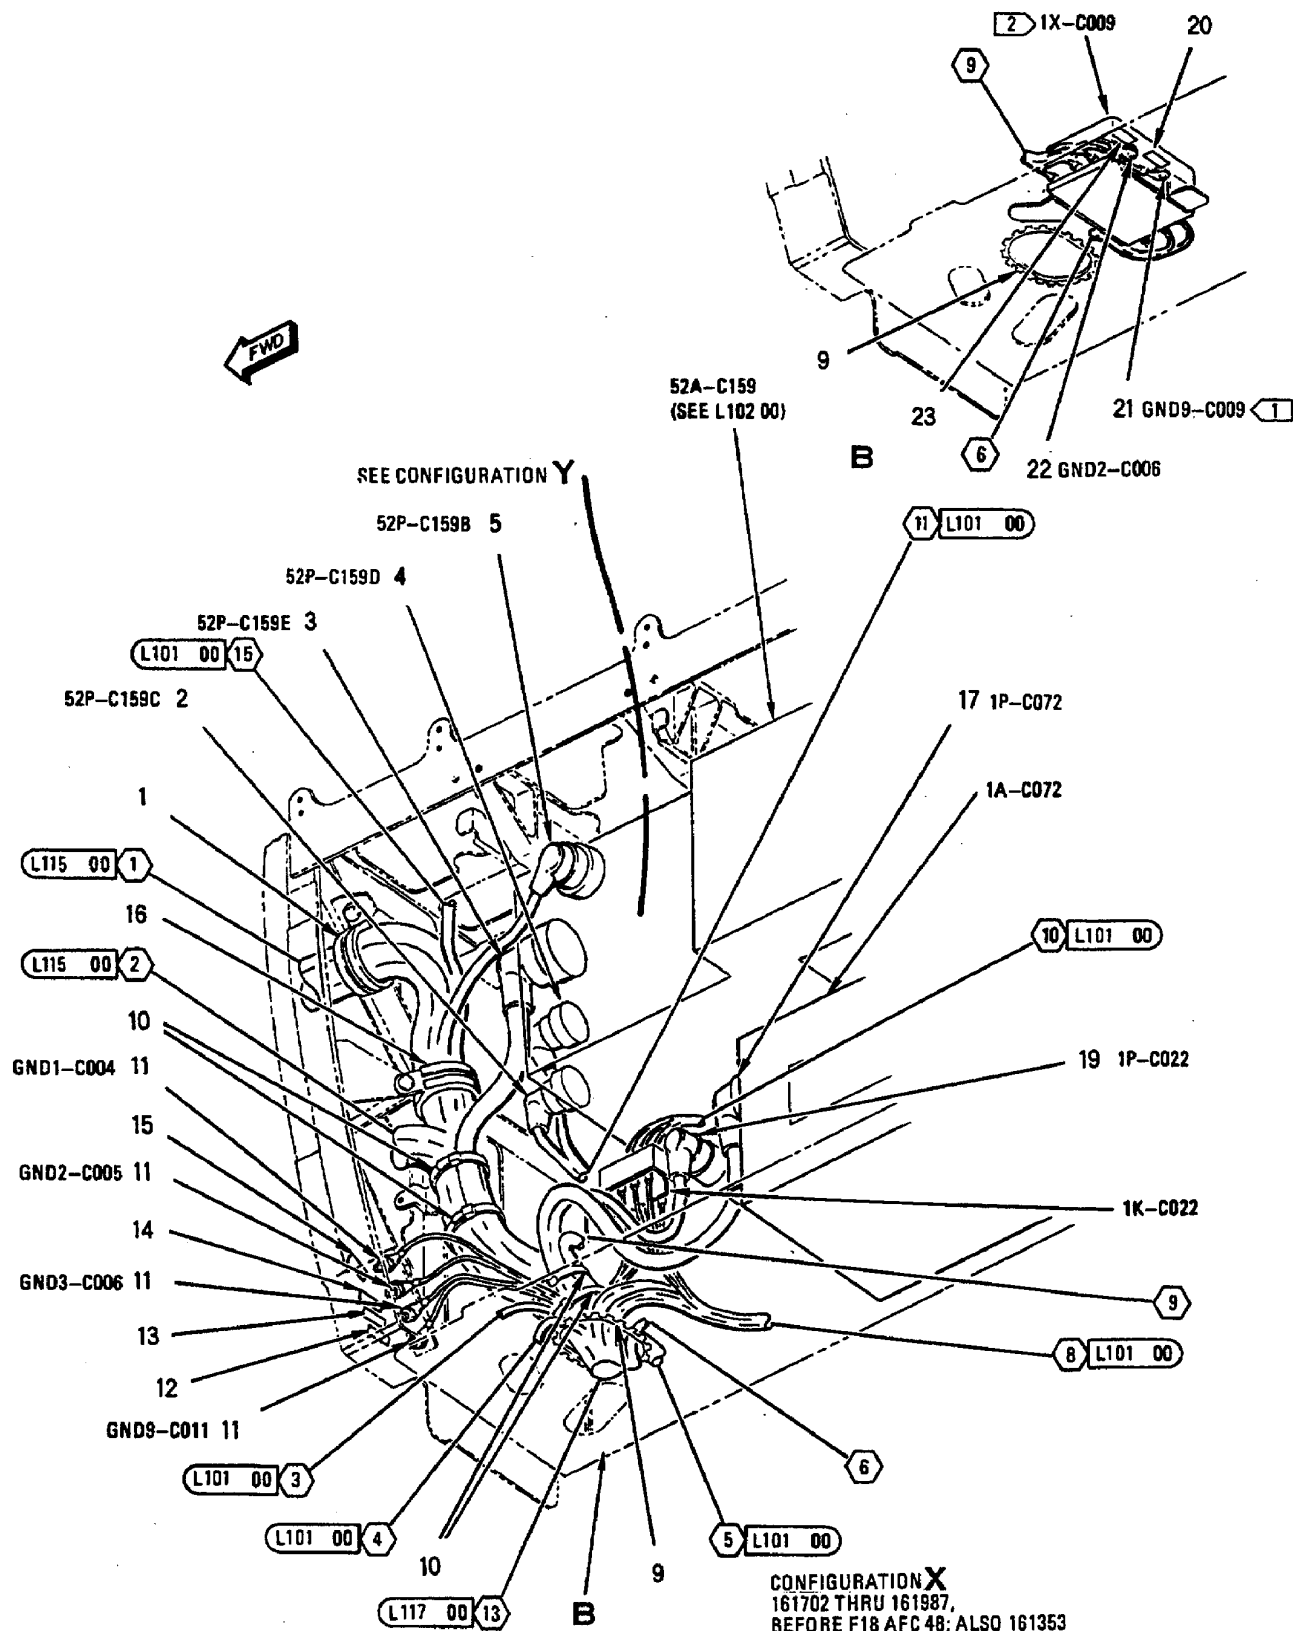

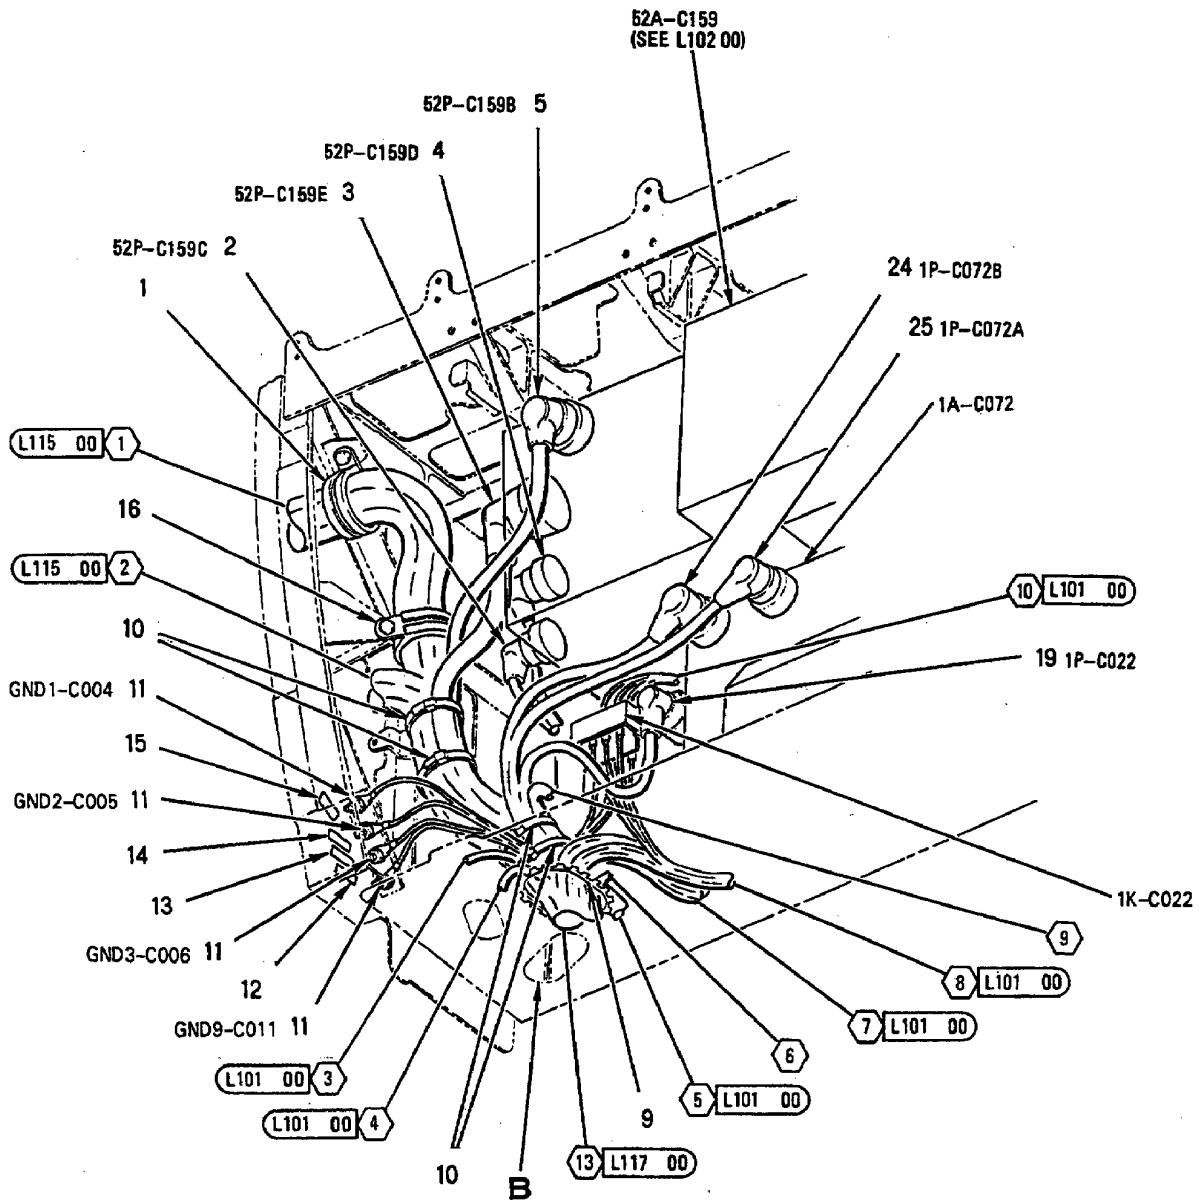

CONFIGURATION Y
161353 THRU 161528
BEFORE F18 AFC 49


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1		-
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
2	MS27467T17B6S	CONNECTOR, PLUG (52P-C159C)	1		PAOZZ
3	MS27467T25B43P	CONNECTOR, PLUG (52P-C159E)	1		PAOZZ
4	MS27467T17B6P	CONNECTOR, PLUG (52P-C159D)	1	C	PAOZZ
	MS27467T17B6PA	CONNECTOR, PLUG (52P-C159D)	1	D	PAOZZ
5	MS27467T21B11S	CONNECTOR, PLUG (52P-C159B)	1		PAOZZ
6	74A890601-2712	MARKER, IDENTIFICATION - ELECTRICAL	1	E	MDOZZ
		(76301) (FOR REF DES GND2-C006)			
7	NAS1801-4-16	SCREW	1	E	PAOZZ
	MS35338-44	WASHER (USE WITH INDEX 7)	1	E	PAOZZ
	AN960D416L	WASHER (USE WITH INDEX 7)	1	E	PAOZZ
8	MS21919WDG #	CLAM	2	E	-
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
9	NS21266-2N	GROMMET	AR		PAOZZ
10	PLT4H-C30	STRAP, TIEDOWN, ELECTRICAL COMPONENTS	4	*	PAOZZ
		(06383) (MCDONNELL SPEC ST9M559-3)			
	WIT-120R-HS	SEE ABOVE (06915)	4	*	PAOZZ
11	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	4		PAOZZ
12	74A890601-2469	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-C011)			
13	74A890601-2461	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-C006)			
14	74A890601-2675	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-C005)			
15	74A890601-2674	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND1-C004)			
16	MS21919WDG #	CLAMP	1		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	MS27467T17B6P	CONNECTOR, PLUG (1P-C072)	1	B	PAOZZ
18	MS27467T13B35S	CONNECTOR, PLUG (1P-C145)	1	E	PAOZZ
19	MS27467T13B35S	CONNECTOR, PLUG (1P-C022)	1		PAOZZ
20	74A890601-2711	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES GND9-C009)			
21	NAS1801-4-10	SCREW	1	A	PAOZZ
	MS35338-44	WASHER (USE WITH INDEX 21)	1	A	PAOZZ
	AN960JD416L	WASHER (USE WITH INDEX 21)	1	A	PAOZZ
22	NAS1801-4-10	SCREW	1	F	PAOZZ
	MS35338-44	WASHER (USE WITH INDEX 22)	1	F	PAOZZ
	AN960JD416L	WASHER (USE WITH INDEX 22)	1	F	PAOZZ
23	74A890601-2712	MARKER, IDENTIFICATION - ELECTRICAL	1	F	MDOZZ
		(76301) (FOR REF DES GND2-C006)			
24	MS27467T17B6P	CONNECTOR, PLUG (1P-C072B)	1	A	PAOZZ
25	MS27467T17B99SA	CONNECTOR, PLUG (1P-C072A)	1	A	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528 BEFORE F18 AFC 49
B	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 49 AND F18 AFC 48
C	161353 THRU 161944
D	161945 & UP
E	162394 & UP; ALSO 161353 THRU 161987 AFTER F18 AFC 48
F	161353 THRU 161987 BEFORE F18 AFC 48

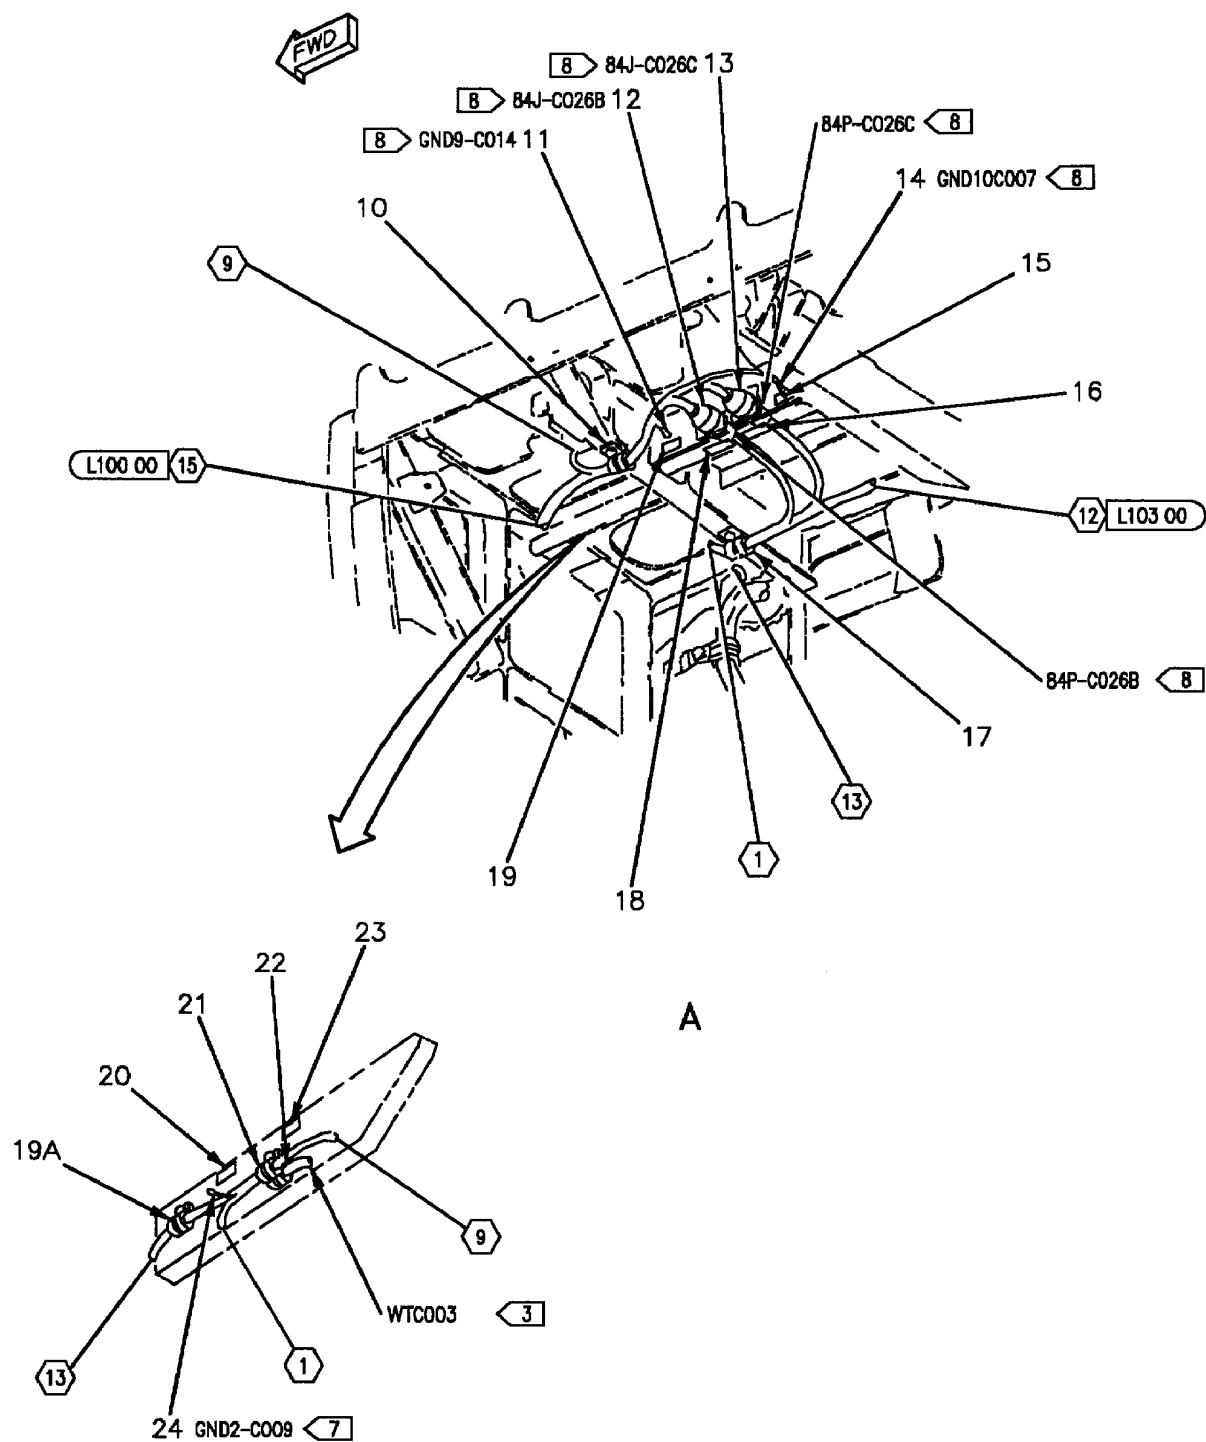

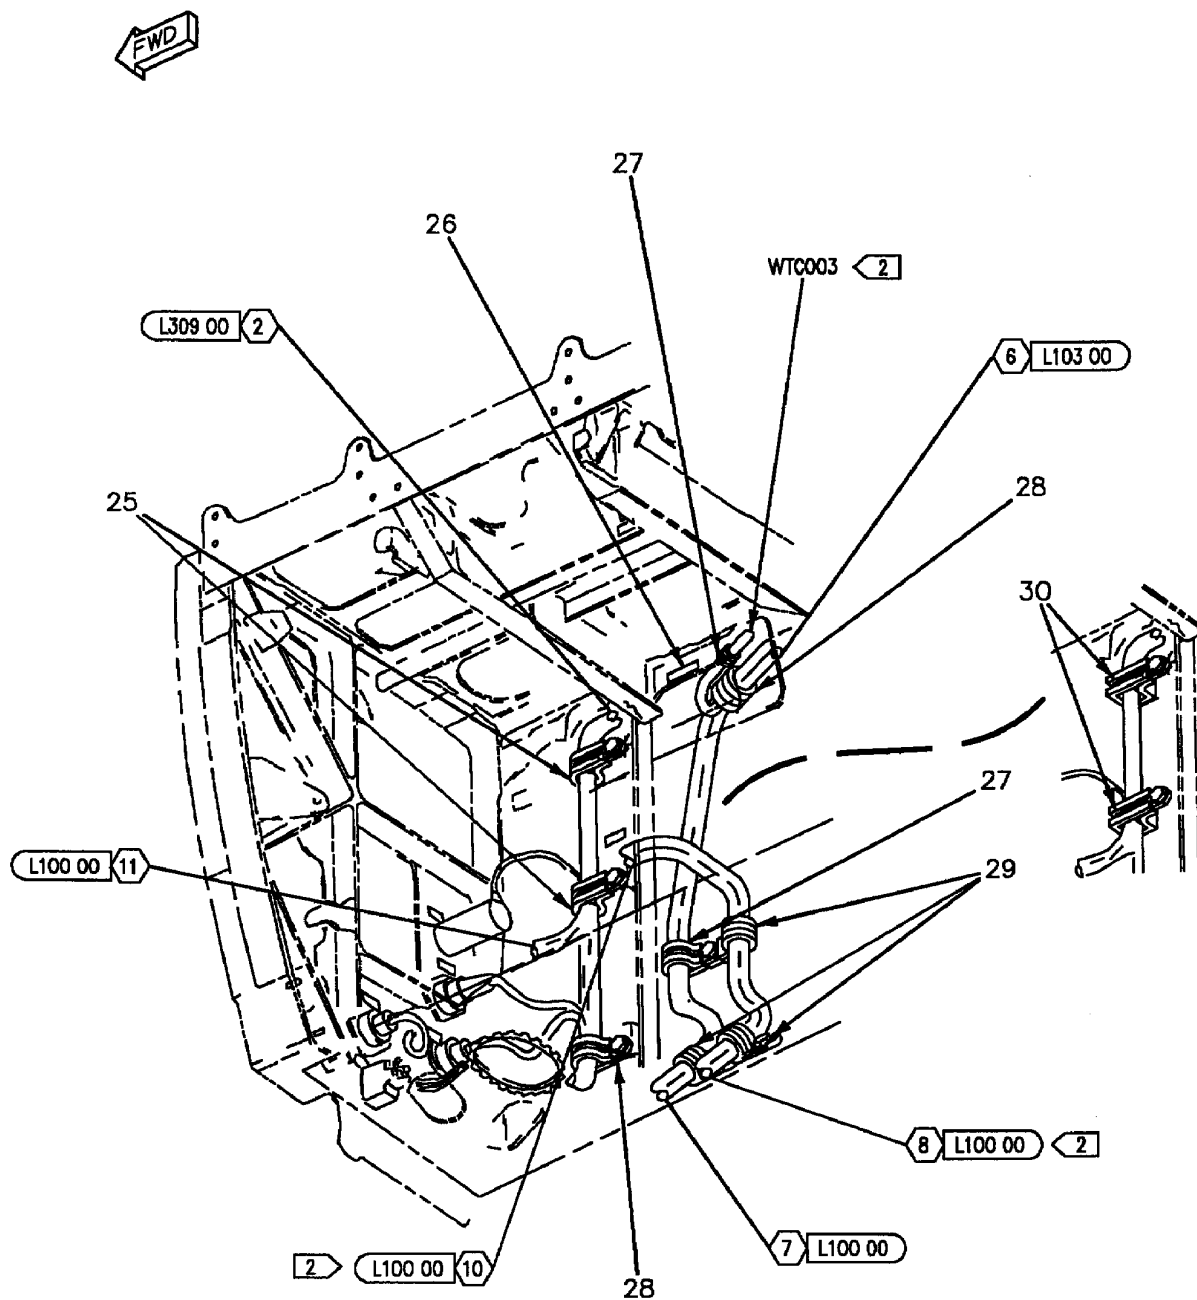

CONFIGURATION X

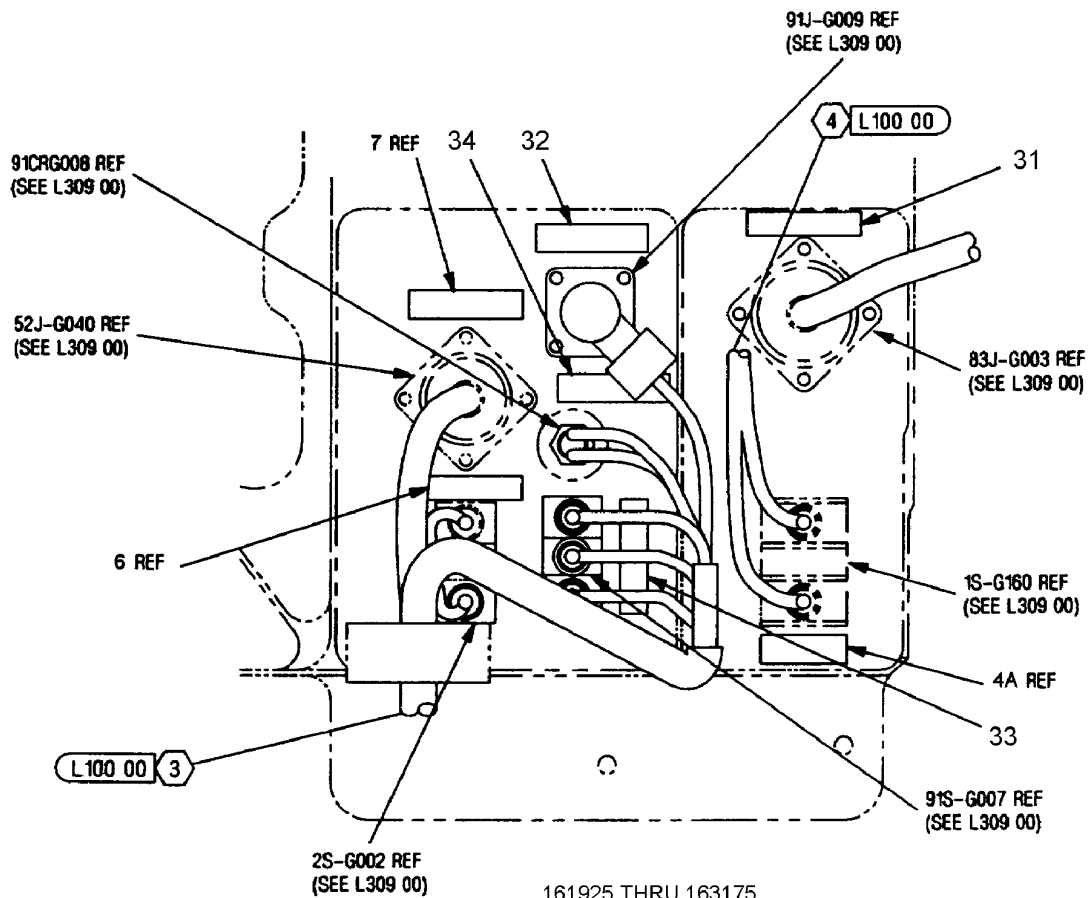

161925 THRU 163175
AFTER F/A-18 AFC 231

B

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	2	J	-
	JM44LC28WD12	CLAMP (22175) (MCDONNELL SPEC	2	H	PAOZZ
		ST9M588WDG12)			
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
1A	NAS1714C12-8N	CLAMP	2	K	PAOZZ
	NAS673V2	BOLT (AP)	1	K	PAOZZ
	AN960JD10L	WASHER (AP)	1	K	PAOZZ
1B	MS21919WDG #	CLAMP	1	G	-
	JM44LC28WD12	CLAMP (22175) (MCDONNELL SPEC	1	H	PAOZZ
		ST9M588WDG12)			
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
2	74A890601-2025	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES WTC005)			
3	MS21919WDG #	CLAMP	2	C	-
	NAS673V5	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
4	MS21266-2N	GROMMET	AR		PAOZZ
4A	74A890601-2939	MARKER, IDENTIFICATION - ELECTRICAL	1	D	MDOZZ
		(76301) (FOR REF DES 1S-G160)			
5	74A890601-2320	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 83J-G003)			
6	74A890601-2288	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 2S-G002)			
7	74A890601-2395	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-G040)			
8	74A890601-2318	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 1J-G089)			
9	74A890601-2287	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 61S-G153)			
10	MS21919WDG #	CLAMP	1	F	-
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
11	NAS1801-3-10	SCREW	1	F	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	1	F	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	1	F	PAOZZ
12	MS27656T13B35SB	CONNECTOR, RECEPTACLE (84J-C026B)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	AN960JD4L	WASHER (AP)	4	F	PAOZZ
13	MS27656T13B35SA	CONNECTOR, RECEPTACLE (84J-C026C)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	AN960JD4L	WASHER (AP)	4	F	PAOZZ
14	NAS1801-3-10	SCREW	1	F	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 14)	1	F	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 14)	1	F	PAOZZ
15	74A890601-2137	MARKER, IDENTIFICATION - ELECTRICAL	1	F	MDOZZ
		76301) (FOR REF DES GND10C007)			
16	74A890601-2186	MARKER, IDENTIFICATION - ELECTRICAL	1	F	MDOZZ
		(76301) (FOR REF DES 84J-C026C)			
17	MS21919WDG #	CLAMP	1	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	74A890601-2192	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-C026B)	1	F	MDOZZ
19	74A890601-2118	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-C014)	1	F	MDOZZ
19A	MS21919WDG #	CLAMP	1	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
20	74A890601-2849	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-C009)	1	E	MDOZZ
21	MS21919WDG #	CLAMP	1	A	-
	NAS673V19	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	A	PAOZZ
22	MS21919WDG #	CLAMP	1	C	-
23	74A890601-2842	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTC003)	1	C	MDOZZ
24	NAS1801-3-10	SCREW	1	E	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 24)	1	E	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 24)	1	E	PAOZZ
25	MS21919WDG #	CLAMP	2	L	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
26	74A890601-2842	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTC003)	1	B	MDOZZ
27	MS21919WDG #	CLAMP	2	B	-
28	MS21919WDG #	CLAMP	2	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
29	MS21919WDG #	CLAMP	3	B	-
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
30	NAS1714C12-8N	CLAMP	2	M	PAOZZ
	NAS673V3	BOLT (AP)	1	M	PAOZZ
	AN960JD10L	WASHER (AP)	1	M	PAOZZ
31	74A890601-2320	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 83J-G003)	1		MDOZZ
32	74A890601-3264	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 91J-G009)	1	N	MDOZZ
33	74A890601-3270	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 91S-G007)	1	N	MDOZZ
34	74A890601-3271	MARKER, IDENTIFICATION, ELECTRICAL (76301) (FOR REF DES 91CRG008)	1	N	MDOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161520 & UP
B	161353 THRU 161519
C	161520 THRU 161987
D	163119 & UP; ALSO 161353 THRU 163118 AFTER F/A-18 AFC 90
E	161520 THRU 163118

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		F						161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27			
		G						161520 THRU 161987, 163145 & UP; ALSO 162394 THRU 163144 BEFORE F/A-18 AFC 93			
		H						162394 THRU 163144 AFTER F/A-18 AFC 93			
		J						163145 & UP; ALSO 161520 THRU 161987 BEFORE F18 AFC 48 AND 163144 BEFORE F/A-18 AFC 93			
		K						161520 THRU 161987 AFTER F18 AFC 48			
		L						161354 THRU 161360 BEFORE F18 AFC 48			
		M						161354 THRU 161360 AFTER F18 AFC 48			
		N						161925 THRU 163175 AFTER F/A-18 AFC 231			

FWD FUSELAGE

DOOR 10L (FWD)
EQUIPMENT INSTALLED

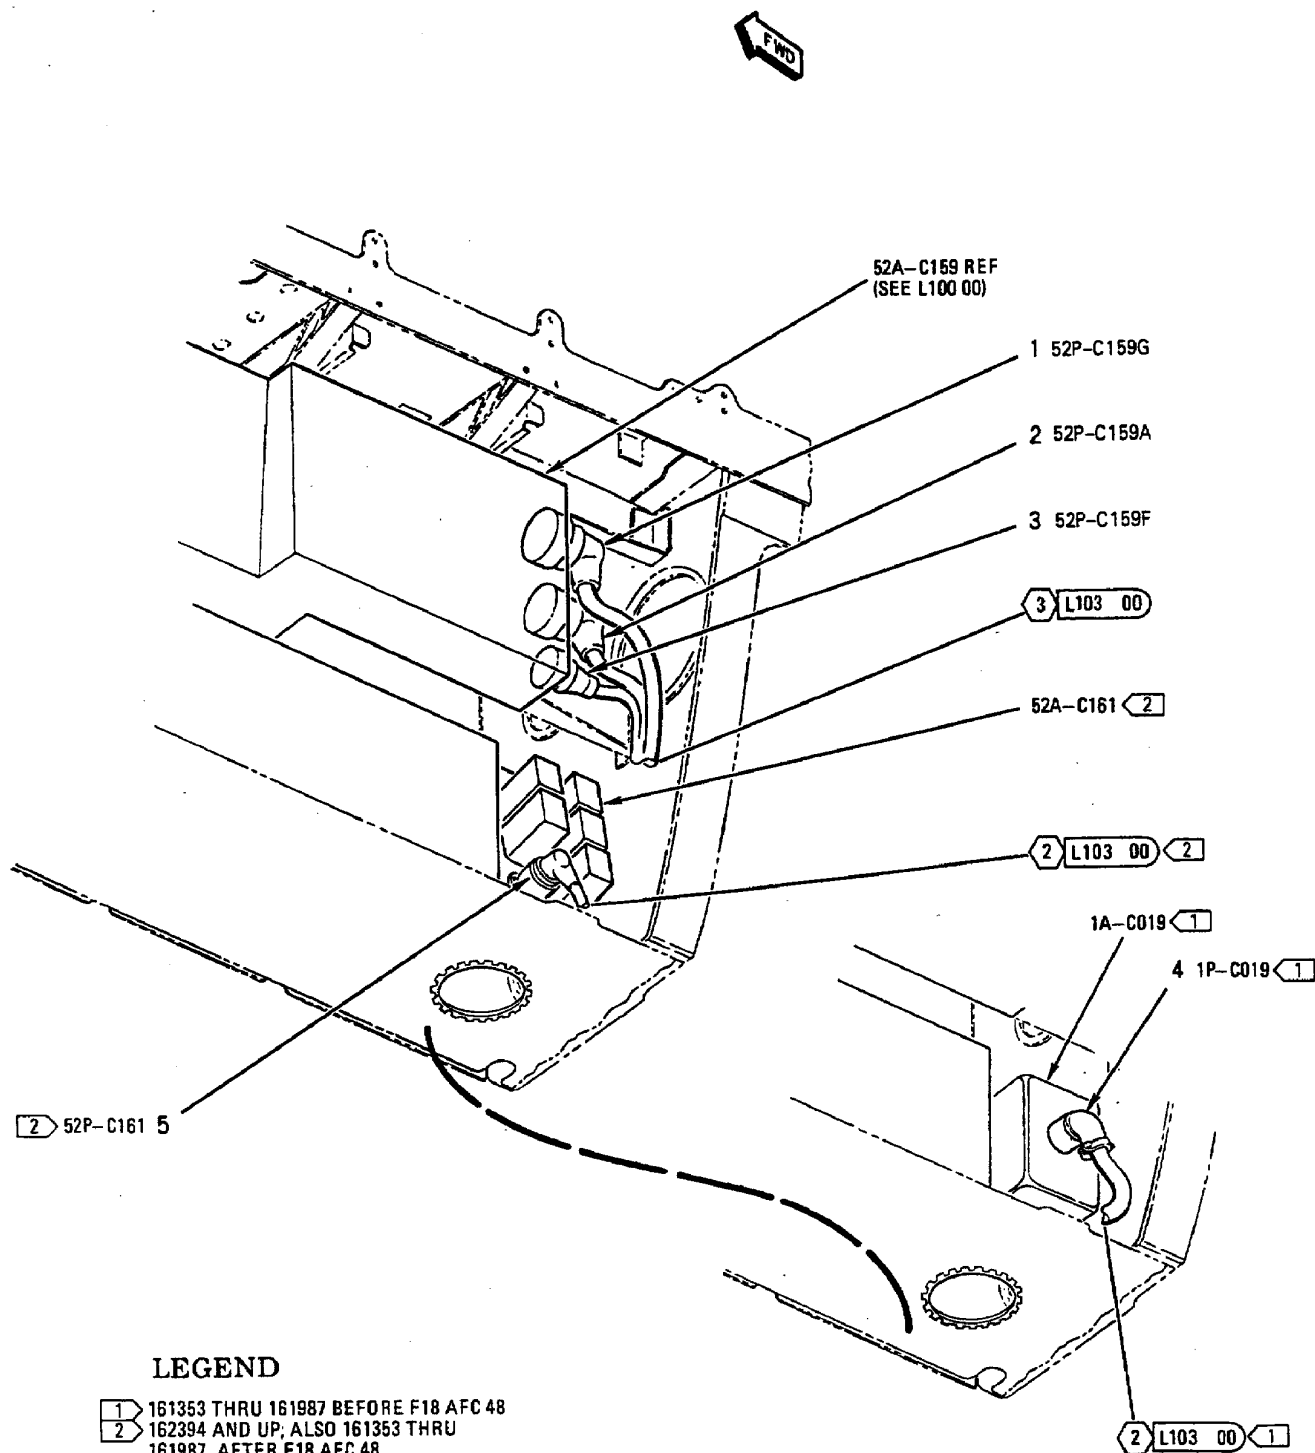

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T23B35P	CONNECTOR, PLUG (52P-C159G)	1		PAOZZ
2	MS27467T21B11S	CONNECTOR, PLUG (52P-C159A)	1		PAOZZ
3	MS27467T17B35S	CONNECTOR, PLUG (52P-C159F)	1		PAOZZ
4	MS3147E7-50S	CONNECTOR, PLUG (1P-C019)	1	A	PAOZZ
5	MS27467T15B35S	CONNECTOR, PLUG (52P-C161)	1	B	PAOZZ


CODE	USABLE ON
A	161353 THRU 161987 BEFORE F18 AFC 48
B	162394 & UP; ALSO 161353 THRU 161987 AFTER F18 AFC 48


FWD FUSELAGE

DOOR 10L (FWD)
EQUIPMENT REMOVED

LEGEND

- 1 161520 THRU 161987 BEFORE F18 AFC 86
- 2 162394 AND UP: ALSO 161520 THRU 161987 AFTER F18 AFC 48
- 3 161520 THRU 161987 BEFORE F18 AFC 48
- 4 161353 THRU 161519 BEFORE F18 AFC 48
- 5 161353 THRU 161519 AFTER F18 AFC 48
- 6 161353 THRU 161519 BEFORE F18 AFC 86

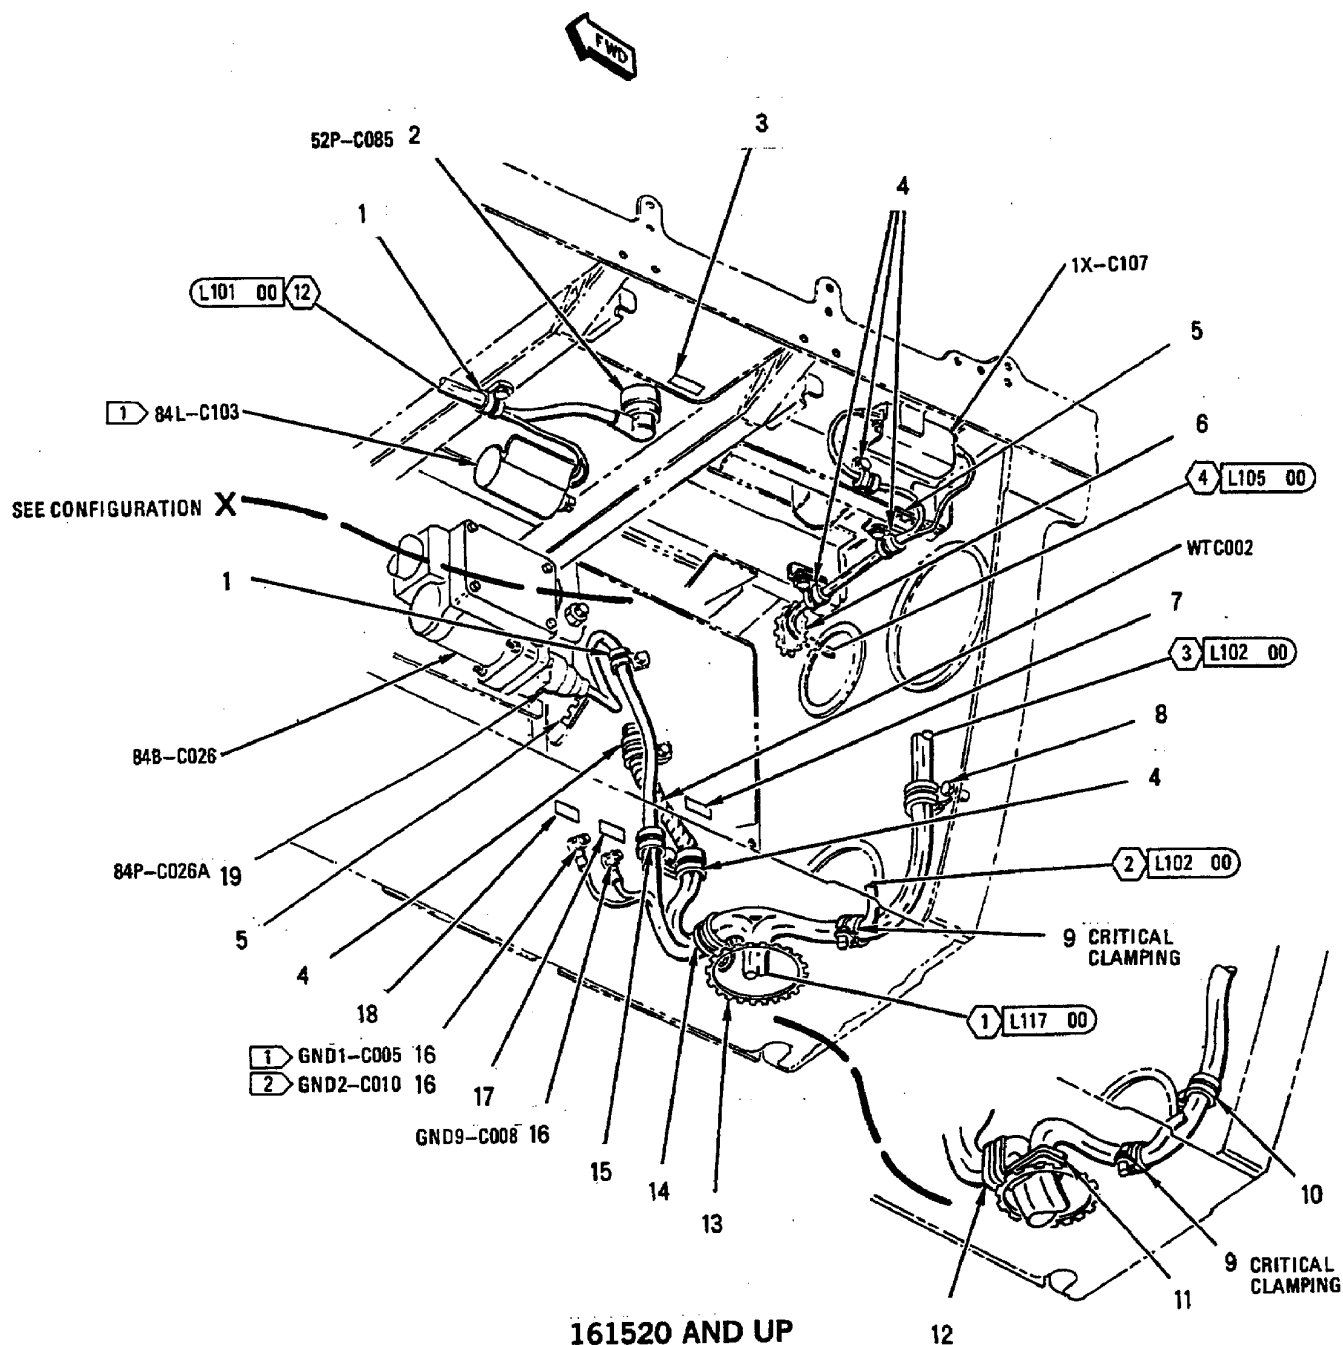

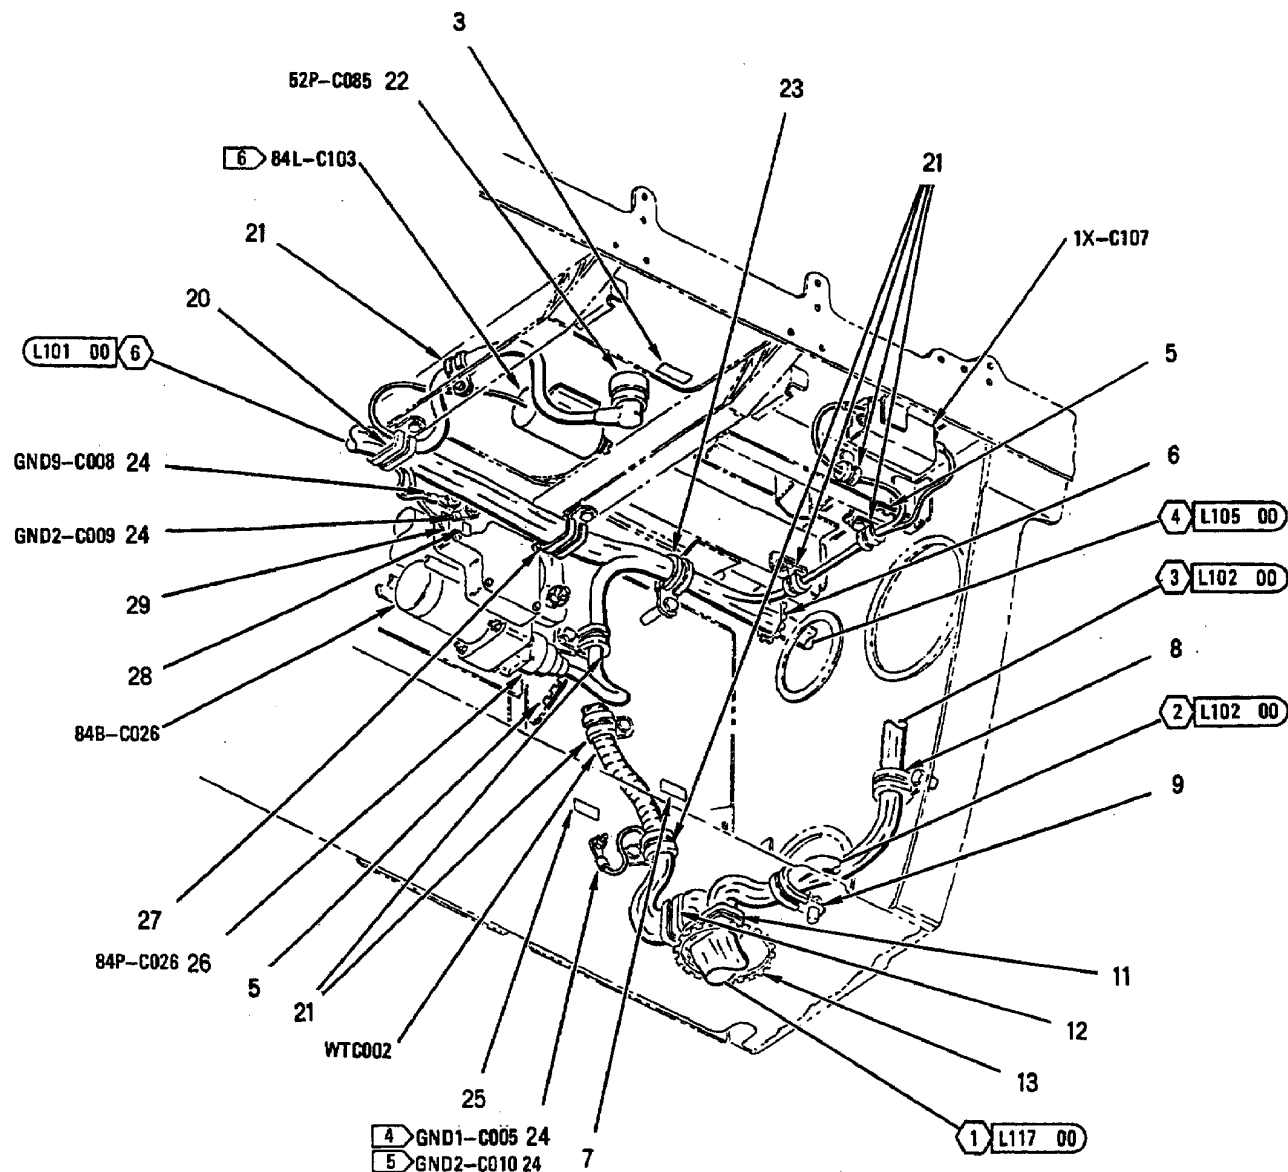


CONFIGURATION X
161353 THRU 161519

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	2	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
2	MS27467T13B4SA	CONNECTOR, PLUG (52P-C085)	1	A	PAOZZ
3	74A890601-2086	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-H085)			
4	MS21919WDG #	CLAMP	5	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
5	MS21266-1N	GROMMET	AR		PAOZZ
6	MS21266-3N	GROMMET	AR		PAOZZ
7	74A890601-2866	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES WTC002)			
8	MS21919WDG #	CLAMP	1	C	-
	NAS673V11	BOLT (AP)	1	J	PAOZZ
	NAS673V3	BOLT (AP)	1	K	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	J	PAOZZ
	NAS1291C3M	NUT (AP)	1	H	PAOZZ
9	MS21919WDG #	CLAMP	1		-
	NAS673V15	BOLT (AP)	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1	E	PAOZZ
10	MS21919WDG #	CLAMP	1	D	-
	NAS673V8	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS42DD6-12	SPACER (AP)	1	D	PAOZZ
11	NAS1712D8-32N	CLAMP	1	E	PAOZZ
	NAS673V5	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
12	NAS1712D8-16N	CLAMP	1	E	PAOZZ
13	MS21266-2N	GROMMET	AR		PAOZZ
14	MS21919WDG #	CLAMP	1	F	-
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
15	MS21919WDG #	CLAMP	1	A	-
16	NAS1801-3-10	SCREW	2	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 16)	2	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 16)	2	A	PAOZZ
17	74A890601-2214	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES GND9-C008)			
18	74A890601-2715	MARKER, IDENTIFICATION - ELECTRICAL	1	G	MDOZZ
		(76301) (FOR REF DES GND1-C005)			
	74A890601-2914	MARKER, IDENTIFICATION - ELECTRICAL	1	L	MDOZZ
		(76301) (FOR REF DES GND2-C010)			
19	MS27467T13B35S	CONNECTOR, PLUG (84P-C026A)	1	A	PAOZZ
20	NAS1712D8-16N	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	MS21919WDG #	CLAMP	7	B	-
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
22	MS27467T13B4SA	CONNECTOR, PLUG (52P-C085)	1	B	PAOZZ
23	MS21919WDG #	CLAMP	1	B	-
	NAS673V11	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
24	MS21042L3	NUT	3	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	MS35338-43	WASHER (USE WITH INDEX 24)	3	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 24)	3	B	PAOZZ
25	74A890601-2715	MARKER, IDENTIFICATION - ELECTRICAL	1	M	MDOZZ
		(76301) (FOR REF DES GND1-C005)			
	74A890601-2914	MARKER, IDENTIFICATION - ELECTRICAL	1	N	MDOZZ
		(76301) (FOR REF DES GND2-C010)			
26	MS27467T13B35S	CONNECTOR, PLUG (84P-C026)	1	B	PAOZZ
27	NAS1712D8-16N	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
28	74A890601-2849	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MDOZZ
		(76301) (FOR REF DES GND2-C009)			
29	74A890601-2214	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MDOZZ
		(76301) (FOR REF DES GND9-C008)			


LENGTH/SIZE TO BE DETERMINED AT INSTALLATION.

CODE	USABLE ON
A	161520 & UP
B	161353 THRU 161519
C	161353 THRU 161759, 162394 & UP
D	161760 THRU 161987
E	161353 THRU 161987
F	162394 & UP
G	161520 THRU 161987 BEFORE F18 AFC 48
H	163092 & UP
J	161353 THRU 161759, 163092 & UP
K	162394 THRU 162909
L	162394 & UP; ALSO 161520 THRU 161987 AFTER F18 AFC 48
M	161353 THRU 161519 BEFORE F18 AFC 48
N	161353 THRU 161519 AFTER F18 AFC 48

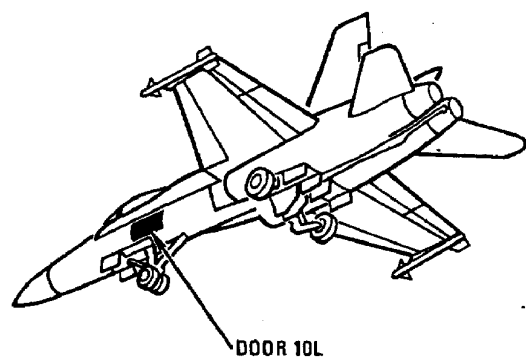

FWD FUSELAGE

DOOR 10L (AFT)
EQUIPMENT INSTALLED

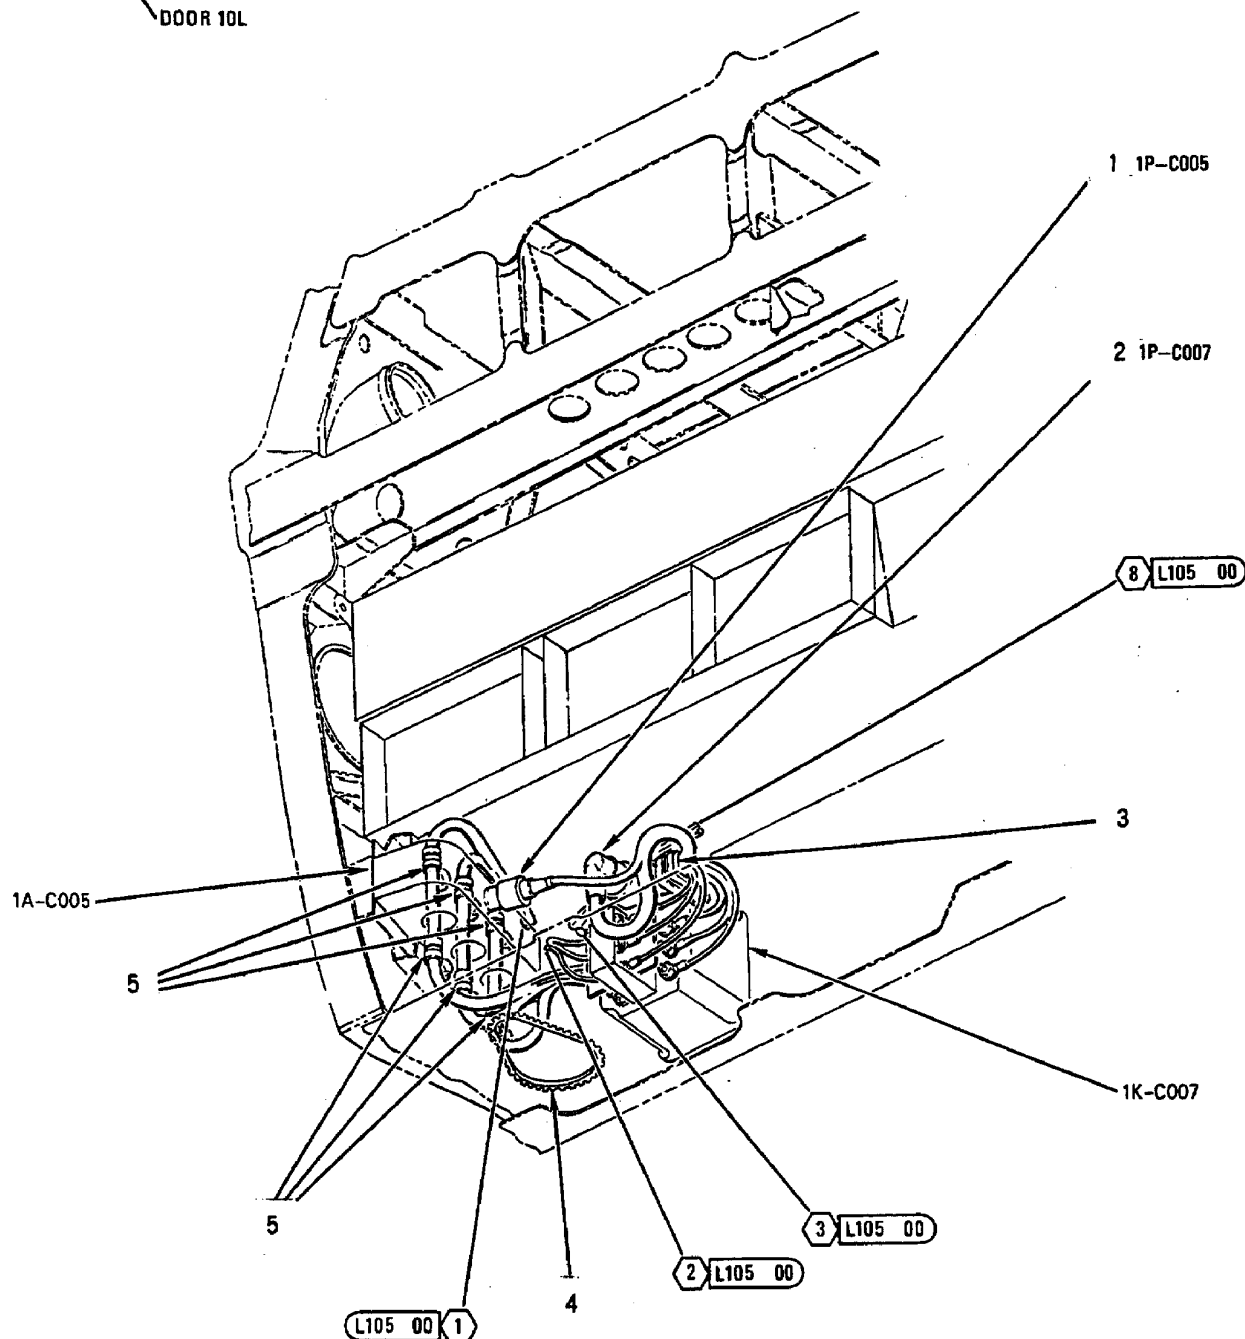

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B35P	CONNECTOR, PLUG (1P-C005)	1		PAOZZ
2	MS27467T13B35S	CONNECTOR, PLUG (1P-C007)	1		PAOZZ
3	TA519WD6-21	CLAMP, LOOP (84971) (MCDONNELL	1	*	PAOZZ
		SPEC ST9M633WD6-21)			
	487WD6-21	CLAMP, LOOP (83930) (MCDONNELL	1	*	PAOZZ
		SPEC ST9M633HD6-21)			
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS21266-4N	GROMMET	AR		PAOZZ
5	MS21919WDG #	CLAMP	6		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


FWD FUSELAGE DOOR 10L (AFT) EQUIPMENT REMOVED

LEGEND

- 1 161520 AND UP
- 2 161353 THRU 163118

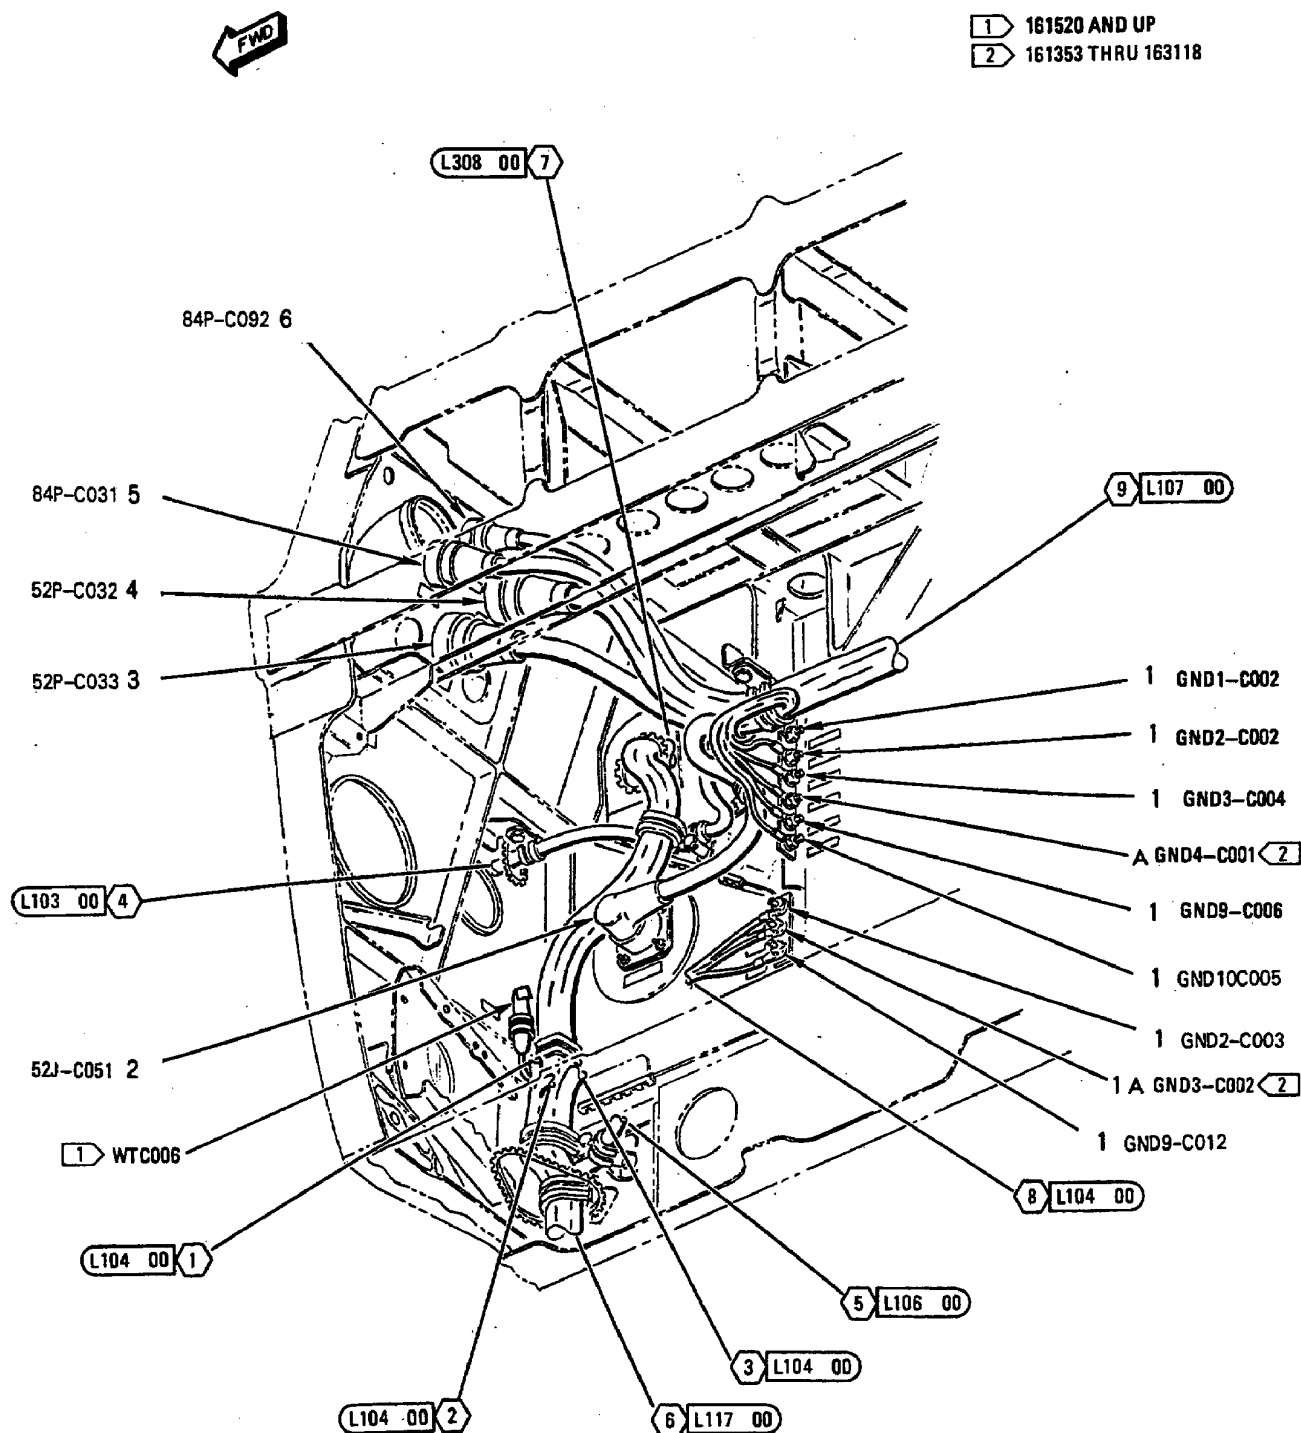

FWD FUSELAGE
DOOR 10L (AFT)
EQUIPMENT REMOVED

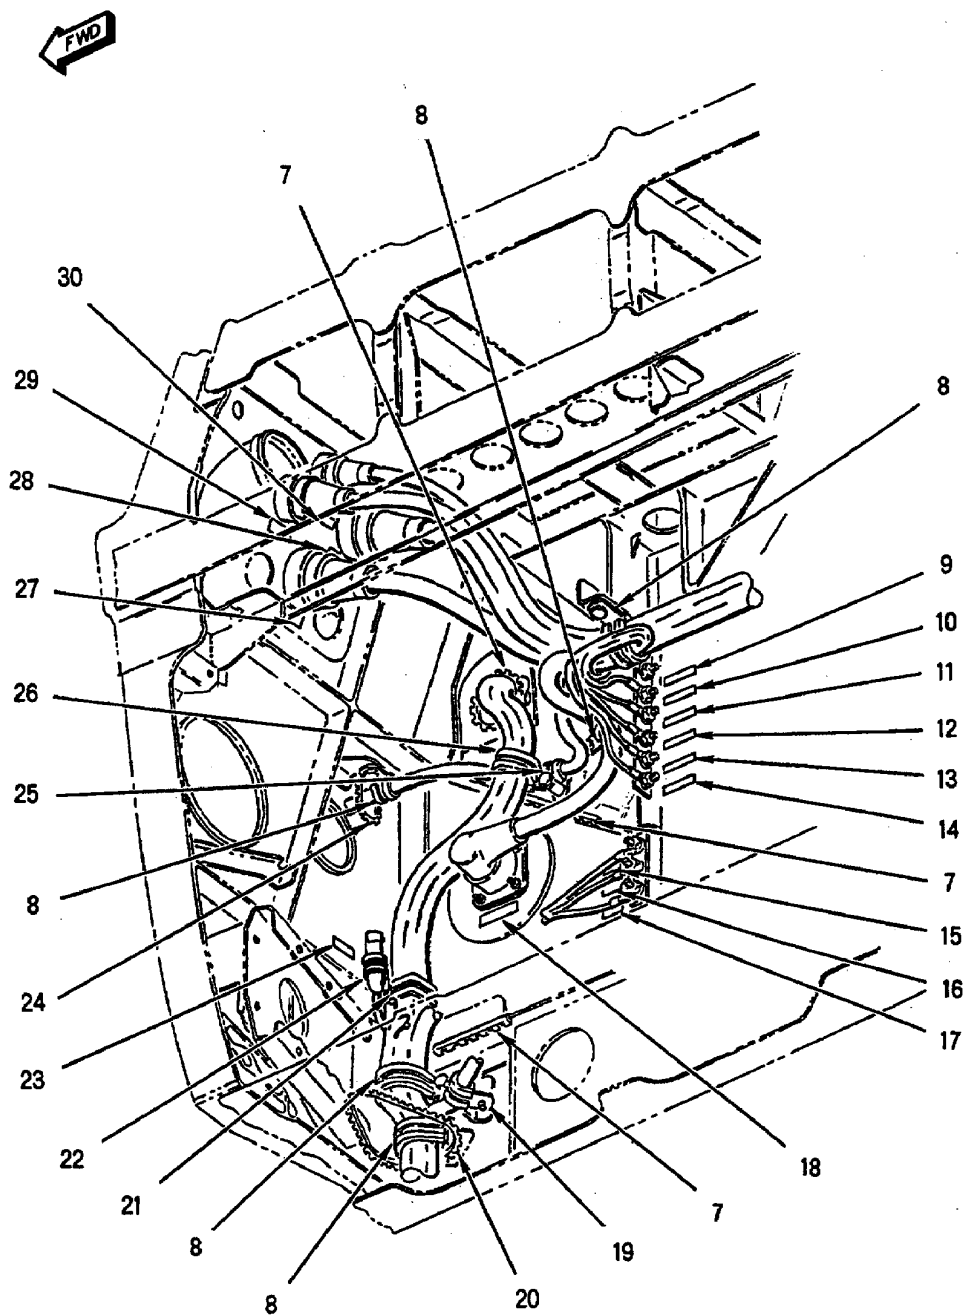

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	7		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	7		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	7		PAOZZ
1A	MS21042L3	NUT	2	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1A)	2	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1A)	2	C	PAOZZ
2	MS27656T21B35S	CONNECTOR, RECEPTACLE (52J-C051)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
3	MS27467T25B61PA	CONNECTOR, PLUG (52P-C033)	1		PAOZZ
4	MS27467T25B35S	CONNECTOR, PLUG (52P-C032)	1		PAOZZ
5	MS27467T17B35SA	CONNECTOR, PLUG (84P-C031)	1		PAOZZ
6	MS27467T13B4P	CONNECTOR, PLUG (84P-C092)	1		PAOZZ
7	MS21266-1N	GROMMET	AR		PAOZZ
8	MS21919WDG #	CLAMP	5		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	74A890601-2217	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-C002)	1		MDOZZ
10	74A890601-2216	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-C002)	1		MDOZZ
11	74A890601-2459	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-C004)	1		MDOZZ
12	74A890601-2591	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-C001)	1	C	MDOZZ
13	74A890601-2215	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-C006)	1		MDOZZ
14	74A890601-2464	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10C005)	1		MDOZZ
15	74A890601-2213	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-C003)	1		MDOZZ
16	74A890601-2585	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-C002)	1	C	MDOZZ
17	74A890601-2666	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-C012)	1		MDOZZ
18	74A890601-2517	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-C051)	1		MDOZZ
19	MS21919WDG #	CLAMP	1		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
20	MS21266-4N	GROMMET	AR		PAOZZ
21	TA519WD7-14	CLAMP, LOOP (84971) (MCDONNELL SPEC ST9M633WD7-14)	1	*	PAOZZ
	487WD7-14	CLAMP, LOOP (83930) (MCDONNELL SPEC ST9M633WD7-14)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	MS21919WDG #	CLAMP	1	A	-
23	74A890601-2026	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTC006)	1	A	MDOZZ
24	MS21266-3N	GROMMET	AR		PAOZZ
25	MS21919WDG #	CLAMP	1	B	-
26	MS21919WDG #	CLAMP	1	D	-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	JM44LC28WD12	CLAMP (22175) (MCDONNELL SPEC ST9M588WDG12)	1	E	PAOZZ
	NAS673V15	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
27	74A890601-2069	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H033)	1		MDOZZ
28	74A890601-2068	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H032)	1		MDOZZ
29	74A890601-2140	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H031)	1		MDOZZ
30	74A890601-2295	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H092)	1		MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161520 & UP
B	161353 THRU 161519
C	161353 THRU 163118
D	161353 THRU 161987, 163145 & UP; ALSO 162394 THRU 163144 BEFORE F/A-18 AFC 93
E	162394 THRU 163144 AFTER F/A-18 AFC 93

FWD FUSELAGE

DOOR 10L (AFT)
EQUIPMENT INSTALLED

LEGEND

1 161702 AND UP; ALSO 161353 THRU 161528
AFTER F18 AFC 54


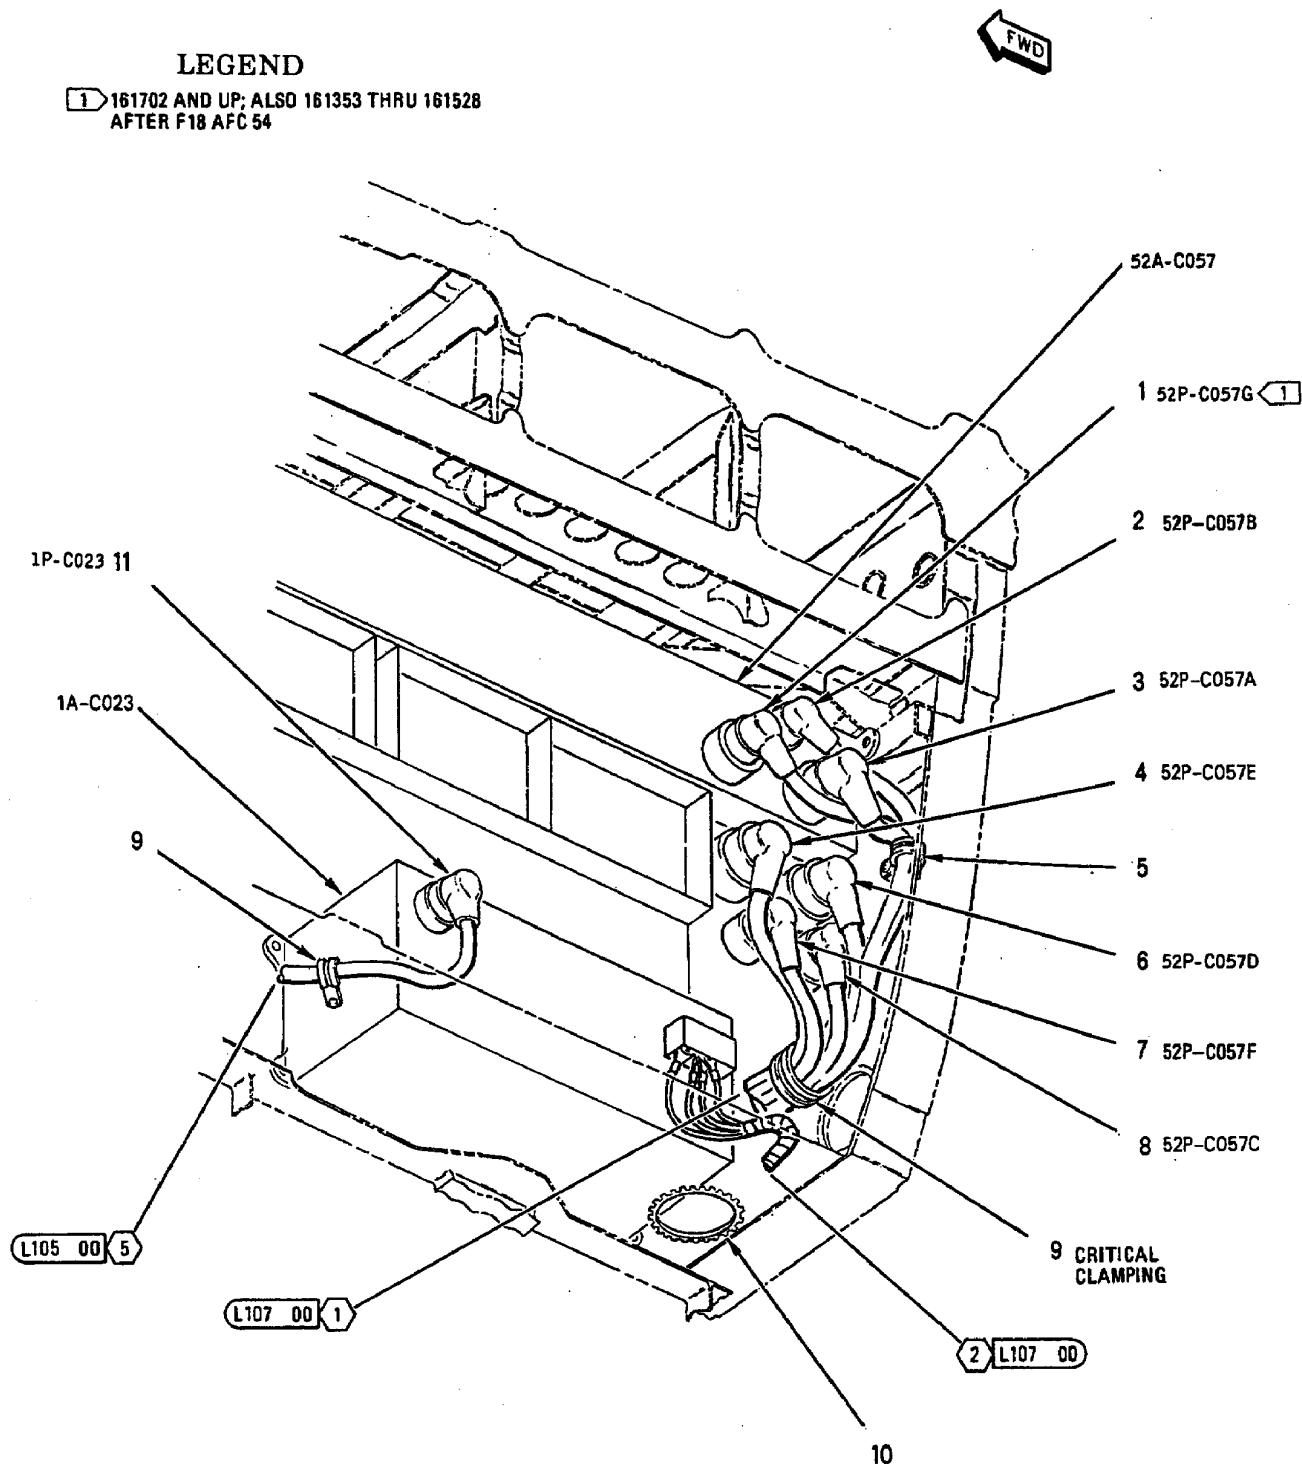


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T23B35S	CONNECTOR, PLUG (52P-C057G)	1	A	PAOZZ
2	MS27467T17B6S	CONNECTOR, PLUG (52P-C057B)	1		PAOZZ
3	MS27467T21B11S	CONNECTOR, PLUG (52P-C057A)	1		PAOZZ
4	MS27467T25B35SA	CONNECTOR, PLUG (52P-C057E)	1		PAOZZ
5	TA5000BH14CR	CLAMP, LOOP (84971) (MCDONNELL	1		PAOZZ
		SPEC 9M329BH14CR)			
	MS20470AD5 #	RIVET (AP)	2		-
6	MS27467T25B35PB	CONNECTOR, PLUG (52P-C057D)	1		PAOZZ
7	MS27467T25B35PC	CONNECTOR, PLUG (52P-C057F)	1		PAOZZ
8	MS27467T25B43P	CONNECTOR, PLUG (52P-C057C)	1		PAOZZ
9	MS21919WDG #	CLAMP	2		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21266-4N	GROMMET	AR		PAOZZ
11	MS27473T16B8S	CONNECTOR, PLUG (1P-C023)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


CODE	USABLE ON
A	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 54

FWD FUSELAGE
DOOR 10L (AFT)
EQUIPMENT REMOVED

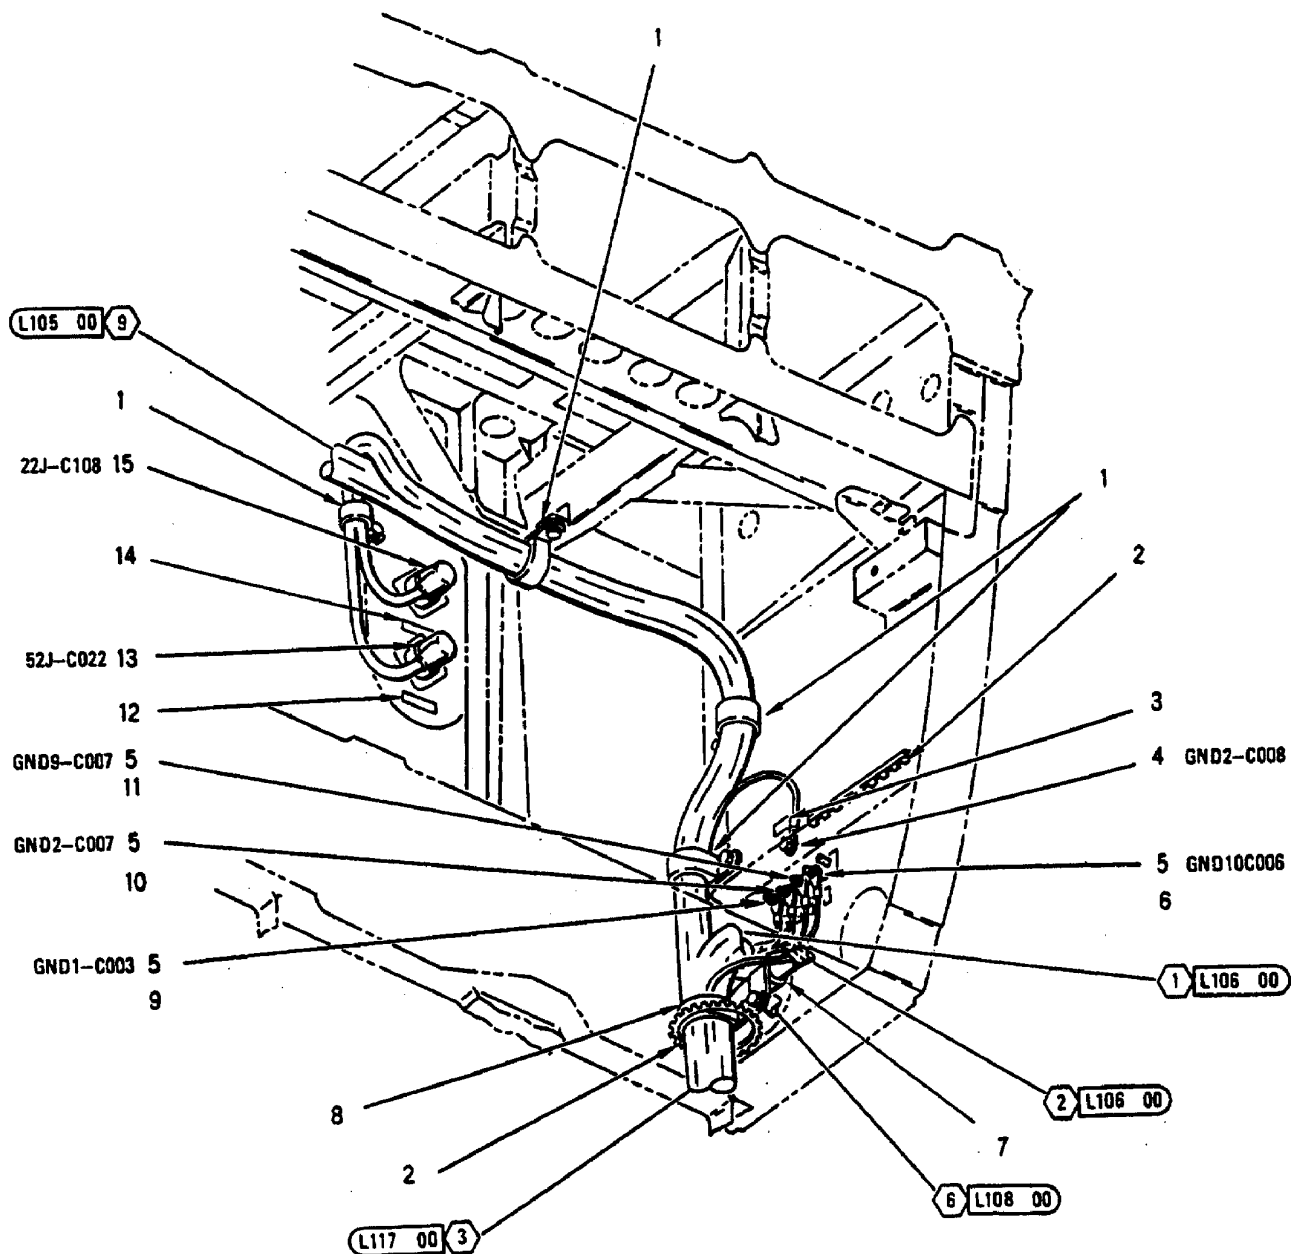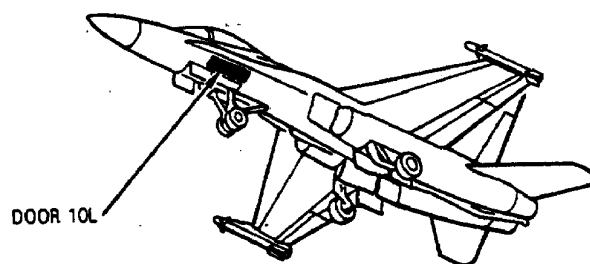

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	4		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	74A890601-2692	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-C008)			
4	NAS675V6	SCREW	1		PAOZZ
	NS35338-45	WASHER (USE WITH INDEX 4)	1		PAOZZ
	AN960JD516L	WASHER (USE WITH INDEX 4)	1		PAOZZ
5	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	4		PAOZZ
6	74A890601-2463	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND10C006)			
7	MS21919WDG #	CLAMP	1		-
8	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	74A890601-2212	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND1-C003)			
10	74A890601-2669	NARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-C007)			
11	74A890601-2218	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-C007)			
12	74A890601-2489	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 52J-C022)			
13	MS27656T19B35S	CONNECTOR, RECEPTACLE (52J-C022)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
14	74A890601-2518	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 22J-C108)			
15	MS27656T17B6S	CONNECTOR, RECEPTACLE (22J-C108)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

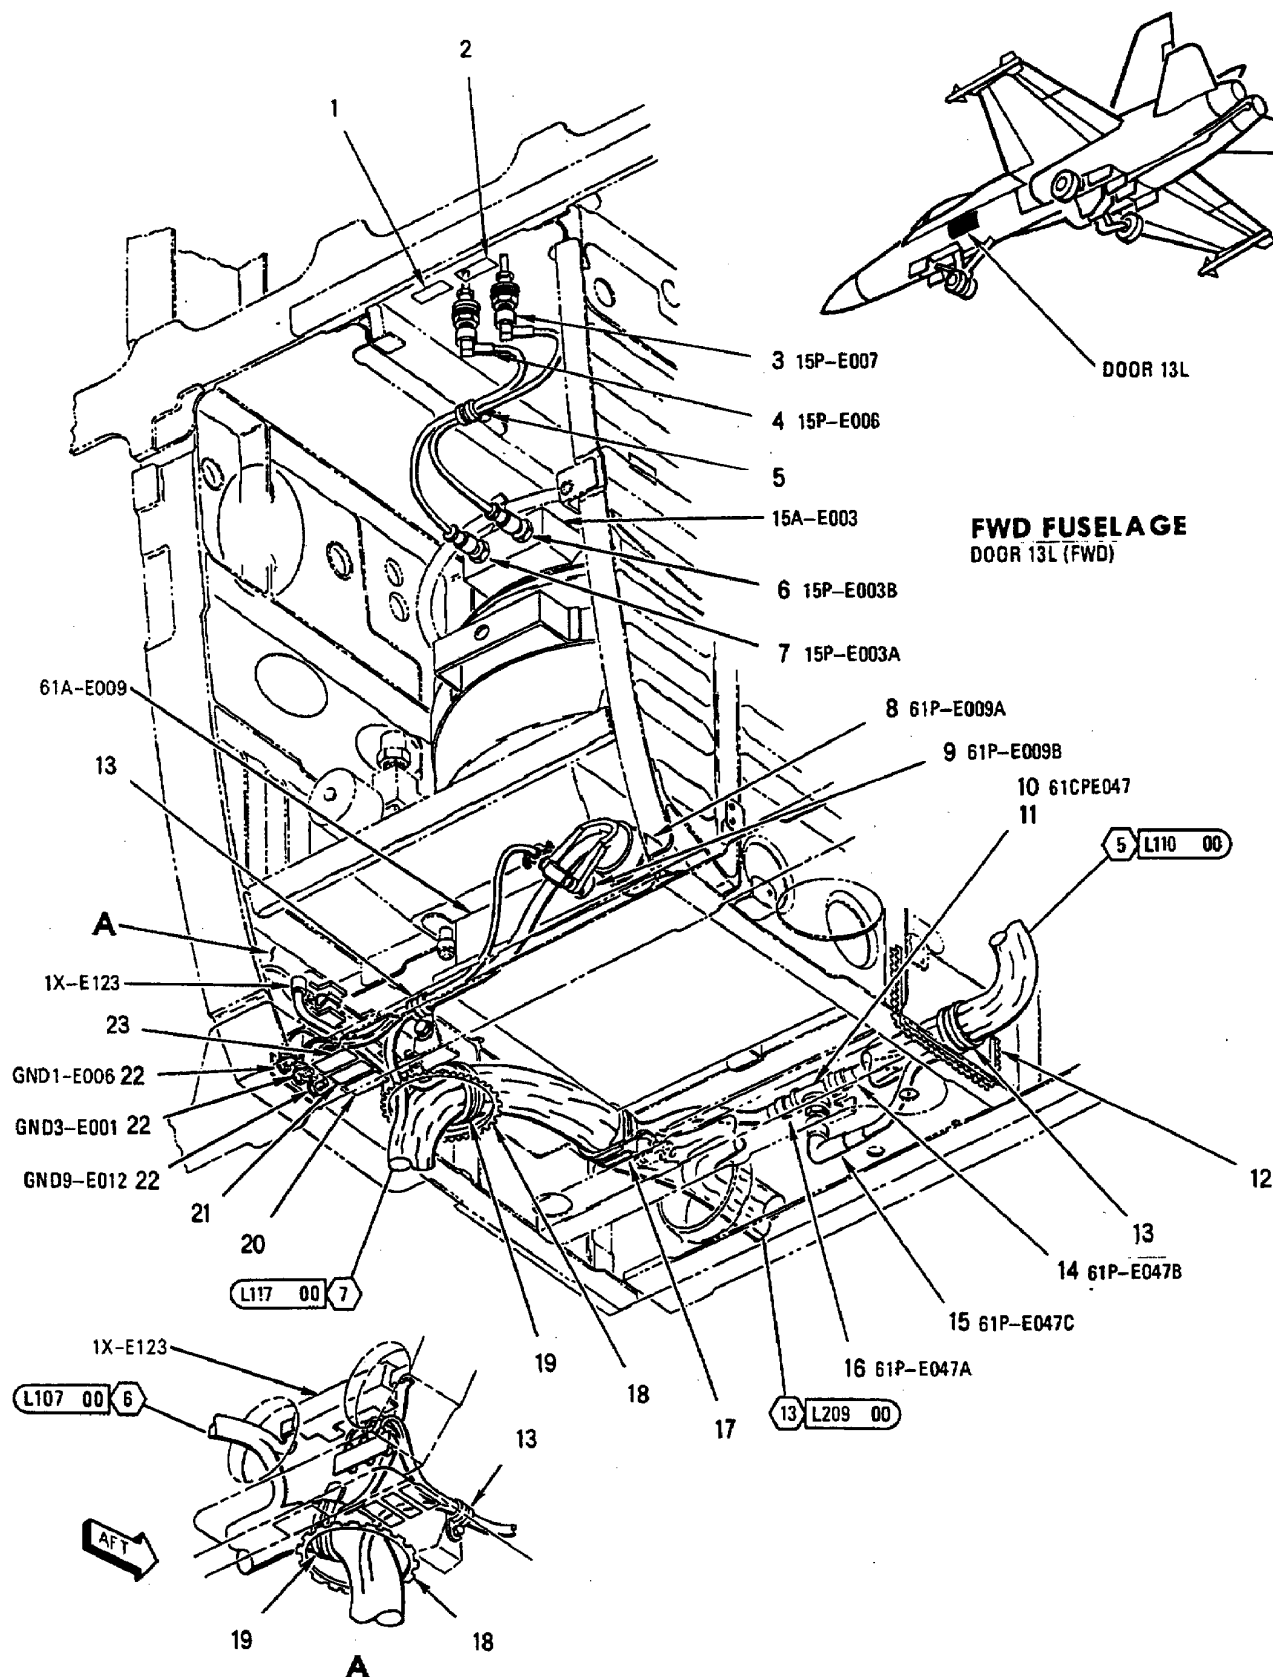


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2154	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 15J-K006)	1		MDOZZ
2	74A890601-2155	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 15J-K007)	1		MDOZZ
3	1212-304	CONNECTOR, PLUG, ELECTRICAL (13556) ... (MCDONNELL SPEC ST5M1305-304R) (15P-E007)	1		PAOZZ
4	1212-004	CONNECTOR, PLUG, ELECTRICAL (13556) ... (MCDONNELL SPEC ST5M1305-004R) (15P-E006)	1		PAOZZ
5	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	M25516/20-03-04	CONNECTOR, PLUG (15P-E003B)	1		PAOZZ
7	M25516/20-10-04	CONNECTOR, PLUG (15P-E003A)	1		PAOZZ
8	MS3476W24-61S	CONNECTOR, PLUG (61P-E009A)	1		PAOZZ
9	MS3116P8-3P	CONNECTOR, PLUG (61P-E009B)	1		PAOZZ
10	M55339-50-00001	ADAPTER (61CPE047)	1		PAOZZ
11	74A890601-2285	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61CPE047)	1		MDOZZ
12	MS21266-4N	GROMMET	AR		PAOZZ
13	MS21919WDG #	CLAMP	2		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	M39012/26-0503	CONNECTOR, PLUG (61P-E047B)	1		PAOZZ
15	M39012/30-0503	CONNECTOR, PLUG (61P-E047C)	1		PAOZZ
16	M39012/26-0503	CONNECTOR, PLUG (61P-E047A)	1		PAOZZ
17	MS21919WDG #	CLAMP	1		-
	NAS673V14	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
18	MS21266-2N	GROMMET	AR		PAOZZ
19	MS21919WDG #	CLAMP	1		-
	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
20	74A890601-2600	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-E012)	1		MDOZZ
21	74A890601-2546	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-E001)	1		MDOZZ
22	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 22)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 22)	3		PAOZZ
23	74A890601-2569	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-E006)	1		MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE
DOOR 13L (AFT)
EQUIPMENT REMOVED

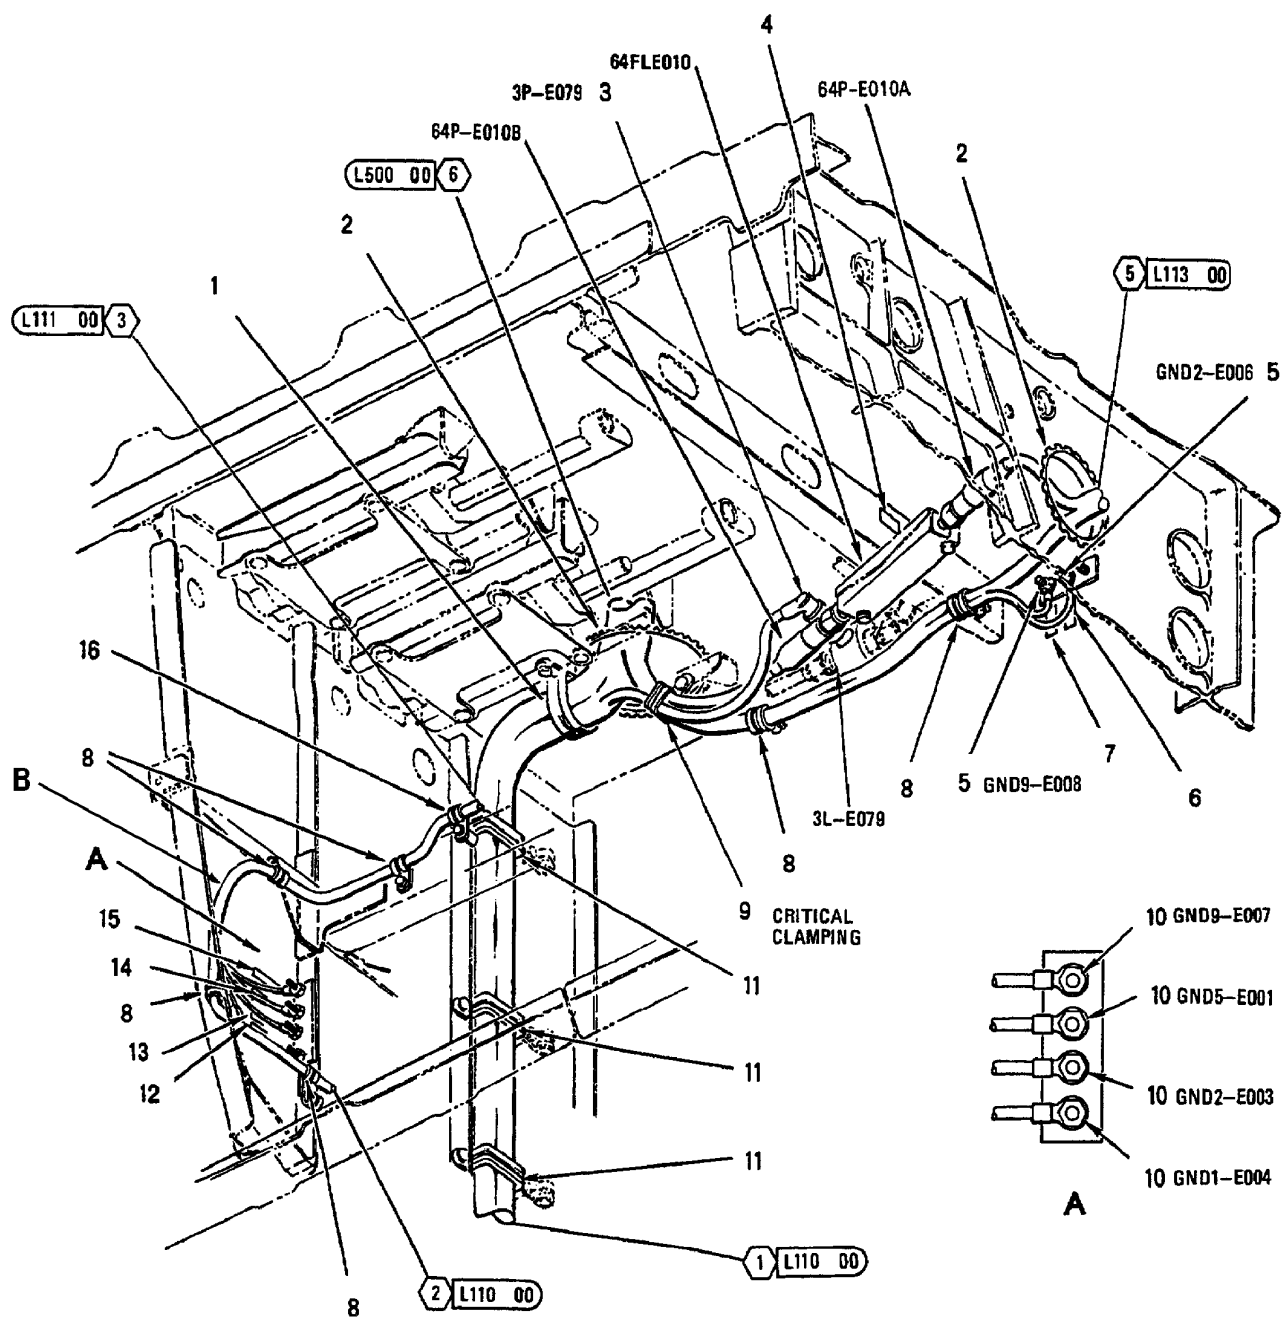

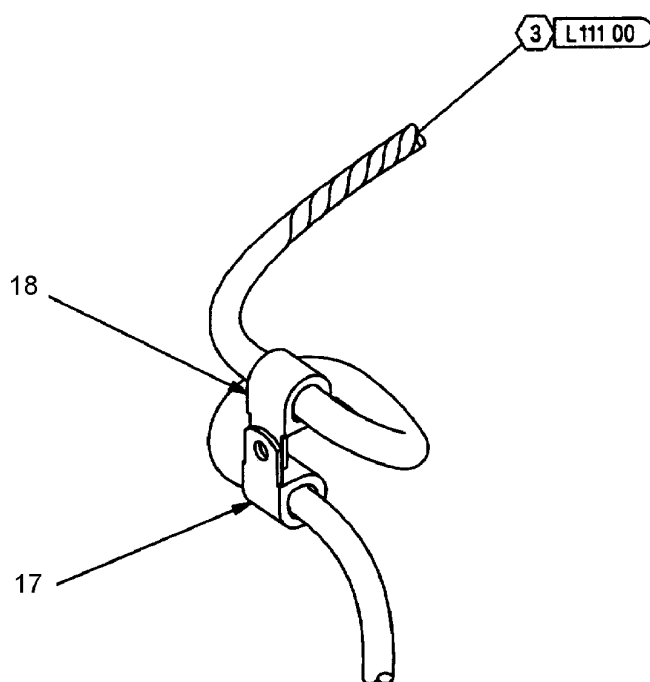

B

161925 THRU 163175
AFTER F/A-18 AFC 231


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1		-
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
2	MS21266-5N	GROMMET	AR		PAOZZ
3	MS27467T11B35S	CONNECTOR, PLUG (3P-E079)	1		PAOZZ
4	74A890068-2025	PLATE, IDENTIFICATION - UPPER EQUIP BAY, ZONE 12 (76301)	1		MDOZZ
5	NAS1801-3-10	SCREW	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	2		PAOZZ
6	74A890601-2851	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-E006)			
7	74A890601-2713	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-E008)			
8	MS21919WDG #	CLAMP	6		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	TA519WD7-14	CLAMP, LOOP (84971) (MCDONNELL SPEC ... ST9M633WD7-14)	1	*	PAOZZ
	487WD7-14	CLAMP, LOOP (83930) (MCDONNELL SPEC ... ST9M633WD7-14)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	4		PAOZZ
11	NAS1677D10W26N	STRAP	3		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
12	74A890601-2222	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND1-E004)			
13	74A890601-2221	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-E003)			
14	74A890601-2220	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND5-E001)			
15	74A890601-2219	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-E007)			
16	MS21919WDG #	CLAMP	1		-
	NAS673V13	BOLT (AP)	1	A	PAOZZ
	NAS673V19	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	B	PAOZZ
17	MS21919WDG8	CLAMP	1	C	PAOZZ
	NAS673V4	BOLT	1	C	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	C*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	C*	PAOZZ
18	MS21919WDG8	CLAMP	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161987
B	162394 & UP
C	161925 & UP AFTER F/A-18 AFC 231

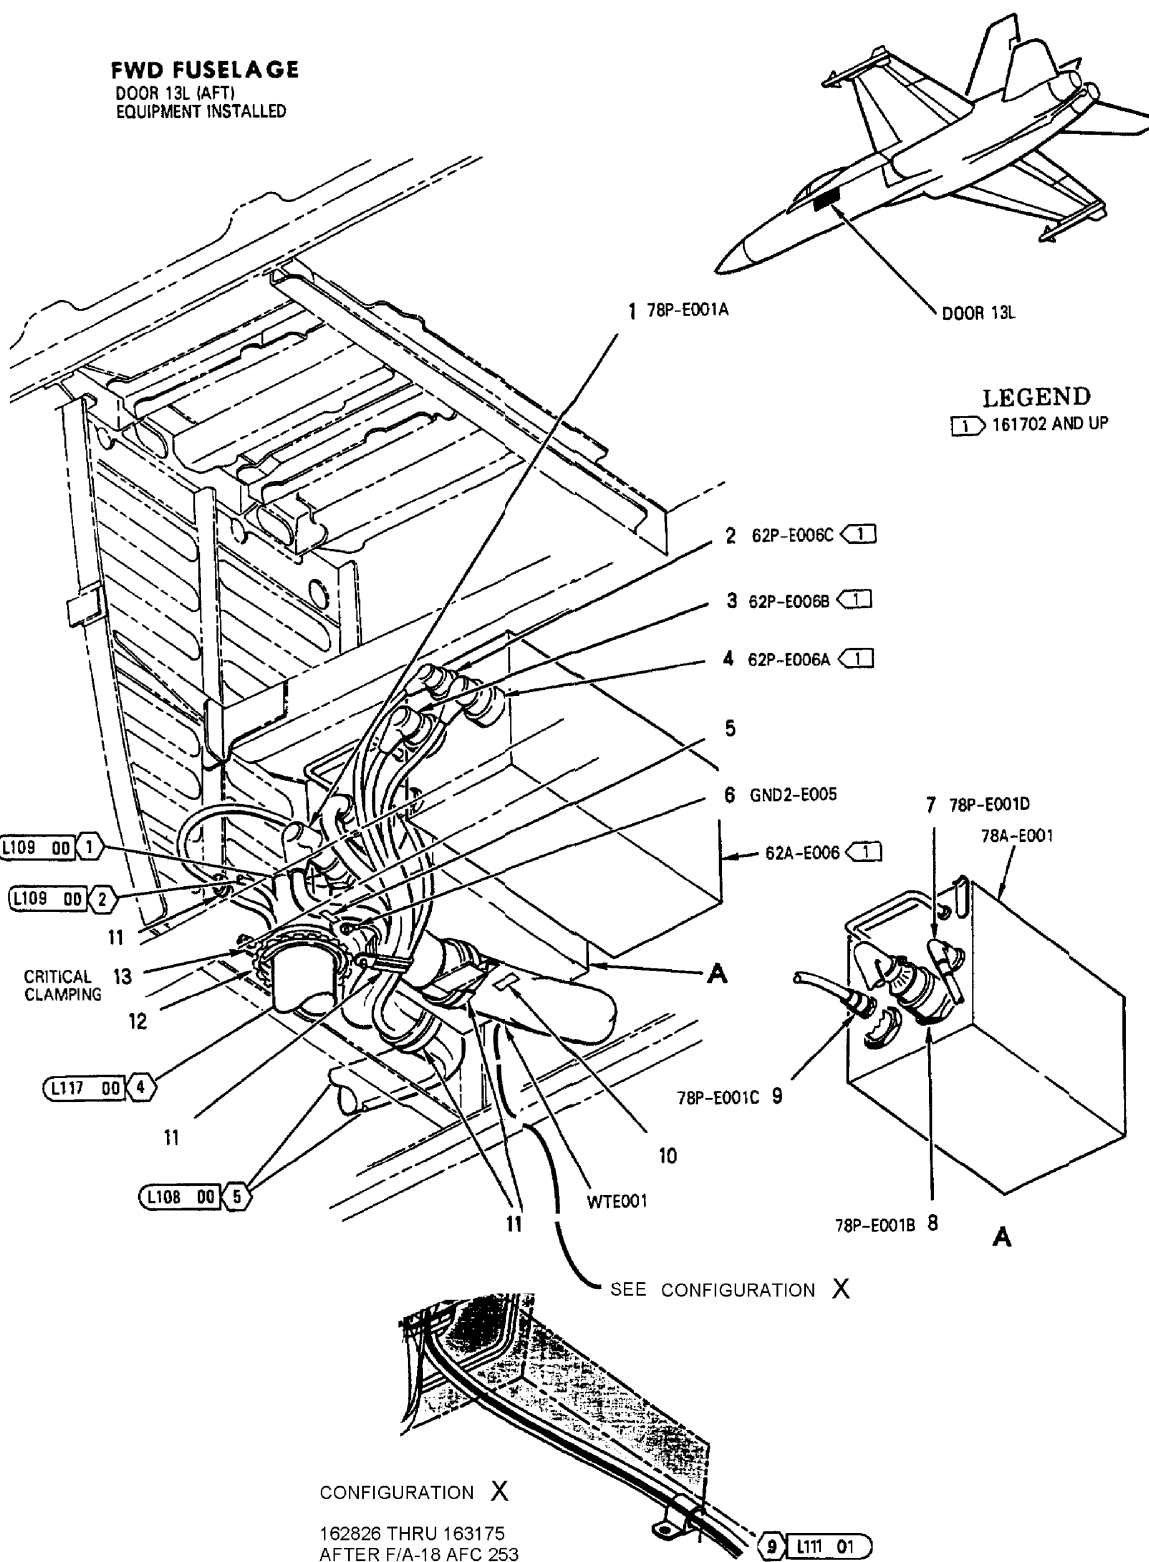

FWD FUSELAGE

DOOR 13L (AFT)
EQUIPMENT INSTALLED

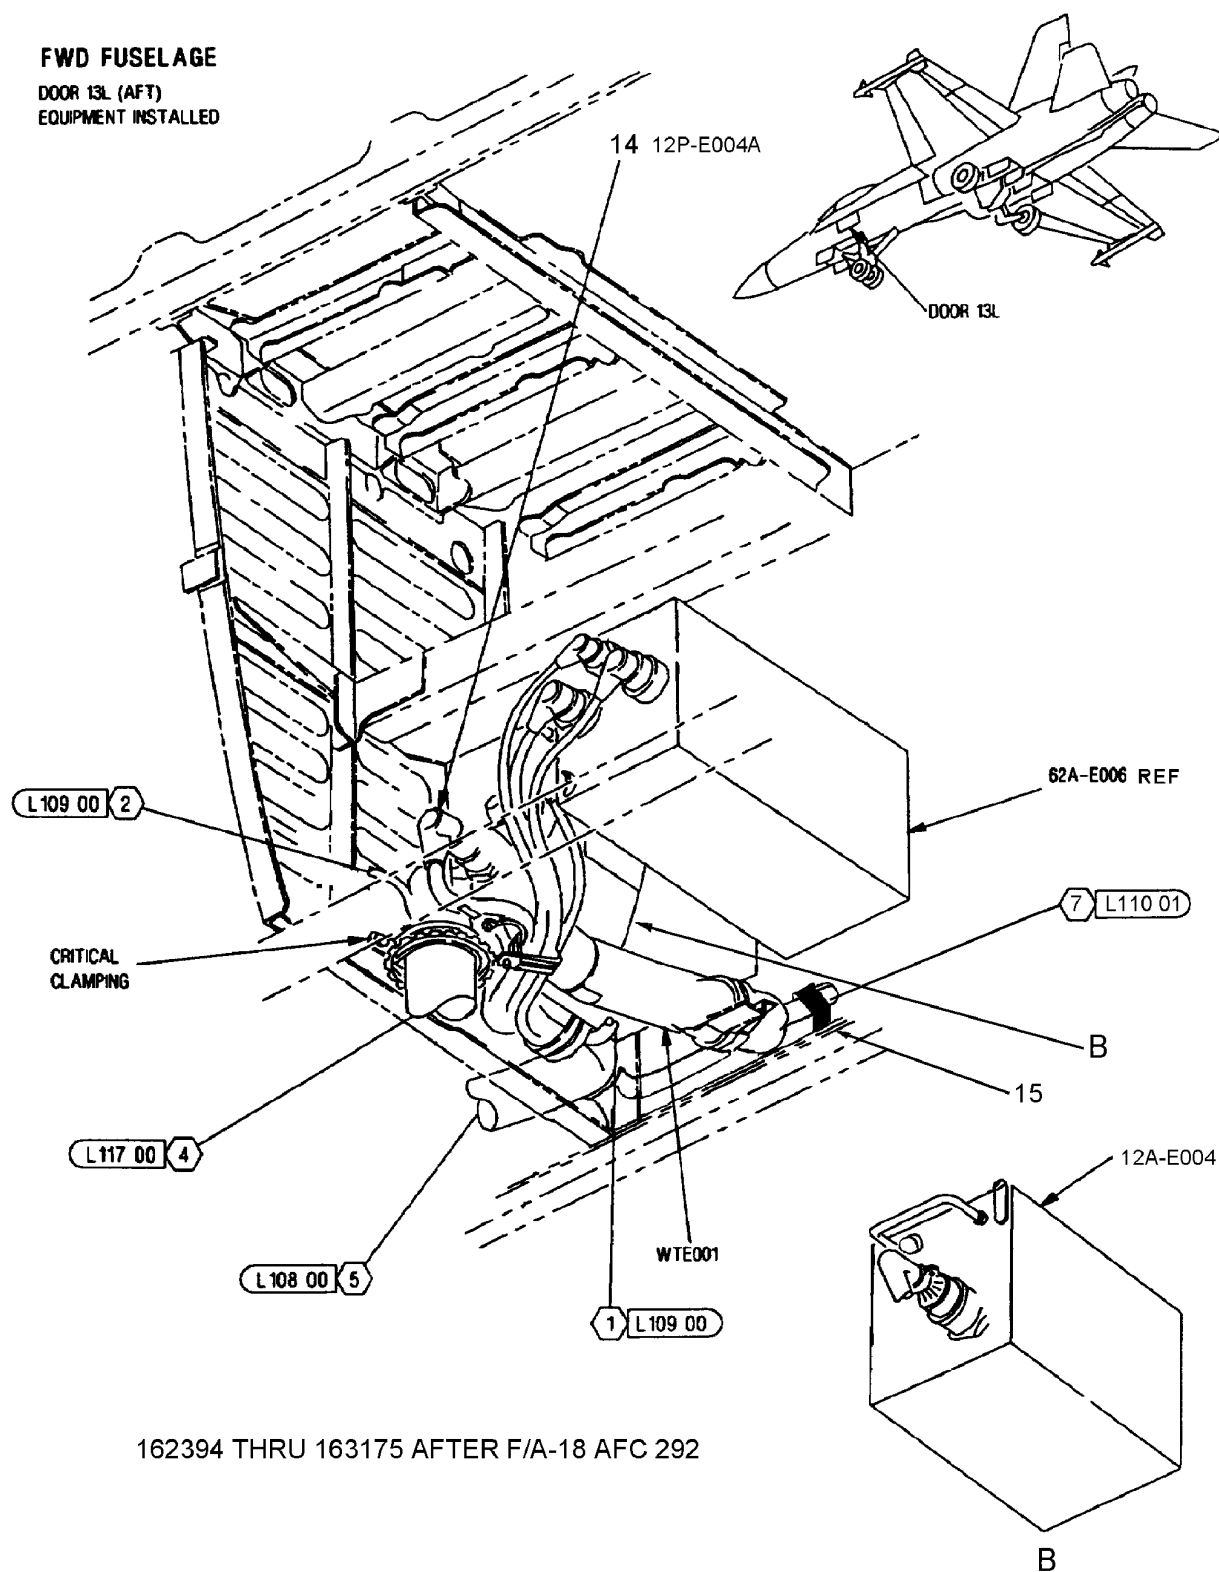

162394 THRU 163175 AFTER F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27473T20B35S	CONNECTOR, PLUG (78P-E001A)	1		PAOZZ
2	MS27467T11B35S	CONNECTOR, PLUG (62P-E006C)	1	A	PAOZZ
3	MS27467T21B35S	CONNECTOR, PLUG (62P-E006B)	1	A	PAOZZ
4	MS27467T21B35P	CONNECTOR, PLUG (62P-E006A)	1	A	PAOZZ
5	74A890601-2665	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-E005)	1		MDOZZ
6	NAS603-8P	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	1		PAOZZ
7	1207-079-A00E	CONNECTOR, PLUG, ELECTRICAL (00795) ... (MCDONNELL SPEC ST5M1332-001) (78P-E001D)	1	*	PAOZZ
	31-4371-3009	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1332-001) (78P-E001D)	1	*	PAOZZ
	126-6	CONNECTOR, PLUG, ELECTRICAL (91836) ... (MCDONNELL SPEC ST5M1332-001) (78P-E001D)	1	*	PAOZZ
8	M22TR10XP6N-H2	CONNECTOR, PLUG, ELECTRICAL (09922) ... (MCDONNELL SPEC 5M1017PN2) (78P-E001B)	1		PAOZZ
9	31-4372-9	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1302-001) (78P-E001C)	1	*	PAOZZ
	125-14	CONNECTOR, PLUG, ELECTRICAL (91836) ... (MCDONNELL SPEC ST5M1302-001) (78P-E001C)	1	*	PAOZZ
10	74A890601-2008	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTE001)	1		MDOZZ
11	MS21919WDG #	CLAMP	4		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	MS21266-2N	GROMMET	AR		PAOZZ
13	MS21919WDG #	CLAMP	1		-
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
14	MS27467T25B35S	CONNECTOR, PLUG (12P-E004A)	1	B	PAOZZ
15	NAS1712D10-14N	CLAMP	1	B	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	B	PAOZZ
	NAS673V2	BOLT	1	B	PAOZZ
16	MS21919WDG6	CLAMP	1	C	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161702 & UP
B	162394 THRU 163175 AFTER F/A-18 AFC 292
C	162826 THRU 163175 AFTER F/A-18 AFC 253



FWD FUSELAGE DOOR 13L (AFT) EQUIPMENT INSTALLED


LEGEND

- | | |
|---|--------------------|
| 1 | 161353 THRU 161528 |
| 2 | 161702 AND UP |
| 3 | 161353 THRU 161761 |
| 4 | 161925 AND UP |

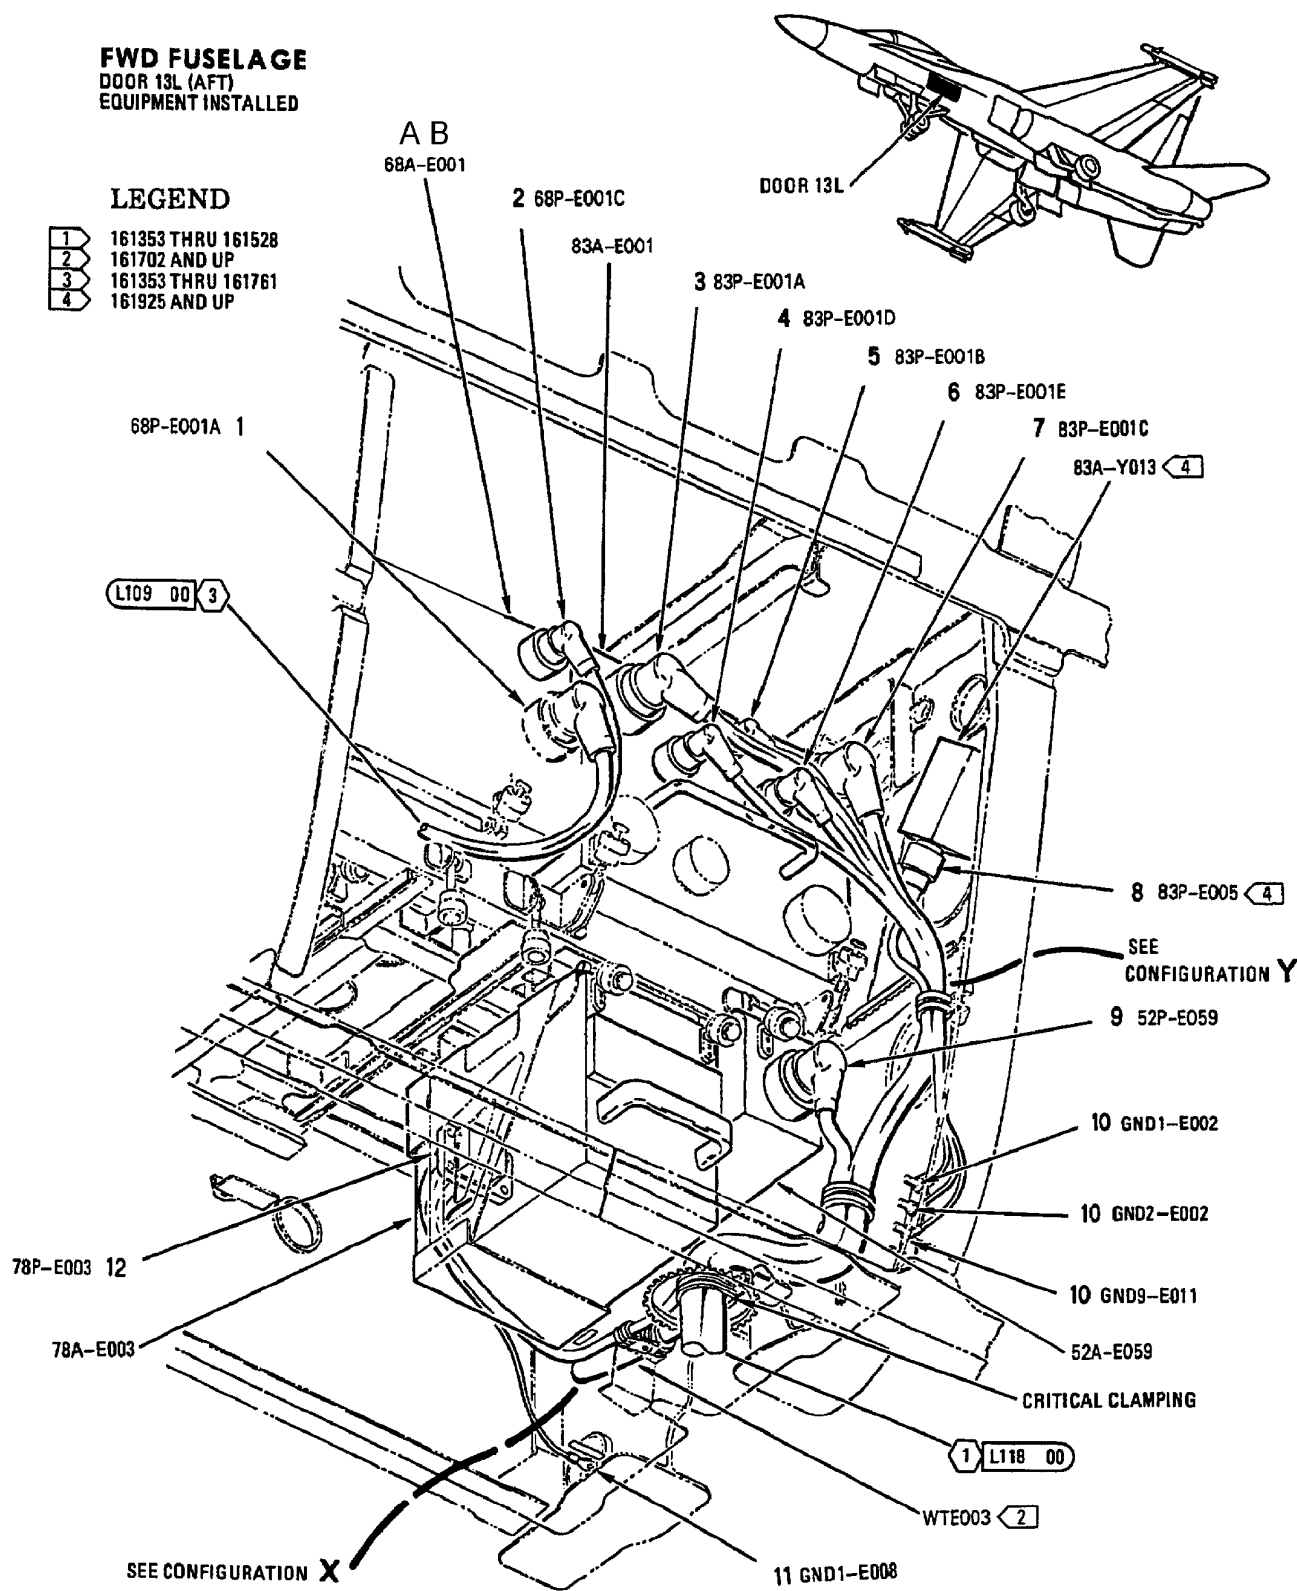


FWD FUSELAGE
DOOR 13L(AFT)
EQUIPMENT INSTALLED

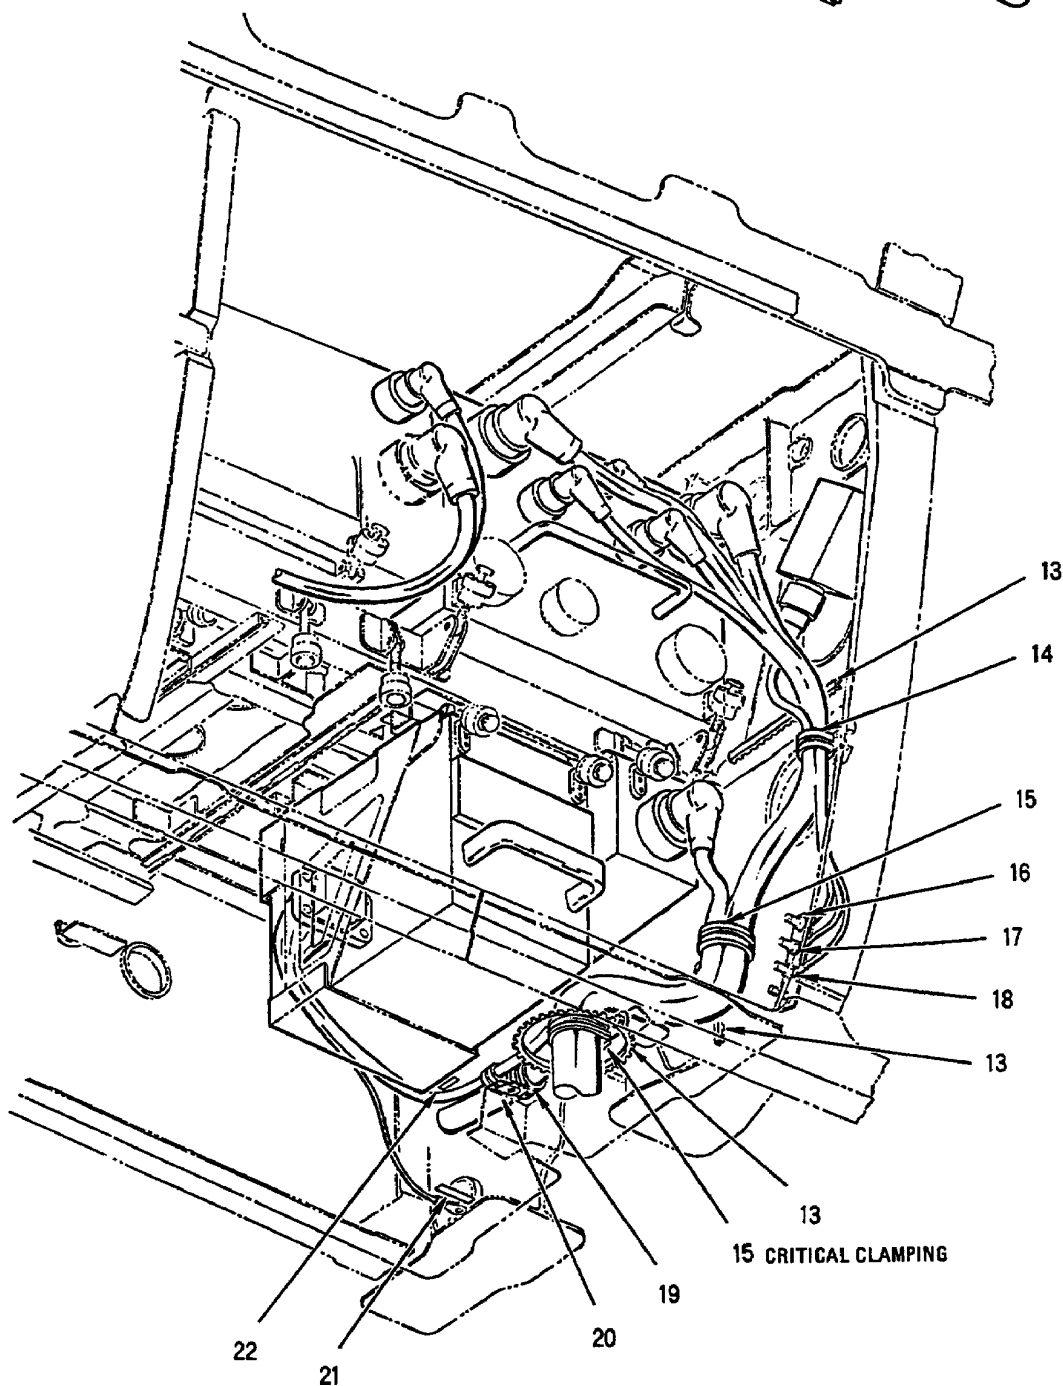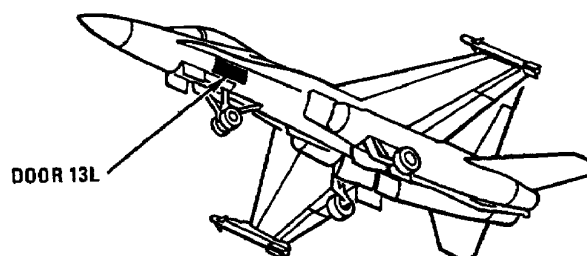


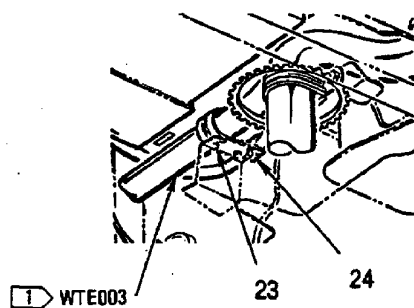


CONFIGURATION X

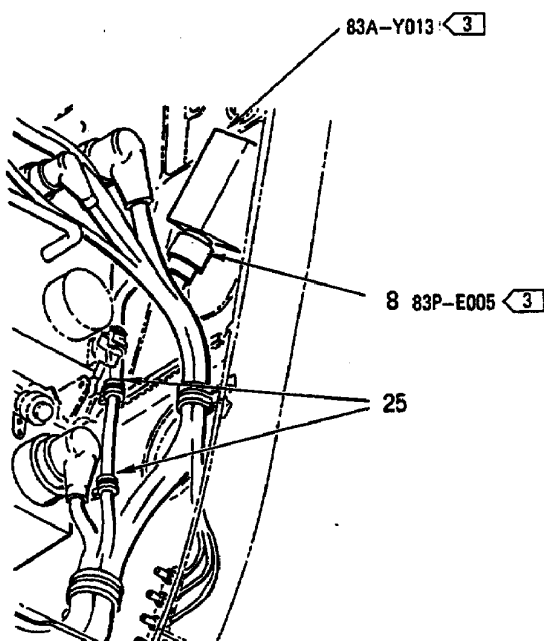

CONFIGURATION Y

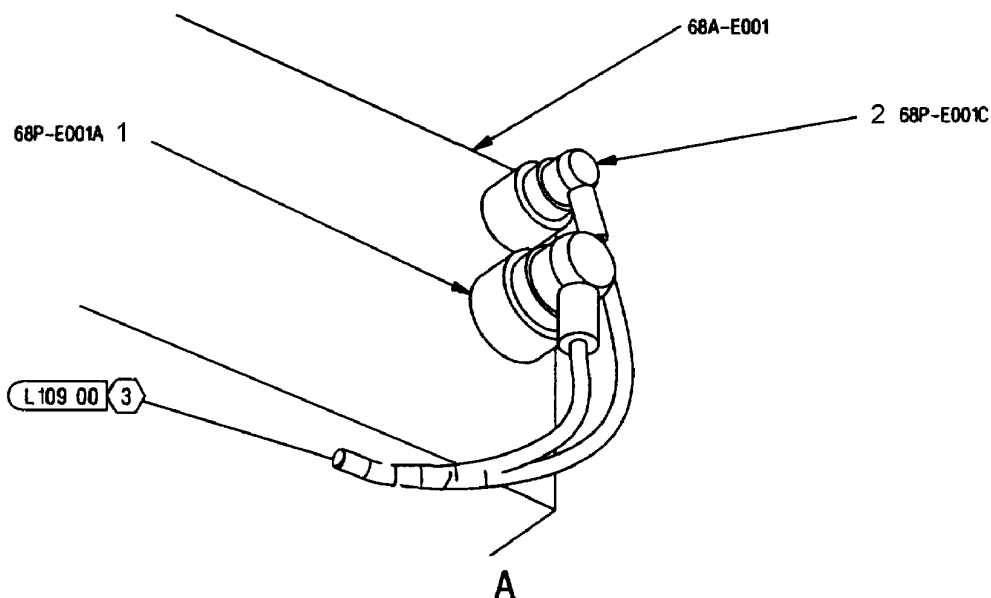

161353 THRU 163175;
ALSO 161925 THRU 163175
BEFORE F/A-18 AFC 231

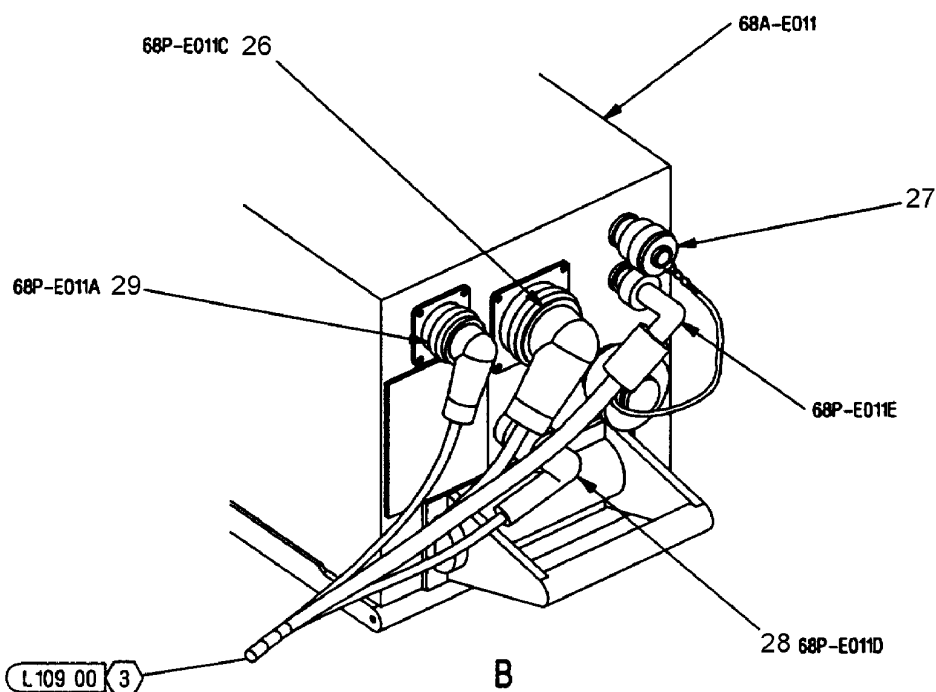


161925 THRU 163175
AFTER F/A-18 AFC 231

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B35S	CONNECTOR, PLUG (68P-E001A)	1		PAOZZ
2	MS27467T17B99S	CONNECTOR, PLUG (68P-E001C)	1		PAOZZ
3	MS27467T25B35PA	CONNECTOR, PLUG (83P-E001A)	1		PAOZZ
4	MS27467T15B35P	CONNECTOR, PLUG (83P-E001D)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (83P-E001B)	1		PAOZZ
6	MS27467T15B35PA	CONNECTOR, PLUG (83P-E001E)	1		PAOZZ
7	MS27467T25B35PB	CONNECTOR, PLUG (83P-E001C)	1		PAOZZ
8	MS27467T13B35S	CONNECTOR, PLUG (83P-E005)	1		PAOZZ
9	MS27467T25B35S	CONNECTOR, PLUG (52P-E059)	1		PAOZZ
10	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	3		PAOZZ
11	NAS1801-3-10	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	1		PAOZZ
12	0N089560-1	CONNECTOR, PLUG, ELECTRICAL (98230) ... (78P-E003)	1		PAOZZ
13	MS21266-2N	GROMMET	AR		PAOZZ
14	TA5000BH12CR	CLAMP, LOOP (84971) (MCDONNELL SPEC ... 9M329BH12CR)	1	D	PAOZZ
	MS21919WDG #	CLAMP	1	E	-
	NAS673V6	BOLT (AP)	2	D	PAOZZ
	NAS673V11	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	2	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	E	PAOZZ
	NAS1291C3M	NUT (AP)	2	D	PAOZZ
	74A314341-2031	SPACER (76301) (USE WITH INDEX 14)	2	D	MGOZZ
15	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	74A890601-2208	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND1-E002)			
17	74A890601-2667	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND2-E002)			
18	74A890601-2599	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND9-E011)			
19	MS21919WDG #	CLAMP	1	A	-
20	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
21	74A890601-2799	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND1-E008)			
22	74A890601-2010	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES WTE003)			
23	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6 #	SPACER (AP)	1	B	-
24	MS21919WDG #	CLAMP	1	B	-
25	MS21919WDG #	CLAMP	2	C	-
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
26	MS27467T25B35S	CONNECTOR, PLUG (68P-E011C)	1	G	PAOZZ
27	M39012/25-0111	COVER, DUST CAP (81349)	1	G	PAOZZ
28	D38999/26WA35SN	CONNECTOR, PLUG (68P-E011D)	1	G	PAOZZ
29	MS27467T17B99S	CONNECTOR, PLUG (68P-E011A)	1	G	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	161353 THRU 161761
D	161353 THRU 162414
E	162415 & UP
F	161353 THRU 163175; ALSO 161925 TRHU 163175 BEFORE F/A-18 AFC 231
G	161925 THRU 163175 AFTER F/A-18 AFC 231

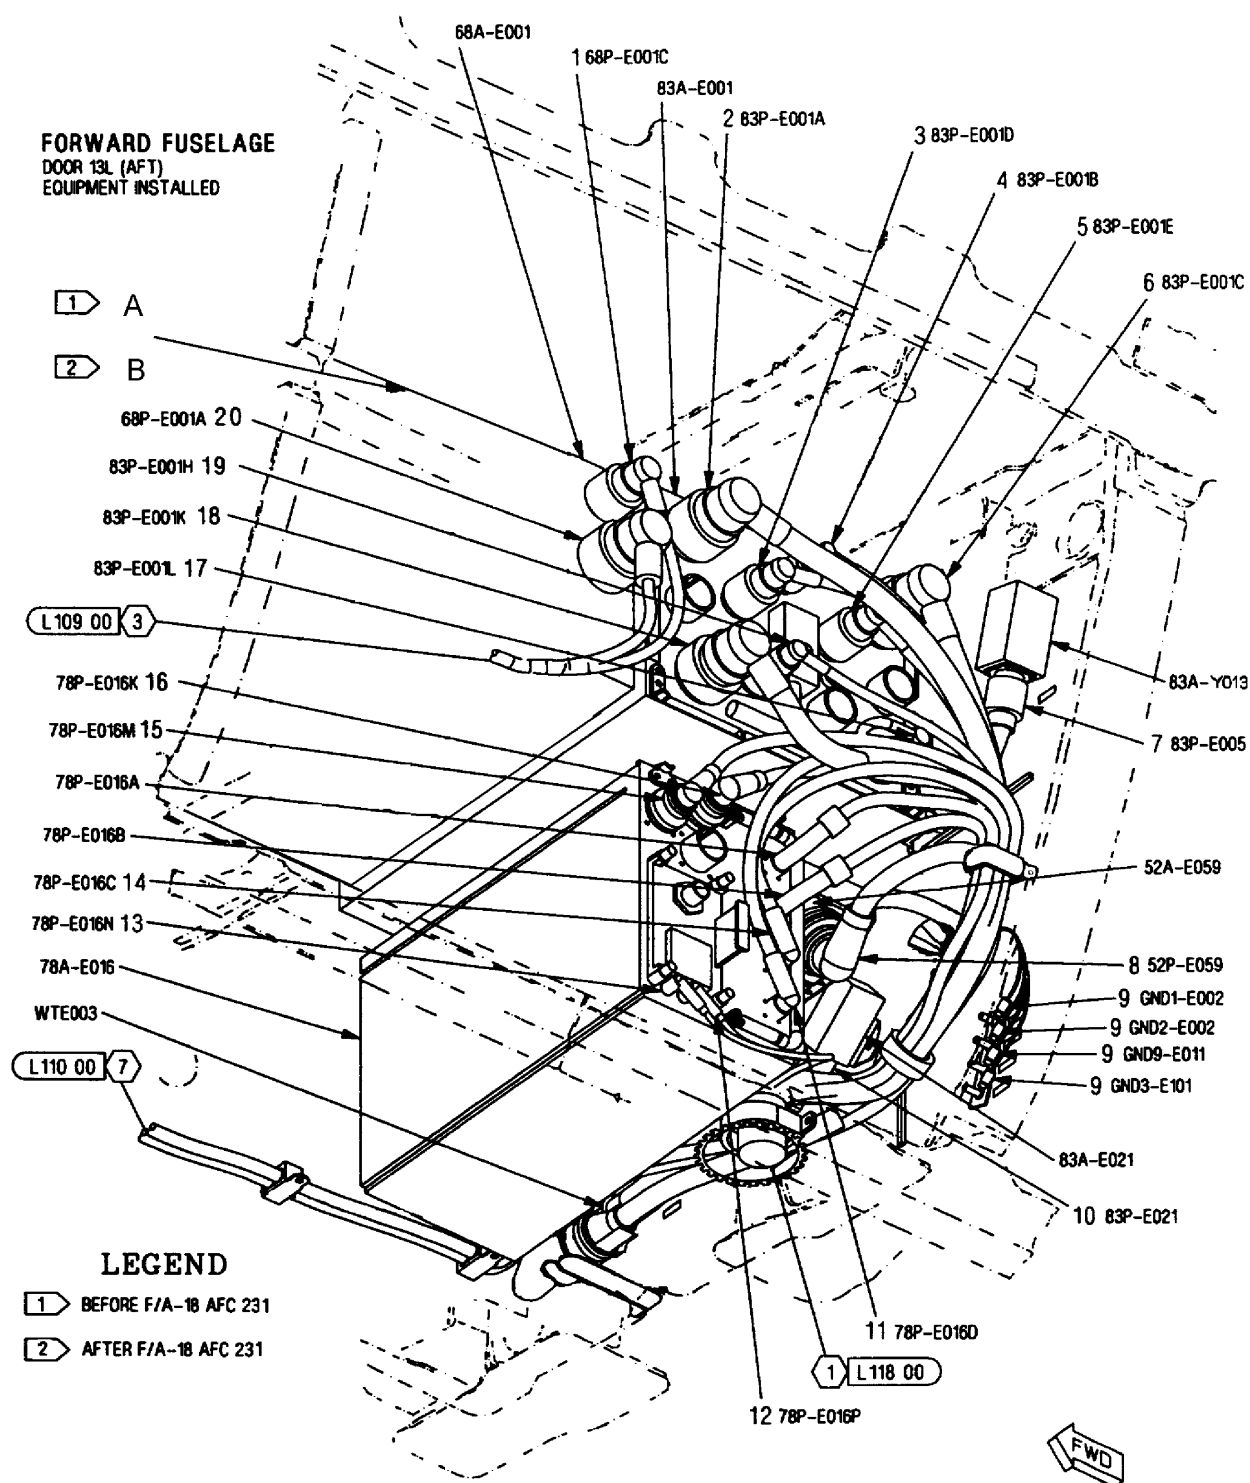

162394 THRU 163175
AFTER F/A-18 AFC 292

FORWARD FUSELAGE
DOOR 13L (AFT)
EQUIPMENT INSTALLED

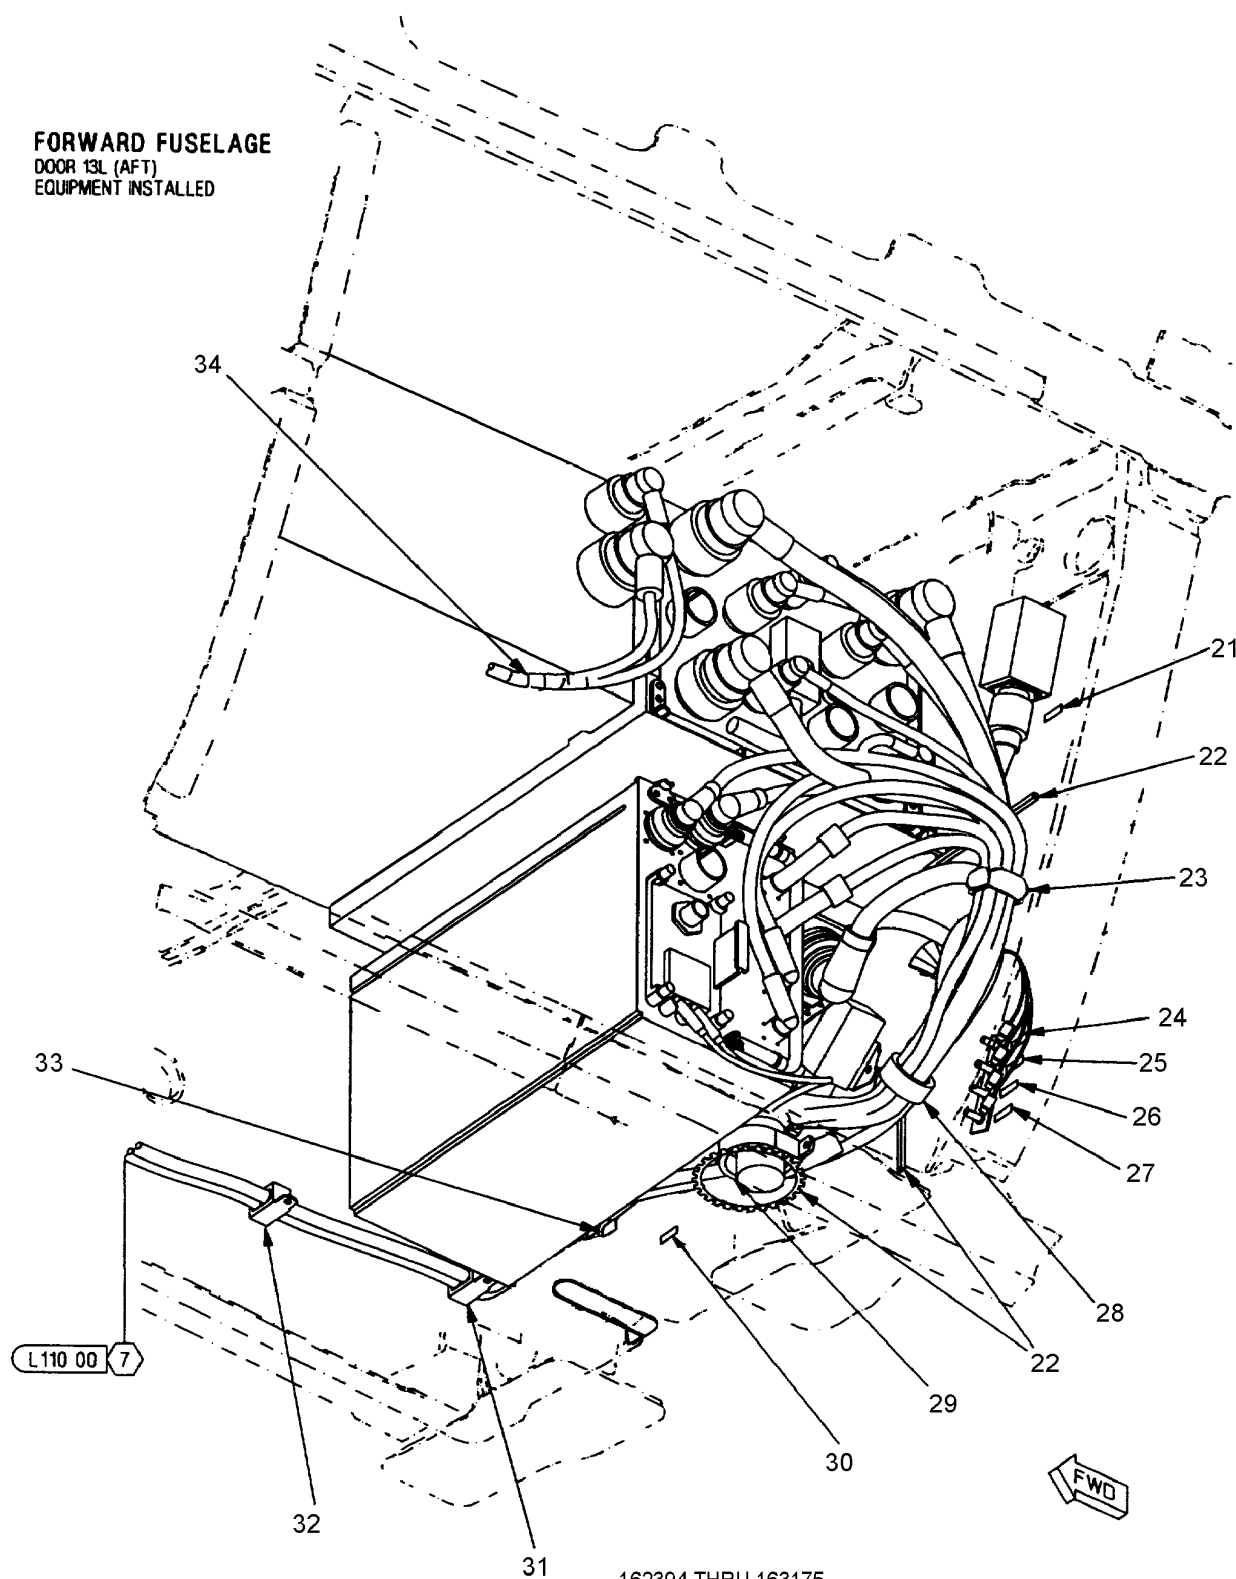


162394 THRU 163175
AFTER F/A-18 AFC 292

FWD FUSELAGE


DOOR 13L (AFT)

EQUIPMENT INSTALLED

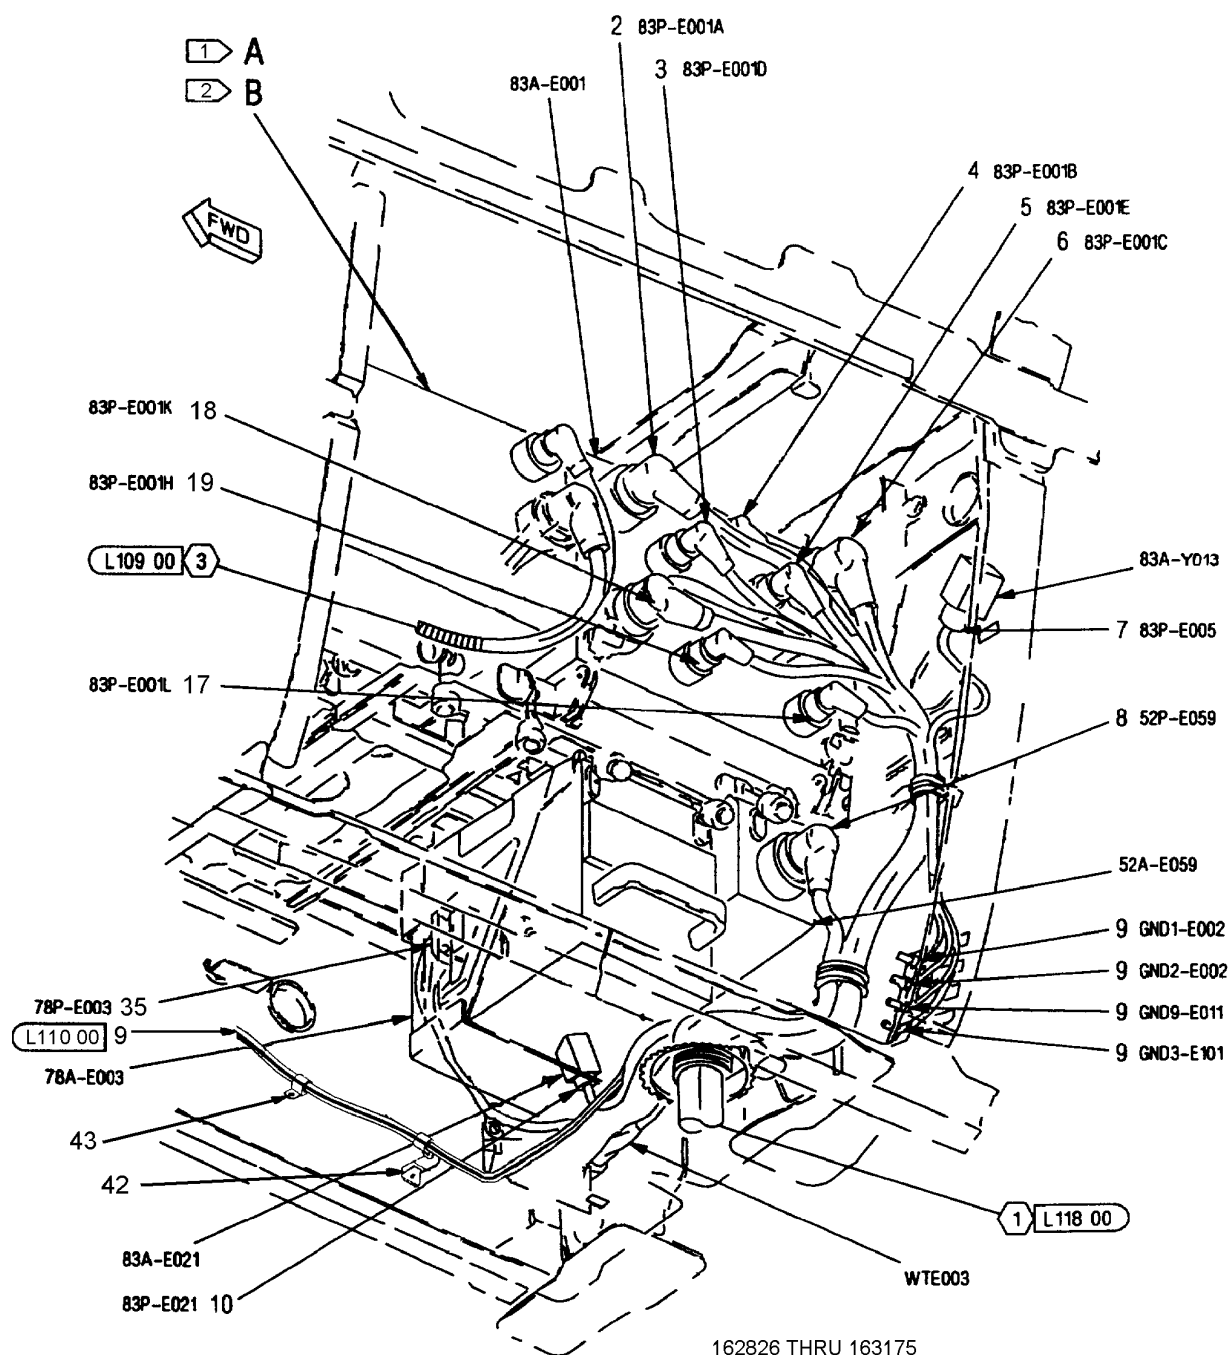


162826 THRU 163175
AFTER F/A-18 AFC 253


FWD FUSELAGE
DOOR 13L (AFT)
EQUIPMENT INSTALLED

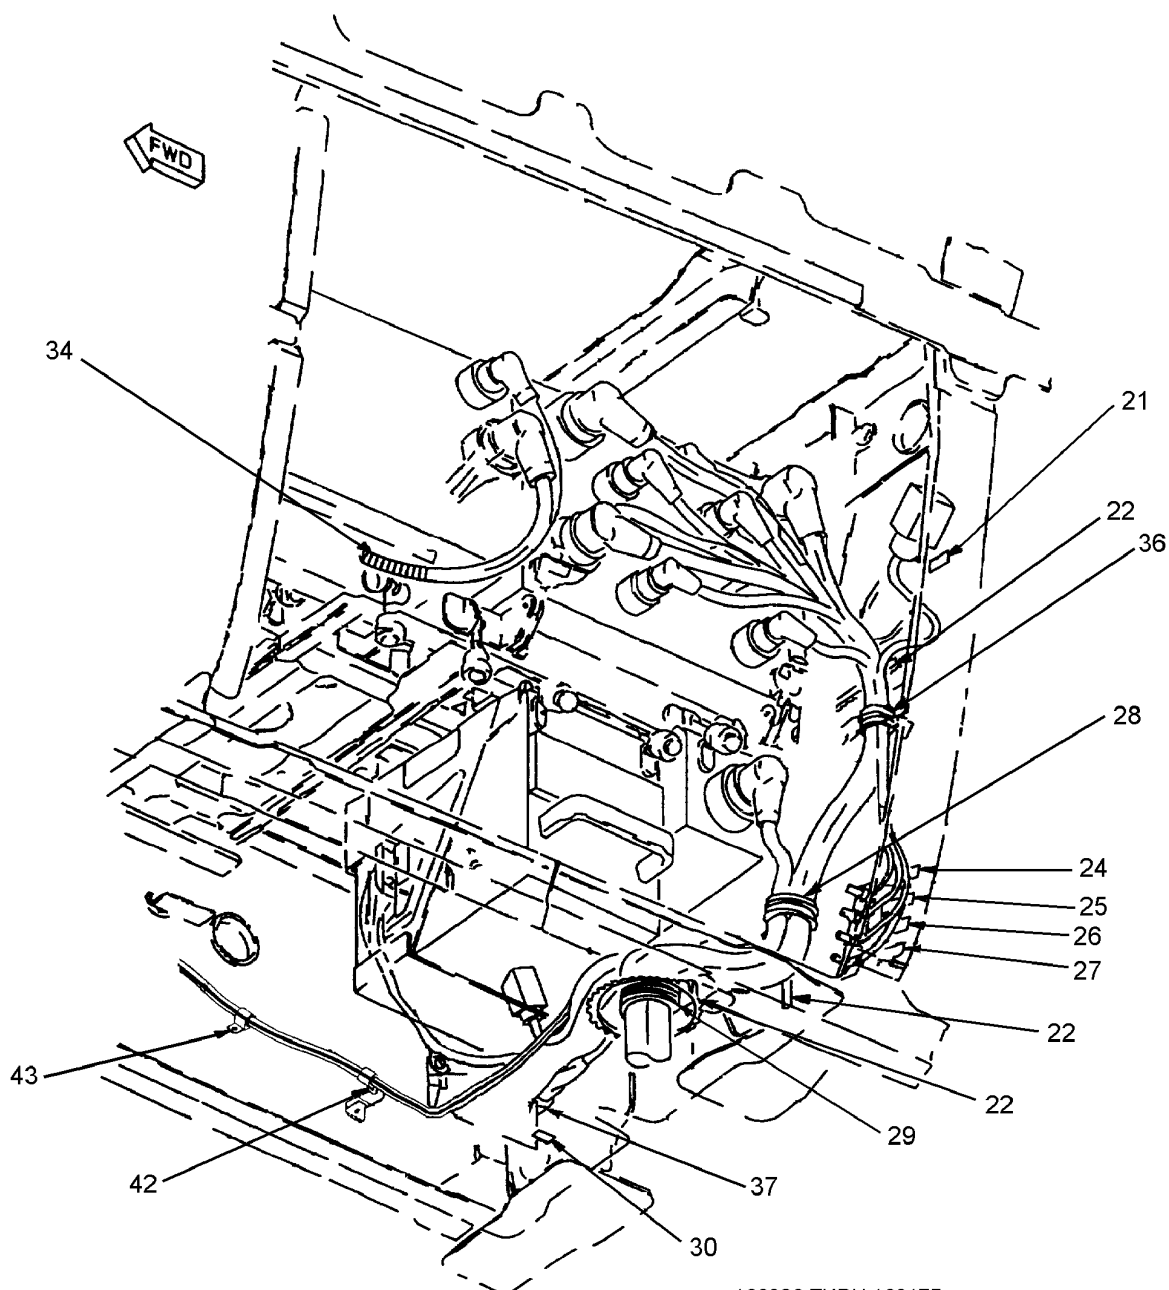

162826 THRU 163175
 AFTER F/A-18 AFC 253

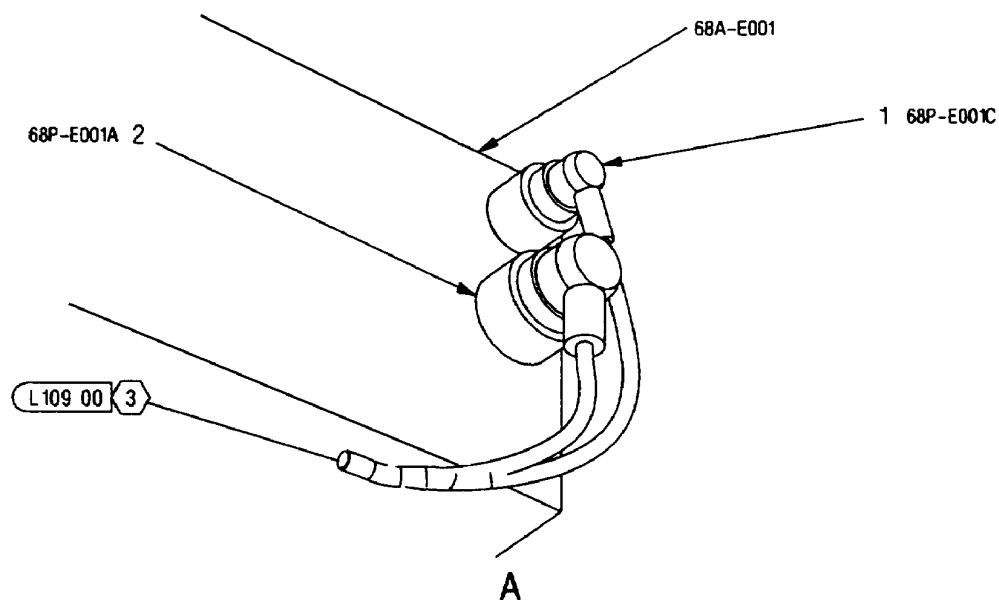

161353 THRU 163175;
ALSO 161925 THRU 163175
BEFORE F/A-18 AFC 231

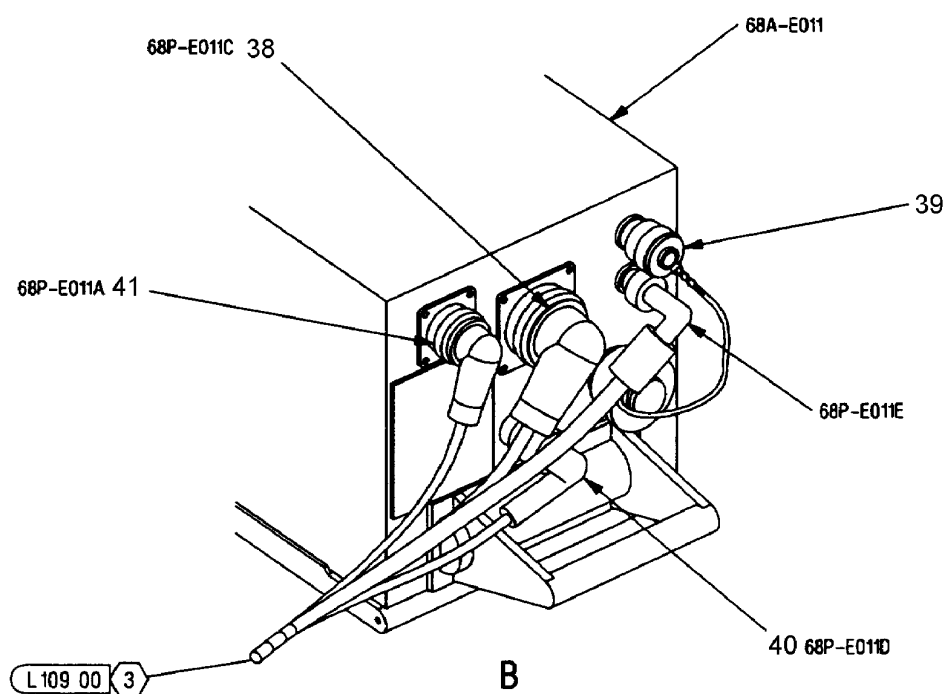

161925 THRU 163175
AFTER F/A-18 AFC 231

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T17B99S	CONNECTOR, PLUG (68P-E001C)	1	C	PAOZZ
2	MS27467T25B35PA	CONNECTOR, PLUG (83P-E001A)	1		PAOZZ
3	MS27467T15B35P	CONNECTOR, PLUG (83P-E001D)	1		PAOZZ
4	MS27467T11B35S	CONNECTOR, PLUG (83P-E001B)	1		PAOZZ
5	MS27467T15B35PA	CONNECTOR, PLUG (83P-E001E)	1		PAOZZ
6	MS27467T25B35PB	CONNECTOR, PLUG (83P-E001C)	1		PAOZZ
7	MS27467T13B35S	CONNECTOR, PLUG (83P-E005)	1		PAOZZ
8	MS27467T25B35S	CONNECTOR, PLUG (52P-E059)	1		PAOZZ
9	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 9)	4		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 9)	4	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 9)	4	*	PAOZZ
	ST5M1379 #	TERMINAL STRIP (76301)	1		-
10	MS27467T11B35SA	CONNECTOR, PLUG (83P-E021)	1		PAOZZ
11	31-4371-3009	CONNECTOR, PLUG, ELECTRICAL	1	A	PAOZZ
		(74868) (78P-E016D) (MCDONNELL SPEC ST5M1332-001)			
	1207-079-A00L	SEE ABOVE (00795)	1	A*	PAOZZ
	126-6	SEE ABOVE (91836)	1	A*	PAOZZ
12	DK-321-0411R-44P	CONNECTOR, PLUG, ELECTRICAL	1	A	PAOZZ
		(06090) (78P-E016P) (MCDONNELL SPEC 5M2778-002)			
13	DK-321-0411R-44P	CONNECTOR, PLUG, ELECTRICAL	1	A	PAOZZ
		(06090) (78P-E016N) (MCDONNELL SPEC 5M2778-002)			
14	31-4371-3009	CONNECTOR, PLUG, ELECTRICAL	1	A*	PAOZZ
		(74868) (78P-E016C) (MCDONNELL SPEC ST5M1332-001)			
	1207-079-A00L	SEE ABOVE (00795)	1	A*	PAOZZ
	126-6	SEE ABOVE (91836)	1	A*	PAOZZ
15	MS27467T15B35S	CONNECTOR, PLUG (78P-E016M)	1	A*	PAOZZ
	88-443749-35S	SEE ABOVE (77820)	1	A*	PAOZZ
16	MS27467T17B35S	CONNECTOR, PLUG (78P-E016K)	1	A	PAOZZ
17	D38999/46WC35PA	CONNECTOR, PLUG (83P-E001L)	1		PAOZZ
18	D38999/46WJ35PN	CONNECTOR, PLUG (83P-E001K)	1		PAOZZ
	JT5M2920-3JW	SEE ABOVE (0BW78)	1	*	PAOZZ
	440HW056NF25	SEE ABOVE (06324)	1	*	PAOZZ
	74R890600-2136	BAND MARKER (AP)	1		PAOZZ
19	D38999/46WC35PN	CONNECTOR, PLUG (83P-E001H)	1		PAOZZ
20	MS27467T25B35S	CONNECTOR, PLUG (68P-E001A)	1	C	PAOZZ
21	74A890601-3001	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 83J-Y005)			
22	MS21266-2N	GROMMET	AR		PAOZZ
23	MS21919WDG25	CLAMP	1	A	PAOZZ
	NAS673V15	BOLT (AP)	1		PAOZZ
	NAS1149FD0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-448	SPACER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	74A890601-2208	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-E002)	1		MDOZZ
25	74A890601-2667	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-E002)	1		MDOZZ
26	74A890601-2599	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-E011)	1		MDOZZ
27	74A890601-2628	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-E101)	1		MDOZZ
28	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
29	MS21919WDG29	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
30	74A890601-2010	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTE003)	1		MDOZZ
31	NAS1712D6-12N	CLAMP	1		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
32	NAS1712D6-12N	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
33	MS21919WDG16	CLAMP	1	K	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
34	500024-1	TUBING, PLASTIC SPIRAL (6M033) (MCDONNELL SPEC 14M912TN4)	AR	D	MGOZZ
	T0004	SEE ABOVE (66794)	AR	D	MGOZZ
	T25T	SEE ABOVE (06383)	AR	D	MGOZZ
	SC-606-1/4	SEE ABOVE (96904)	AR	D	MGOZZ
35	0N089560-1	CONNECTOR, PLUG, ELECTRICAL (98230) (78P-E003)	1	B	PAOZZ
36	MS21919WDG #	CLAMP	1	B	-
	NAS673V11	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	2	*	PAOZZ
	AN960JD10LL	WASHER (AP)	2	*	PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	MS21919WDG #	CLAMP	1	B	-
37	NAS673V3	BOLT (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
38	MS27467T25B35S	CONNECTOR, PLUG (68P-E011C)	1	D	PAOZZ
39	M39012/25-0111	COVER, DUST CAP (81349)	1	D	PAOZZ
40	D38999/26WA35SN	CONNECTOR, PLUG (68P-E011D)	1	D	PAOZZ
41	MS27467T17B99S	CONNECTOR, PLUG (68P-E011A)	1	D	PAOZZ
42	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	B	PAOZZ
	NAS673V9	BOLT (AP)	1	B	PAOZZ
43	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS1149D0316S	WASHER (AP)	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	162394 THRU 163175 AFTER F/A-18 AFC 292
B	162826 THRU 163175 AFTER F/A-18 AFC 253
C	161925 THRU 163175 BEFORE F/A-18 AFC 231
D	161925 THRU 163175 AFTER F/A-18 AFC 231


FWD FUSELAGE DOOR 14L EQUIPMENT INSTALLED

LEGEND


- 1 MATES WITH 64J-E001F
161702 AND UP BEFORE
F/A-18 AFC 50;
CAPPED AND STOWED 161702
AND UP AFTER F/A-18 AFC 50
- 2 161702 AND UP
BEFORE F/A-18 AFC 50

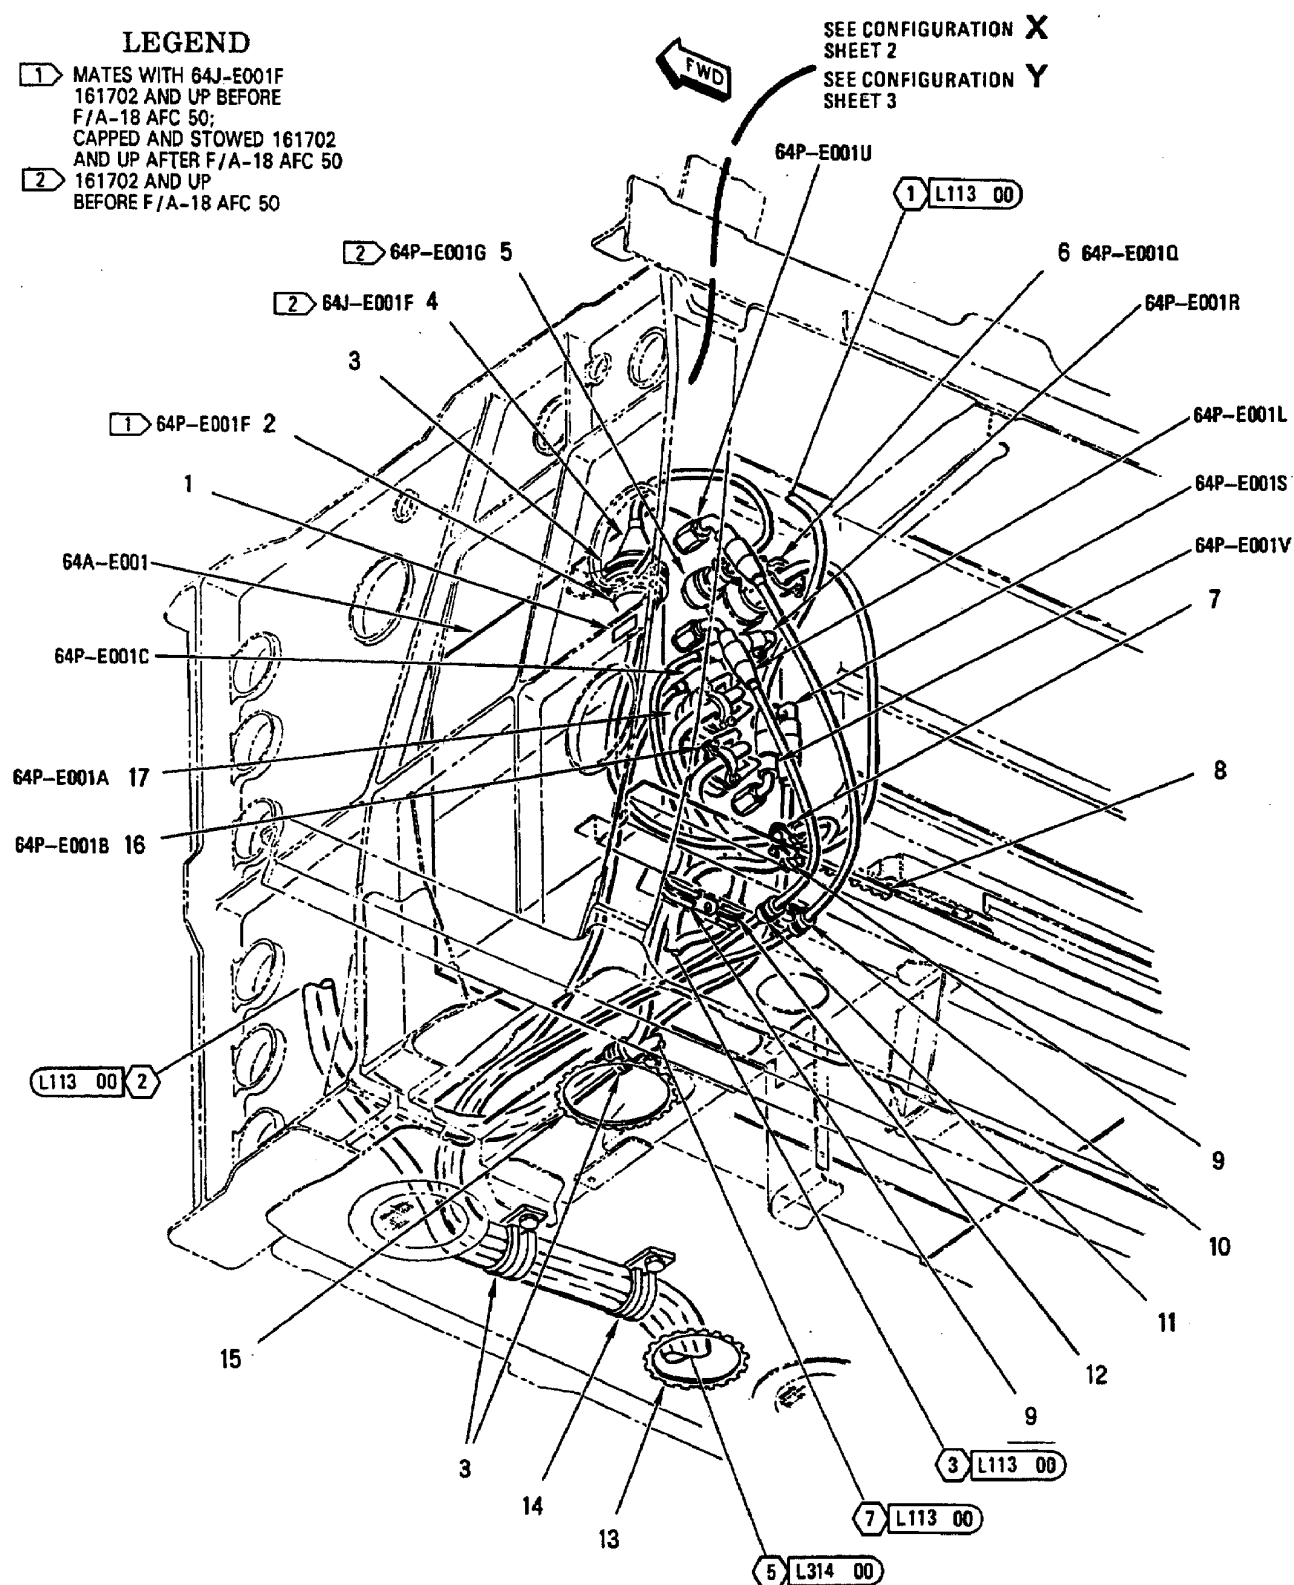

FWD FUSELAGE
DOOR 14L
EQUIPMENT INSTALLED

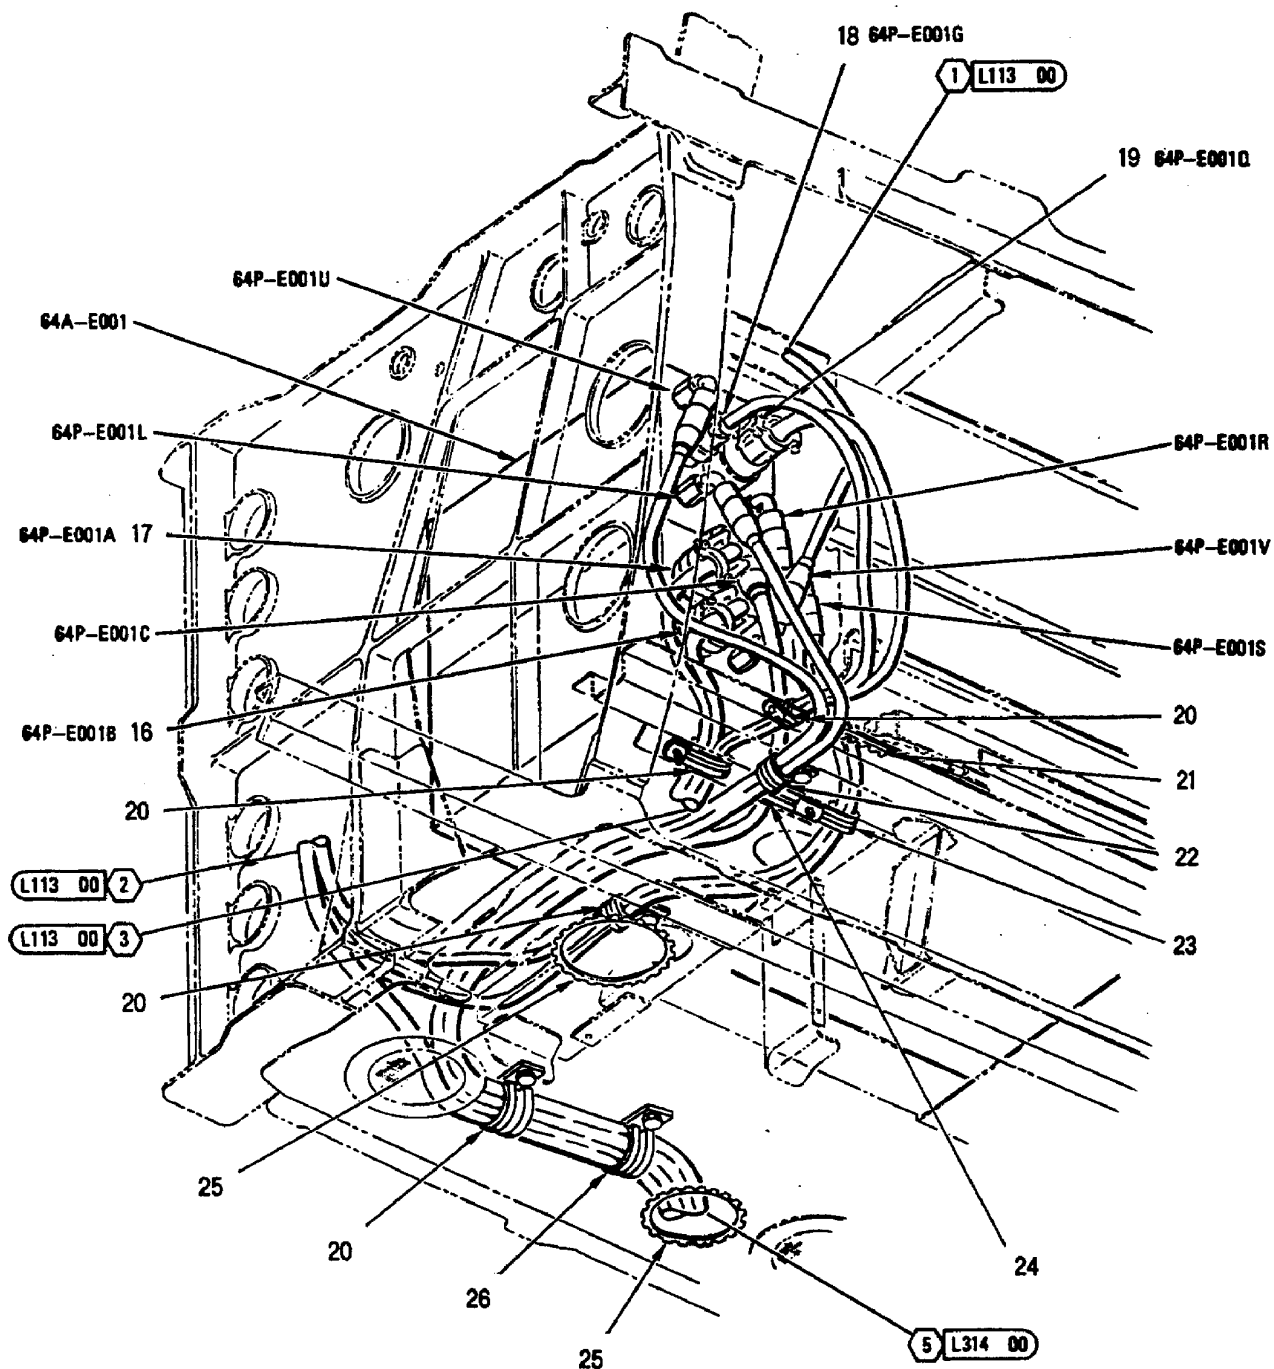

CONFIGURATION X
161353 THRU 161528

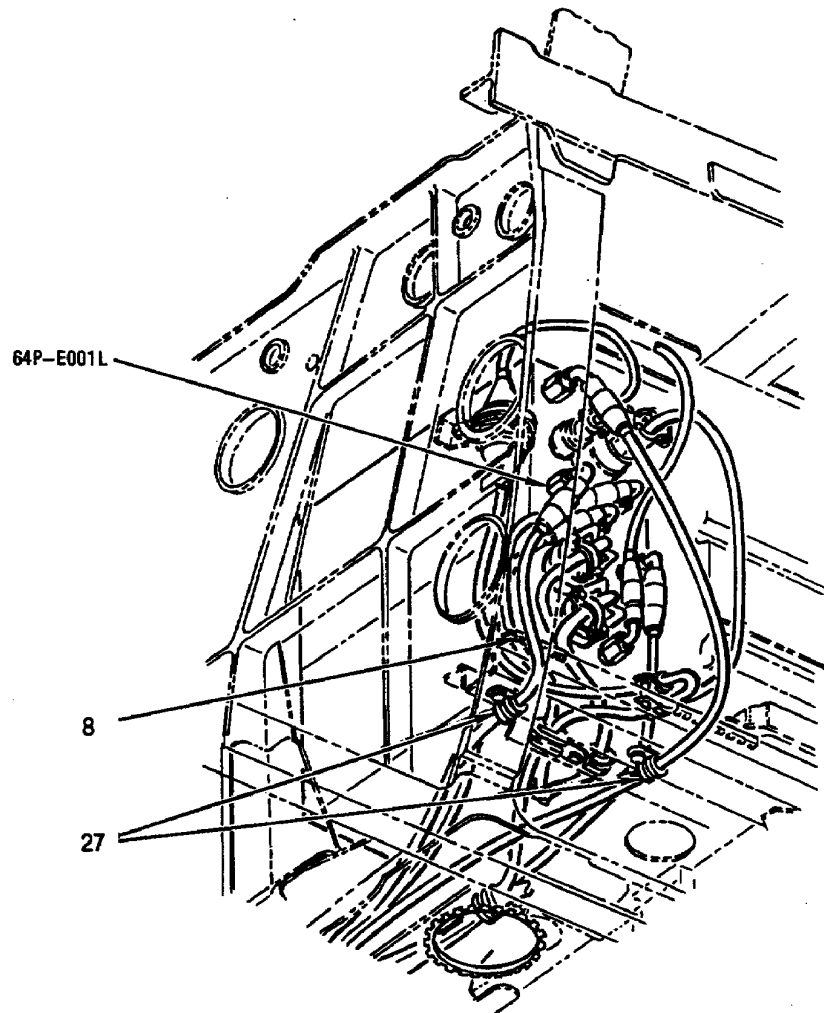


CONFIGURATION Y


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2861	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 64J-E001F)	1	H	MDOZZ
2	MS27467T23B53S	CONNECTOR, PLUG (64P-E001F)	1	H	PAOZZ
3	MS21919WDG #	CLAMP	3	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
4	LJT01RT23-53P014	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC 5M2120T23B53P) (64J-E001F)	1	E	PAOZZ
5	MS3476W10-6P	CONNECTOR, PLUG (64P-E001G)	1	E	PAOZZ
6	MS24266R22B32PN	CONNECTOR, PLUG (64P-E001Q)	1	A	PAOZZ
7	MS21919WDG #	CLAMP	1	A	-
	NAS673V16	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-48	SPACER (AP)	1	A	PAOZZ
8	MS21266-1N	GROMMET	AR	A	PAOZZ
9	MS21919WDG #	CLAMP	2	A	-
10	MS21919WDG #	CLAMP	1	C	-
	NAS673V4	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
11	MS21919WDG #	CLAMP	1	C	-
12	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
13	MS21266-2N	GROMMET	AR	F	PAOZZ
	MS21266-6N	GROMMET	AR	G	PAOZZ
14	MS21919WDG #	CLAMP	1	A	-
	NAS673V7	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	A	PAOZZ
15	MS21266-6N	GROMMET	AR	A	PAOZZ
16	MS3459W22-14P	CONNECTOR, PLUG (64P-E001B)	1		PAOZZ
17	MS3459W22-5S	CONNECTOR, PLUG (64P-E001A)	1		PAOZZ
18	MS3476W10-6P	CONNECTOR, PLUG (64P-E001G)	1	B	PAOZZ
19	M83723-76A2232N	CONNECTOR, PLUG (64P-E001Q)	1	B	PAOZZ
20	MS21919WDG #	CLAMP	4	B	-
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	MS21266-1N	GROMMET	AR	B	PAOZZ
22	NAS1714D2-8N	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
23	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
24	MS21919WDG #	CLAMP	1	B	-
25	MS21266-2N	GROMMET	AR	B	PAOZZ
26	MS21919WDG #	CLAMP	1	B	-
	NAS673V7	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	B	PAOZZ
27	MS21919WDG #	CLAMP	2	D	-
	NAS673V7	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	D	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE DOOR 14L EQUIPMENT REMOVED

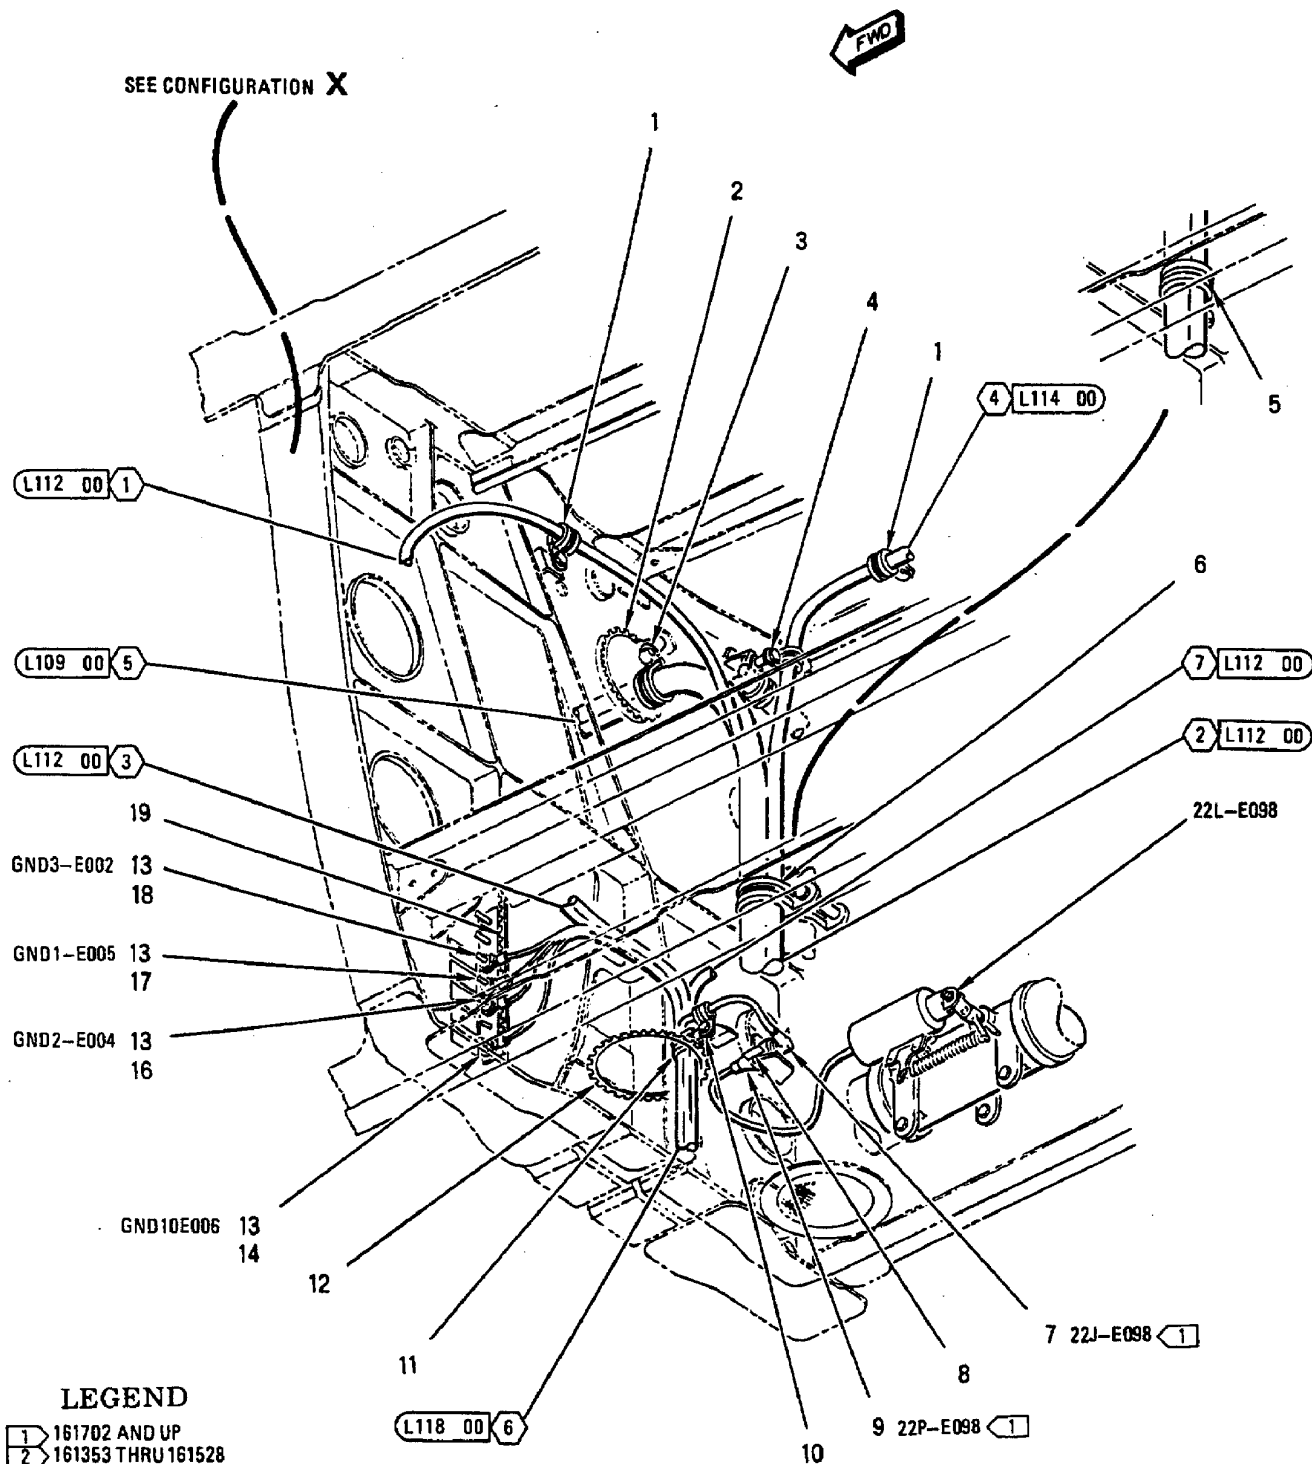

FWD FUSELAGE
DOOR 14L
EQUIPMENT REMOVED

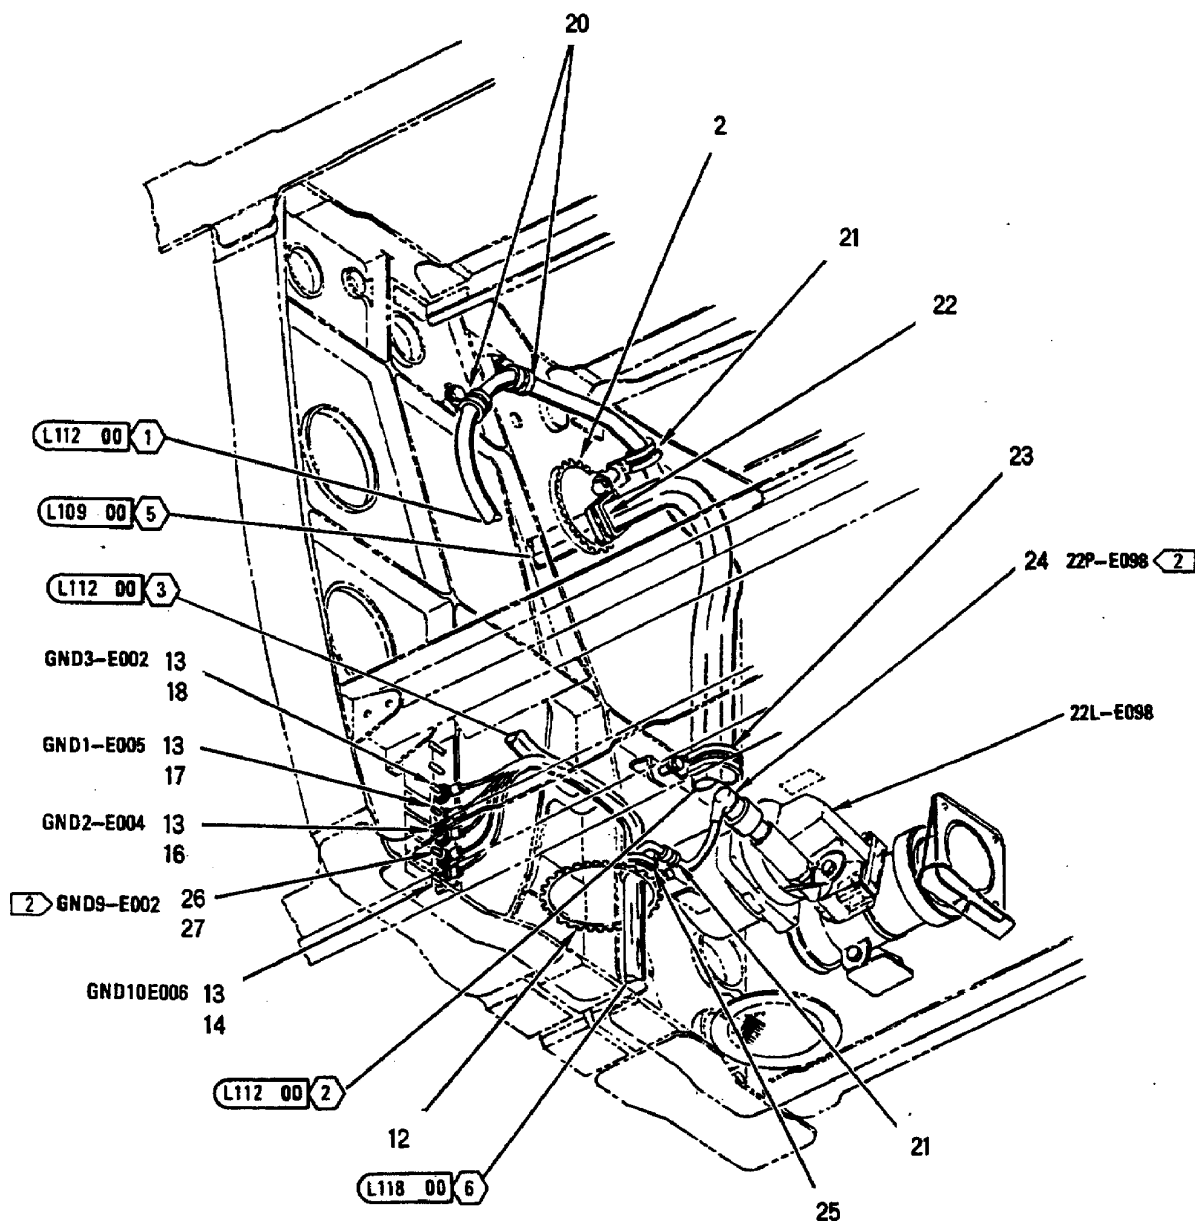

CONFIGURATION X
161353 THRU 161528



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	2	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
2	MS21266-5N	GROMMET	AR	C	PAOZZ
	MS21266-7N	GROMMET	AR	D	PAOZZ
3	MS21919WDG #	CLAMP	1	A	-
	NAS673V13	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
4	MS21919WDG #	CLAMP	1	A	-
	NAS673V19	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	A	PAOZZ
5	MS21919WDG #	CLAMP	1	E	-
	NAS673V19	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	E	PAOZZ
6	MS21919WDG #	CLAMP	1	F	-
	NAS673V19	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	F	PAOZZ
7	MS27656T9B35S	CONNECTOR, RECEPTACLE (22J-E098)	1	A	-
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
8	74A890601-2332	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES 22J-E098)			
9	MS27467T9B35P	CONNECTOR, PLUG (22P-E098)	1	A	PADZZ
10	MS21919WDG #	CLAMP	1	A	-
11	MS21919WDG #	CLAMP	1	A	-
	NAS673V7	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	A	PAOZZ
12	MS21266-2N	GROMMET	AR		PAOZZ
13	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 13)	4		PAOZZ
14	74A890601-2748	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND10E006)			
15		DELETED			
16	74A890601-2672	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-E004)			
17	74A890601-2671	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND1-E005)			
18	74A890601-2670	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-E002)			
19	MS21266-2N	GROMMET	AR	A	PAOZZ
20	MS21919WDG #	CLAMP	2	B	-
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	MS21919WDG #	CLAMP	2	B	-
22	MS21919WDG #	CLAMP	1	B	-
	NAS673V13	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
23	MS21919WDG #	CLAMP	1	B	-
	NAS673V19	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	B	PAOZZ
24	MS27467T9B35S	CONNECTOR, PLUG (22P-E098)	1	B	PAOZZ
25	MS21919WDG #	CLAMP	1	B	-


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
26	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	MS21042L3	NUT	1	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 26)	1	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 26)	1	B	PAOZZ
27	74A890601-2225	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MDOZZ
		(76301) (FOR REF DES GND9-E002)			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	161353 THRU 162445
D	162446 & UP
E	161702 THRU 161987
F	162394 & UP

FWD FUSELAGE DOOR 14L EQUIPMENT REMOVED

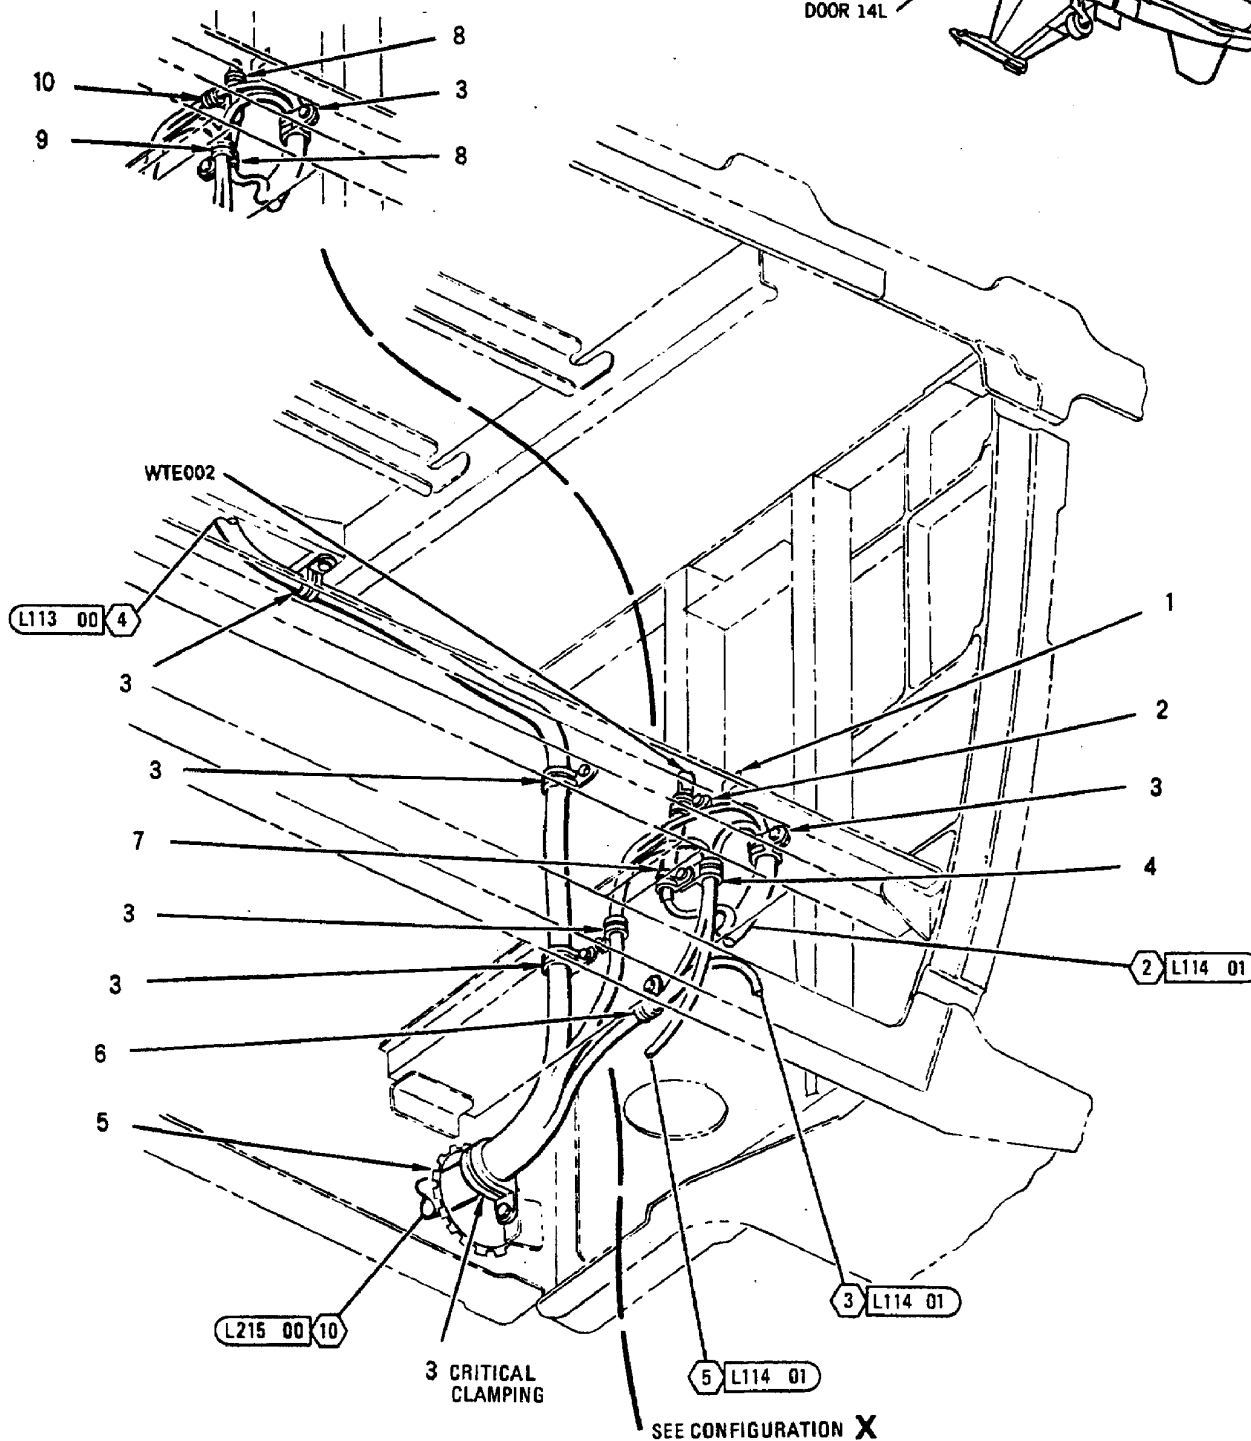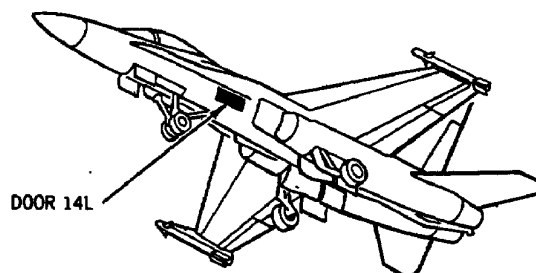

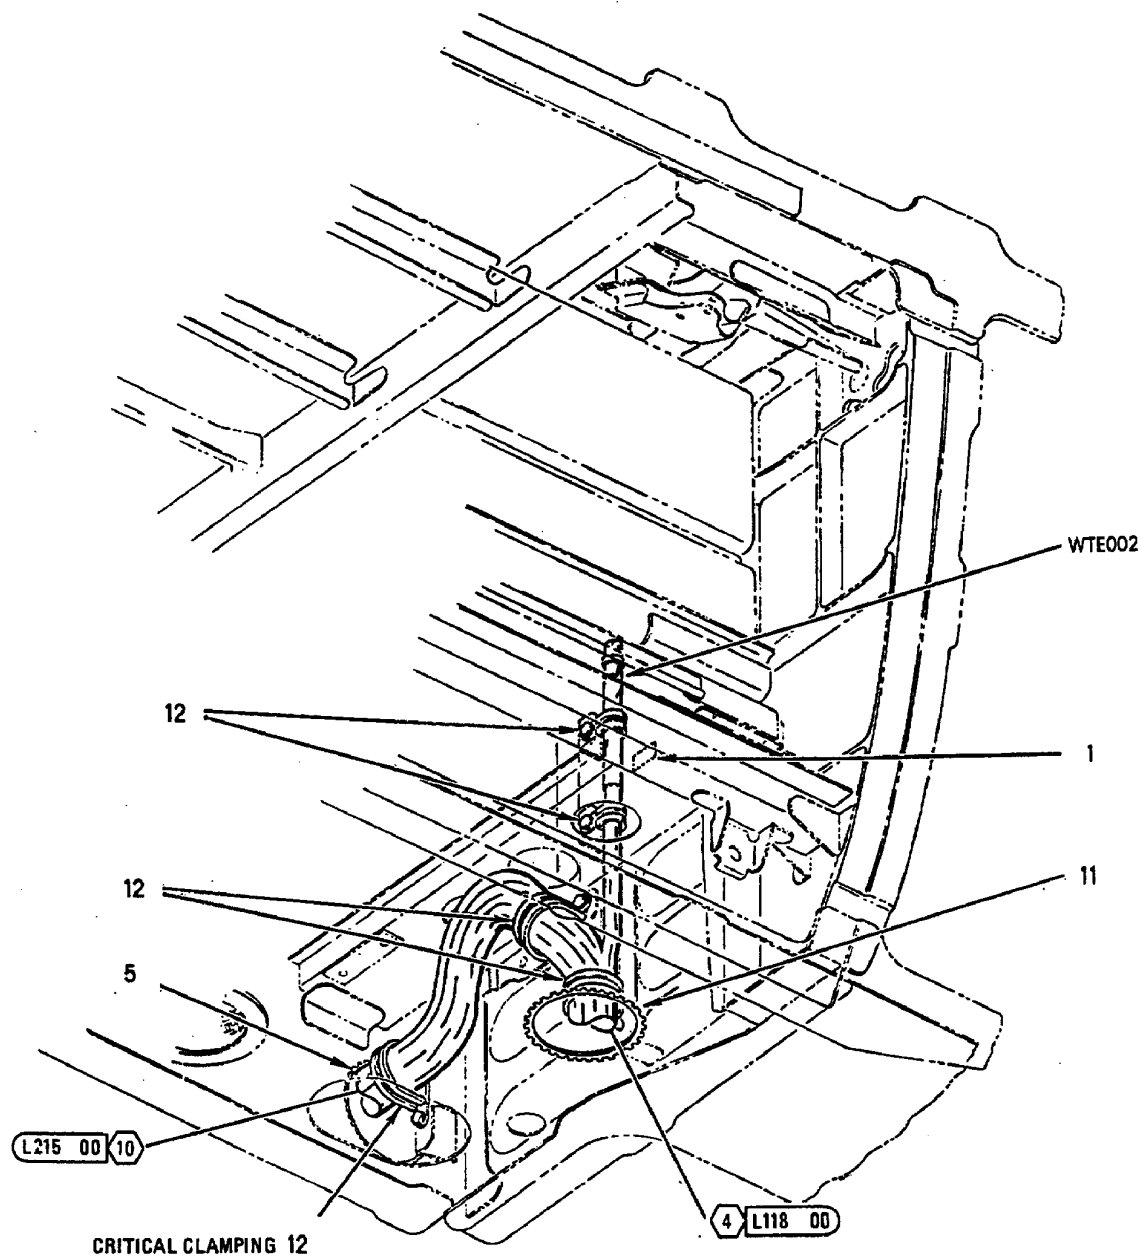


CONFIGURATION X
161353 THRU 161528

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2009	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTE002)	1		MDOZZ
2	MS21919WDG #	CLAMP	1	C	-
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
3	MS21919WDG #	CLAMP	6	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
4	MS21919WDG #	CLAMP	1	C	-
5	MS21266-4N	GROMMET	AR		PAOZZ
6	MS21919WDG #	CLAMP	1	A	-
	NAS673V8	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-24	SPACER (AP)	1	A	PAOZZ
7	MS21919WDG #	CLAMP	1	C	-
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
8	MS21919WDG #	CLAMP	2	D	-
9	MS21919WDG #	CLAMP	1	D	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
10	MS21919WDG #	CLAMP	1	D	-
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
11	MS21266-2N	GROMMET	AR	B	PAOZZ
12	MS21919WDG #	CLAMP	5	B	-
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	161743 & UP
D	161702 THRU 161742

FWD FUSELAGE DOOR 14L EQUIPMENT INSTALLED

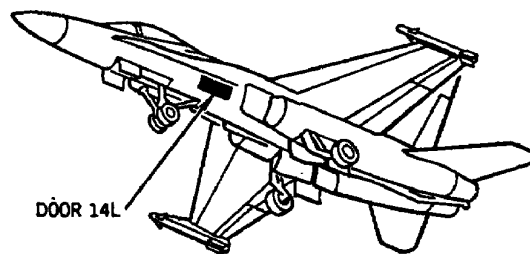

LEGEND

1 161702 AND UP

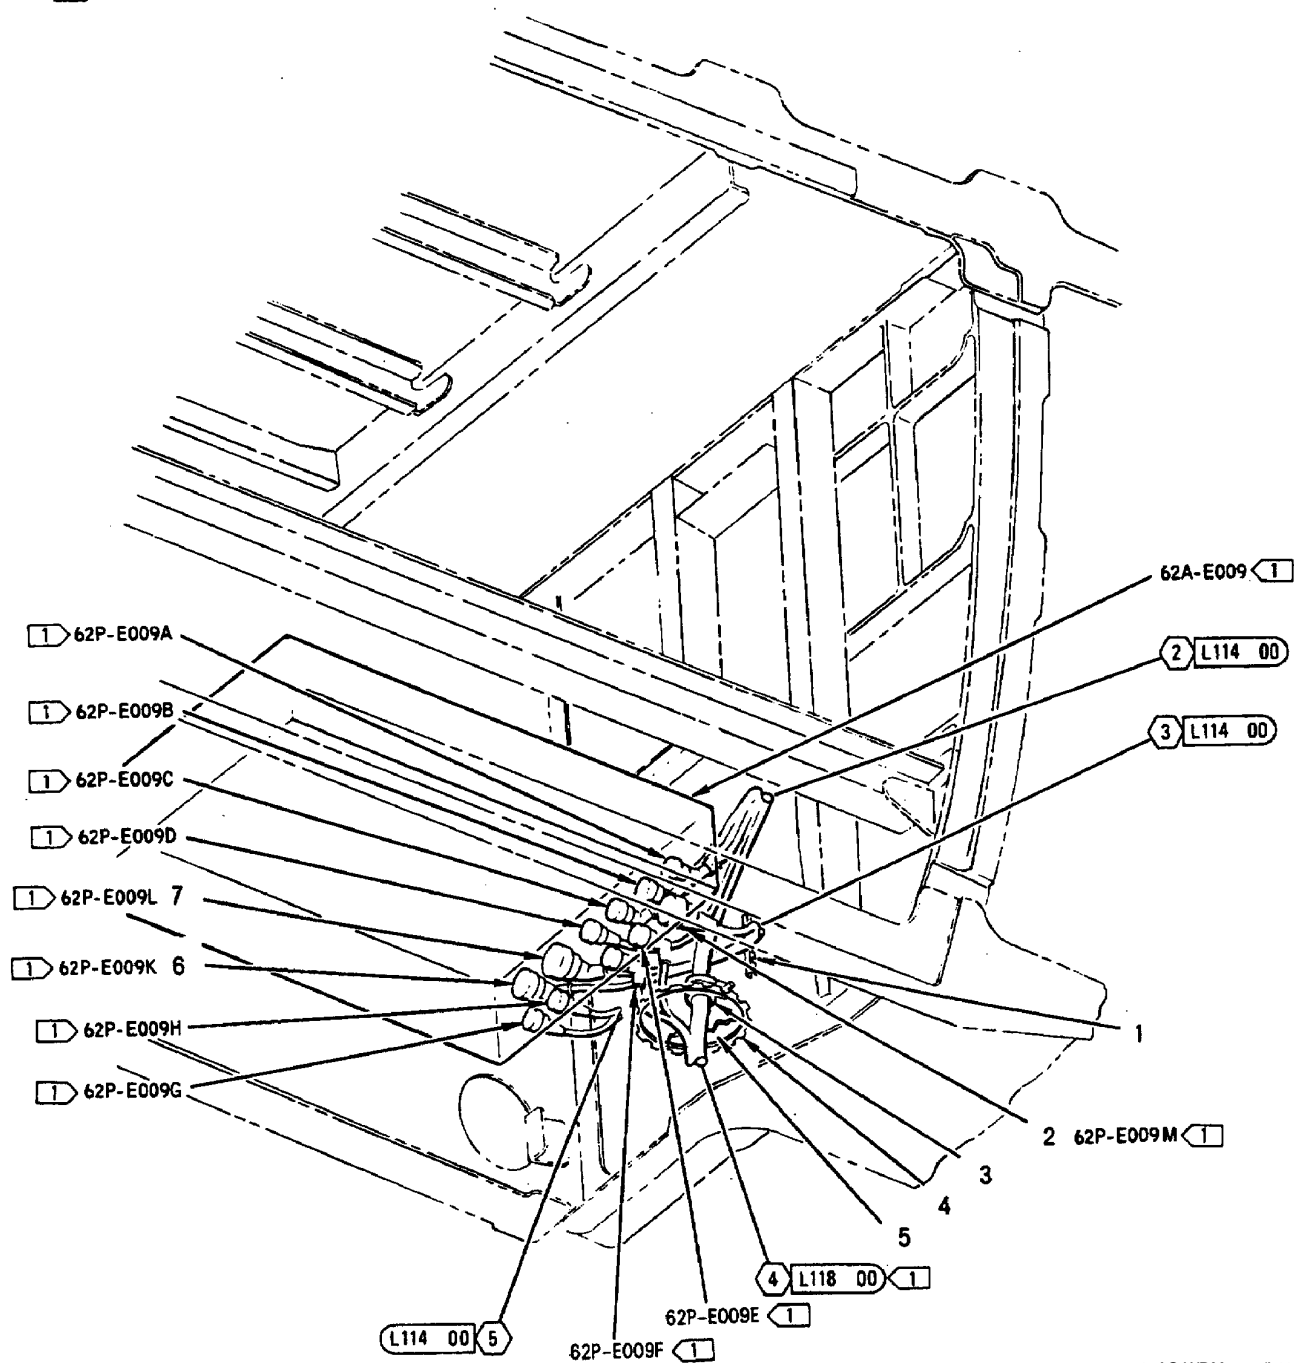


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-3N	GROMMET	AR	C	PAOZZ
2	MS27467T15B35S	CONNECTOR, PLUG (62P-E009M)	1	A	PAOZZ
3	MS21919WDG #	CLAMP	1	A	-
	NAS673V8	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-24	SPACER (AP)	1	A	PAOZZ
4	MS21266-2N	GROMMET	AR	B	PAOZZ
5	74A600122-2001	SEAL, FLEXIBLE (76301)	1	A	MGOZZ
6	MS27467T11B98S	CONNECTOR, PLUG (62P-E009K)	1	A	PAOZZ
7	MS27467T15B35P	CONNECTOR, PLUG (62P-E009L)	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161702 & UP
B	161353 THRU 161528
C	162394 & UP

FWD FUSELAGE DOOR 9 AND DOOR 11L

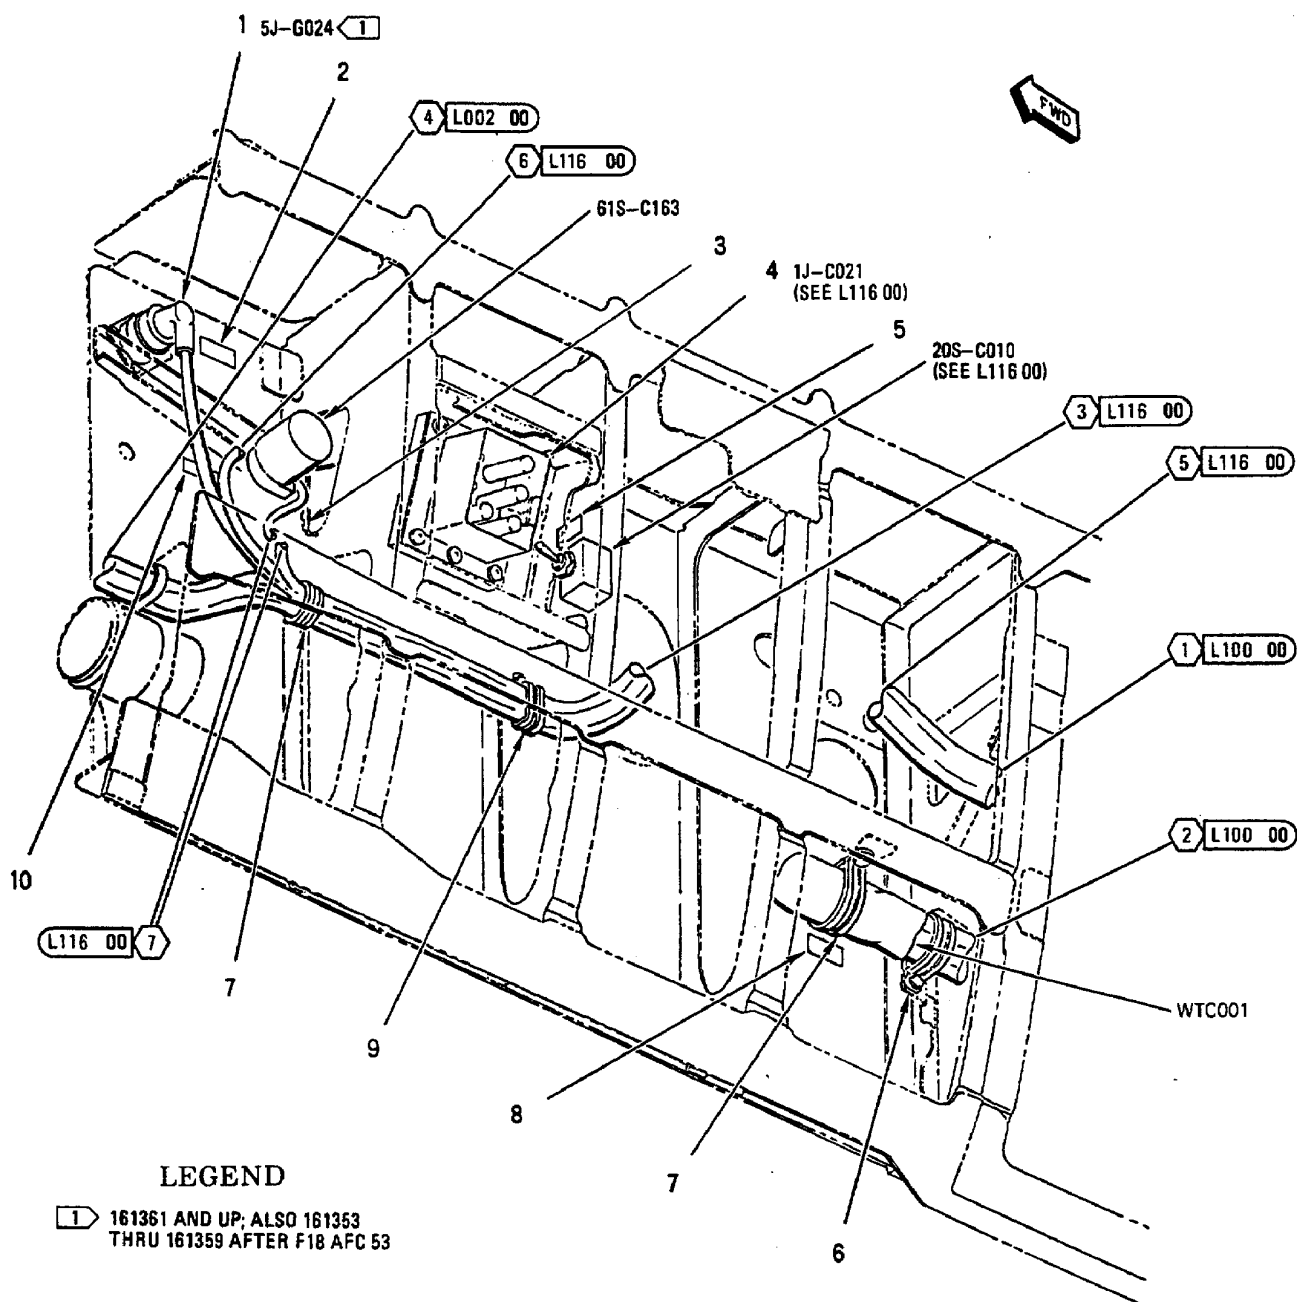

LEGEND

1 161361 AND UP; ALSO 161353
THRU 161359 AFTER F18 AFC 53


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T17B35SA	CONNECTOR, RECEPTACLE (5J-G024)	1	A	PAOZZ
	NAS600-7P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
2	74A890601-2863	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 5J-G024)	1	A	MDOZZ
3	MS21266-1N	GROMMET	AR		PAOZZ
4	7350-0695-0000	CONNECTOR, RECEPTACLE (EXTERNAL POWER RECEPTACLE) (81861) (MCDONNELL SPEC 5M1992-001) (1J-C021)	1		PAOZZ
	NAS1351-3-20P	SCREW (AP)	6		PAOZZ
	AN960JD10L	WASHER (AP)	6		PAOZZ
	NAS1291C3M	NUT (AP)	6		PAOZZ
	7350-0694-0000	SHIELD (EXTERNAL POWER RECEPTACLE) (81861) (MCDONNELL SPEC 5M1992-002) (USE WITH INDEX 4)	1		PAOZZ
5	74A890601-2182	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 20S-C010)	1		MDOZZ
6	MS21919WDG #	CLAMP			
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	74A890601-2004	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTC001)	1		MDOZZ
9	NAS1712D11-20N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	74A890601-2788	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61S-C163)	1		MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161361 & UP; ALSO 161353 THRU 161359 AFTER F18 AFC 53


FWD FUSELAGE

NOSE WHEELWELL
INTERNAL DOOR-NWC
(LEFT)

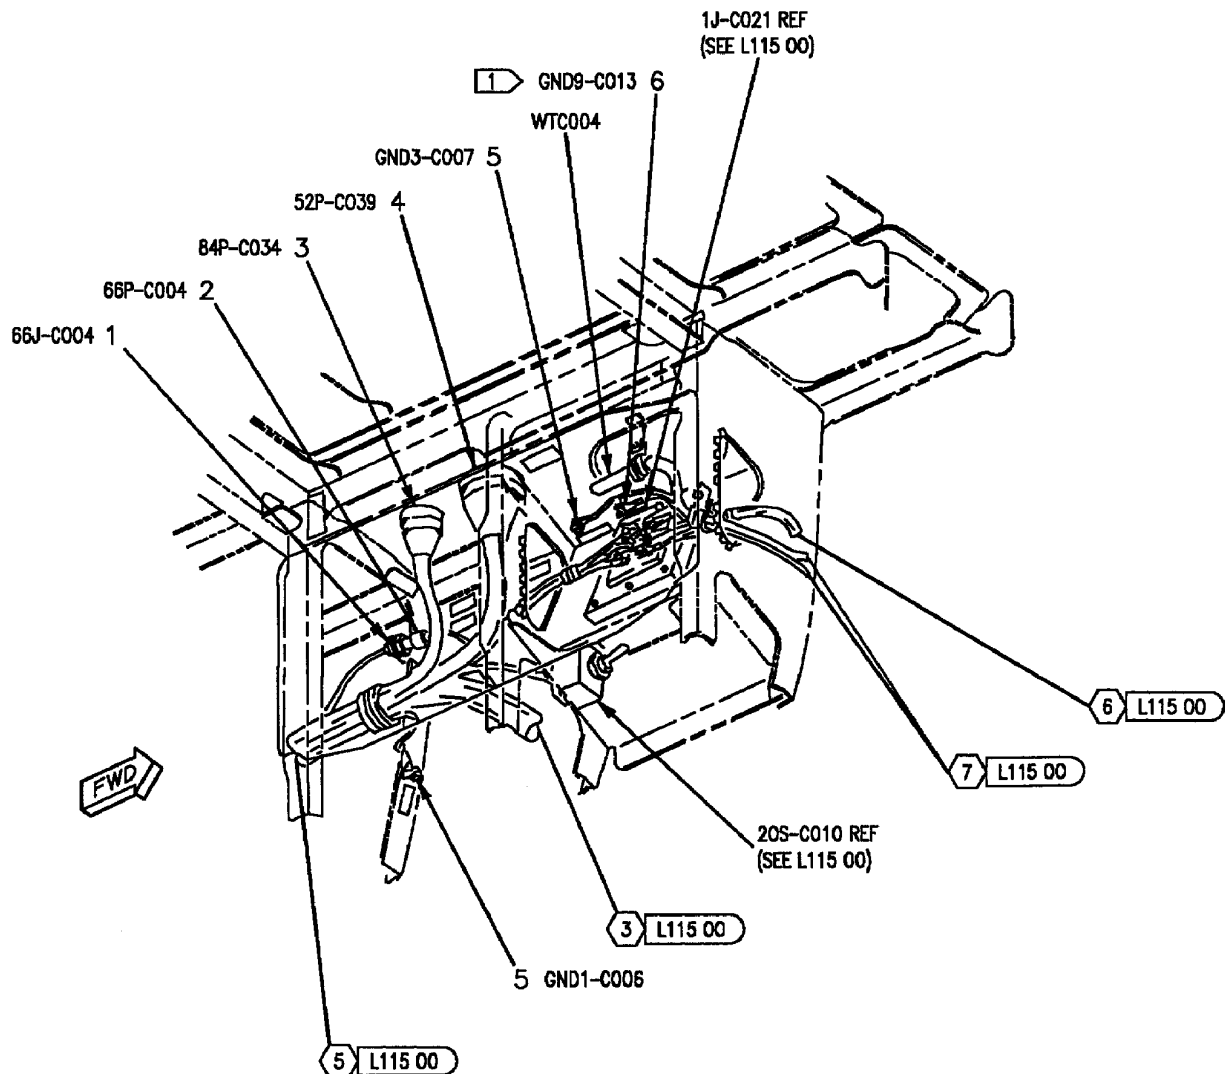

LEGEND

1 161361 AND UP

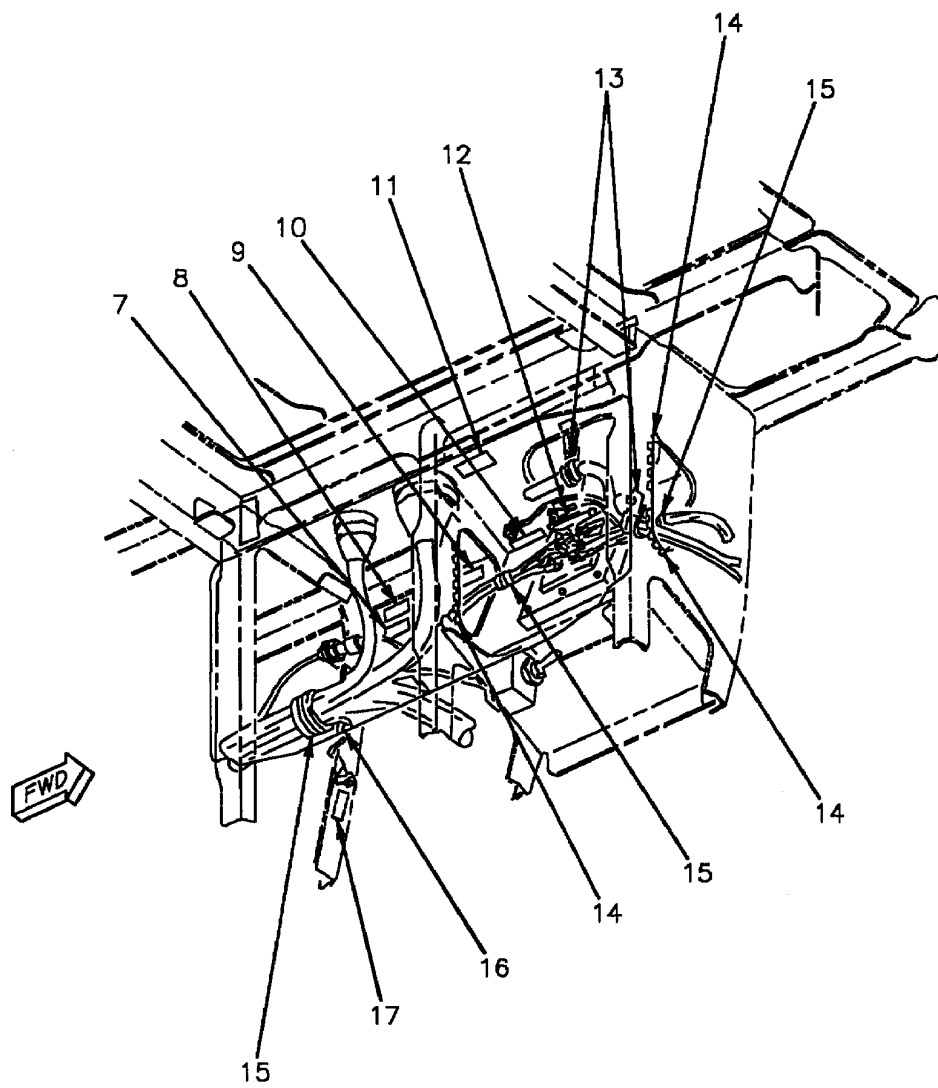


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M25516/19-04-14	CONNECTOR, RECEPTACLE (66J-C004)	1		PAOZZ
2	1211-422	CONNECTOR, PLUG, ELECTRICAL (13556) . . . (MCDONNELL SPEC ST5M1305-422P) .. (66P-C004)	1		PAOZZ
3	MS27467T17B35SA	CONNECTOR, PLUG (84P-C034)	1		PAOZZ
4	MS27467T25B35S	CONNECTOR, PLUG (52P-C039)	1		PAOZZ
5	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	2		PAOZZ
6	MS21042L3	NUT	1	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	1	A	PAOZZ
7	74A890601-2563	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 66J-C004)	1		MDOZZ
8	74A890601-2511	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H034)	1		MDOZZ
9	74A890601-2072	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H039)	1		MDOZZ
10	74A890601-2847	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-C007)	1		MDOZZ
11	74A890601-2848	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTC004)	1		MDOZZ
12	74A890601-2862	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-C013)	1	A	MDOZZ
13	MS21919WDG #	CLAMP	2		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	MS21266-1N	GROMMET	AR		PAOZZ
15	MS21919WDG #	CLAMP	3		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS21266-1N	GROMMET	AR		PAOZZ
17	74A890601-2717	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-C006)	1		MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE USABLE ON

A 161361 & UP

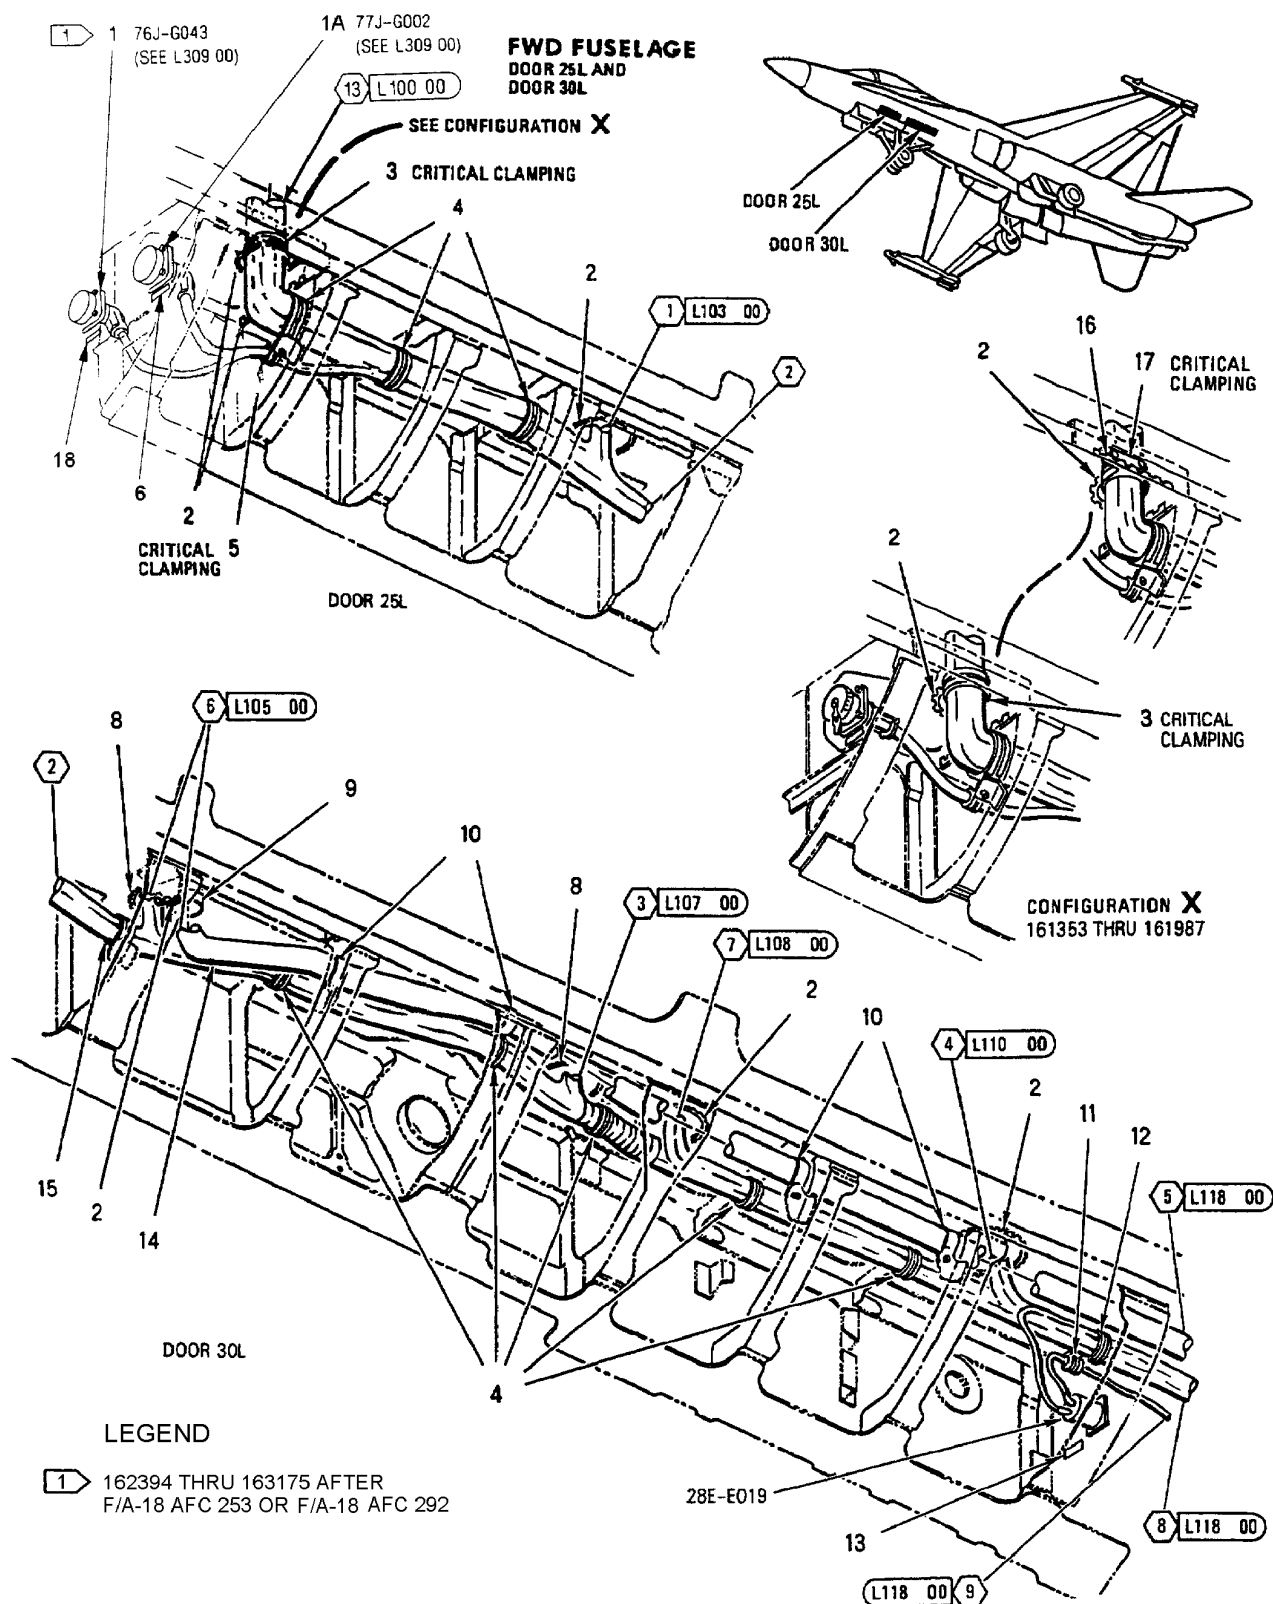


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T9B35S	CONNECTOR, RECEPTACLE (76J-G043)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	NAS1149DN416J	WASHER (AP)	4	F*	PAOZZ
	AN960JD4L	WASHER (AP)	4	F*	PAOZZ
	74A600620-2001	SPACER (USE WITH INDEX 1)	1	F	MDOZZ
1A	MS3470W16-8S	CONNECTOR, RECEPTACLE (77J-G002)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
4	MS21919WDG #	CLAMP	8		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS21919WDG6	CLAMP	1		PAOZZ
6	74A890601-2319	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 77J-G002)			
7	MS3181-16CA	COVER	1		PAOZZ
	NAS600-6P	SCREW (AP)	1	A	PAOZZ
	AN960JD4L	WASHER (AP)	1	A	PAOZZ
	NAS679A04W	NUT (AP)	1	D	PAOZZ
	MS21042L04	NUT (AP)	1	E	PAOZZ
8	MS21266-4N	GROMMET	AR		PAOZZ
9	AN742D16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
10	AN742D16	CLAMP	4		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	MS21919WDG #	CLAMP	1		-
	NAS673V15	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	NAS42DD6-32	SPACER (AP)	1		PAOZZ
	MS21919WG #	CLAMP	1		-
	74A890601-2210	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 28E-E019)			
14	74A782463-1001	TUBE ASSY, METALLIC - LH GENERATOR	1		MGOZZ
		(76301) (SUPERSEDES 74A782463-2001)			
15	MS21919WDG #	CLAMP	1		-
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS21266-2N	GROMMET	AR	C	PAOZZ
17	MS21919WDG30	CLAMP	1	C	PAOZZ
	NAS673V11	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	C	PAOZZ
18	74A890601-3093	MARKER, IDENTIFICATION-ELECTRICAL	1	F	MDOZZ
		(76301) (FOR REF DES 76J-G043)			

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS


CODE	USABLE ON
A	161361 & UP
B	161523 & UP
C	161353 THRU 161522
D	161361 THRU 162464
E	162465 & UP
F	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

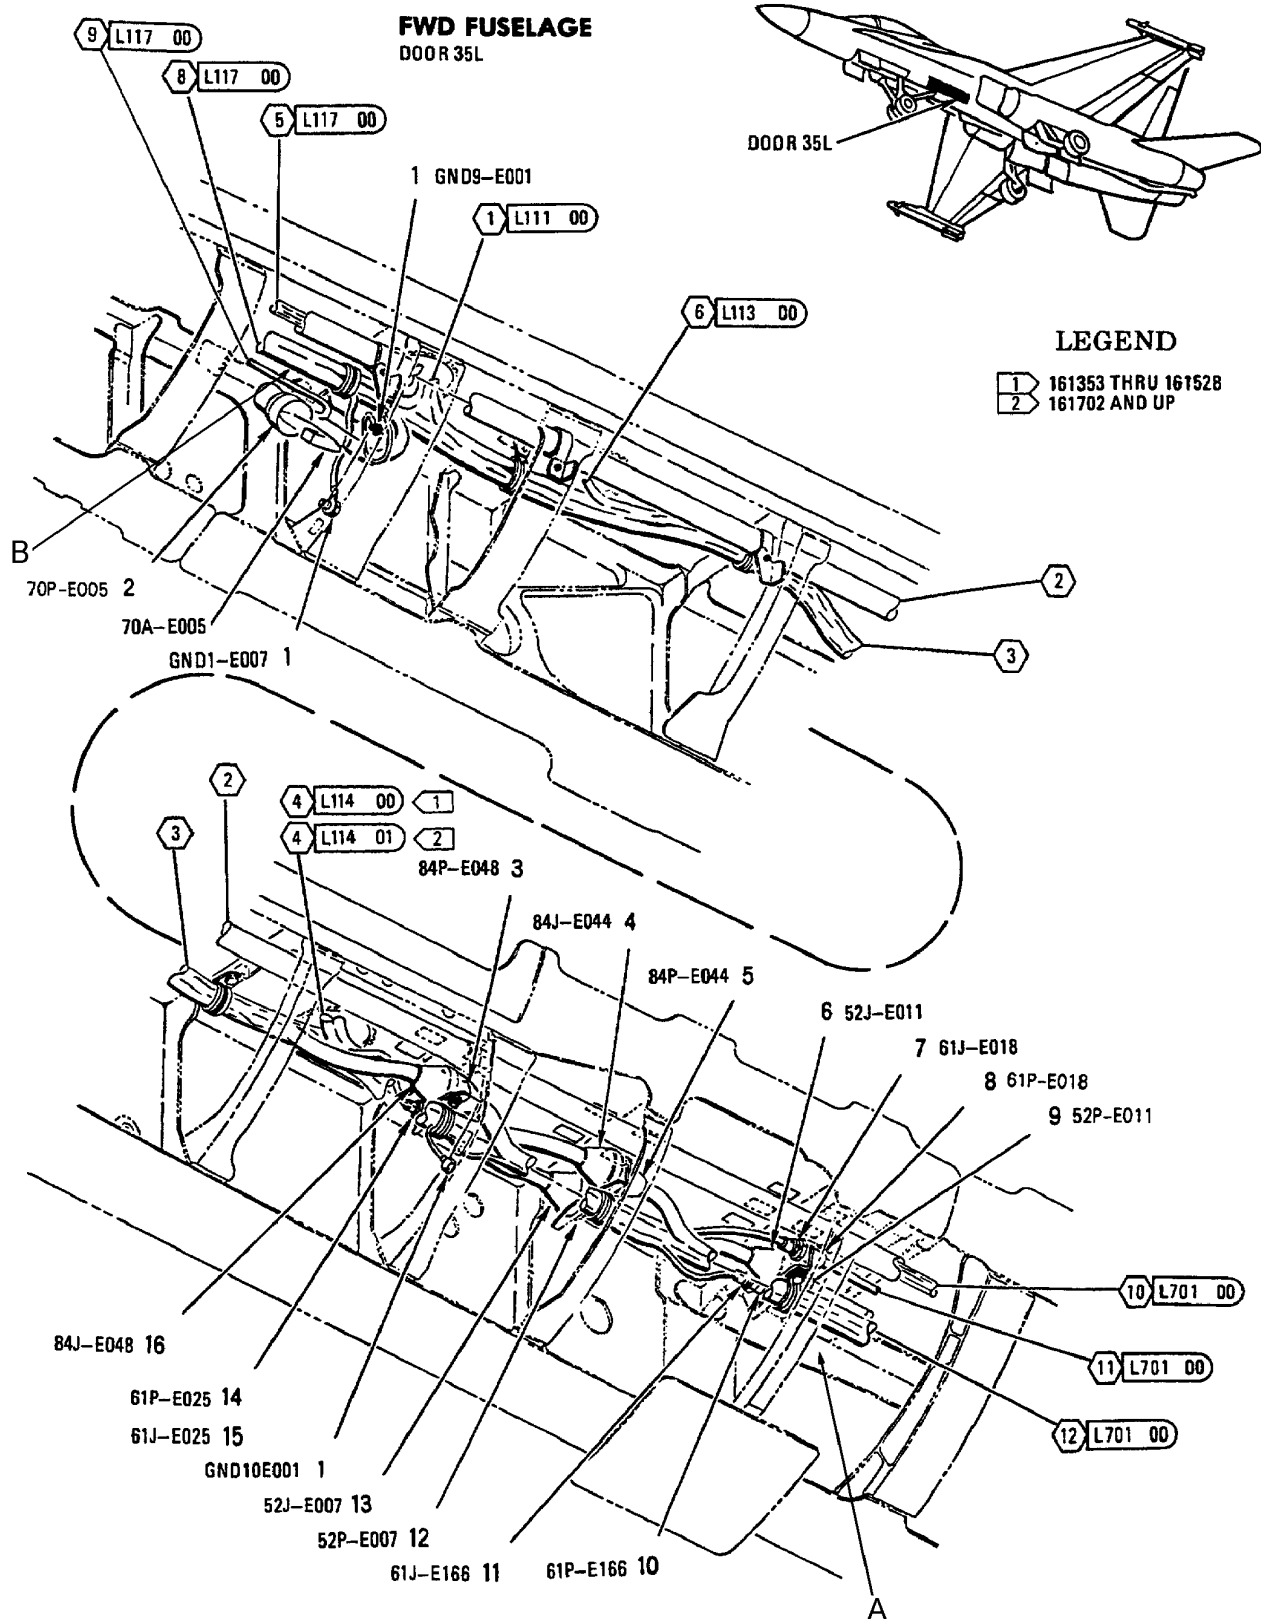

FWD FUSELAGE


DOOR 35L

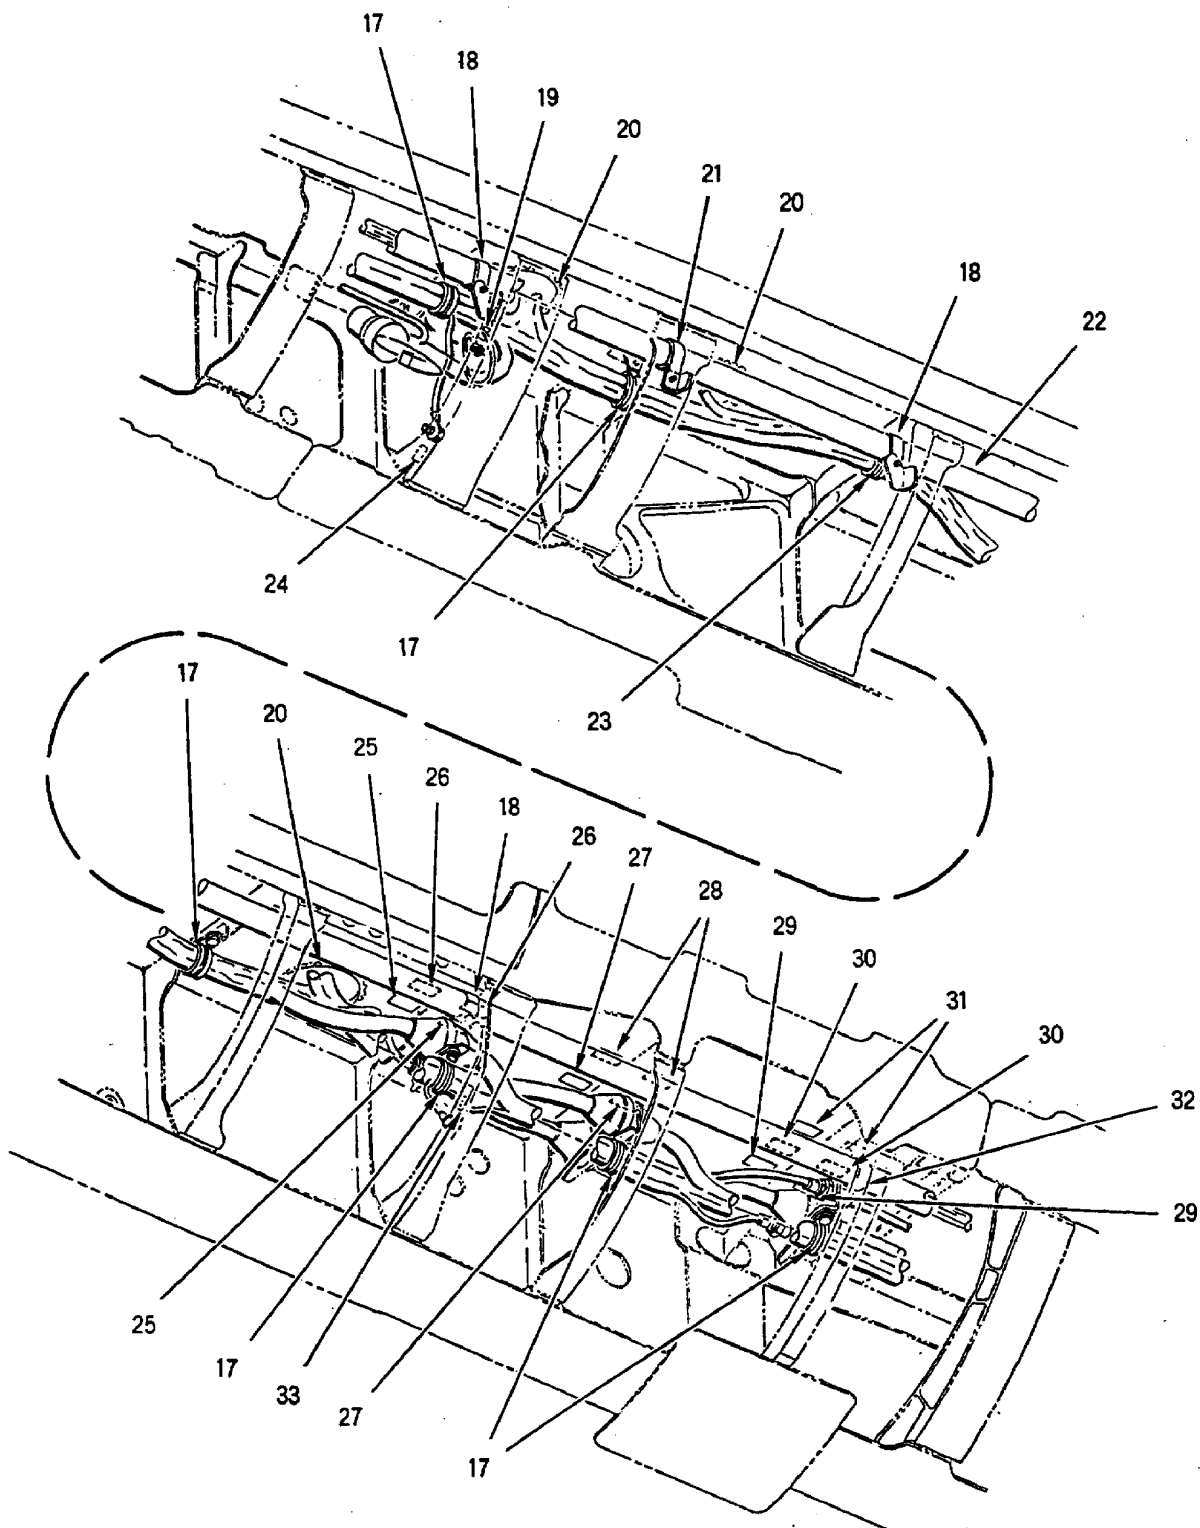

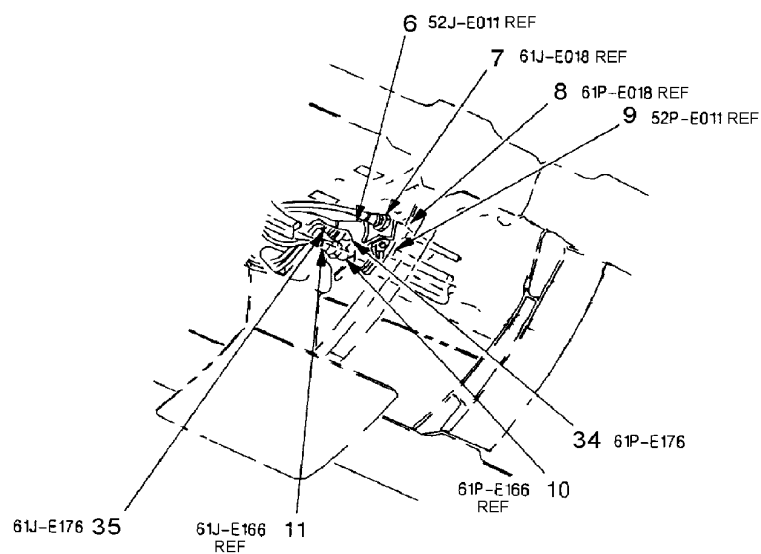

A

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

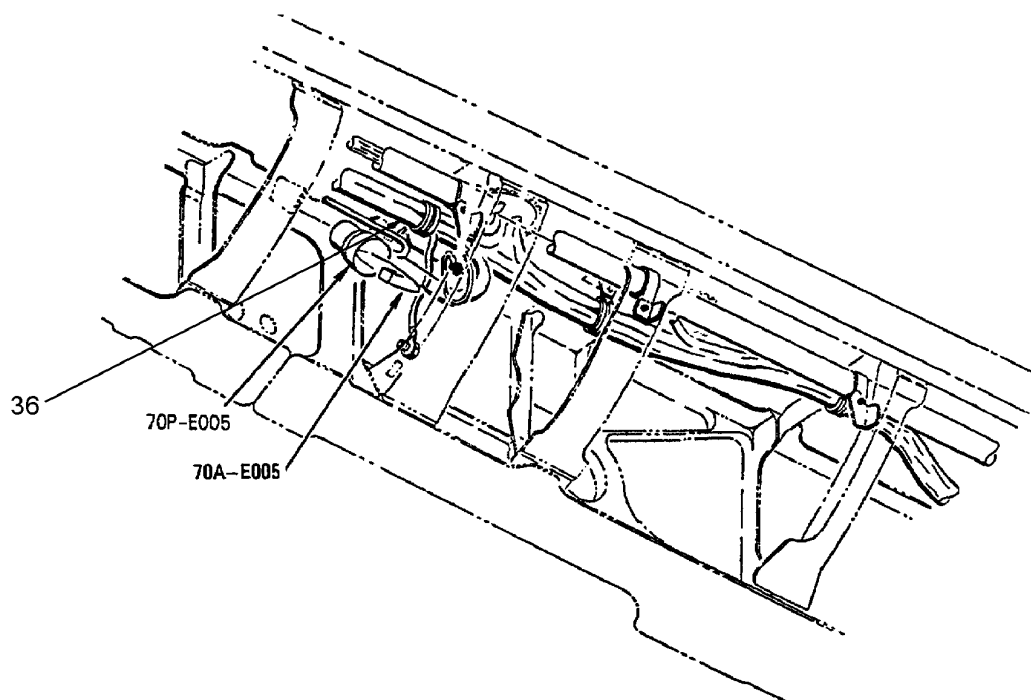

B

162394 THRU 163175
AFTER F/A-18 AFC 292


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	3		PAOZZ
2	MS3459W18-1S	CONNECTOR, PLUG (70P-E005)	1		PAOZZ
3	MS27467T25B35SA	CONNECTOR, PLUG (84P-E048)	1		PAOZZ
4	MS27656T25B35S	CONNECTOR, RECEPTACLE (84J-E044)	1		PAOZZ
	NAS600-8P	SCREW (AP)	1		PAOZZ
	AN960JD4L	WASHER (AP)	1		PAOZZ
5	MS27467T25B35P	CONNECTOR, PLUG (84P-E044)	1		PAOZZ
6	MS27656T23B53S	CONNECTOR, RECEPTACLE (52J-E011)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
7	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A001) (61J-E018)	1	*	PAOZZ
	5841-0904	SEE ABOVE (95077)	1	*	PAOZZ
8	31-33449-3	CONNECTOR, PLUG, ELECTRICAL (74868)	1	A*	PAOZZ
		(MCDONNELL SPEC ST5M1425-01S) (61P-E018)			
	5801-0901	SEE ABOVE (95077)	1	A*	PAOZZ
	31-33449-12	CONNECTOR, PLUG, ELECTRICAL (74868)	1	B*	PAOZZ
		(MCDONNELL SPEC ST5M1425A01S) (61P-E018)			
	5803-0901	SEE ABOVE (95077)	1	B*	PAOZZ
9	MS27467T23B53P	CONNECTOR, PLUG (52P-E011)	1		PAOZZ
10	31-33449-13	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1425A02S) (61P-E166)			
	5803-0902	SEE ABOVE (95077)	1	*	PAOZZ
11	31-33819-12	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1426A002) (61J-E166)			
	5841-0905	SEE ABOVE (95077)	1	*	PAOZZ
12	MS27467T25B35PB	CONNECTOR, PLUG (52P-E007)	1		PAOZZ
13	MS27656T25B35SB	CONNECTOR, RECEPTACLE (52J-E007)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
14	M39012/26-0503	CONNECTOR, PLUG (61P-E025)	1		PAOZZ
15	M39012/28-0503	CONNECTOR, RECEPTACLE (61J-E025)	1		PAOZZ
16	MS27656T25B35PA	CONNECTOR, RECEPTACLE (84J-E048)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
17	MS21919WDG #	CLAMP	6		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
18	AN742D16	CLAMP	3		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	74A890601-2209	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-E001)			
20	MS21266-2N	GROMMET	AR		PAOZZ
21	AN742D16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	NAS673V6	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-12	SPACER (AP)	1	D	PAOZZ
22	74A782463-1001	TUBE ASSY, METALLIC - LH GENERATOR	1		MGOZZ
		(76301) (SUPERSEDES 74A782463-2001)			
23	MS21919WDG16	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	74A890601-2682	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-E007)	1		MDOZZ
25	74A890601-2101	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-E025)	2		MDOZZ
26	74A890601-2151	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-E048)	2		MDOZZ
27	74A890601-2049	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-E007)	2		MDOZZ
28	74A890601-2147	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-E044)	2		MDOZZ
29	74A890601-2116	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-E166)	2		MDOZZ
30	74A890601-2053	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-E011)	2		MDOZZ
31	74A890601-2100	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-E018)	2		MDOZZ
32	AN742D16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
33	74A890601-2205	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10E001)	1		MDOZZ
34	82-5773-3	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC 5M2497S31) (61P-E176)	1	E	PAOZZ
35	82-5770	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC 5M2496-001) (61J-E176)	1	E	PAOZZ
	150290-0076	RING, POLARIZING, ELECTRICAL (71468) (MCDONNELL SPEC ST5M1377T30) (USE WITH INDEX 35)	1	*E	PAOZZ
	KA-89-66-M07	SEE ABOVE (91863)	1	*E	PAOZZ
36	AMS3652	TEFLON SHEET	A/R	F	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161741
B	161742 & UP
C	161353 THRU 162477
D	162826 & UP
E	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292
F	162394 THRU 163175 AFTER F/A-18 AFC 292

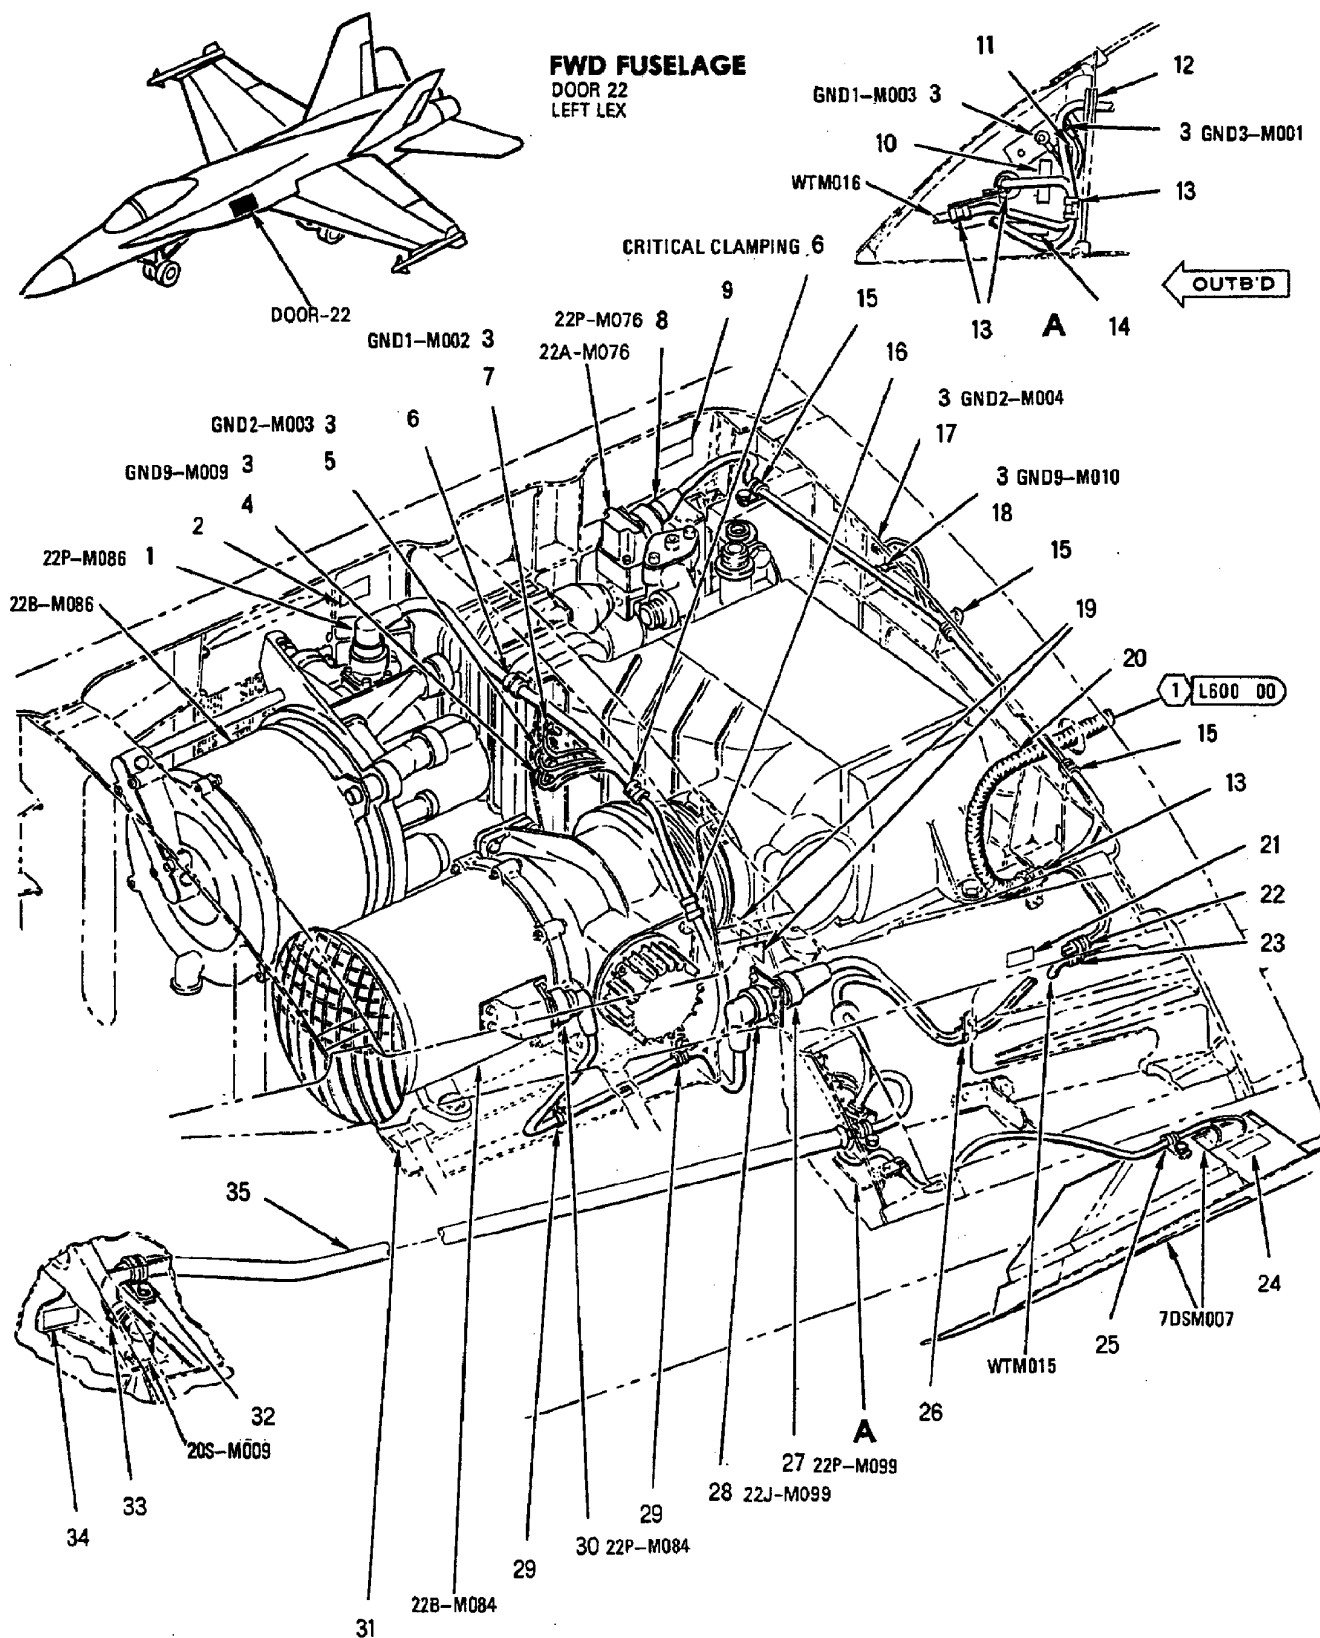

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B1SS	CONNECTOR, PLUG (22P-M086)	1		PAOZZ
2	74A890068-2013	PLATE, IDENTIFICATION - UPPER EQUIP BAY, . ZONE 12 (76301) (FOR REF DES 22B-M086)	1		MDOZZ
3	MS21042L3	NUT	7		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	7		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	7		PAOZZ
4	74A890601-2816	MARKER, IDENTIFICATION - ELECTRICAL .. (76301) (FOR REF DES GND9-M009)	1		MDOZZ
5	74A890601-2815	MARKER, IDENTIFICATION - ELECTRICAL .. (76301) (FOR RES DES GND2-M003)	1		MDOZZ
6	MS21919WDG4	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	74A890601-2814	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-M002)	1		MDOZZ
8	MS27467T11B35S	CONNECTOR, PLUG (22P-M076)	1		PAOZZ
9	74A890068-2015	PLATE, IDENTIFICATION - UPPER EQUIP BAY, . ZONE 12 (76301) (FOR REF DES 22A-M076)	1		MDOZZ
10	74A890601-2302	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-M003)	1		MDOZZ
11	74A890601-2330	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-M001)	1		MDOZZ
12	MS35489-9	GROMMET	1		PAOZZ
13	MS21919WDG #	CLAMP	4		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74A890601-2435	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTM016)	1		MDOZZ
15	MS21919WDG3	CLAMP	3		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V15	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-48A	SPACER (AP)	1		PAOZZ
17	74A890601-2839	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-M004)	1		MDOZZ
18	74A890601-2817	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-M010)	1		MDOZZ
19	74A890601-2043	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 22J-M099)	2		MDOZZ
20	200038-00-16	TUBING, NON-METALLIC (05593)	AR	*	PAOZZ
		(MCDONNELL SPEC ST5M1330-16)			
	N11000-032	SEE ABOVE (81482)	AR	*	PAOZZ
	22A00010-00016	SEE ABOVE (07418)	AR	*	PAOZZ
	32A00001-01600	SEE ABOVE (56963)	AR	*	PAOZZ
	ZCT-TE-032	SEE ABOVE (32039)	AR	*	PAOZZ
	CCT-16-0-00	SEE ABOVE (05593) (USE UNTIL	AR	*	PAOZZ
		EXHAUSTED)			
	C11000-16	SEE ABOVE (81482) (USE UNTIL	AR	*	PAOZZ
		EXHAUSTED)			
21	74A890601-2021	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTM015)	1		MDOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
22	MS21919WDG8	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
23	MS21919WDG10	CLAMP	1		PAOZZ
24	74A890601-2438	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 7DSM007)			
25	MS21919WDG2	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	MS21919WDG8	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
27	MS27467T15B19S	CONNECTOR, PLUG (22P-M099)	1		PAOZZ
28	MS27656T15B19P	CONNECTOR, RECEPTACLE (22J-M099)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
29	MS21919WDG3	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
30	MS27467T11B35S	CONNECTOR, PLUG (22P-M084)	1		PAOZZ
31	74A890068-2011	PLATE, IDENTIFICATION - UPPER EQUIP	1		MDOZZ
		BAY, ZONE 12 (76301) (FOR REF DES 22B-M084)			
32	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
33	AN735D4	CLAMP	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	MS35338-43	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
34	74A890601-2185	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 20S-M009)			
35	74A782451-1001	TUBE, BENT, METALLIC - ELECTRICAL	1		MGOZZ
		CONDUIT (76301)			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


FWD FUSELAGE

DOOR 10R (FWD)
EQUIPMENT INSTALLED

LEGEND

- 1 161520 AND UP; ALSO 161353 THRU
161519 AFTER F18 AFC 27
- 2 161702 AND UP; ALSO 161353 THRU 161528 AFTER F18 AFC 49
- 3 161353 THRU 161528 BEFORE F18 AFC 49

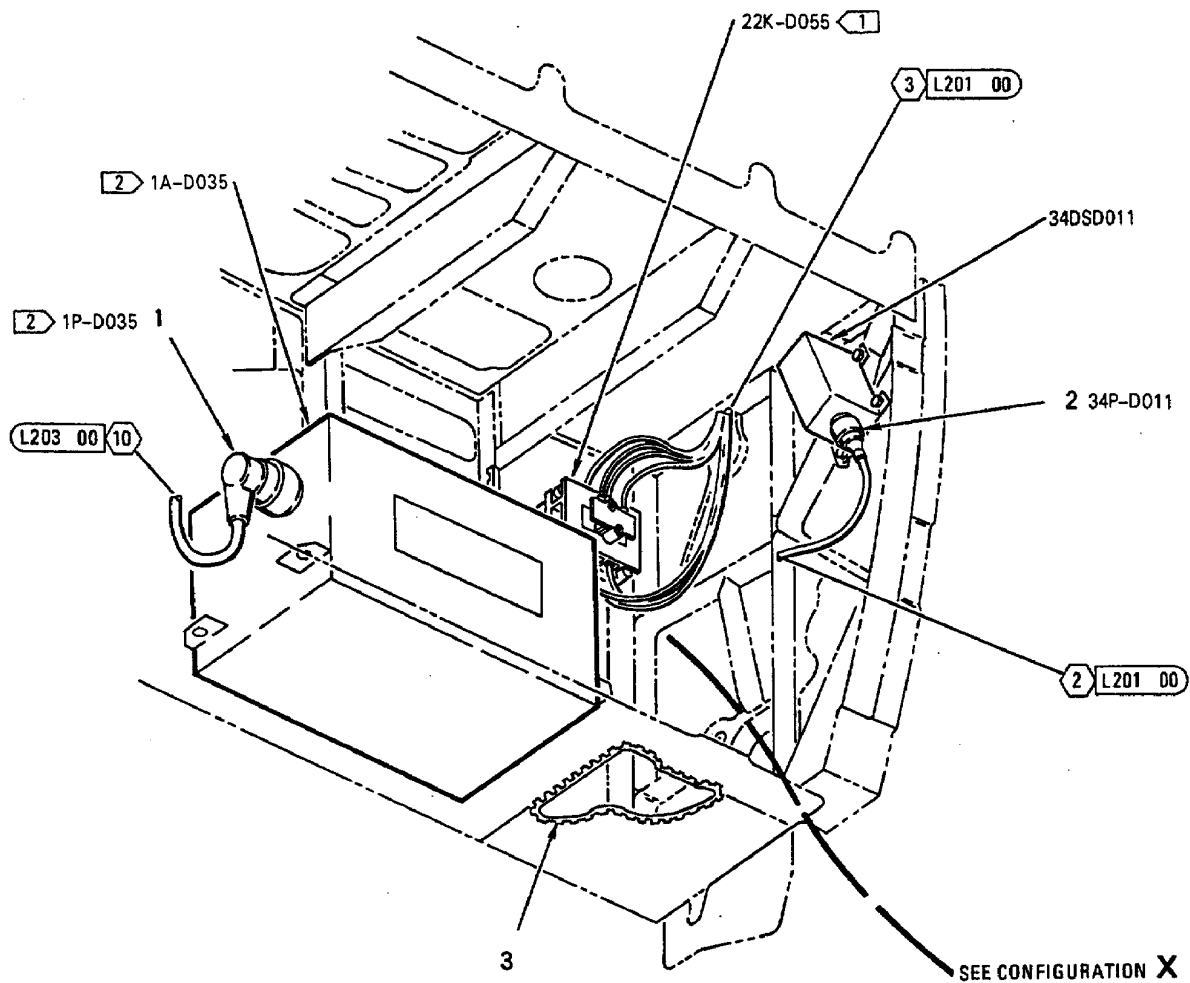

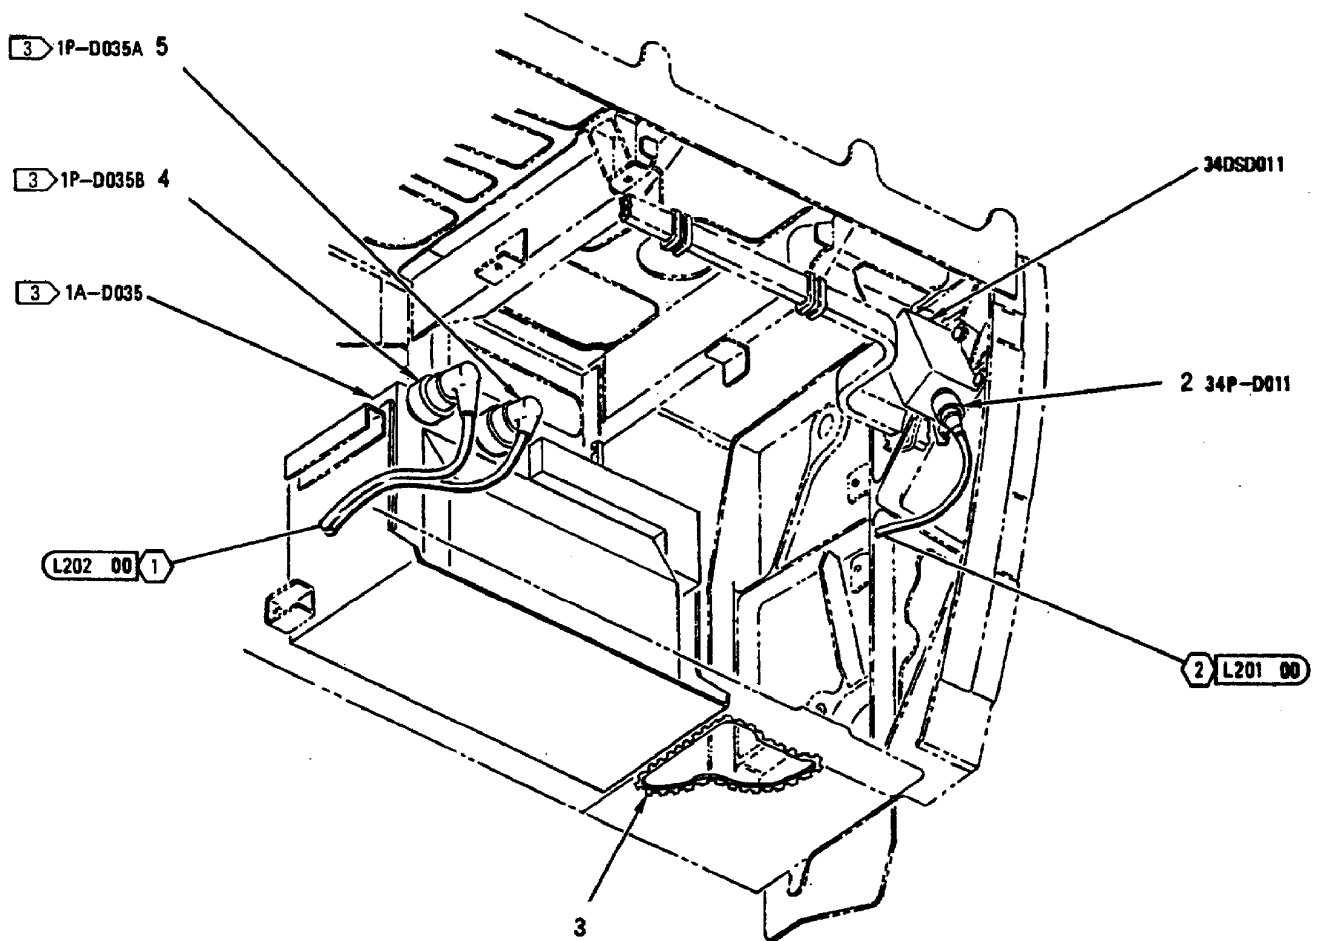

CONFIGURATION X


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T17B6P	CONNECTOR, PLUG (1P-D035)	1	B	PAOZZ
2	MS27467T9B35SA	CONNECTOR, PLUG (34P-D011)	1		PAOZZ
3	MS21266-5N	GROMMET	AR		PAOZZ
4	MS27467T17B6P	CONNECTOR, PLUG (1P-D035B)	1	A	PAOZZ
5	MS27467T17B99SA	CONNECTOR, PLUG (1P-D035A)	1	A	PAOZZ

CODE USABLE ON

A 161353 THRU 161528
 BEFORE F18 AFC 49

B 161702 & UP; ALSO
 161353 THRU 161528
 AFTER F18 AFC 49

FWD FUSELAGE DOOR 10R (FWD) EQUIPMENT REMOVED




CONFIGURATION X



LEGEND

1 161353 THRU 161519
BEFORE F18 AFC 27

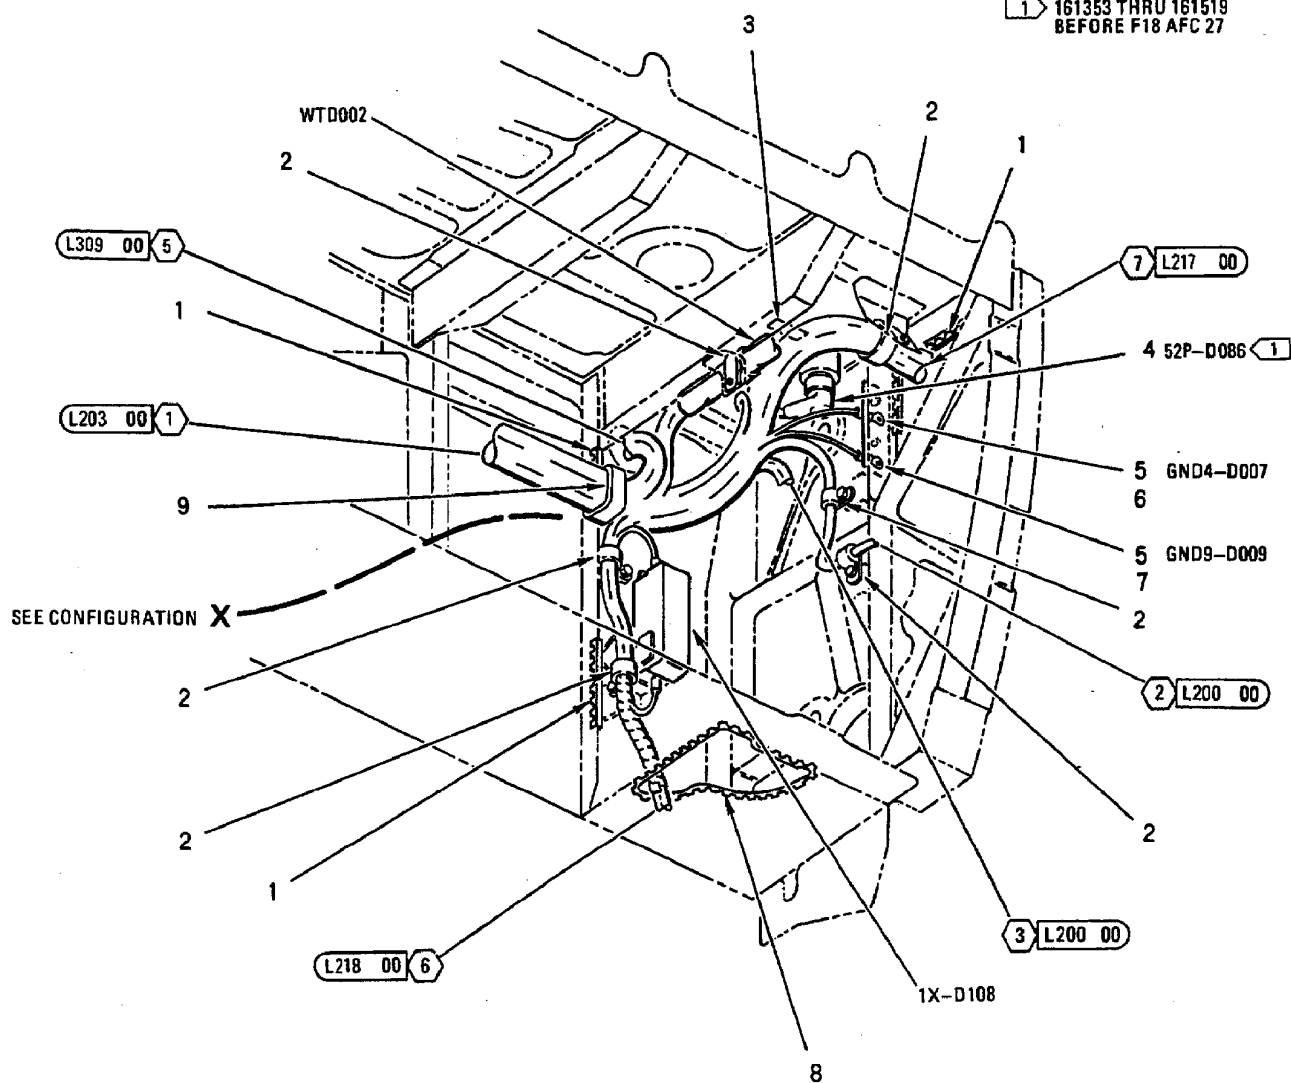

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR		PAOZZ
2	MS21919WDG #	CLAMP	6		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	74A890601-2855	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTD002)	1		MDOZZ
4	MS27467T13B4S	CONNECTOR, PLUG (52P-D086)	1	A	PAOZZ
5	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	2		PAOZZ
6	74A890601-2787	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-D007)	1		MDOZZ
7	74A890601-2381	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-D009)	1		MDOZZ
8	MS21266-5N	GROMMET	AR		PAOZZ
9	NAS1677D10-30N	STRAP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	2	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
10	NAS1712D12-22N	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.



CODE	USABLE ON
A	161353 THRU 161519 BEFORE F18 AFC 27
B	161522 & UP
C	161353 THRU 161521

FWD FUSELAGE

DOOR 10R (FWD)
EQUIPMENT INSTALLED

LEGEND:

- 1 161353 THRU 161359
- 2 161361 AND UP
- 3 161353 THRU 161987 BEFORE
F18 AFC 48
- 4 163119 AND UP; ALSO
161353 THRU 163118
AFTER F/A-18 AFC 90

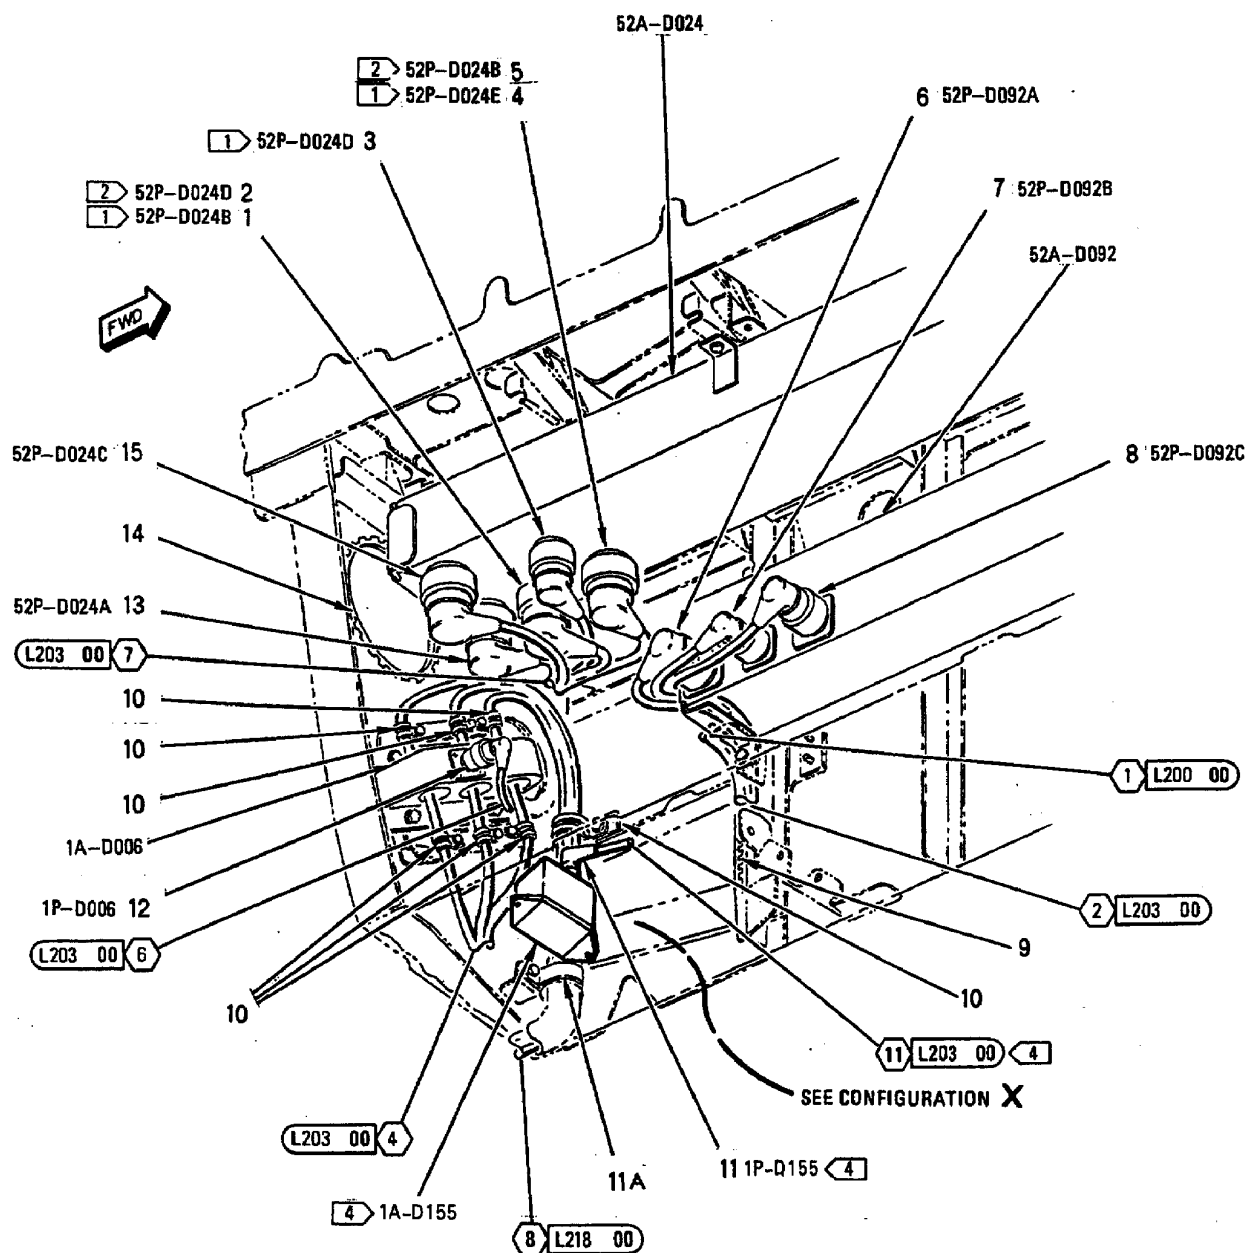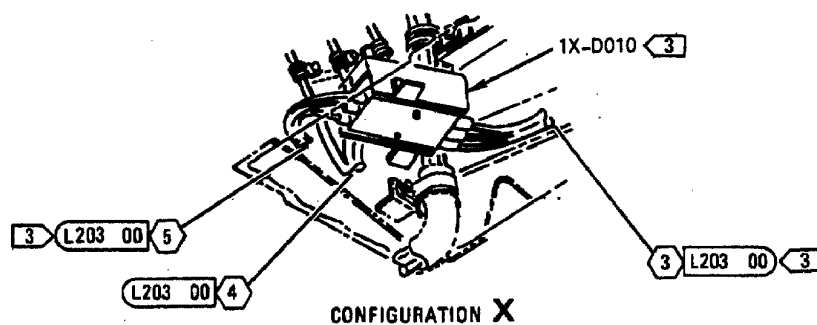

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T21B11SA	CONNECTOR, PLUG (52P-D024B)	1	A	PAOZZ
2	MS27467T21B35P	CONNECTOR, PLUG (52P-D024D)	1	B	PAOZZ
3	MS27467T17B35PA	CONNECTOR, PLUG (52P-D024D)	1	A	PAOZZ
4	MS27467T17B6PB	CONNECTOR, PLUG (52P-D024E)	1	A	PAOZZ
5	NS27467T17B6P	CONNECTOR, PLUG (52P-D024B)	1	B	PAOZZ
6	MS27467T17B6S	CONNECTOR, PLUG (52P-D092A)	1		PAOZZ
7	MS27467T19B11P	CONNECTOR, PLUG (52P-D092B)	1		PAOZZ
8	MS27467T15B35P	CONNECTOR, PLUG (52P-D092C)	1		PAOZZ
9	MS21266-2N	GROMMET	AR		PAOZZ
10	MS21919WDG #	CLAMP	7		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	D38999/46WB5SN	CONNECTOR, PLUG (1P-D155)	1	C	PAOZZ
11A	AN742D16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3N	NUT (AP)	1		PAOZZ
12	MS27467T9B35P	CONNECTOR, PLUG (1P-D006)	1		PAOZZ
13	MS27467T21B11S	CONNECTOR, PLUG (52P-D024A)	1		PAOZZ
14	MS21266-4N	GROMMET	AR		PAOZZ
15	MS27467T25B43P	CONNECTOR, PLUG (52P-D024C)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161353 THRU 161359
B	161361 & UP
C	163119 & UP; ALSO 161353 THRU 163118 AFTER F/A-18 AFC 90


FWD FUSELAGE

DOOR 10R (FWD)
EQUIPMENT REMOVED



LEGEND

- 1 161520 AND UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27
- 2 161353 THRU 161528
- 3 161702 AND UP
- 4 161353 THRU 161987
- 5 163119 AND UP; ALSO 161353 THRU 163118 AFTER F/A-18 AFC 90

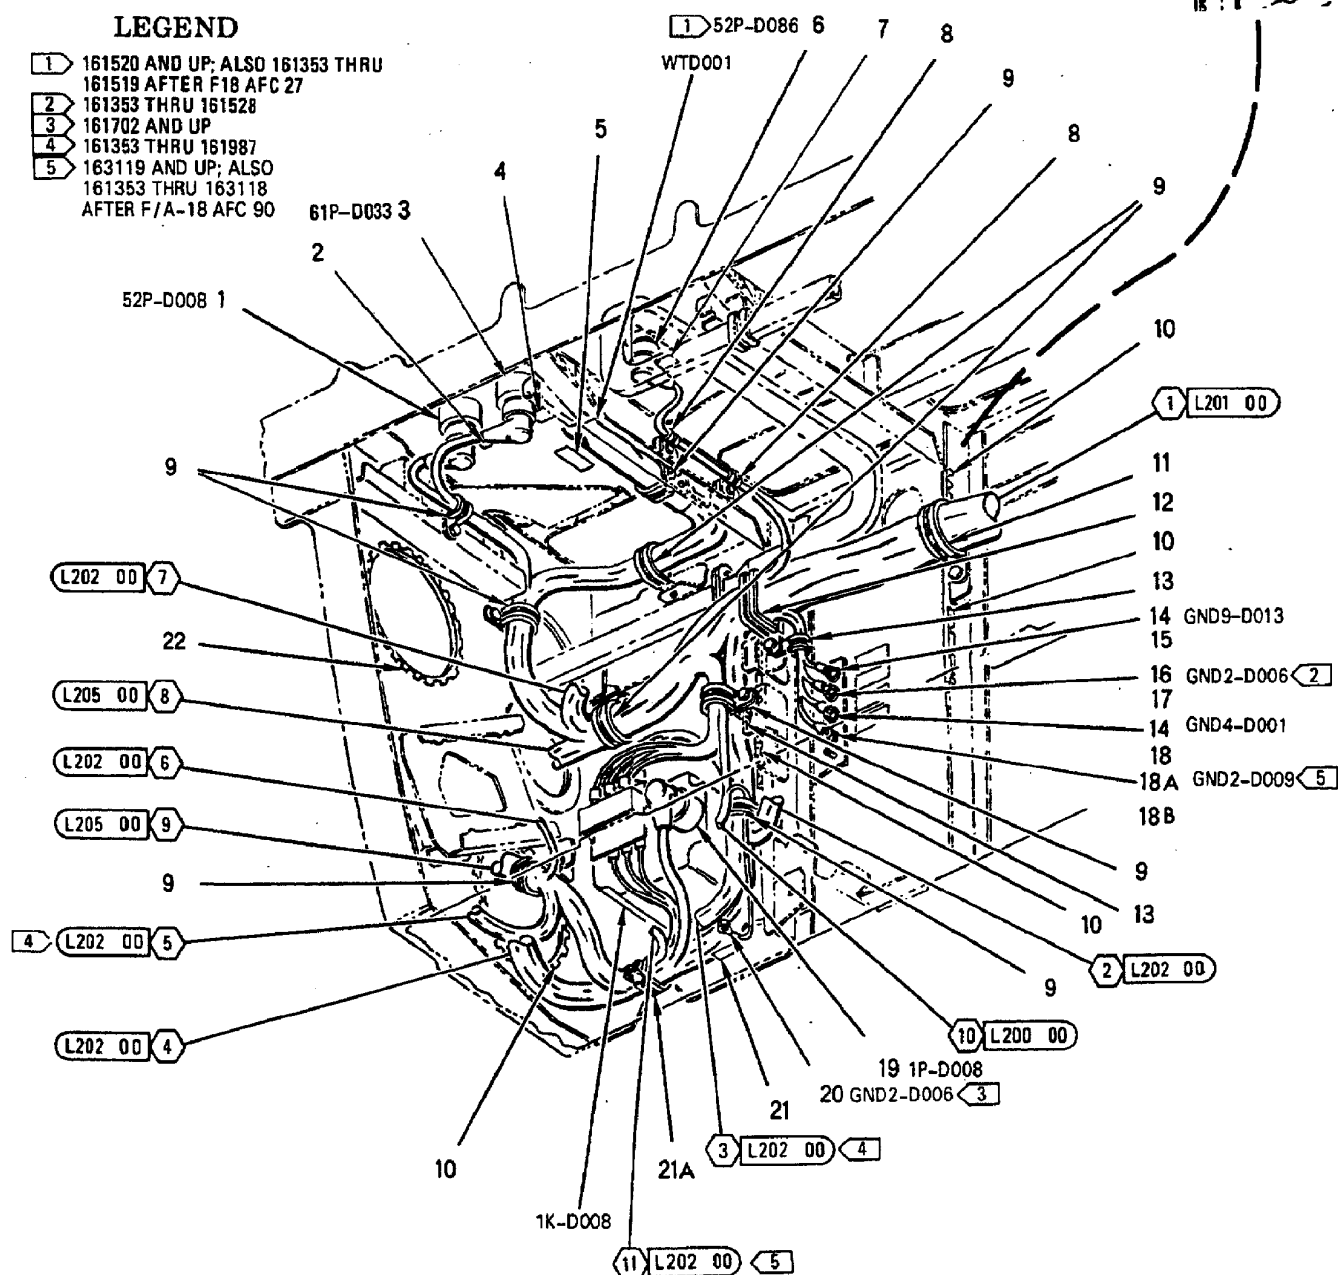

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B97SA	CONNECTOR, PLUG (52P-D008)	1		PAOZZ
2	74A890601-2050	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-J008)			
3	MS27467T15B35P	CONNECTOR, PLUG (61P-D033)	1		PAOZZ
4	74A890601-2104	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 61J-J033)			
5	74A890601-2006	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES WTD001)			
6	MS27467T13B4S	CONNECTOR, PLUG (52P-D086)	1	A	PAOZZ
7	74A890601-2087	MARKER, IDENTIFICATION -	1	A	MDOZZ
		ELECTRICAL (76301) (FOR REF DES 52J-J086)			
8	MS21919WDG #	CLAMP	2	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
9	MS21919WDG #	CLAMP	8		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21266-2N	GROMMET	AR		PAOZZ
11	MS21919WDG #	CLAMP	1	E	-
	NAS673V #	BOLT (AP)	1	E	-
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
12	NAS1712D26-16N	CLAMP	1	D	PAOZZ
	NAS1712D28-12N	CLAMP	1	E	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	MS21919WDG #	CLAMP	2		-
14	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 14)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 14)	2		PAOZZ
15	74A890601-2388	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-D013)			
16	MS21042L3	NUT	1	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 16)	1	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 16)	1	C	PAOZZ
17	74A890601-2378	MARKER, IDENTIFICATION - ELECTRICAL	1	C	MDOZZ
		(76301) (FOR REF DES GND2-D006)			
18	74A890601-2370	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-D001)			
18A	MS21042L3	NUT	1	F	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 18A)	1	F	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 18A)	1	F	PAOZZ
18B	74A890601-2938	MARKER, IDENTIFICATION - ELECTRICAL	1	F	MDOZZ
		(76301) (FOR REF DES GND2-D009)			
19	MS27467T13B35S	CONNECTOR, PLUG (1P-D008)	1		PAOZZ
20	NAS1801-4-15	SCREW	1	B	PAOZZ
	MS35338-44	WASHER (USE WITH INDEX 20)	1	B	PAOZZ
	AN960JD416L	WASHER (USE WITH INDEX 20)	1	B	PAOZZ
21	74A890601-2378	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MDOZZ
		(76301) (FOR REF DES GND2-D006)			
21A	MS21919WDG #	CLAMP	1	H	-
	JM44LC28WD12	CLAMP (22175) (MCDONNELL SPEC	1	G	PAOZZ
		ST9M588WDG12)			
	A11144-4-3	NUT, CLIP (72962) (MCDONNELL SPEC	1	G	PAOZZ
		ST3M523C3M1)			
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
22	MS21266-4N	GROMMET	AR		PAOZZ
23	NAS1712D26-16N	CLAMP	1	D	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161520 & UP; ALSO 61353 THRU 161519 AFTER F18 AFC 27
B	161702 & UP
C	161353 THRU 161528
D	161353 THRU 161521
E	161522 & UP
F	163119 & UP; ALSO 161353 THRU 163118 AFTER F/A-18 AFC 90
G	162394 THRU 163144 AFTER F/A-18 AFC 93
H	161353 THRU 161987, 163145 & UP; ALSO 162394 THRU 163144 BEFORE F/A-18 AFC 93


FWD FUSELAGE
DOOR 10R (AFT)
EQUIPMENT INSTALLED

LEGEND

- 1 161353 THRU 161987
BEFORE F/A-18 AFC 48
- 2 162394 AND UP; ALSO
161353 THRU 161987
AFTER F/A-18 AFC 48
- 3 162394 AND UP; ALSO
161353, 161358,
161361, 161362,
161365, 161367,
161702 THRU 161987
AFTER F/A-18 AFC 74

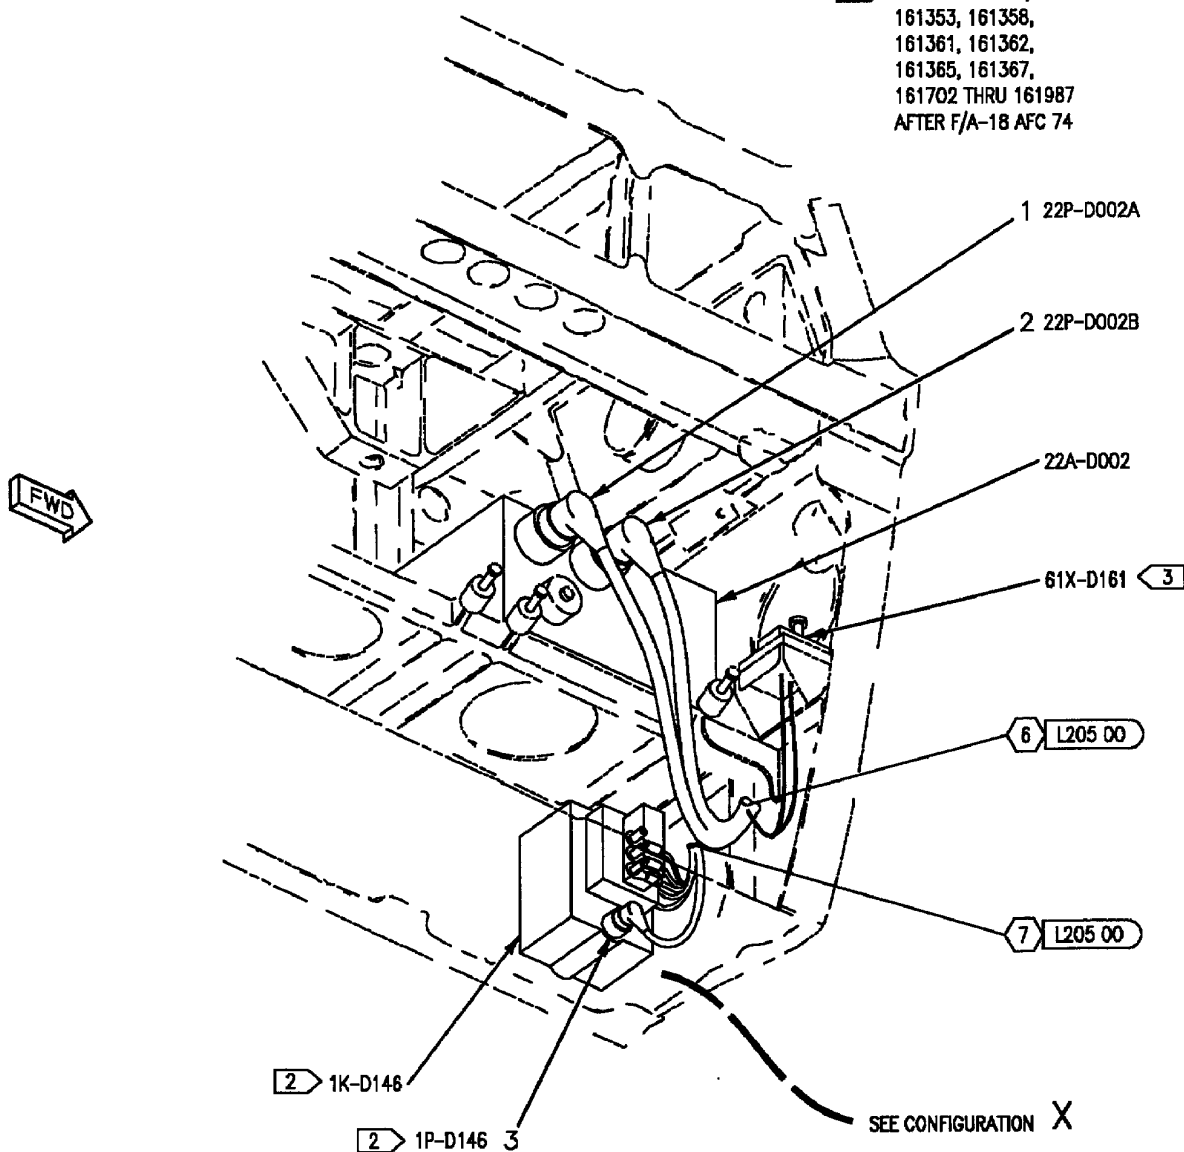


162394 AND UP

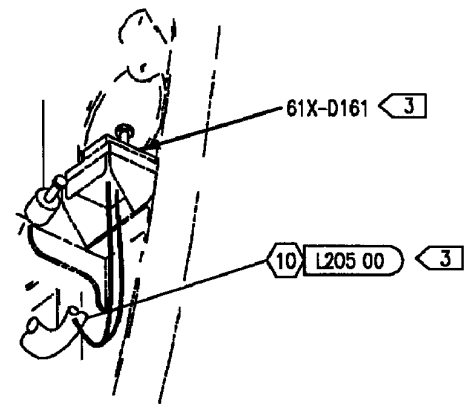

CONFIGURATION Y

162394 AND UP; ALSO
161353, 161358, 161361,
161362, 161365, 161367,
161702 THRU 161987
AFTER F/A-18 AFC 74

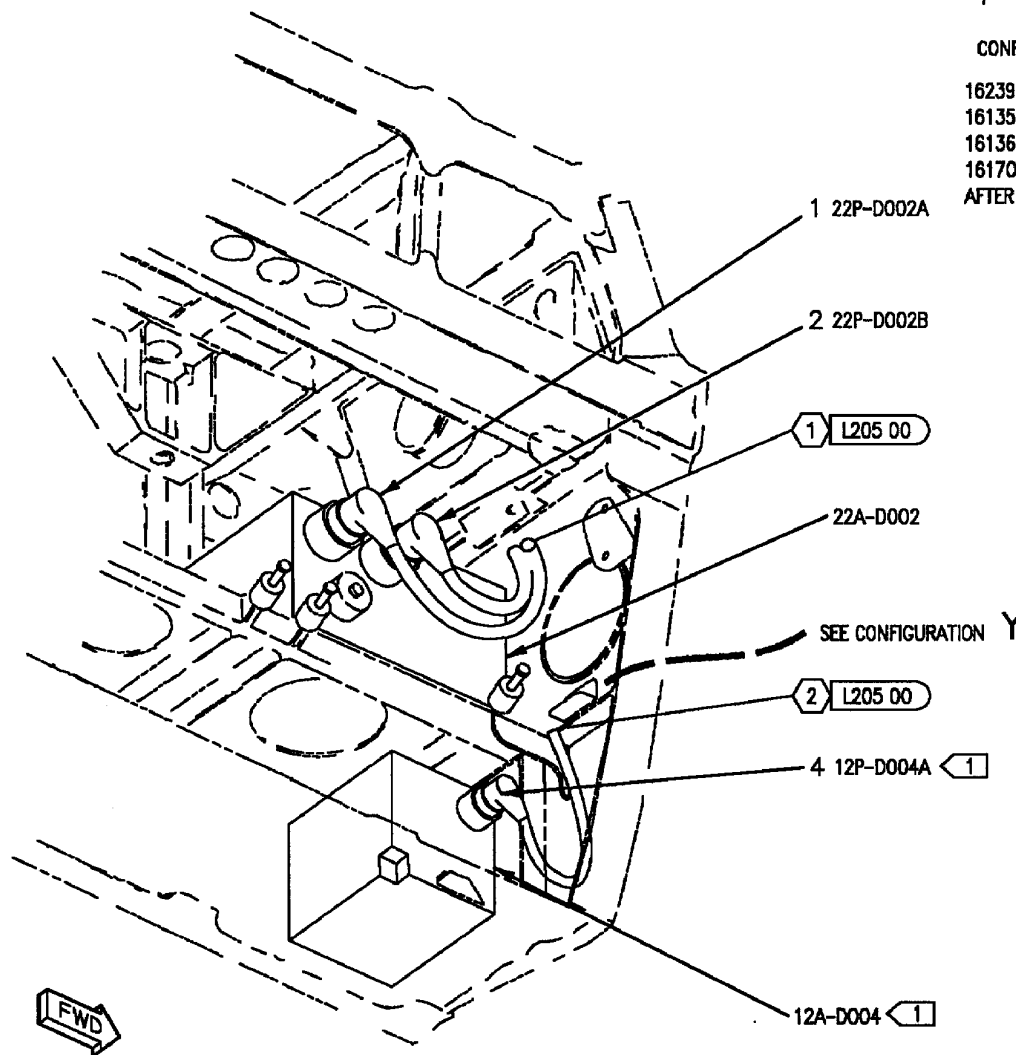

CONFIGURATION X

161359, 161363, 161364, 161366,
161519 THRU 161528; AND 161353,
161358, 161361, 161362, 161365,
161367, 161702 THRU 161987


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T17B35S	CONNECTOR, PLUG (22P-D002A)	1		PAOZZ
2	MS27467T17B35SA	CONNECTOR, PLUG (22P-D002B)	1		PAOZZ
3	MS27467T13B35S	CONNECTOR, PLUG (1P-D146)	1	B	PAOZZ
4	MS27467T25B35S	CONNECTOR, PLUG (12P-D004A)	1	A	PAOZZ


CODE	USABLE ON
A	161353 THRU 161987 BEFORE F18 AFC 48
B	162394 & UP; ALSO 161353 THRU 161987 AFTER F18 AFC 48

FWD FUSELAGE
DOOR 10R (AFT)
EQUIPMENT REMOVED

LEGEND

- 1 161353 THRU 161987
- 2 162394 AND UP
- 3 162406 AND UP
- 4 161353 THRU 161987 BEFORE F/A-18 AFC 48
- 5 162394 AND UP; ALSO 161353 THRU 161987 AFTER F/A-18 AFC 48
- 6 162394 AND UP; ALSO 161353, 161358, 161361, 161362, 161365, 161367, 161702 THRU 161987 AFTER F/A-18 AFC 74

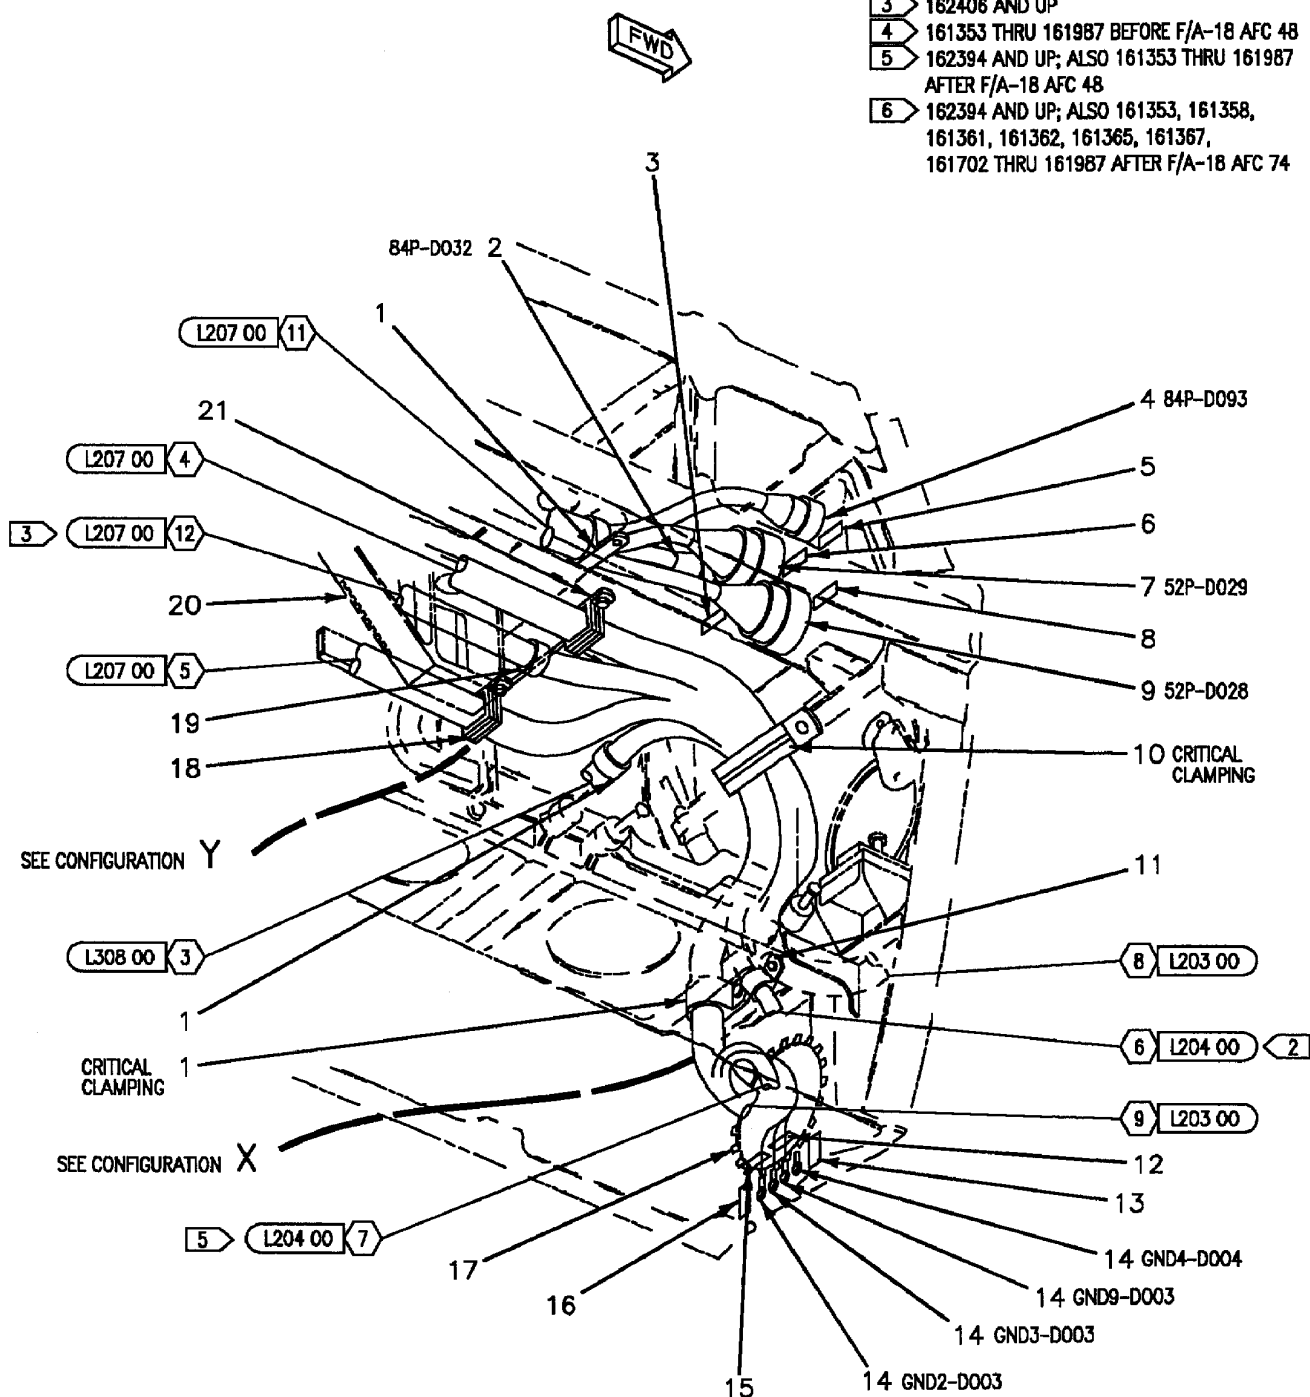

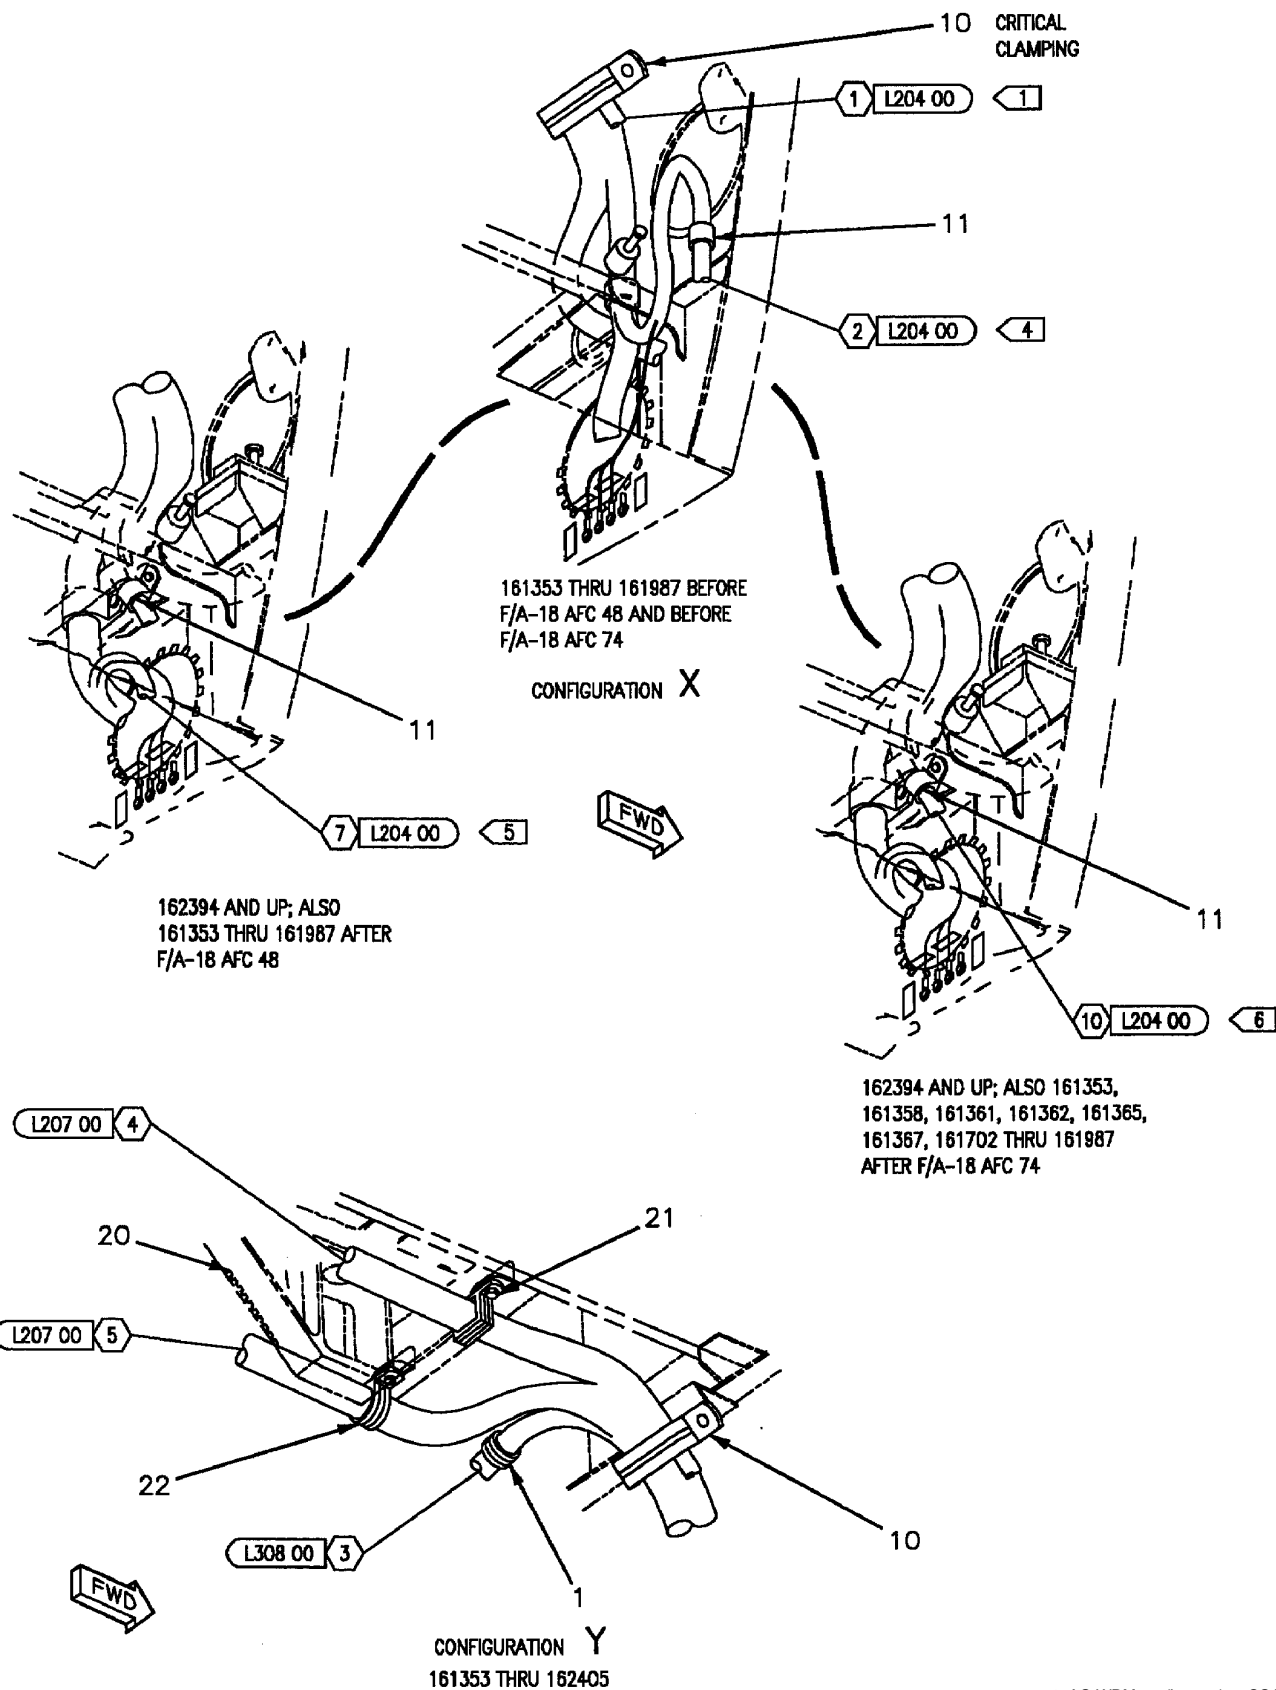

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27467T17B35SA	CONNECTOR, PLUG (84P-D032)	1		PAOZZ
3	74A890601-2141	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-J032)	1		MDOZZ
4	MS27467T13B4P	CONNECTOR, PLUG (84P-D093)	1		PAOZZ
5	74A890601-2296	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-J093)	1		MDOZZ
6	74A890601-2066	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-J029)	1		MDOZZ
7	MS27467T25B35SA	CONNECTOR, PLUG (52P-D029)	1		PAOZZ
8	74A890601-2065	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-J028)	1		MDOZZ
9	MS27467T25B35S	CONNECTOR, PLUG (52P-D028)	1		PAOZZ
10	NAS1677D32-24N	STRAP	1	A	PAOZZ
	NAS1677D24-32N	STRAP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
11	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	74A890601-2391	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-D003)	1		MDOZZ
13	74A890601-2734	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-D004)	1		MDOZZ
14	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 14)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 14)	4		PAOZZ
15	74A890601-2548	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-D003)	1		MDOZZ
16	74A890601-2373	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-D003)	1		MDOZZ
17	MS21266-2N	GROMMET	AR		PAOZZ
18	NAS1712D12-24N	CLAMP	1	D	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	MS21919WDG #	CLAMP	1	D	-
20	MS21266-1N	GROMMET	AR		PAOZZ
21	NAS1712D8-18N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE USABLE ON

A 161353 THRU 161528

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

B	161702 & UP
C	161353 THRU 162405
D	162406 & UP

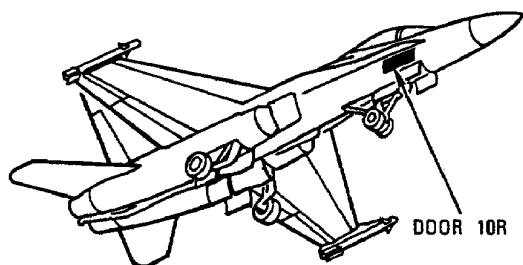


FWD FUSELAGE

DOOR 10R (AFT)
EQUIPMENT INSTALLED

LEGEND

- 1 161353 THRU 161359
- 2 161361 & UP

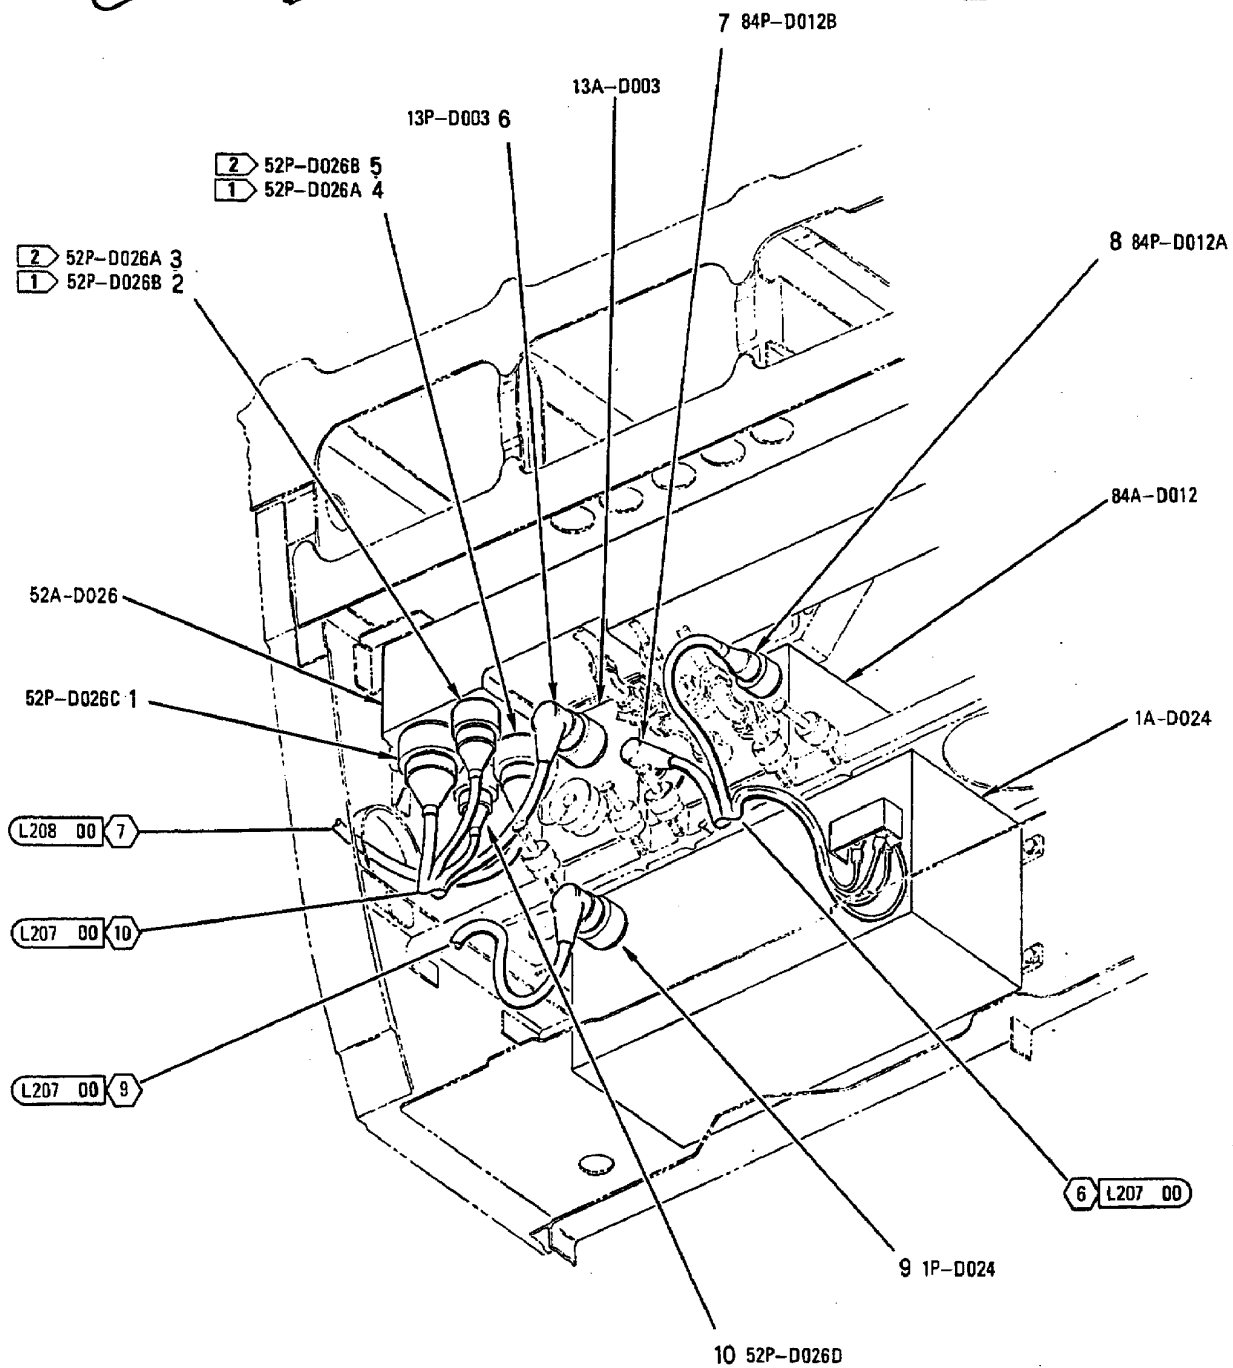

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B43P	CONNECTOR, PLUG (52P-D026C)	1		PAOZZ
2	MS27467T17B6S	CONNECTOR, PLUG (52P-D026B)	1	A	PAOZZ
3	MS27467T17B35P	CONNECTOR, PLUG (52P-D026A)	1	B	PAOZZ
4	MS27467T21B11S	CONNECTOR, PLUG (52P-D026A)	1	A	PAOZZ
5	MS27467T21B11S	CONNECTOR, PLUG (52P-D026B)	1	B	PAOZZ
6	MS27467T17B26S	CONNECTOR, PLUG (13P-D003)	1		PAOZZ
7	MS27467T13B35SB	CONNECTOR, PLUG (84P-D012B)	1		PAOZZ
8	MS27467T13B35SD	CONNECTOR, PLUG (84P-D012A)	1		PAOZZ
9	NS27473T16B8S	CONNECTOR, PLUG (1P-D024)	1		PAOZZ
10	MS27467T15B35P	CONNECTOR, PLUG (52P-D026D)	1	A	PAOZZ
	MS27467T15B35S	CONNECTOR, PLUG (52P-D026D)	1	B	PAOZZ


CODE	USABLE ON
A	161353 THRU 161359
B	161361 & UP

FWD FUSELAGE

DOOR 10R (AFT)
EQUIPMENT REMOVED


LEGEND


- 1 161520 AND UP
- 2 161353 THRU 161519
- 3 162406 AND UP
- 4 161353 THRU 161519
BEFORE F18 AFC 27
- 5 161520 AND UP;
ALSO 161353 THRU
161519 AFTER
F18 AFC 27

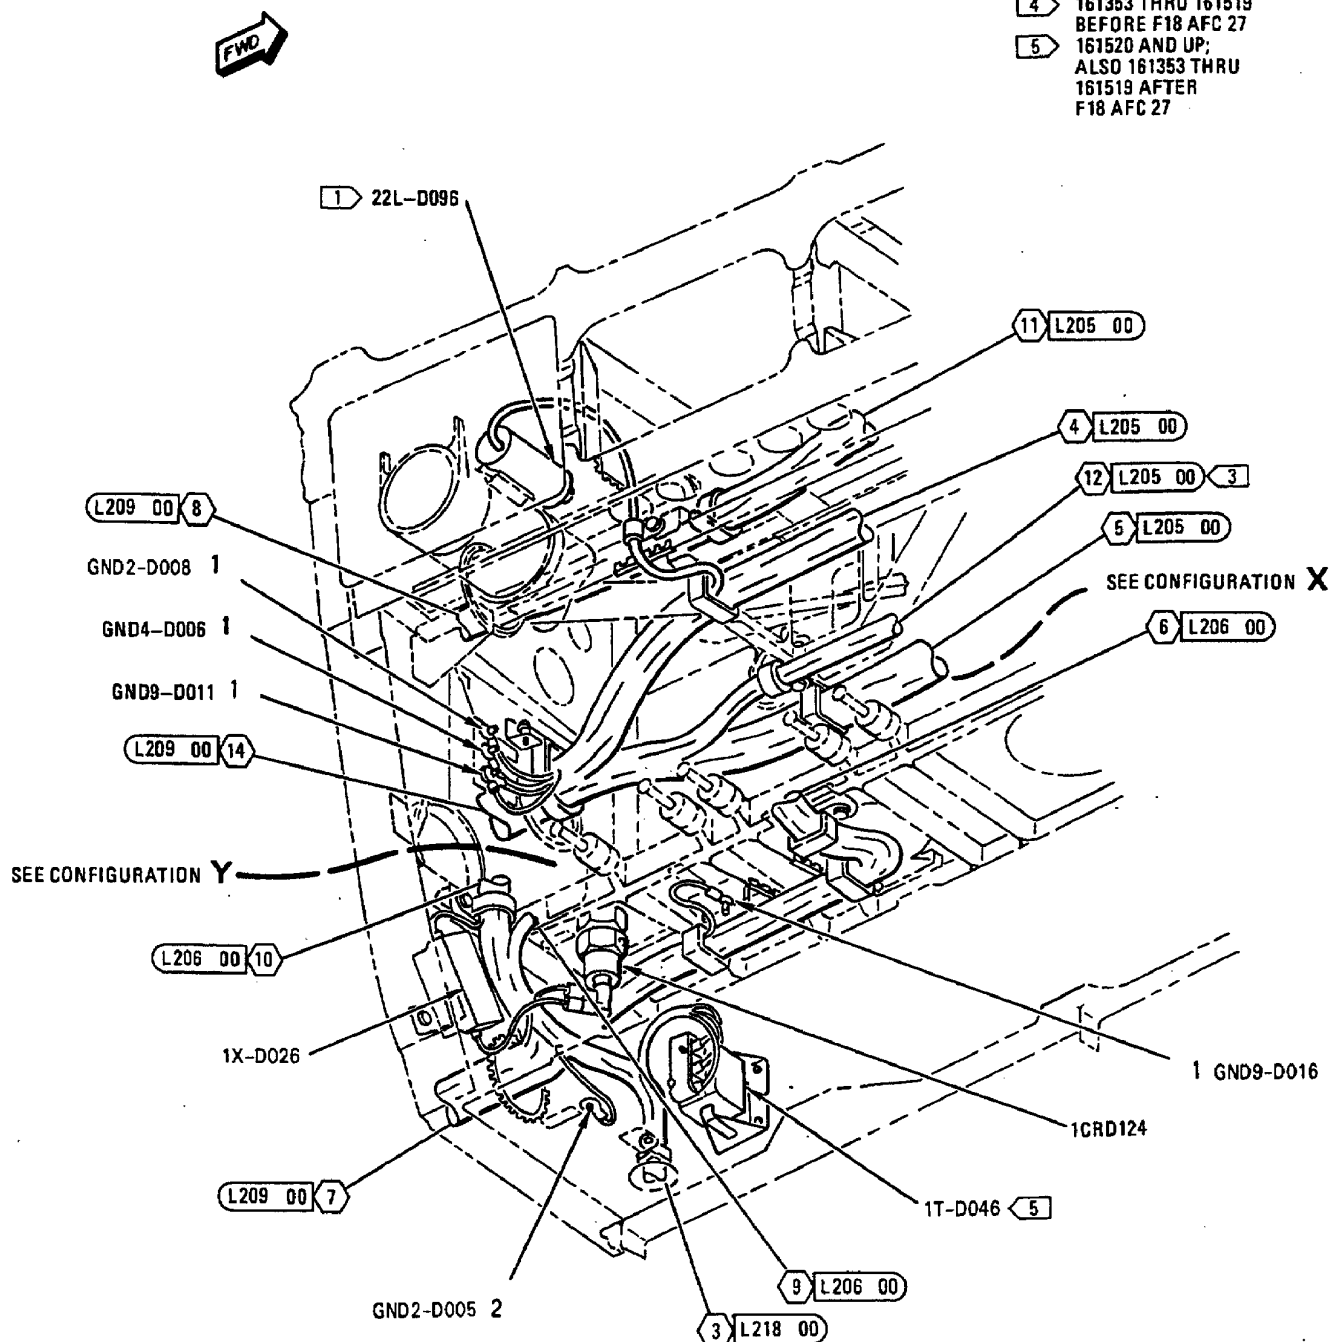


FWD FUSELAGE

DOOR 10R (AFT)
EQUIPMENT REMOVED

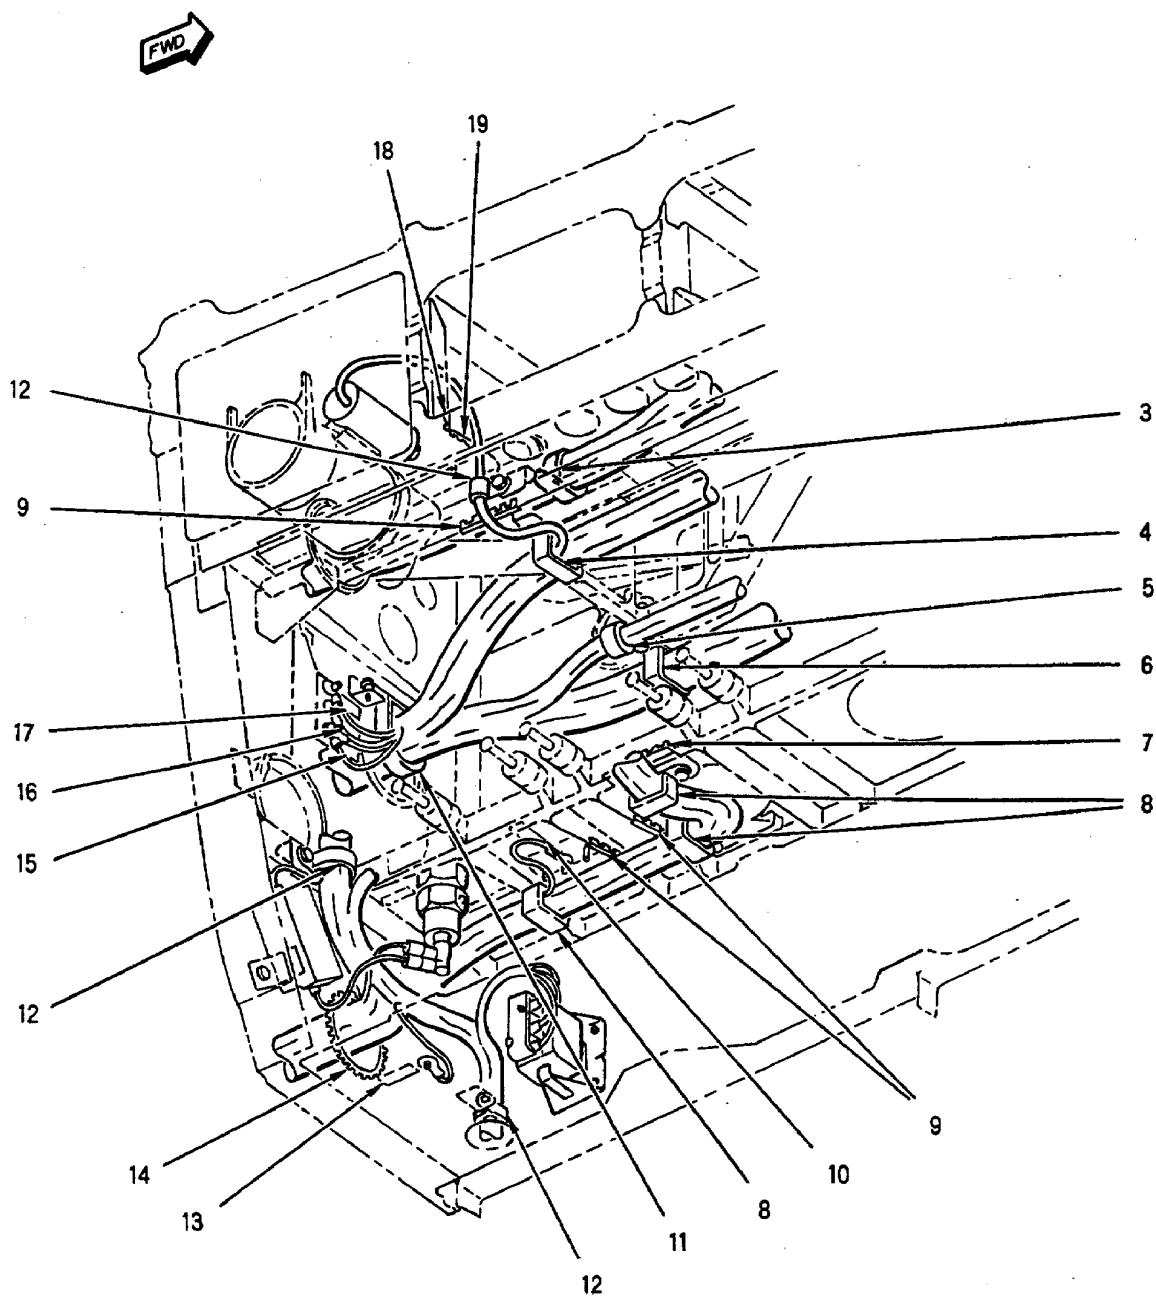


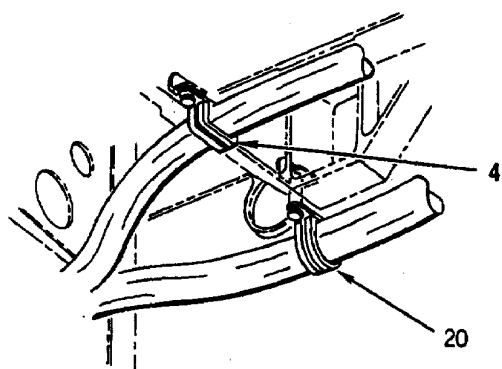

CONFIGURATION X

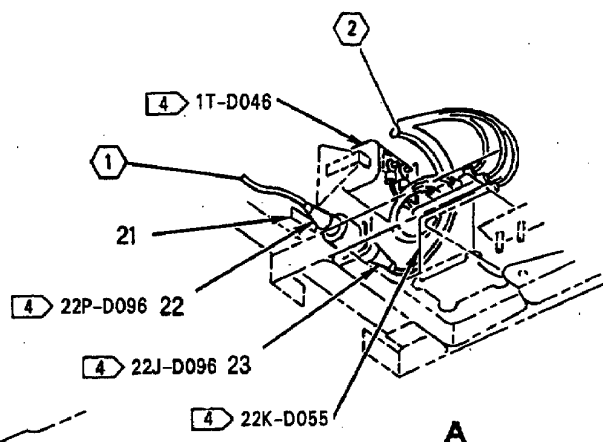

A

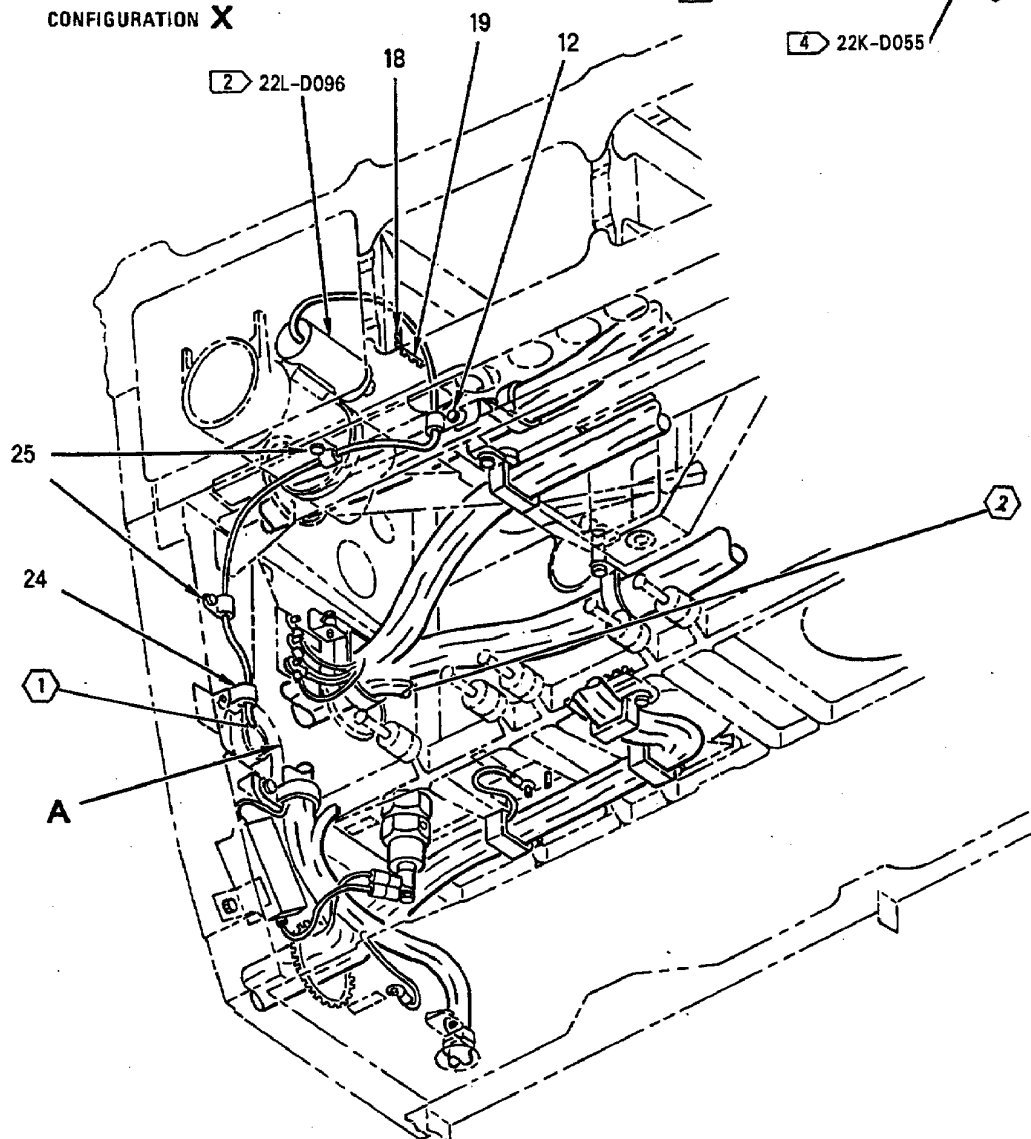

CONFIGURATION Y


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	NAS675V6	BOLT	1		PAOZZ
	MS35338-45	WASHER (USE WITH INDEX 2)	1		PAOZZ
	AN960JD516L	WASHER (USE WITH INDEX 2)	1		PAOZZ
3	MS21919WDG #	CLAMP	1		-
	NAS673V2	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	NAS1712D8-18N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS21919WDG #	CLAMP	1	D	-
6	NAS1712D12-24N	CLAMP	1	D	PAOZZ
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
7	NAS42DD6-32	SPACER (AP)	1	D	PAOZZ
	MS21266-6N	GROMMET	AR		PAOZZ
	NAS1712D6-14N	CLAMP	3		PAOZZ
8	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21266-2N	GROMMET	AR	B	PAOZZ
10	74A890601-2390	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
11	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	NAS42DD6-16	SPACER (AP)	1		PAOZZ
	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
13	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A890601-2439	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-D005)			
14	MS21266-6N	GROMMET	AR		PAOZZ
15	74A890601-2384	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
16		(76301) (FOR REF DES GND9-D011)			
	74A890601-2708	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-D006)			
17	74A890601-2707	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
18		(76301) (FOR REF DES GND2-D008)			
	MS21266-2N	GROMMET	AR		PAOZZ
	MS21266-8N	GROMMET	AR		PAOZZ
20	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
21	NAS42DD6-32	SPACER (AP)	1	C	PAOZZ
	74A890601-2558	MARKER, IDENTIFICATION - ELECTRICAL	1	E	MDOZZ
		(76301) (FOR REF DES 22J-D096)			
22	MS27467T9B35P	CONNECTOR, PLUG (22P-D096)	1	E	PAOZZ
23	MS27656T9B35S	CONNECTOR, RECEPTACLE (22J-D096)	1	E	PAOZZ
	NAS600-8P	SCREW (AP)	4	E	PAOZZ
	AN960JD4L	WASHER (AP)	4	E	PAOZZ
24	MS21919WDG #	CLAMP	1	A	-
	NAS673V18	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
25	NAS42DD6-48	SPACER (AP)	1	A	PAOZZ
	MS21919WDG #	CLAMP	2	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
--------------	----------------	------------------------------	----------------------	-------------------	--------------

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161353 THRU 161519
B	162394 & UP
C	161353 THRU 162405
D	162406 & UP
E	161353 THRU 161519 BEFORE F18 AFC 27


FWD FUSELAGE DOOR 13R EQUIPMENT INSTALLED

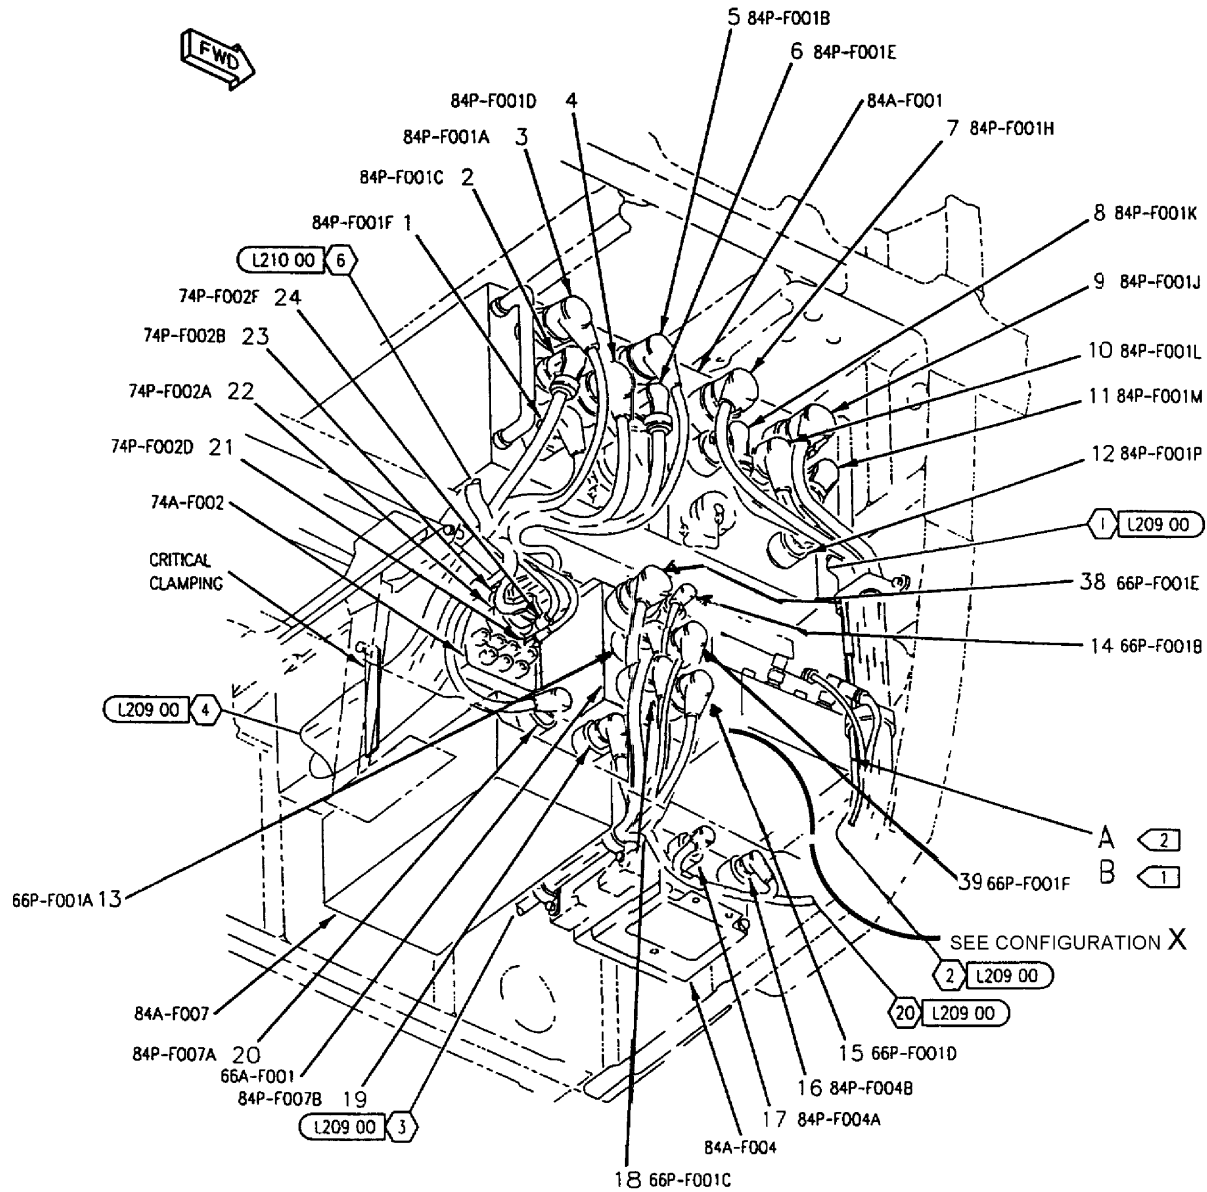


LEGEND

- ① 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292
- ② 161353 AND UP; ALSO 162394
THRU 163175 BEFORE F/A-18
AFC 253 OR F/A-18 AFC 292


FWD FUSELAGE
DOOR 13R
EQUIPMENT INSTALLED

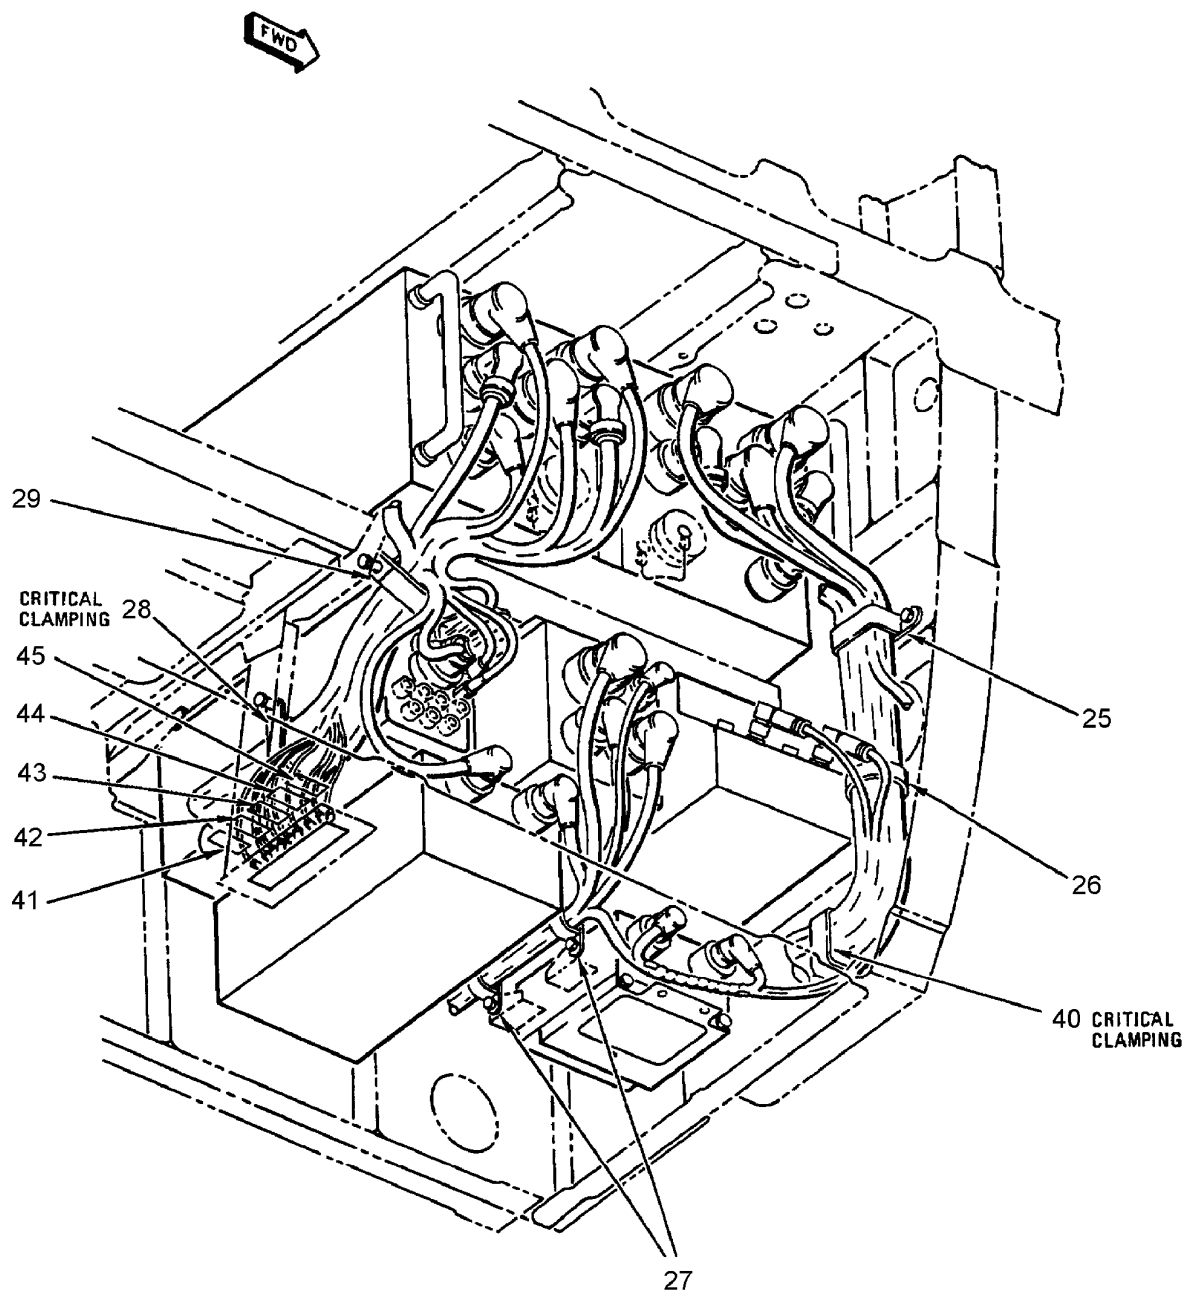

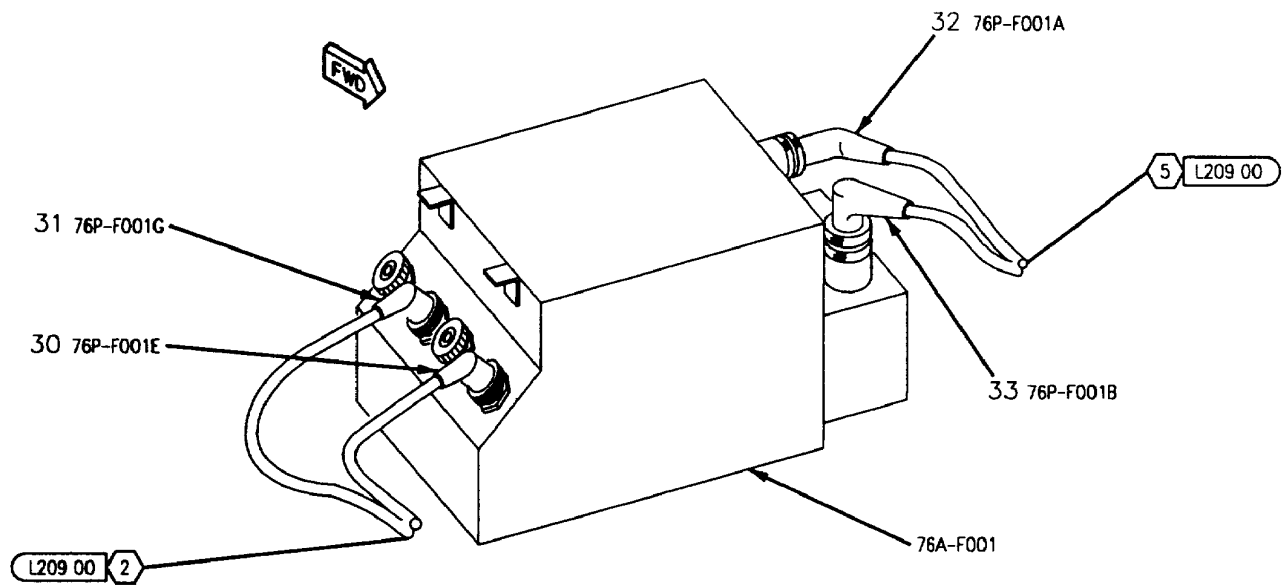


A

RT-1250()/ARC-182 AND UP
161353, ALSO 162394 THRU 163175
BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292

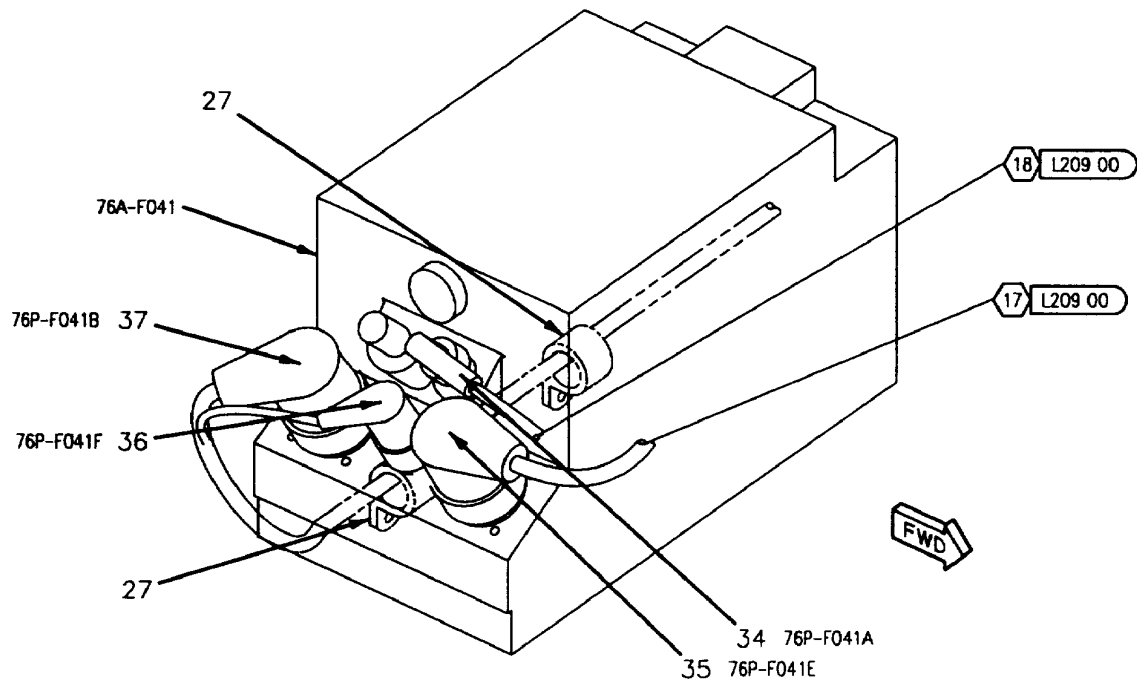

B

RT-1556/ARC-210 162394 THRU
163175 AFTER F/A-18 AFC 253
OR F/A-18 AFC 292

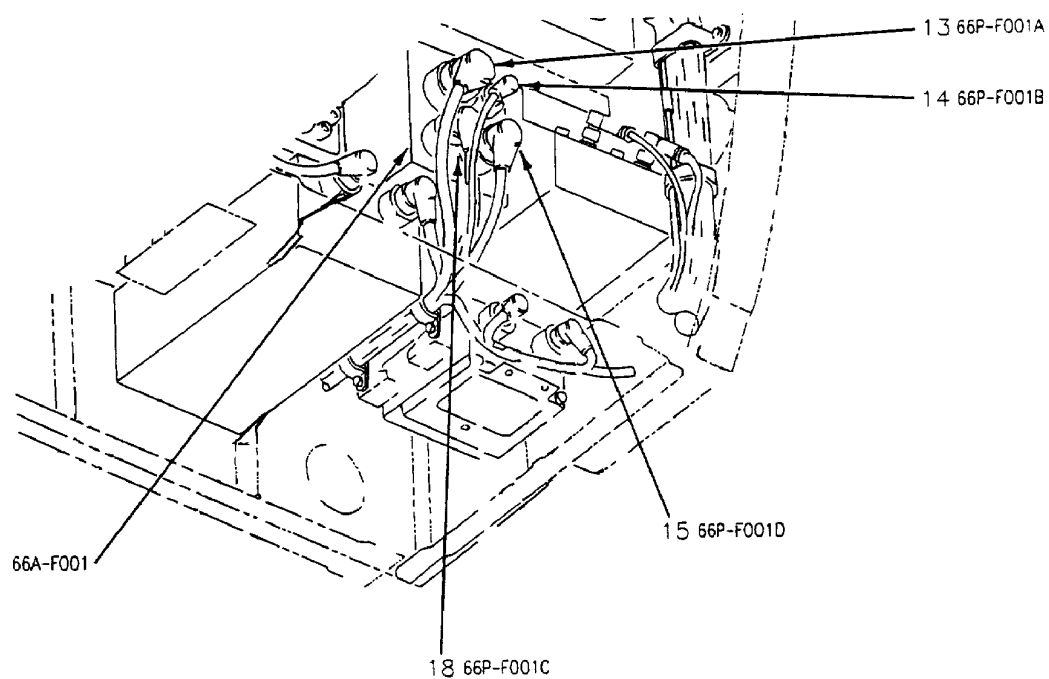

2 CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T17B99S	CONNECTOR, PLUG (84P-F001F)	1		PAOZZ
2	MS27467T19B35S	CONNECTOR, PLUG (84P-F001C)	1		PAOZZ
3	MS27467T25B35P	CONNECTOR, PLUG (84P-F001A)	1		PAOZZ
4	MS27467T25B35S	CONNECTOR, PLUG (84P-F001D)	1		PAOZZ
5	MS27467T25B35SA	CONNECTOR, PLUG (84P-F001B)	1		PAOZZ
6	MS27467T19B35PA	CONNECTOR, PLUG (84P-F001E)	1		PAOZZ
7	MS27467T25B35SB	CONNECTOR, PLUG (84P-F001H)	1		PAOZZ
8	MS27467T19B35PB	CONNECTOR, PLUG (84P-F001K)	1		PAOZZ
9	MS27467T25B35PC	CONNECTOR, PLUG (84P-F001J)	1		PAOZZ
10	MS27467T25B35SC	CONNECTOR, PLUG (84P-F001L)	1		PAOZZ
11	MS27467T19B35SC	CONNECTOR, PLUG (84P-F001M)	1		PAOZZ
12	MS27467T17B99SA	CONNECTOR, PLUG (84P-F001P)	1		PAOZZ
13	MS27467T23B21S	CONNECTOR, PLUG (66P-F001A)	1		PAOZZ
14	MS27467T11B98S	CONNECTOR, PLUG (66P-F001B)	1		PAOZZ
15	MS27467T19B11S	CONNECTOR, PLUG (66P-F001D)	1		PAOZZ
16	MS27467T13B35SA	CONNECTOR, PLUG (84P-F004B)	1		PAOZZ
17	MS27467T13B35S	CONNECTOR, PLUG (84P-F004A)	1		PAOZZ
18	MS27467T17B35S	CONNECTOR, PLUG (66P-F001C)	1		PAOZZ
19	MS27467T15B35SA	CONNECTOR, PLUG (84P-F007B)	1		PAOZZ
20	MS27467T15B35S	CONNECTOR, PLUG (84P-F007A)	1		PAOZZ
21	M39012/55-4502	CONNECTOR, PLUG (74P-F002D)	1		PAOZZ
22	M81511-56WD01S3	CONNECTOR, PLUG (74P-F002A)	1		PAOZZ
23	M81511-56WD01P1	CONNECTOR, PLUG (74P-F002B)	1		PAOZZ
24	M39012/55-4502	CONNECTOR, PLUG (74P-F002F)	1		PAOZZ
25	NAS1712D11-20N	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
26	NAS1712D10-16N	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
27	MS21919WDG #	CLAMP	2		-
28	MS21919WDG #	CLAMP	1		-
	NAS673V13	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
29	NAS1712D12-28N	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
30	31-34179-1	CONNECTOR, PLUG, ELECTRICAL	1	A	PAOZZ
		(74868) (MCDONNELL SPEC 5M1953RP1) (76P-F001E)			
31	31-34179-1	CONNECTOR, PLUG, ELECTRICAL	1	A	PAOZZ
		(74868) (MCDONNELL SPEC 5M1953RP1) (76P-F001G)			
32	M39012/30-0503	CONNECTOR, PLUG (76P-F001A)	1	A	PAOZZ
33	D38999/26WE35SN	CONNECTOR, PLUG, ELECTRICAL (76P-F001B)	1	A	PAOZZ
34	M39012/30-0503	CONNECTOR, PLUG (76P-F041A)	1	B	PAOZZ
35	D38999/26WE35SC	CONNECTOR, PLUG, ELECTRICAL (76P-F041E)	1	B	PAOZZ
36	D38999/26WA35SN	CONNECTOR, PLUG, ELECTRICAL (76P-F041F)	1	B	PAOZZ
37	D38999/26WE35SN	CONNECTOR, PLUG, ELECTRICAL (76P-F041B)	1	B	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE

38	D38999/26WE35SN	CONNECTOR, PLUG (66P-F001E)	1	B	PAOZZ
39	D38999/26WD35SN	CONNECTOR, PLUG (66P-F001F)	1	B	PAOZZ
40	NAS1712D20-10N	CLAMP	1		PAOZZ
	NAS673V#	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
41	74A890601-2827	MARKER IDENTIFICATION - ELECTRICAL ... (76301) (FOR RES DES GND1-F005)	1		MDOZZ
42	74A890601-2695	MARKER IDENTIFICATION - ELECTRICAL ... (76301) (FOR RES DES GND2-F016)	1		MDOZZ
43	74A890601-2696	MARKER IDENTIFICATION - ELECTRICAL ... (76301) (FOR RES DES GND3-F012)	1		MDOZZ
44	74A890601-2697	MARKER IDENTIFICATION - ELECTRICAL ... (76301) (FOR RES DES GND4-F008)	1		MDOZZ
45	74A890601-2348	MARKER IDENTIFICATION - ELECTRICAL ... (76301) (FOR RES DES GND9-F034)	1		MDOZZ


*ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE USABLE ON

A	161353 & UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292
B	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292.

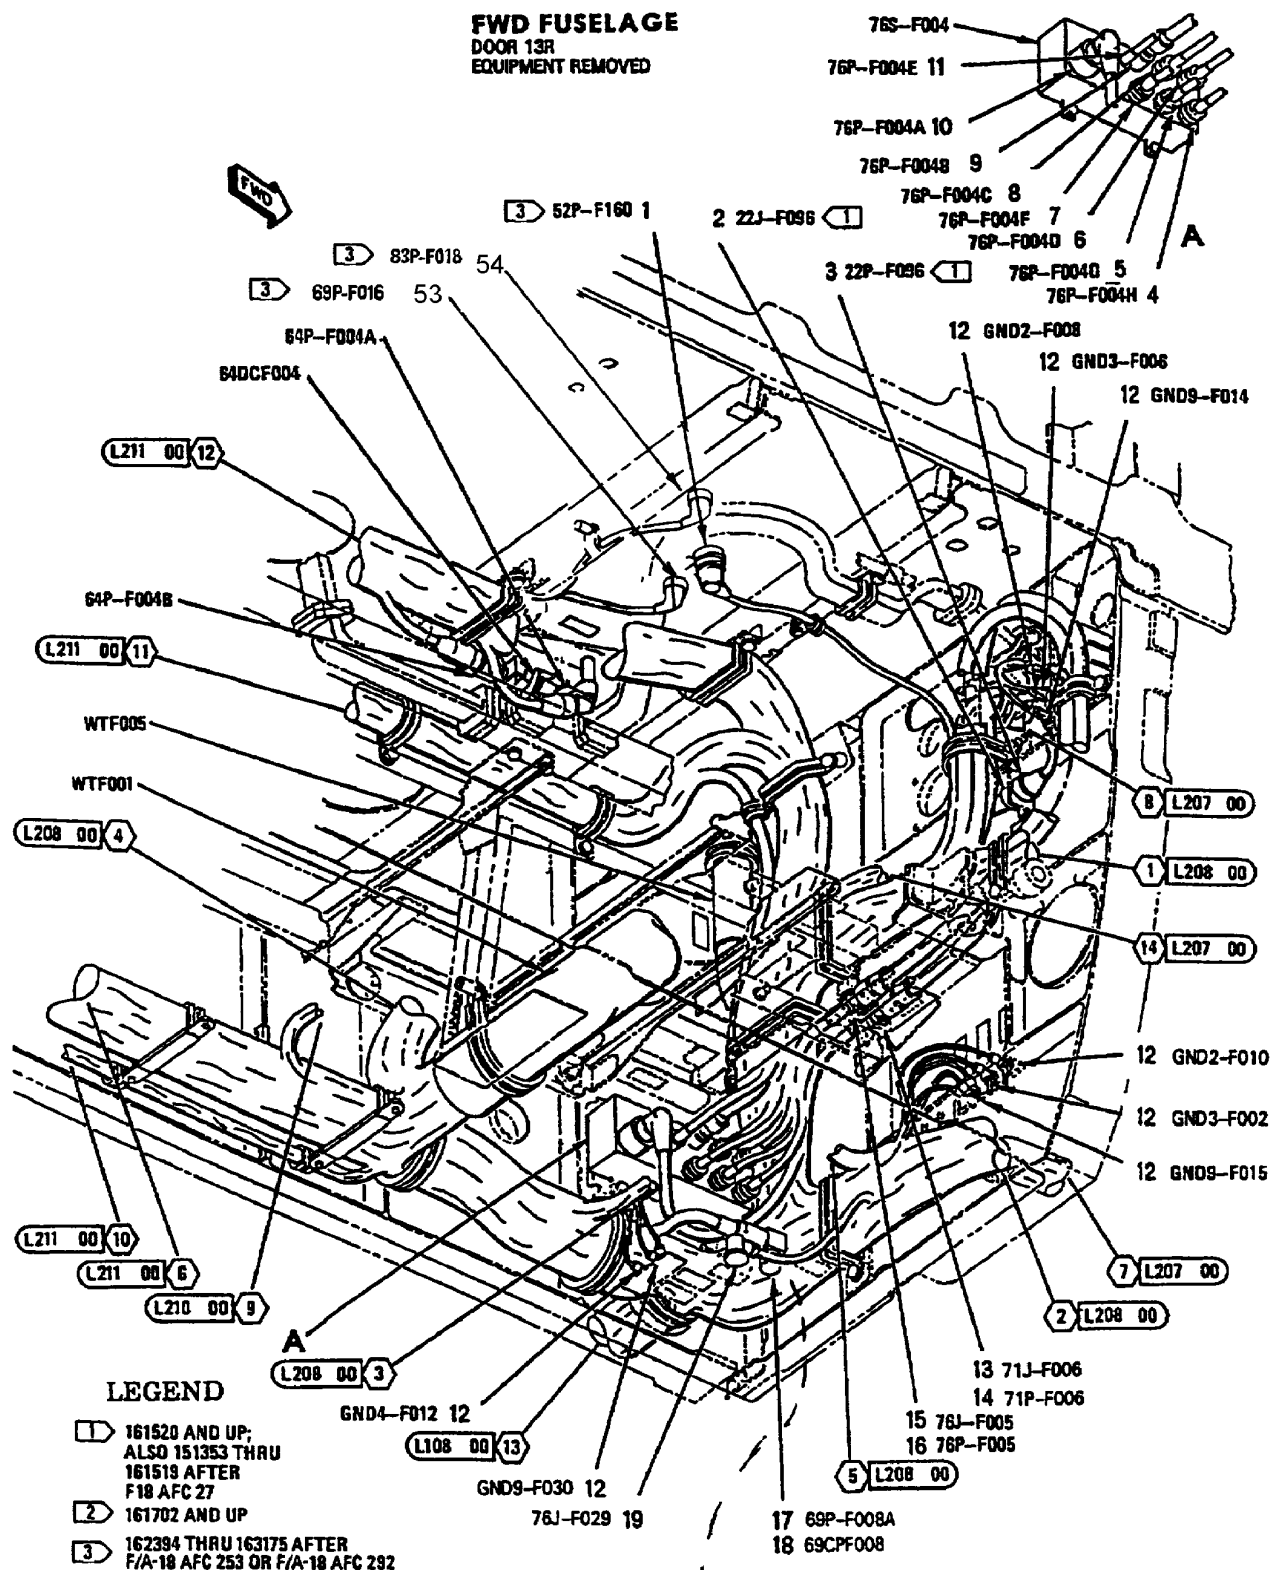


SEE CONFIGURATION Z

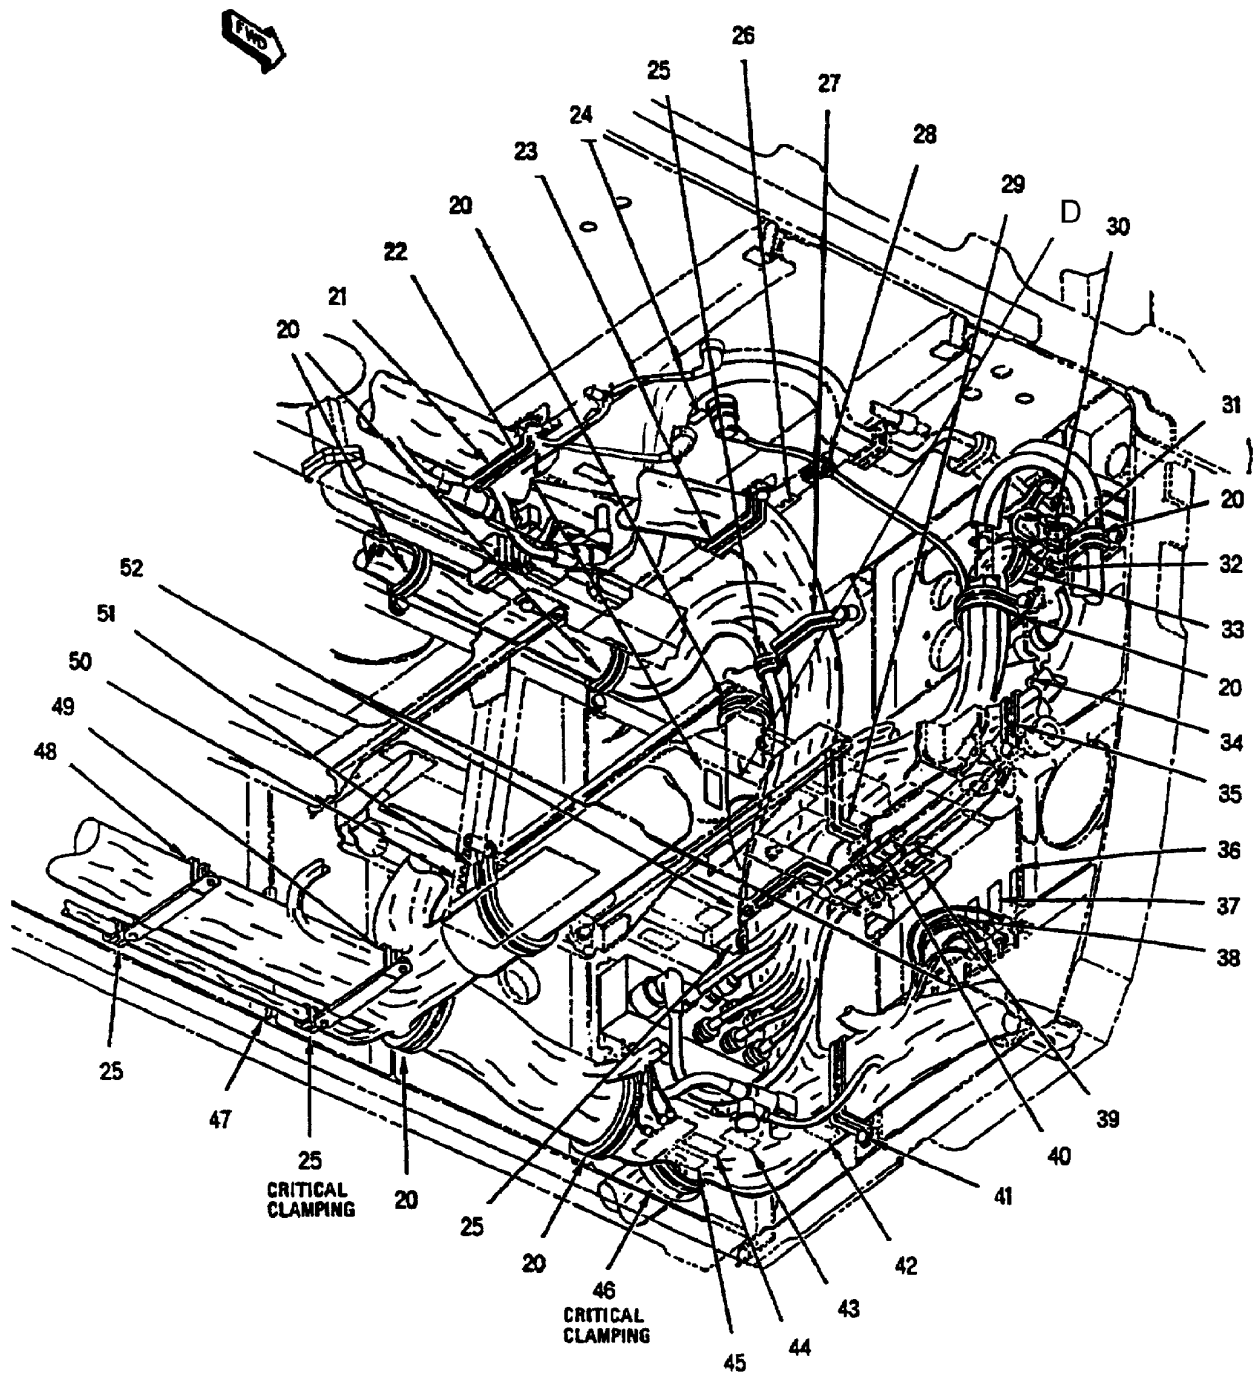

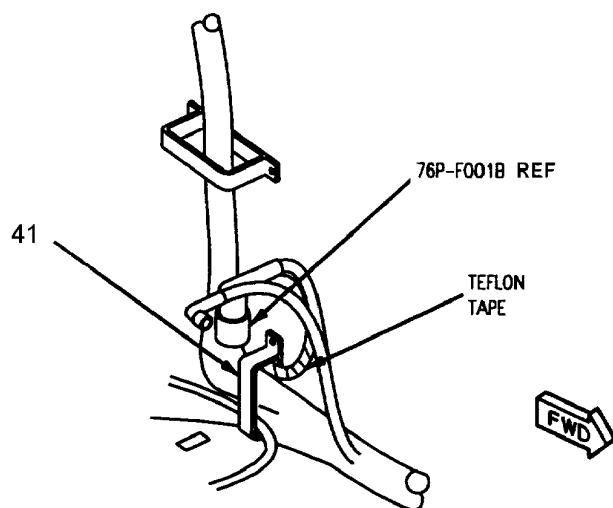

CONFIGURATION Z

161353 AND UP; ALSO 162394 THRU
163175 BEFORE F/A-18 AFC 253 OR
F/A-18 AFC 292

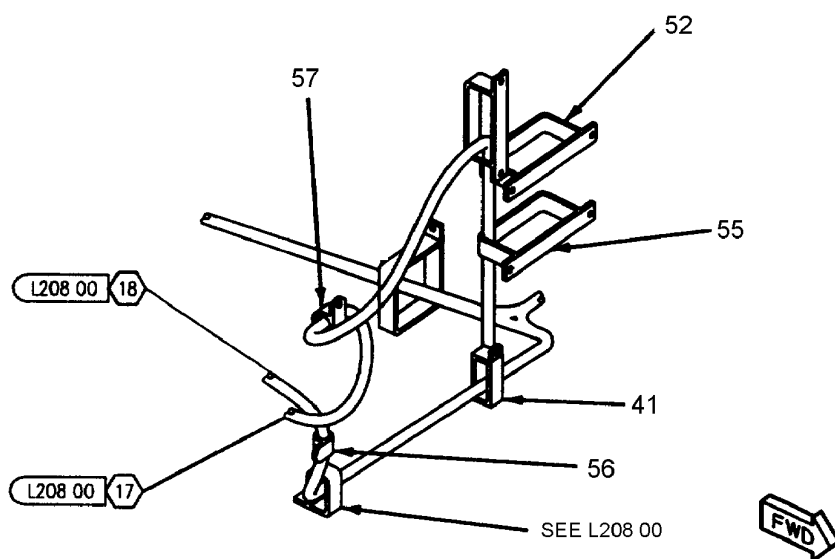

D

WITH RT-1556/ARC -210
162394 THRU 163175
AFTER F/A-18 AFC 253
OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T17B35S	CONNECTOR, PLUG (52P-F160)	1	B	PAOZZ
2	MS27656T9B35S	CONNECTOR, RECEPTACLE (22J-F096)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
3	MS27467T9B35P	CONNECTOR, PLUG (22P-F096)	1	A	PAOZZ
4	31-3228-1002	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS2B)			
		(76P-F004H)			
	125-1-2	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS2B)			
		(76P-F004H)			
	1203-034-A00E-2	SEE ABOVE (00795)	1	*	PAOZZ
5	31-3228-1006	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS6B)			
		(76P-F004G)			
	125-1-6	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS6B)			
		(76P-F004G)			
	1203-034-A00E-6	SEE ABOVE (00795)	1	*	PAOZZ
6	31-3228-1005	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS5B)			
		(76P-F004D)			
	125-1-5	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS5B)			
		(76P-F004D)			
	1203-034-A00E-5	SEE ABOVE (00795)	1	*	PAOZZ
7	31-3228-1004	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS4B)			
		(76P-F004F)			
	125-1-4	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS4B)			
		(76P-F004F)			
	1203-034-A00E-4	SEE ABOVE (00795)	1	*	PAOZZ
8	31-3228-1001	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS1B)			
		(76P-F004C)			
	125-1-1	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1348TS1B)			
		(76P-F004C)			
	1203-034-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
9	31-4372-3	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1302-301)			
		(76P-F004B)			
	125-14-3	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1302-301)			
		(76P-F004B)			
10	MS27467T13B35S	CONNECTOR, PLUG (76P-F004A)	1		PAOZZ
11	M39012/26-0503	CONNECTOR, PLUG (76P-F004E)	1		PAOZZ
12	MS21042L3	NUT	8		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 12)	8		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 12)	8		PAOZZ
13	M39012/28-0503	CONNECTOR, RECEPTACLE (71J-F006)	1		PAOZZ
14	31-4372-2	CONNECTOR, PLUG, ELECTRICAL (74868)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1302-201) (71P-F006)			
	125-14-2	CONNECTOR, PLUG, ELECTRICAL (91836)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1302-201) (71P-F006)			
15	M39012/28-0503	CONNECTOR, RECEPTACLE (76J-F005)	1		PAOZZ
	150290-0074	ADAPTER, CABLE CLAMP TO CONNECTOR	1	G*	PAOZZ
		(71468) (MCDONNELL SPEC ST5M1377T10)			
		(USE WITH INDEX 15)			
	KA-89-64-M07	SEE ABOVE (91836)	1	G*	PAOZZ
	1261-000-A00M-1	SEE ABOVE (00795)	1	G*	PAOZZ
	MS16624-4043	RETAINER (USE WITH INDEX 15)	1	G	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
16	31-4372-1	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1302-101) (76P-F005)	1	*	PAOZZ
	125-14-1	CONNECTOR, PLUG, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1302-101) (76P-F005)	1	*	PAOZZ
17	M39012/01-0501	CONNECTOR, PLUG (69P-F008A)	1		PAOZZ
18	UG202AU	ADAPTER, CONNECTOR (69CPF008)	1		PAOZZ
19	101-T4100A-75	CONNECTOR, RECEPTACLE, ELECTRICAL (94375) (MCDONNELL SPEC 5M1797-002) (76J-F029)	1	*	PAOZZ
	1205-115-A008	CONNECTOR, RECEPTACLE, ELECTRICAL (00795) (MCDONNELL SPEC 5M1797-002) (76J-F029)	1	*	PAOZZ
20	MS21919WDG #	CLAMP	7		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
21	NAS1677D10-39N	STRAP	1	C	PAOZZ
	NAS1677D14-40N	STRAP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
22	74A890601-2238	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTF005)	1		MDOZZ
23	NAS1677D10-39N	STRAP	1	C	PAOZZ
	NAS1677D14-40N	STRAP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
24	74A890601-2304	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-L160)	1	B	MDOZZ
25	MS21919WDG #	CLAMP	4		-
26	MS21266-2N	GROMMET	AR		PAOZZ
27	NAS1677D16-37N	STRAP	1	C	PAOZZ
	NAS1677D20-43N	STRAP	1	D	PAOZZ
	NAS673V11	BOLT (AP)	2	E	PAOZZ
	NAS673V5	BOLT (AP)	2	F	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-32	SPACER (AP)	2	E	PAOZZ
28	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	B	PAOZZ
29	NAS1677D16-36N	STRAP	1	C	PAOZZ
	NAS1677D24-43N	STRAP	1	H	PAOZZ
	NAS1677D20-43N	STRAP	1	J	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
30	74A890601-2693	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-F008)	1		MDOZZ
31	74A890601-2694	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-F006)	1		MDOZZ
32	74A890601-2353	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F014)	1		MDOZZ
33	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
34	74A890601-2622	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 22J-F096)	1	A	MDOZZ
35	NAS1712D12-24N	CLAMP	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
36	74A890601-2362	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-F010)			
37	74A890601-2366	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-F002)			
38	74A890601-2354	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F015)			
39	74A890601-2437	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 71J-F006)			
40	74A890601-2436	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 76J-F005)			
41	NAS1677D10-39N	STRAP	1		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
42	74A890601-2818	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 69CPF008)			
43	74A890601-2133	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 76J-F029)			
44	74A890601-2689	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F030)			
45	74A890601-2690	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-F012)			
46	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
47	MS21266-3N	GROMMET	AR		PAOZZ
48	NAS1677D14-46N	STRAP	1		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
49	NAS1677D16-44N	STRAP	1		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
50	MS21266-2N	GROMMET	AR	K	PAOZZ
51	MS21919WDG #	CLAMP	1		-
	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
52	NAS1677D24-43N	STRAP	1	C	PAOZZ
	NAS1677D24-52N	STRAP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
53	D38999/26WC35PA	CONNECTOR, PLUG (69P-F016)	1	L	PAOZZ
54	MS27467T13B35S	CONNECTOR, PLUG (83P-F018)	1	L	PAOZZ
55	NAS1677D24-52N	STRAP	1	L	PAOZZ
	NAS673V5	BOLT (AP)	1	L	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	L*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	L*	PAOZZ
56	MS21919WDG3	CLAMP	1	L	PAOZZ
	NAS673V3	BOLT (AP)	1	L	PAOZZ
	NAS1149D0316J	WASHER	1	L	PAOZZ
57	MS21919WDG16	CLAMP	1	L	PAOZZ
	NAS42DD6-16	SPACER	1	L	PAOZZ
	NAS673V11	BOLT	1	L	PAOZZ
	NAS1149D0316J	WASHER	1	L	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27
B	161702 & UP
C	161353 THRU 161728
D	161729 & UP
E	161353 THRU 161761
F	161925 & UP
G	161940 & UP
H	161729 THRU 161987
J	162394 & UP
K	161941 & UP
L	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292



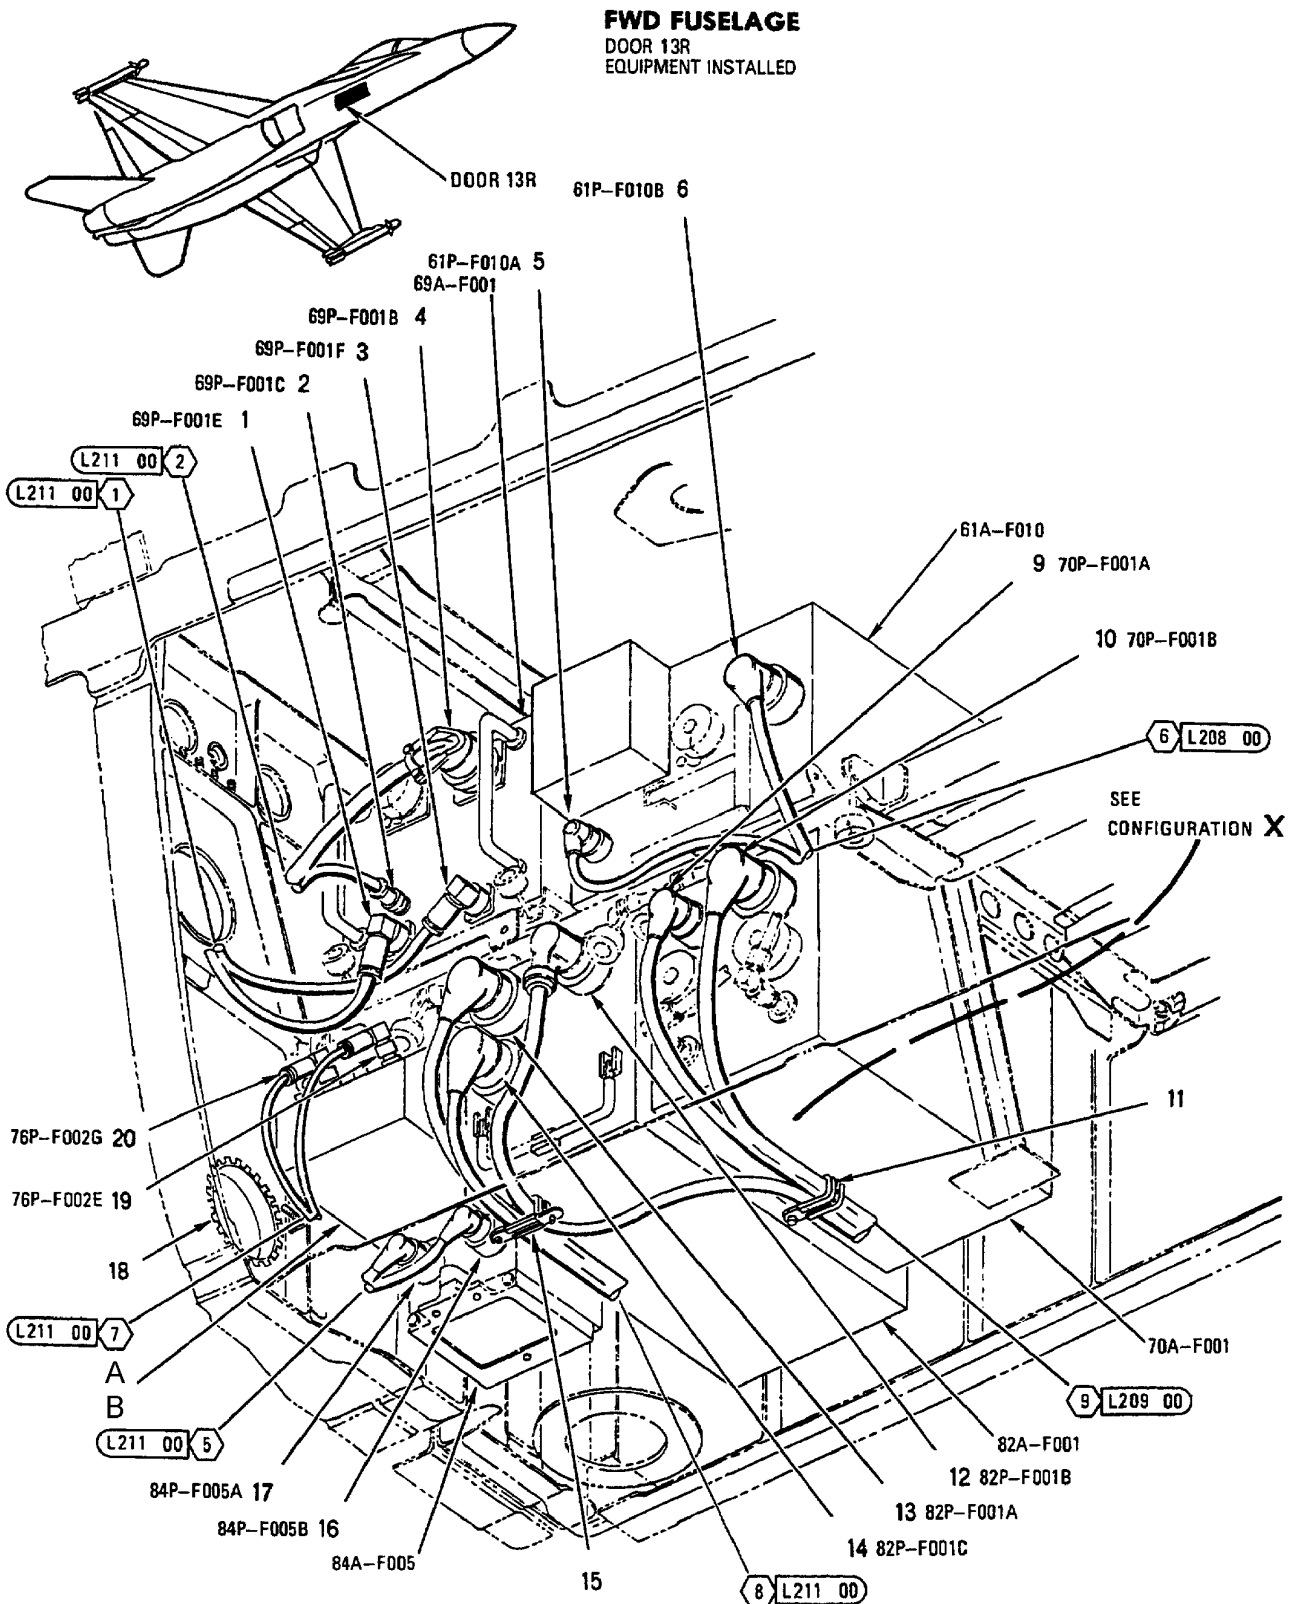


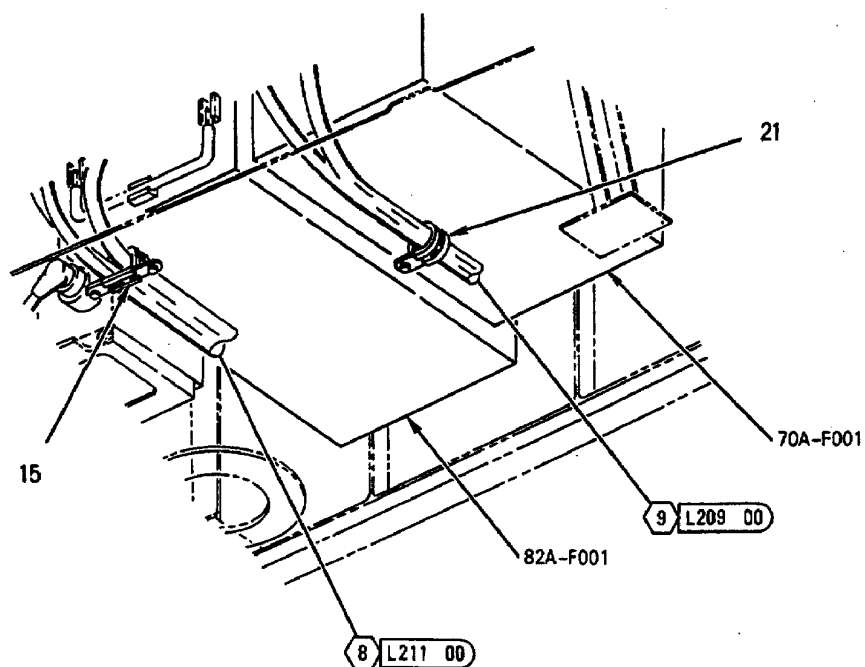

CONFIGURATION X
161353 THRU 161928

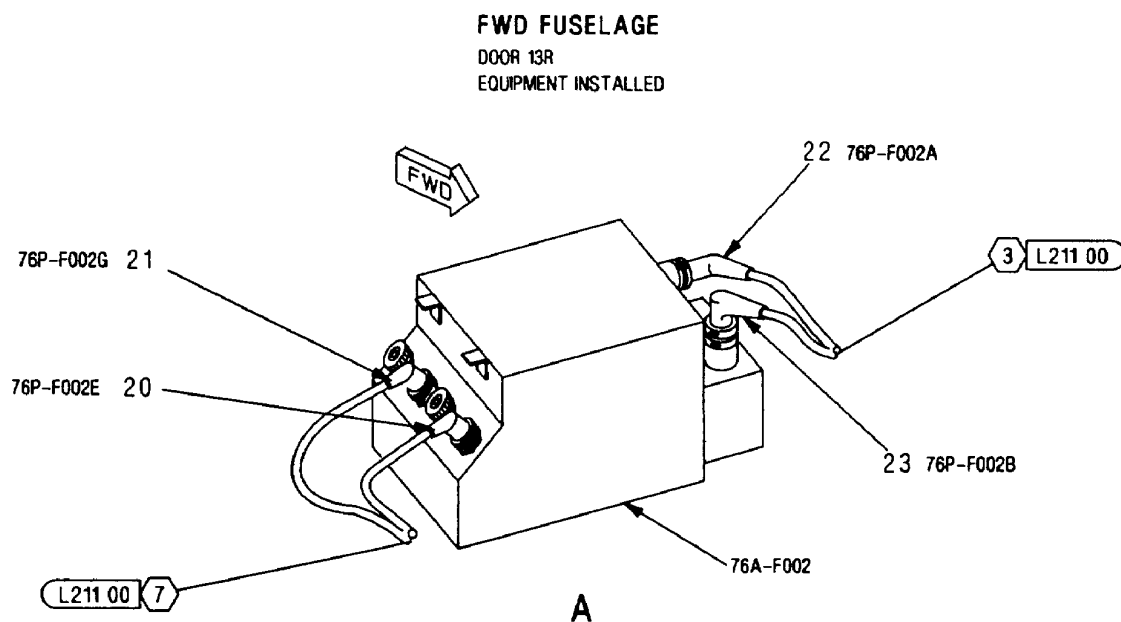

RT-1250()/ARC-182
161353 AND UP; ALSO
162394 THRU 163175
BEFORE F/A-18 AFC 253
OR F/A-18 AFC 292

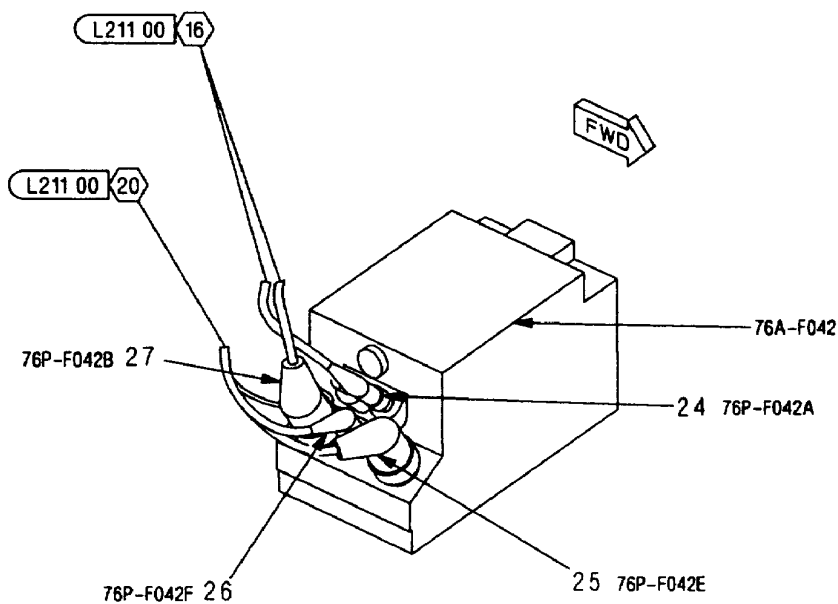

RT-1556/ARC-210 OR RT-1824/ARC-210
162394 THRU 163175 AFTER F/A-18
AFC 253 OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	10567	CONNECTOR, PLUG, ELECTRICAL (94375) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001E)	1	*	PAOZZ
	19900	CONNECTOR, PLUG, ELECTRICAL (08718) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001E)	1	*	PAOZZ
	1604-079-A001-1	CONNECTOR, PLUG, ELECTRICAL (00795) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001E)	1	*	PAOZZ
2	31-39100-10	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1464-0001) (69P-F001C)	1	*	PAOZZ
	39100-10	SEE ABOVE (95712)	1	*	PAOZZ
3	10567	CONNECTOR, PLUG, ELECTRICAL (94375) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001F)	1	*	PAOZZ
	19900	CONNECTOR, PLUG, ELECTRICAL (08718) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001F)	1	*	PAOZZ
	1604-079-A001-1	CONNECTOR, PLUG, ELECTRICAL (00795) ... (MCDONNELL SPEC ST5M1333-002) (69P-F001F)	1	*	PAOZZ
4	MS3476W22-55S	CONNECTOR, PLUG (69P-F001B)	1		PAOZZ
5	MS27467T11B98S	CONNECTOR, PLUG (61P-F010A)	1		PAOZZ
6	MS27467T21B35SA	CONNECTOR, PLUG (61P-F010B)	1		PAOZZ
7	M39012/30-0503	CONNECTOR, PLUG (76P-F002A)	1		PAOZZ
8	D38999/26WE35SN	CONNECTOR, PLUG (77820) (76P-F002B)	1		PAOZZ
9	MS27467T15B35S	CONNECTOR, PLUG (70P-F001A)	1		PAOZZ
10	MS27467T25B35P	CONNECTOR, PLUG (70P-F001B)	1		PAOZZ
11	NAS1712D8-18N	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
12	MS27467T21B35S	CONNECTOR, PLUG (82P-F001B)	1		PAOZZ
13	MS27467T25B35SA	CONNECTOR, PLUG (82P-F001A)	1		PAOZZ
14	MS27467T25B35S	CONNECTOR, PLUG (82P-F001C)	1		PAOZZ
15	NAS1677D8-24N	STRAP	1		PAOZZ
	NAS673V2	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
16	MS27467T13B35SA	CONNECTOR, PLUG (84P-F005B)	1		PAOZZ
17	MS27467T13B35S	CONNECTOR, PLUG (84P-F005A)	1		PAOZZ
18	MS21266-2N	GROMMET	AR		PAOZZ
19	31-34179-1	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC 5M1953RP1) (76P-F002E)	1	*	PAOZZ
20	31-34179-1	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC 5M1953RP1) (76P-F002G)	1	*	PAOZZ
21	MS21919WDG #	CLAP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE		USABLE ON
A		161353 THRU 161928
B		161929 & UP

FWD FUSELAGE

DOOR 13R (AFT)
EQUIPMENT REMOVED

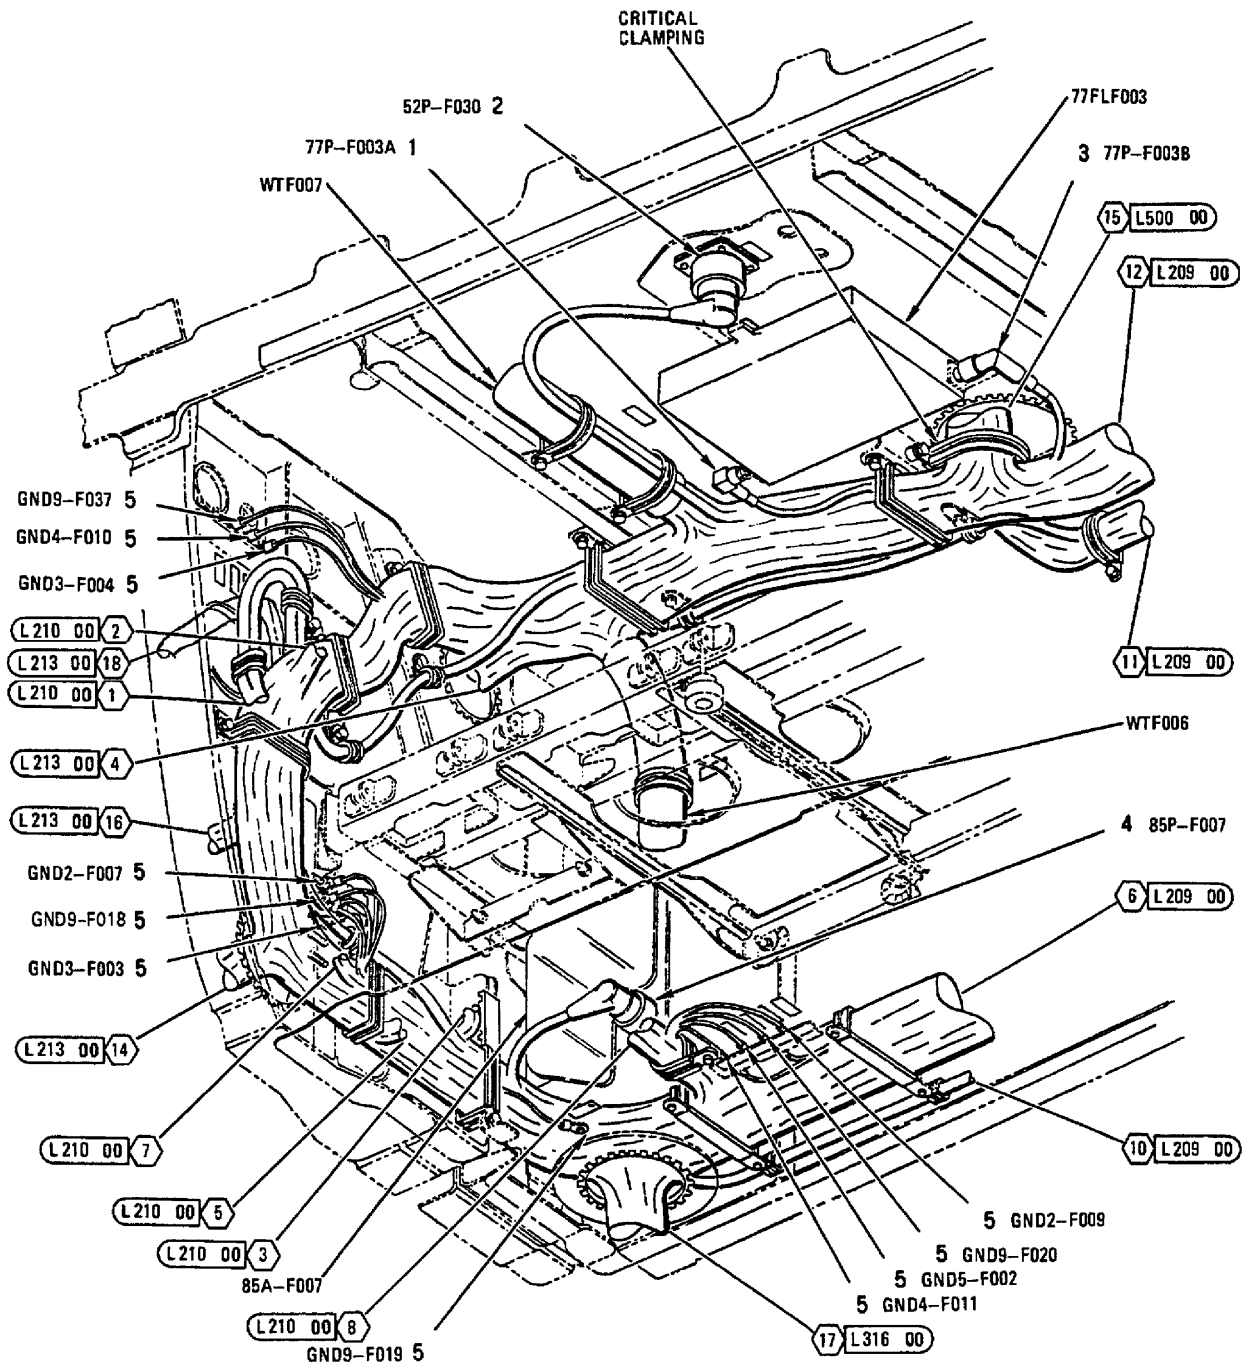

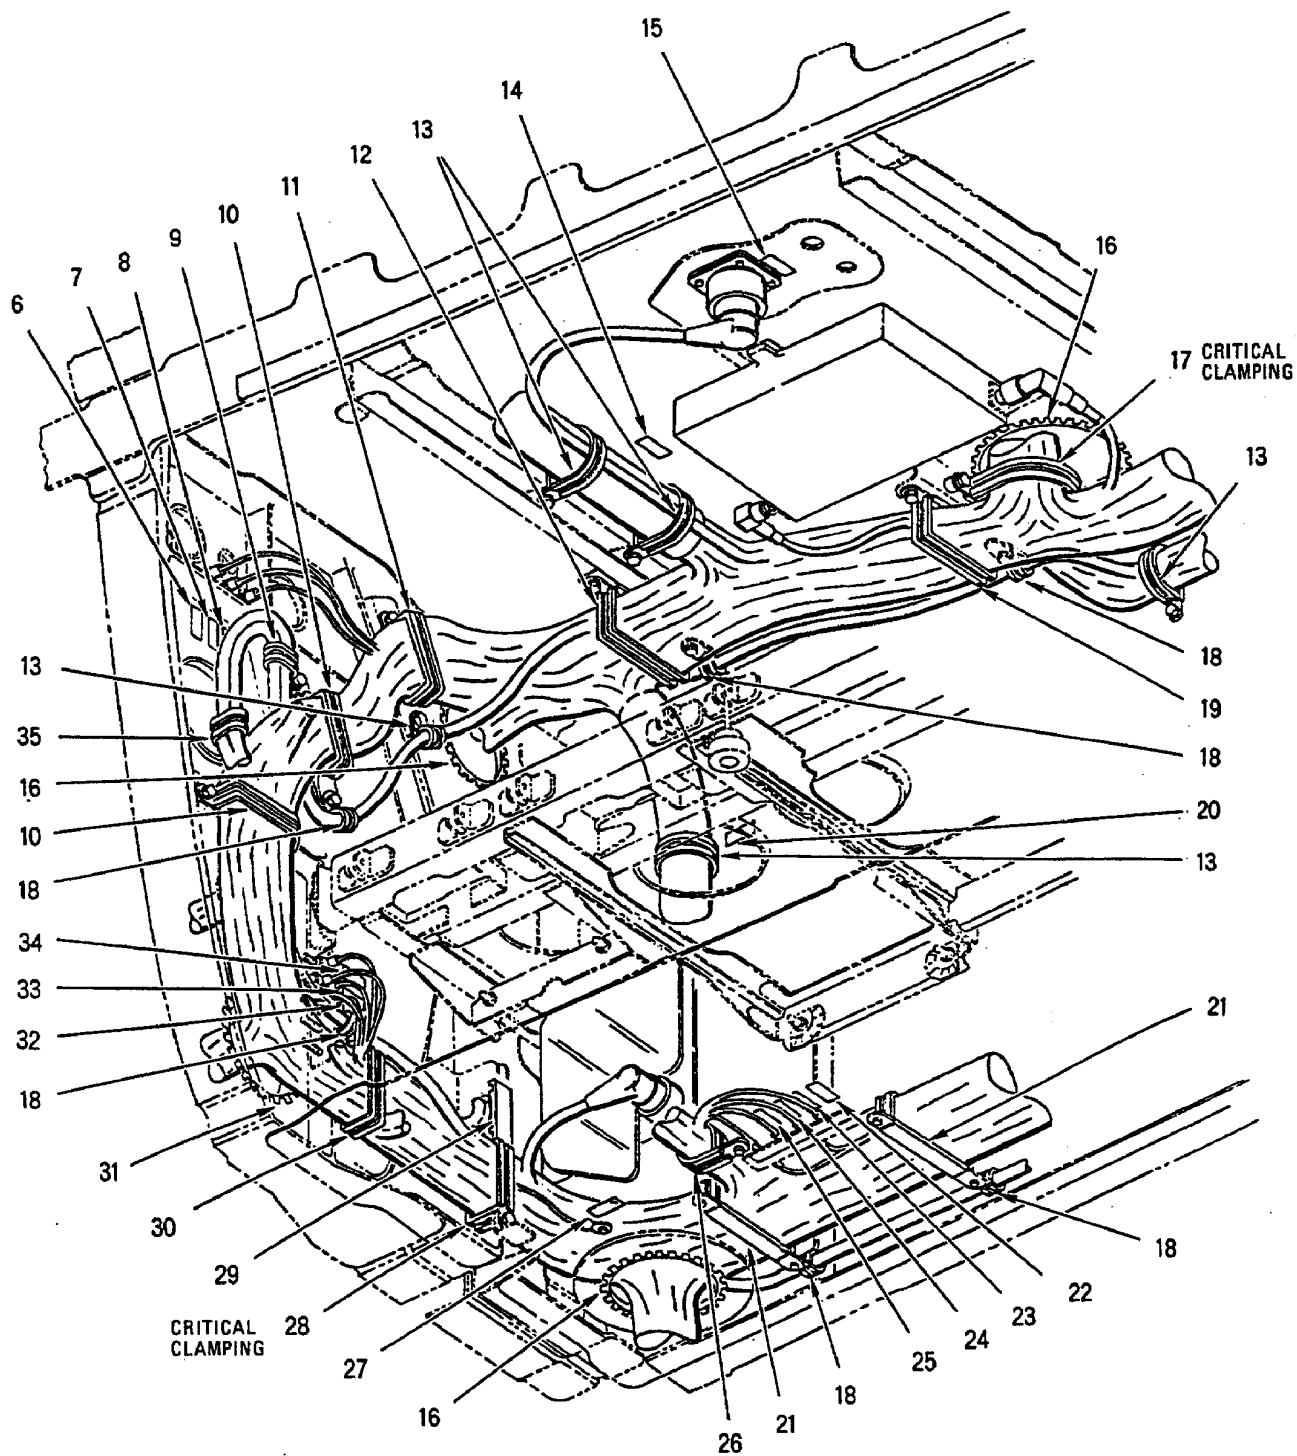

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M39012/30-0503	CONNECTOR, PLUG (77P-F003A)	1		PAOZZ
2	MS27467T21B35S	CONNECTOR, PLUG (52P-F030)	1		PAOZZ
3	31-3229-1001	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5N1348TR1B) (77P-F003B)			
	126-1-1	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(91836) (MCDONNELL SPEC			
		ST5M1348TR1B) (77P-F003B)			
	1207-034-A00E-1	SEE ABOVE (00795)	1	*	PAOZZ
4	MS27467T15B35S	CONNECTOR, PLUG (85P-F007)	1		PAOZZ
5	MS21042L3	NUT	11		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	11		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	11		PAOZZ
6	74A890601-2406	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND9-F037)			
7	74A890601-2357	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND4-F010)			
8	74A890601-2468	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND3-F004)			
9	NAS1714D2-6NW	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	NAS1677D14-40N	STRAP	2		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
11	NAS1712D15-30N	CLAMP	1	A	PAOZZ
	NAS1712D14-40N	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	NAS1677D16-44N	STRAP	1	A	PAOZZ
	NAS1677D20-52N	STRAP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
13	MS21919WDG #	CLAMP	5		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74A890601-2240	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES WTF007)			
15	74A890601-2544	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES 52J-L030)			
16	MS21266-2N	GROMMET	AR		PAOZZ
17	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
18	MS21919WDG #	CLAMP	6		-
19	NAS1677D20-43N	STRAP	1	A	PAOZZ
	NAS1677D24-43N	STRAP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
20	74A890601-2239	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES WTF006)			
21	NAS1677D16-46N	STRAP	2		PAOZZ
	NAS673V5	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
22	74A890601-2687	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND2-F009)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
23	74A890601-2685	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F020)	1		MDOZZ
24	74A890601-2356	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND5-F002)	1		MDOZZ
25	74A890601-2686	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-F011)	1		MDOZZ
26	NAS1712D8-18N	CLAMP	1	G	PAOZZ
	MS21919WDG #	CLAMP	1	H	-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
27	74A890601-2684	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F019)	1		MDOZZ
28	NAS1712D12-32N	CLAMP	1	C	PAOZZ
	NAS1712D16-36N	CLAMP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
29	MS21266-6N	GROMMET	AR		PAOZZ
30	NAS1712D12-32N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
31	MS21266-8N	GROMMET	AR		PAOZZ
32	74A890601-2407	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-F003)	1		MDOZZ
33	74A890601-2355	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-F018)	1		MDOZZ
34	74A890601-2361	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-F007)	1		MDOZZ
35	NAS1714D2-6NW	CLAMP	1	E	PAOZZ
	NAS1712D12-6N	CLAMP	1	F	PAOZZ
	NAS673V23	BOLT (AP)		1	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161728
B	161729 & UP
C	161353 THRU 161731
D	161732 & UP
E	161353 THRU 161985
F	161986 & UP


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

G 161353 THRU 161928


H 161929 & UP

FWD FUSELAGE

DOOR 14R
EQUIPMENT INSTALLED

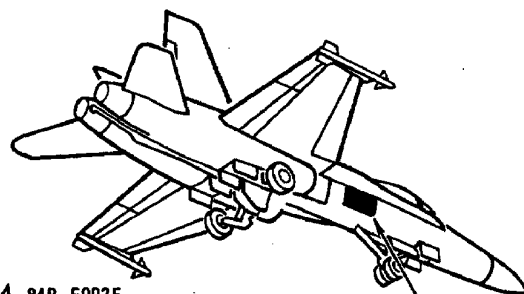


DOOR 14R


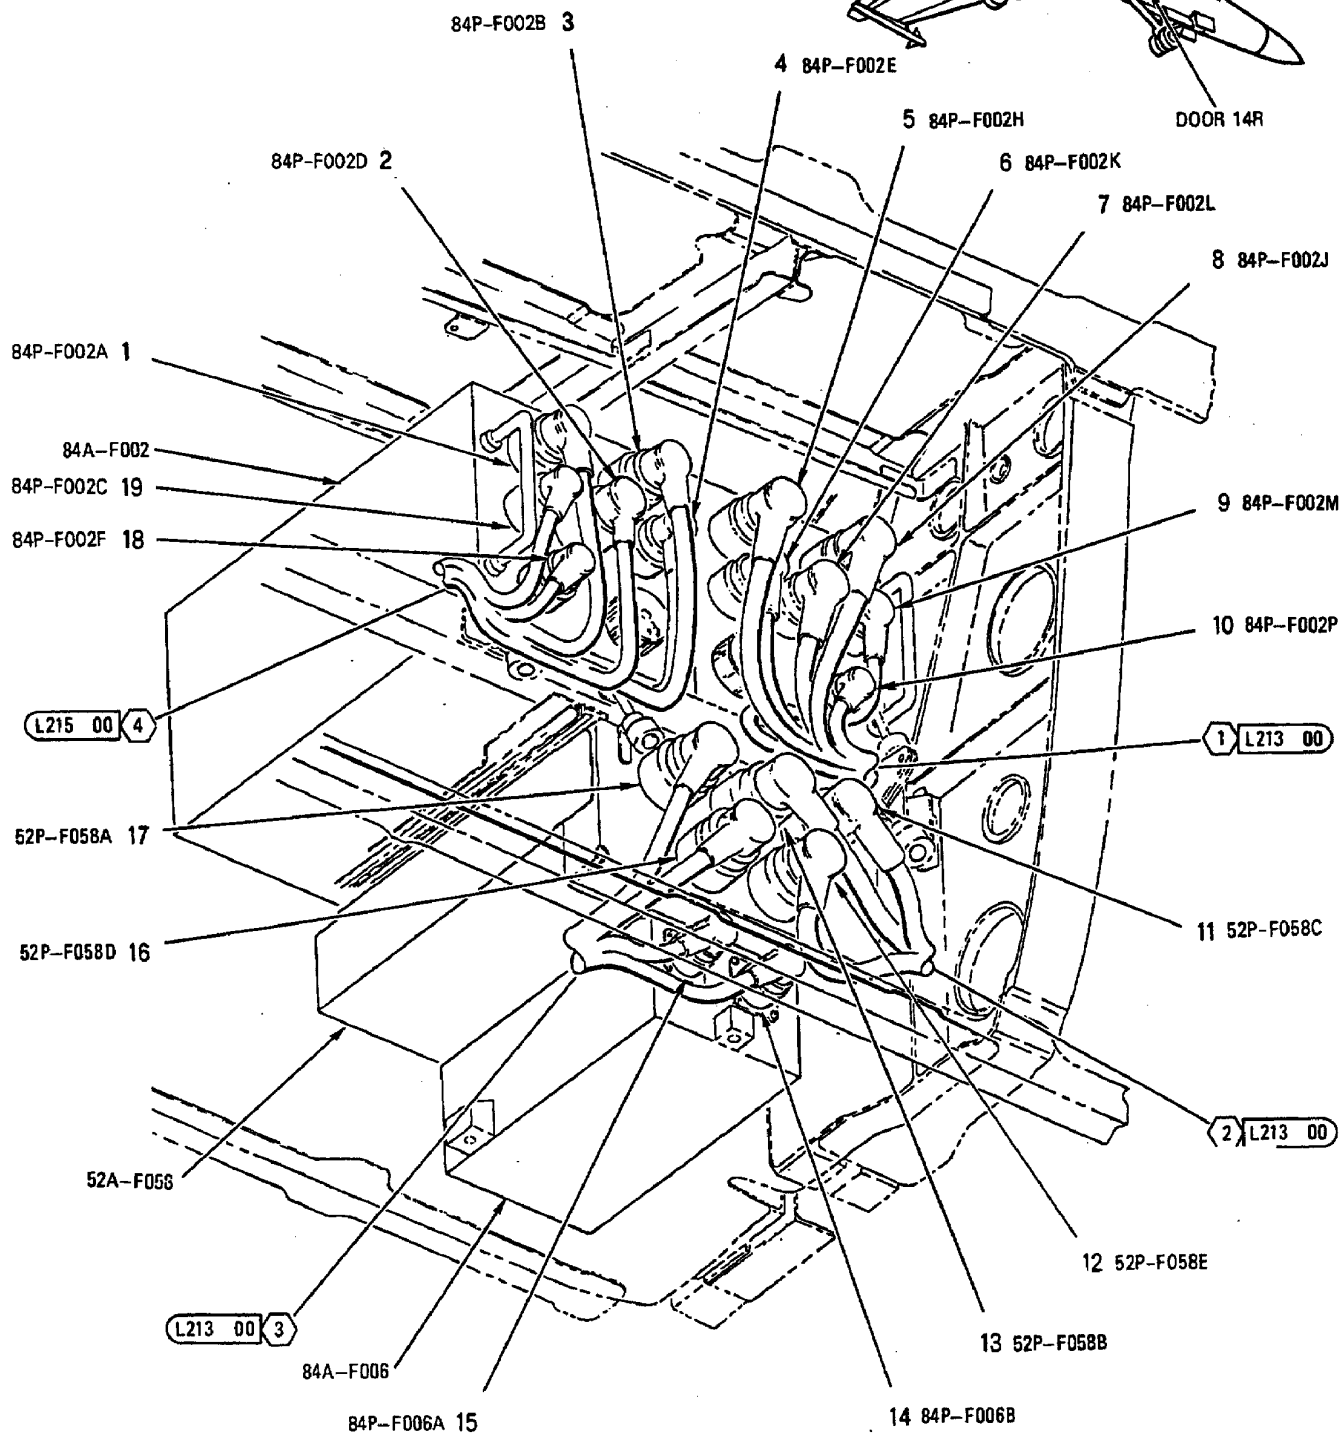


INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B35P	CONNECTOR, PLUG (84P-F002A)	1		PAOZZ
2	MS27467T25B35S	CONNECTOR, PLUG (84P-F002D)	1		PAOZZ
3	MS27467T25B35SA	CONNECTOR, PLUG (84P-F002B)	1		PAOZZ
4	MS27467T19B35PA	CONNECTOR, PLUG (84P-F002E)	1		PAOZZ
5	MS27467T25B35SB	CONNECTOR, PLUG (84P-F002H)	1		PAOZZ
6	MS27467T19B35PB	CONNECTOR, PLUG (84P-F002K)	1		PAOZZ
7	MS27467T25B35SC	CONNECTOR, PLUG (84P-F002L)	1		PAOZZ
8	MS27467T25B35PC	CONNECTOR, PLUG (84P-F002J)	1		PAOZZ
9	MS27467T19B35SC	CONNECTOR, PLUG (84P-F002M)	1		PAOZZ
10	MS27467T17B99SA	CONNECTOR, PLUG (84P-F002P)	1		PAOZZ
11	MS27467T25B35SB	CONNECTOR, PLUG (52P-F058C)	1		PAOZZ
12	MS27467T25B35SD	CONNECTOR, PLUG (52P-F058E)	1		PAOZZ
13	MS27467T25B35SA	CONNECTOR, PLUG (52P-F058B)	1		PAOZZ
14	MS27467T15B35SA	CONNECTOR, PLUG (84P-F006B)	1		PAOZZ
15	MS27467T15B35S	CONNECTOR, PLUG (84P-F006A)	1		PAOZZ
16	MS27467T25B29SC	CONNECTOR, PLUG (52P-F058D)	1		PAOZZ
17	MS27467T25B43S	CONNECTOR, PLUG (52P-F058A)	1		PAOZZ
18	MS27467T17B99S	CONNECTOR, PLUG (84P-F002F)	1		PAOZZ
19	MS27467T19B35S	CONNECTOR, PLUG (84P-F002C)	1		PAOZZ

FWD FUSELAGE

DOOR 14R (FWD)
EQUIPMENT REMOVED

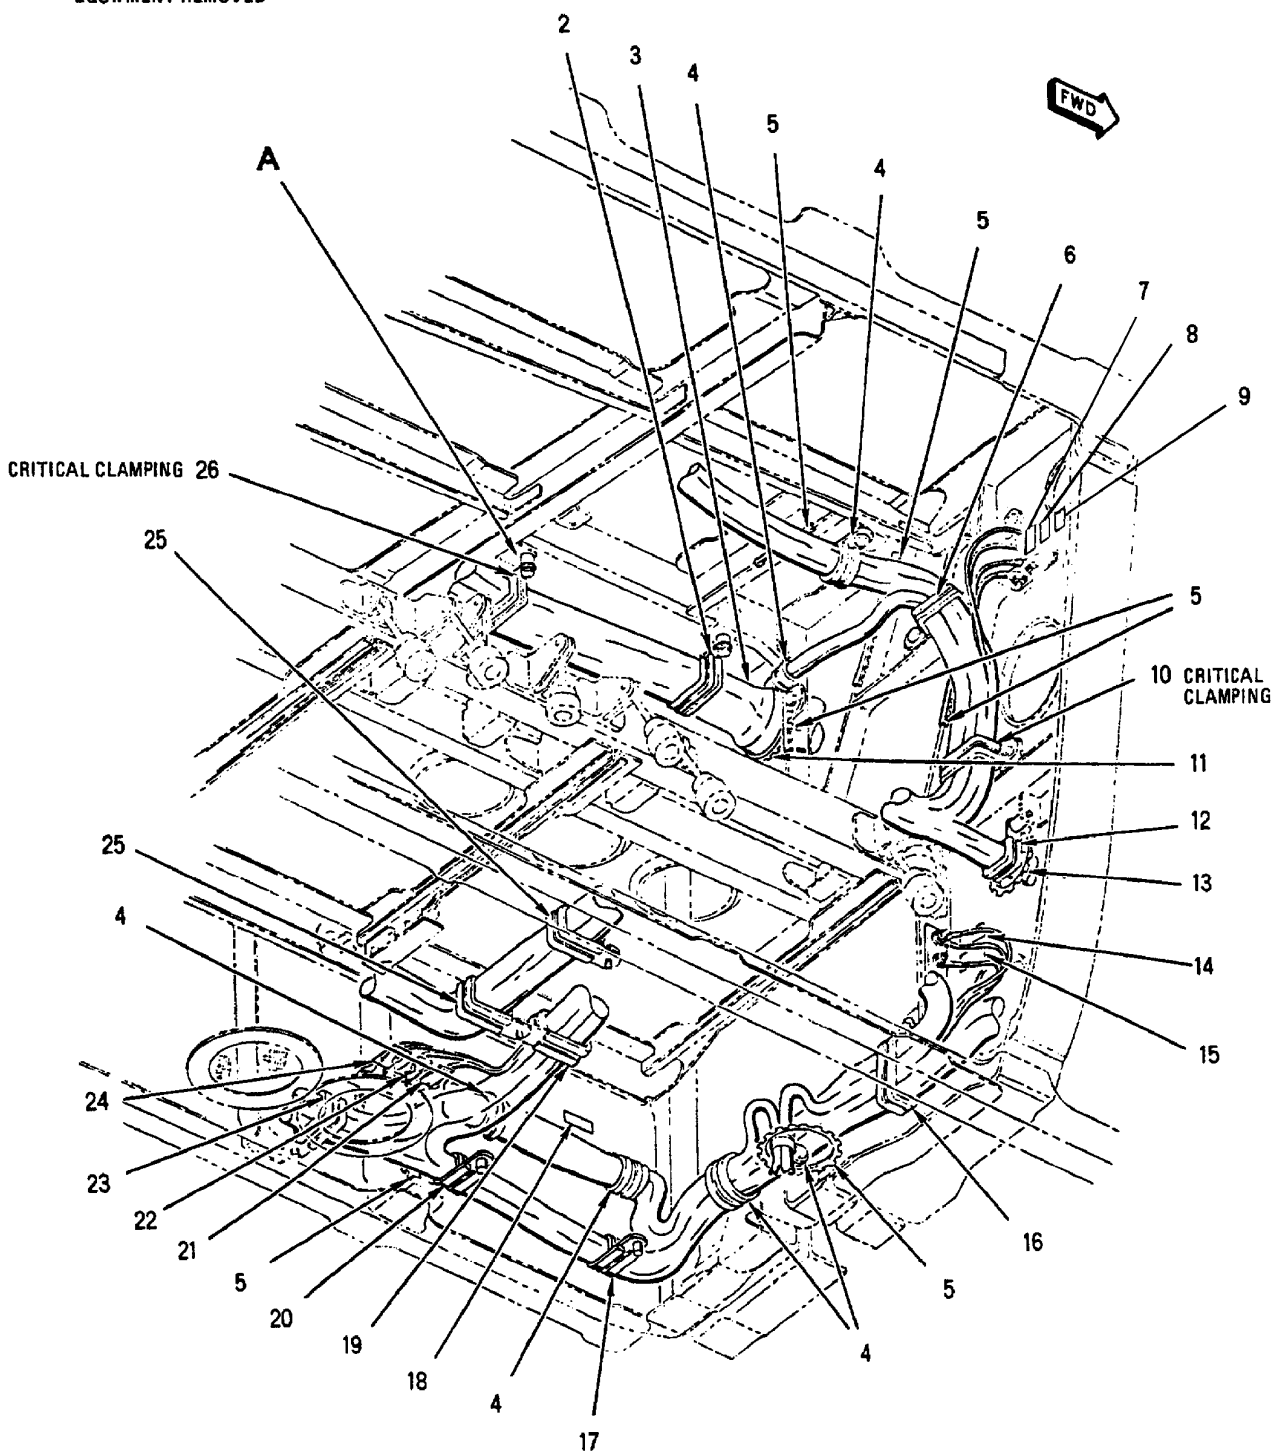

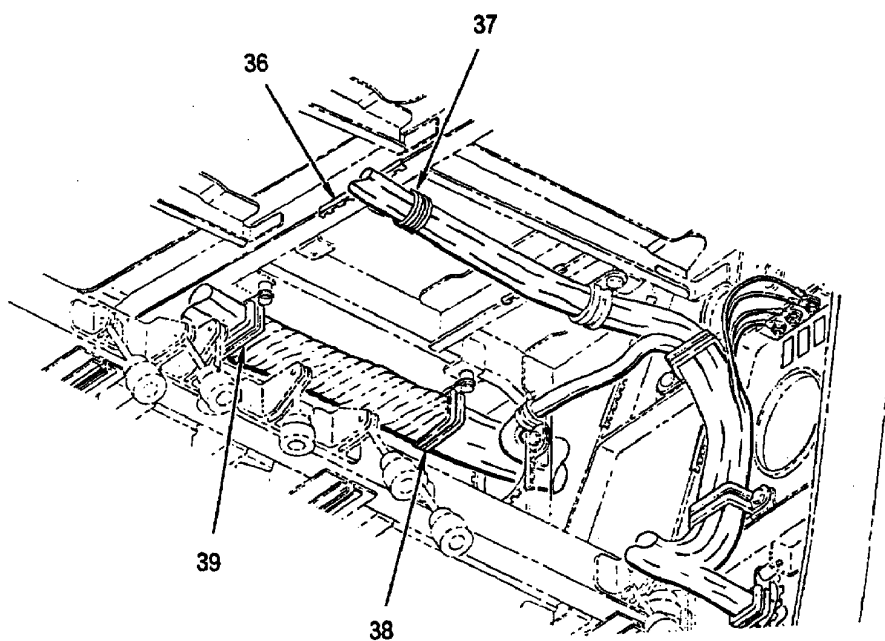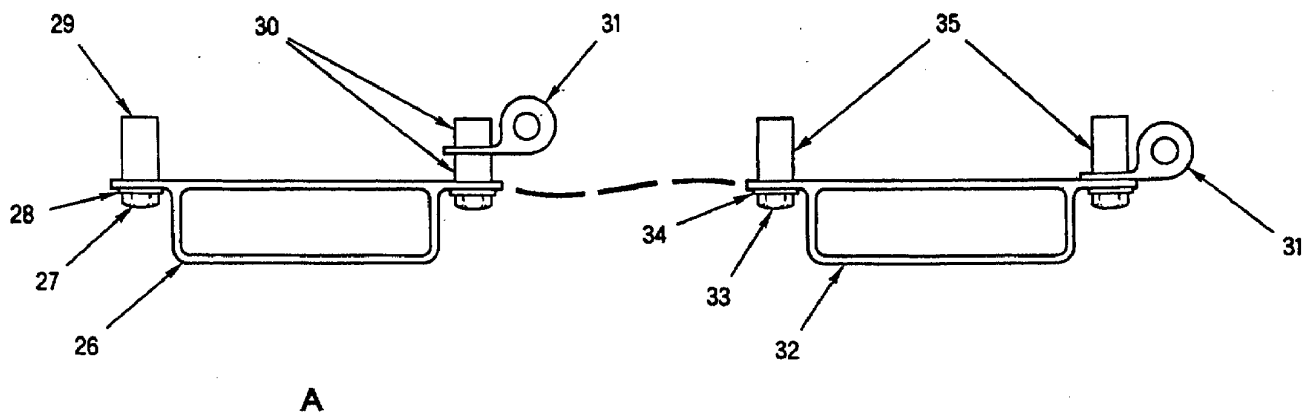


CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	8		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	8		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	8		PAOZZ
2	NAS1677C14-54N	STRAP	1	D	PAOZZ
	NAS673V9	BOLT (AP)	2	D	PAOZZ
	AN960JD10L	WASHER (AP)	2	D	PAOZZ
	NAS42DD6-24	SPACER (AP)	2	D	PAOZZ
3	74A600609-2001	SHROUD, WIRE SUPPORT - ELECTRICAL (76301)	1	D	XBOZZ
4	MS21919WDG #	CLAMP	6		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	NAS1712D11-20N	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	74A890601-2457	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-F010)	1		MDOZZ
8	74A890601-2393	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F041)	1		MDOZZ
9	74A890601-2737	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-F018)	1		MDOZZ
10	NAS1677D10-27N	STRAP	1		PAOZZ
	NAS673V3	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
11	MS21266-5N	GROMMET	AR	E	PAOZZ
	MS21266-6N	GROMMET	AR	F	PAOZZ
12	NAS1712D14-7N	CLAMP	1		PAOZZ
	NAS673V15	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
13	MS21266-5N	GROMMET	AR		PAOZZ
14	74A890601-2347	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F033)	1		MDOZZ
15	74A890601-2573	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10F001)	1		MDOZZ
16	NAS1712D12-32N	CLAMP	1	C	PAOZZ
	NAS1712D12-24N	CLAMP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	MS21919WDG #	CLAMP	1	C	-
	NAS1712D16-12N	CLAMP	1	D	PAOZZ
	NAS673V #	BOLT (AP)	1	C	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-64	SPACER (AP)	1	D	PAOZZ
18	74A890601-2013	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTF003)	1		MDOZZ
19	NAS1712D8-18N	CLAMP	1	C	PAOZZ
	NAS1712D8-24N	CLAMP	1	D	PAOZZ
20	MS21919WDG #	CLAMP	1	C	-
	NAS1712D16-12N	CLAMP	1	D	PAOZZ
	NAS673V #	BOLT (AP)	1	C	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
21	74A890601-2458	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F022)	1		MDOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
22	74A890601-2456	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-F020)	1		MDOZZ
23	NAS1712D8-24N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
24	74A890601-2342	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-F002)	1		MDOZZ
25	NAS1712D7-14N	CLAMP	2		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	NAS1677C8-54N	STRAP	1	H	PAOZZ
27	NAS673V10	BOLT	2	H	PAOZZ
28	AN960JD10L	WASHER	2	H	PAOZZ
29	NAS43DD3-38	SPACER	1	H	PAOZZ
30	NAS43DD3-14	SPACER	2	H	PAOZZ
31	MS25281-7	CLAMP	1	D	PAOZZ
32	NAS1677C14-54N	STRAP	1	G	PAOZZ
33	NAS673V5	BOLT	2	G	PAOZZ
34	AN960JD10L	WASHER	2	G	PAOZZ
35	NAS42DD6-8	SPACER	2	G	PAOZZ
36	MS21266-2N	GROMMET	AR	C	PAOZZ
37	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
38	MS21919WDG #	CLAMP	1	A	-
	NAS1712D16-36N	CLAMP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-20	SPACER (AP)	1	A	PAOZZ
39	NAS1677D10-39N	STRAP	1	A	PAOZZ
	NAS1677D16-36N	STRAP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	2	C	-
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
	NAS42DD3-20	SPACER (AP)	2	A	PAOZZ
40	D38999/26WD35SA	CONNECTOR, PLUG (76P-F042H)	1	J	PAOZZ
41	D38999/26WD35SN	CONNECTOR, PLUG (76P-F042G)	1	J	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161353 THRU 161728
B	161729 THRU 161987
C	161353 THRU 161987
D	162394 & UP
E	161353 THRU 161759
F	161760 & UP
G	162394 THRU 163145
H	163146 & UP
J	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

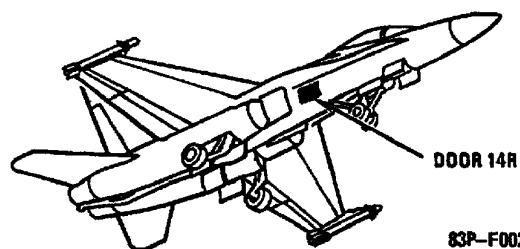



DOOR 14R

FWD FUSELAGE DOOR 14R EQUIPMENT INSTALLED


LEGEND

- A. WIRE BUNDLE ROUTING
SHALL NOT COVER CODE
WHEELS OR INDICATOR
WINDOWS.
161353 THRU 161967
162354 AND UP

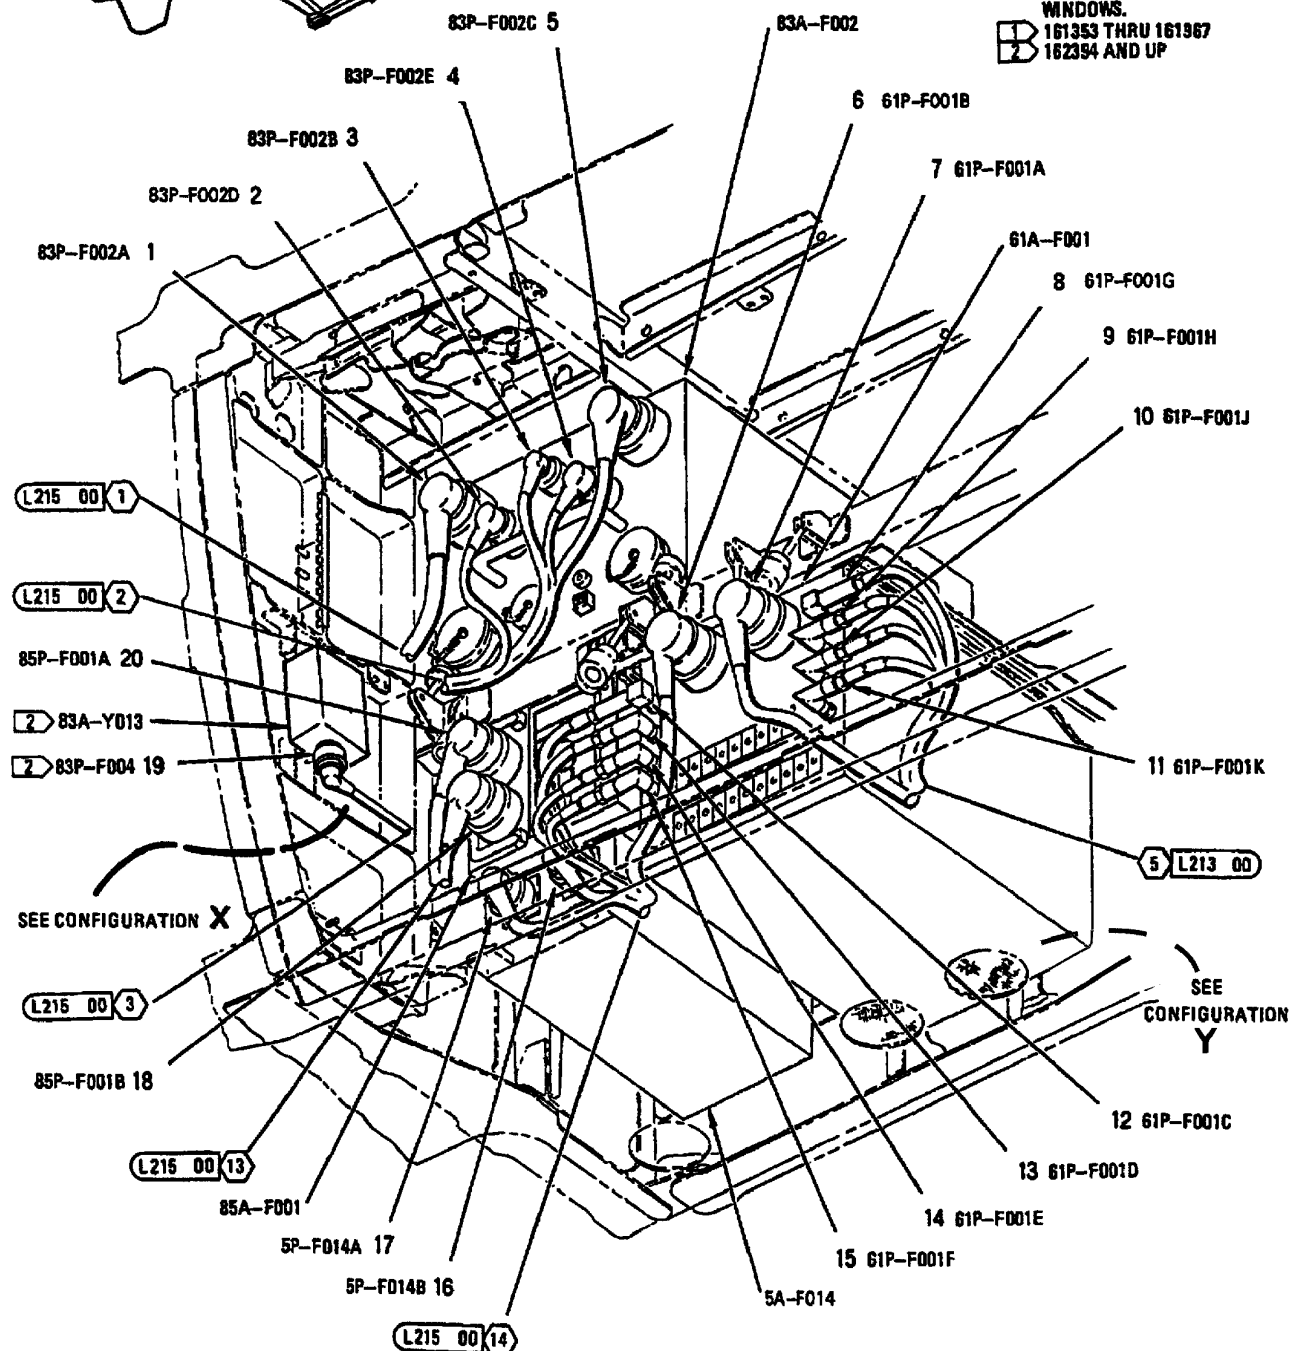

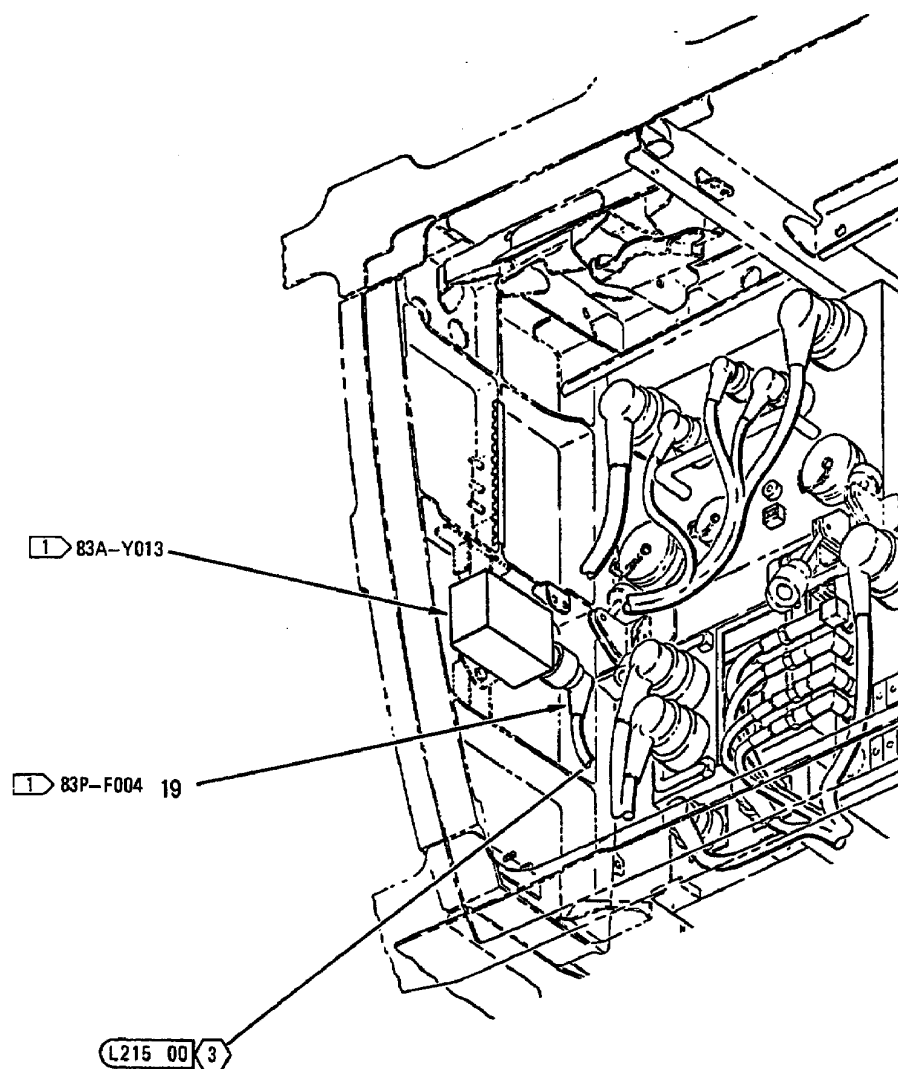

CONFIGURATION X

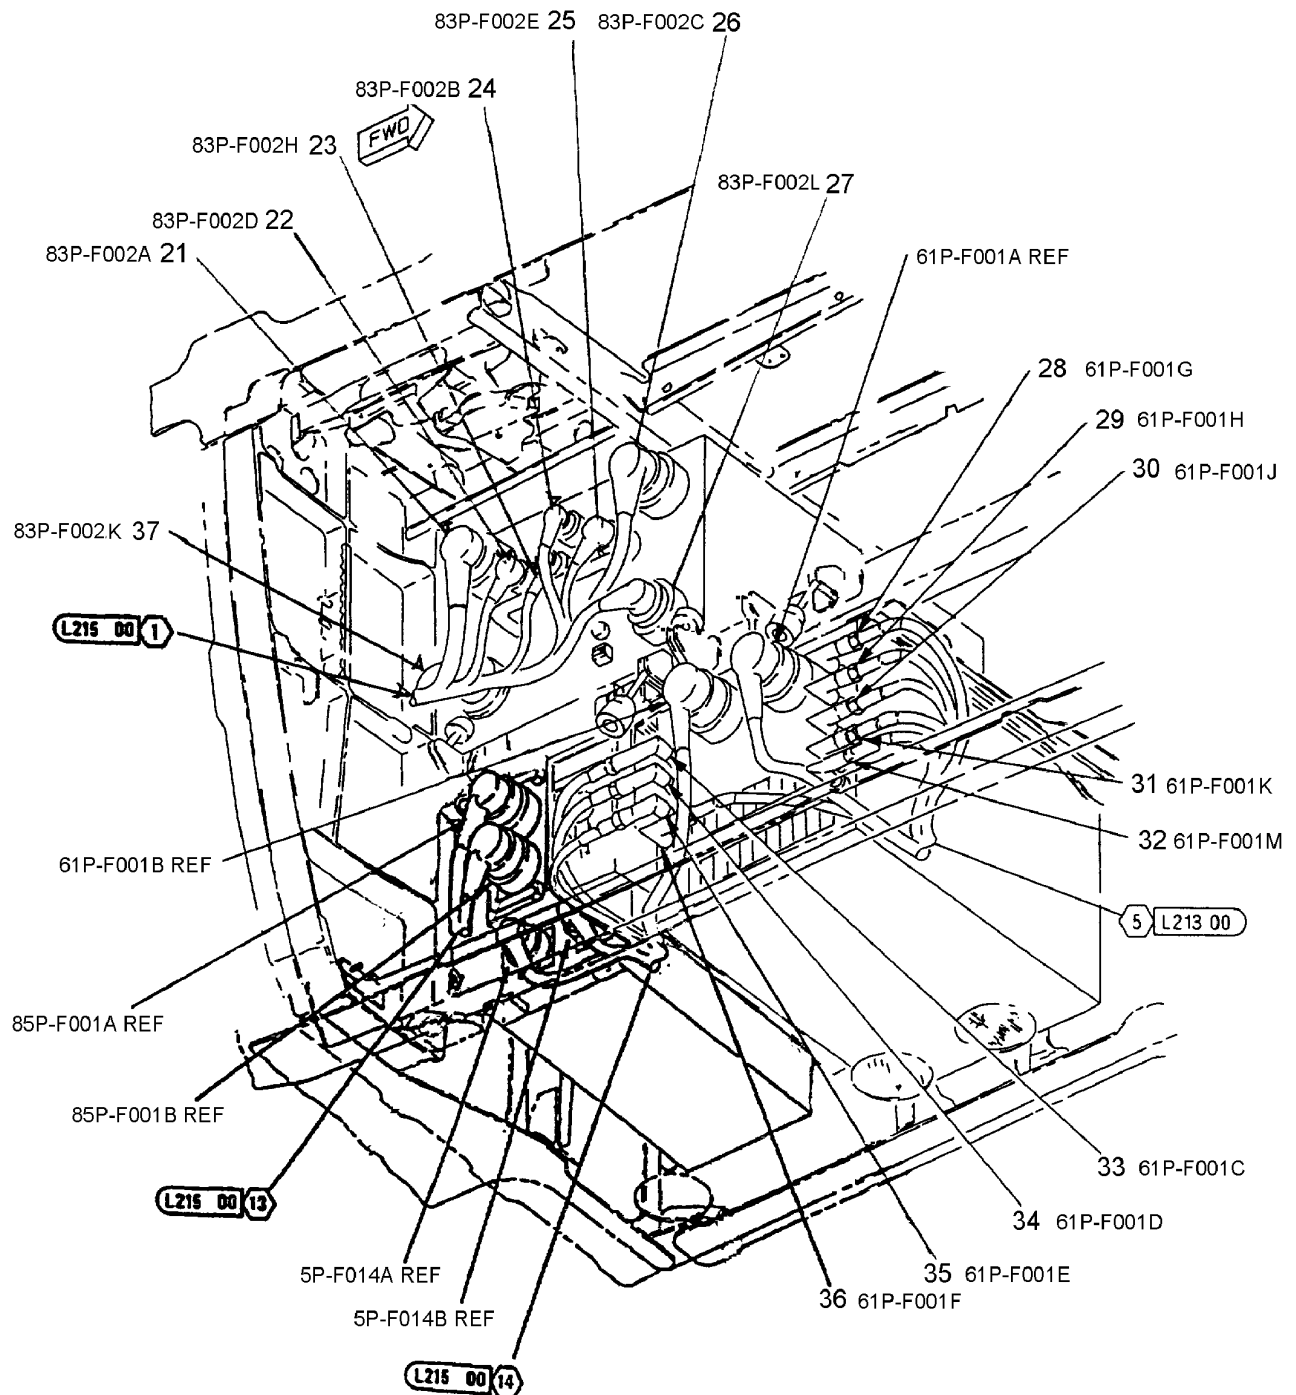

CONFIGURATION Y

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B35PA	CONNECTOR, PLUG (83P-F002A)	1		PAOZZ
2	MS27467T15B35P	CONNECTOR, PLUG (83P-F002D)	1		PAOZZ
3	MS27467T11B35S	CONNECTOR, PLUG (83P-F002B)	1		PAOZZ
4	MS27467T15B35PA	CONNECTOR, PLUG (83P-F002E)	1		PAOZZ
5	MS27467T25B35PB	CONNECTOR, PLUG (83P-F002C)	1		PAOZZ
6	MS27467T25B35S	CONNECTOR, PLUG (61P-F001B)	1		PAOZZ
7	MS27467T25B35SD	CONNECTOR, PLUG (61P-F001A)	1		PAOZZ
8	31-33522-6	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1344RP5B) (61P-F001G)			
	4811-0905	SEE ABOVE (95077)	1	*	PAOZZ
	33522-6	SEE ABOVE (95712)	1	*	PAOZZ
9	31-33821-11	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1425A01R) (61P-F001H)			
	5813-0901	SEE ABOVE (95077)	1	*	PAOZZ
	33821-11	SEE ABOVE (95712)	1	*	PAOZZ
10	31-33821-12	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		STSM1425A02R) (61P-F001J)			
	5813-0902	SEE ABOVE (95077)	1	*	PAOZZ
	33821-12	SEE ABOVE (95712)	1	*	PAOZZ
11	31-33821-13	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1425A03R) (61P-F001K)			
	5813-0903	SEE ABOVE (95077)	1	*	PAOZZ
	33821-13	SEE ABOVE (95712)	1	*	PAOZZ
12	31-33522-10	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1344RP3B) (61P-F001C)			
	4811-0903	SEE ABOVE (95077)	1	*	PAOZZ
	33522-10	SEE ABOVE (95712)	1	*	PAOZZ
13	31-33821-13	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1425A03R) (61P-F001D)			
	5813-0903	SEE ABOVE (95077)	1	*	PAOZZ
	33821-13	SEE ABOVE (95712)	1	*	PAOZZ
14	31-33821-11	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1425A01R) (61P-F001E)			
	5813-0901	SEE ABOVE (95077)	1	*	PAOZZ
	33821-11	SEE ABOVE (95712)	1	*	PAOZZ
15	31-33821-12	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		ST5M1425A02R) (61P-F001F)			
	5813-0902	SEE ABOVE (95077)	1	*	PAOZZ
	33821-12	SEE ABOVE (95712)	1	*	PAOZZ
16	MS27467T17B35S	CONNECTOR, PLUG (5P-F014B)	1		PAOZZ
17	MS27467T17B35SA	CONNECTOR, PLUG (5P-F014A)	1		PAOZZ
18	MS27467T21B35S	CONNECTOR, PLUG (85P-F001B)	1		PAOZZ
19	MS27467T13B35S	CONNECTOR, PLUG (83P-F004)	1		PAOZZ
20	MS27467T25B35S	CONNECTOR, PLUG (85P-F001A)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
21	MS27467T25B35PA	CONNECTOR, PLUG (83P-F002A)	1		PAOZZ
22	MS27467T15B35P	CONNECTOR, PLUG (83P-F002D)	1		PAOZZ
23	D38999/46WC35PN	CONNECTOR, PLUG (83P-F002H)	1		PAOZZ
24	MS27467T11B35S	CONNECTOR, PLUG (83P-F002B)	1		PAOZZ
25	MS27467T15B35PA	CONNECTOR, PLUG (83P-F002E)	1		PAOZZ
26	MS27467T25B35PB	CONNECTOR, PLUG (83P-F002C)	1		PAOZZ
27	D38999/46WC35PA	CONNECTOR, PLUG (83P-F002L)	1		PAOZZ
28	82-5772-1	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R11)			
		(61P-F001G)			
	4610-002	SEE ABOVE (95077)	1		PAOZZ
29	82-5968-2	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R23)			
		(61P-F001H)			
	4610-0022	SEE ABOVE (95077)	1		PAOZZ
30	82-5968-3	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R33)			
		(61P-F001J)			
	4610-0023	SEE ABOVE (95077)	1		PAOZZ
31	82-5968-4	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R43)			
		(61P-F001K)			
	4610-0024	SEE ABOVE (95077)	1		PAOZZ
32	82-5968-5	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R53)			
		(61P-F001M)			
	4610-0025	SEE ABOVE (95077)	1		PAOZZ
33	82-5772-1	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R11)			
		(61P-F001C)			
	4610-002	SEE ABOVE (95077)	1		PAOZZ
34	82-5968-2	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R23)			
		(61P-F001D)			
	4610-0022	SEE ABOVE (95077)	1		PAOZZ
35	82-5968-3	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R33)			
		(61P-F001E)			
	4610-0023	SEE ABOVE (95077)	1		PAOZZ
36	82-5772-4	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(74868) (MCDONNELL SPEC 5M2497R41)			
		(61P-F001F)			
	4610-005	SEE ABOVE (95077)	1		PAOZZ
37	D38999/46WJ35PN	CONNECTOR, PLUG (83P-F002K)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(WP002 00)


FWD FUSELAGE



DOOR 14R (AFT)
EQUIPMENT REMOVED

SEE CONFIGURATION X

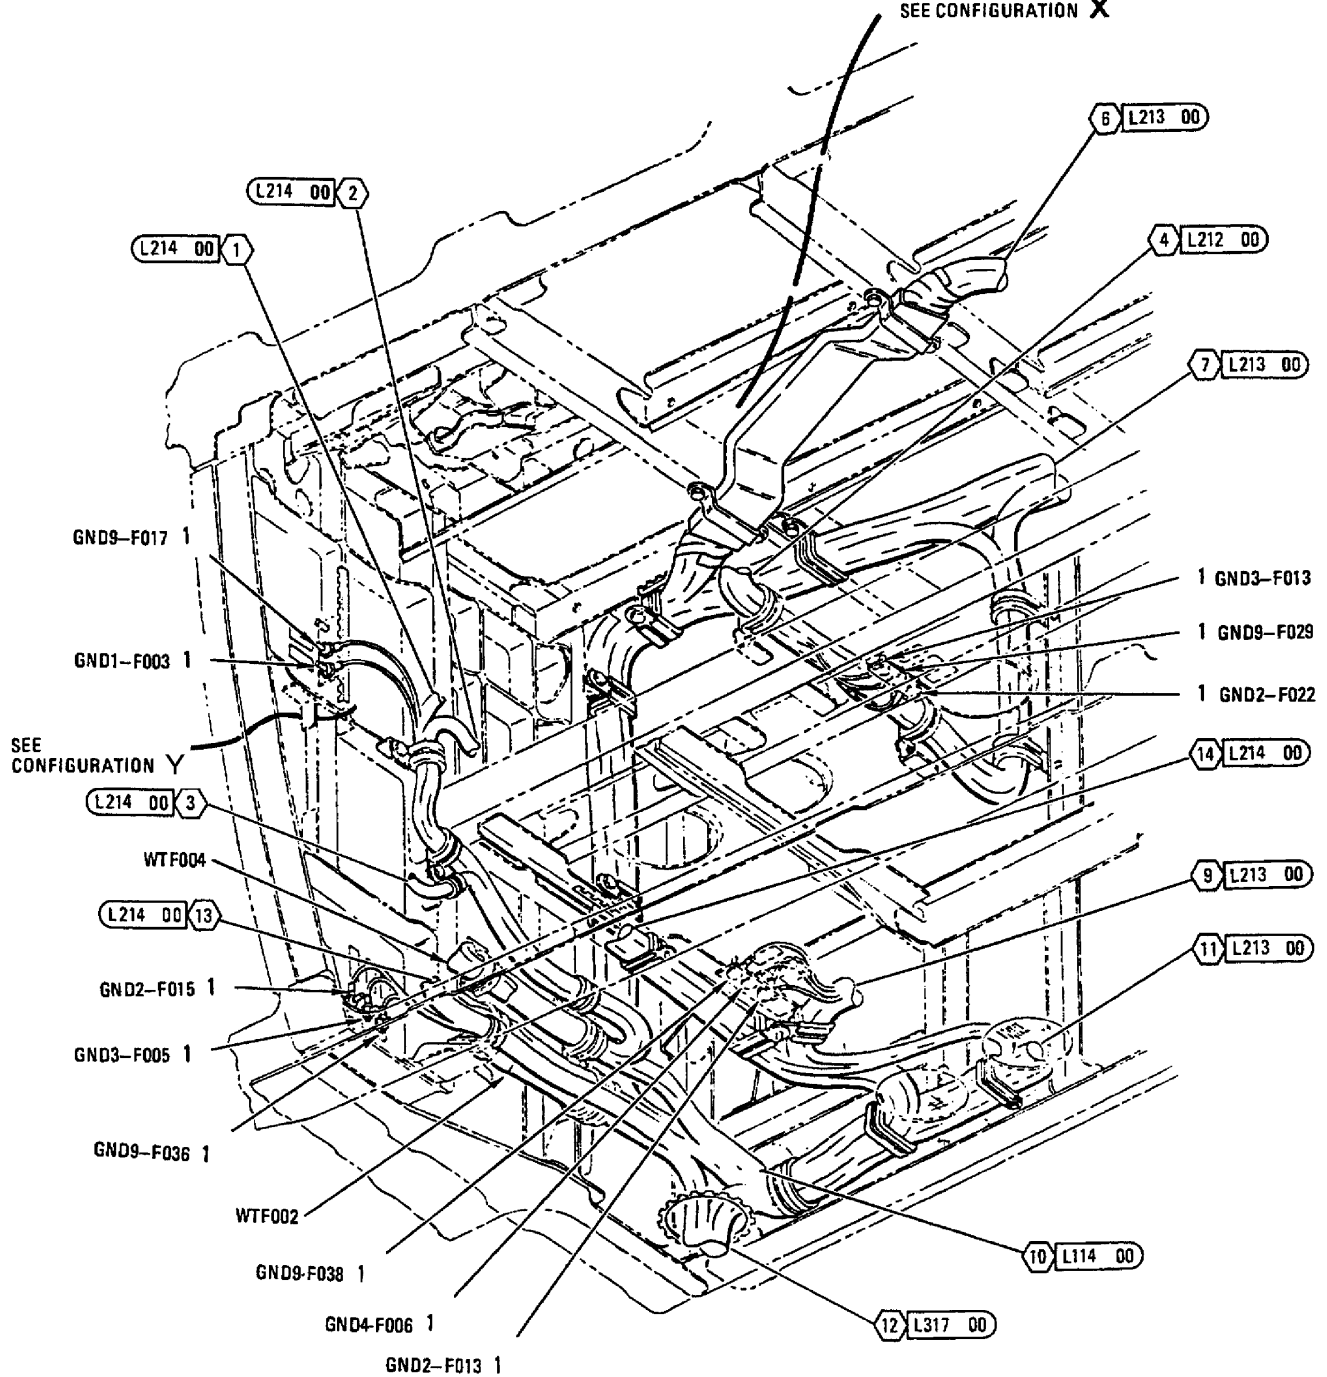

FWD FUSELAGE
DOOR 14R (AFT)
EQUIPMENT REMOVED

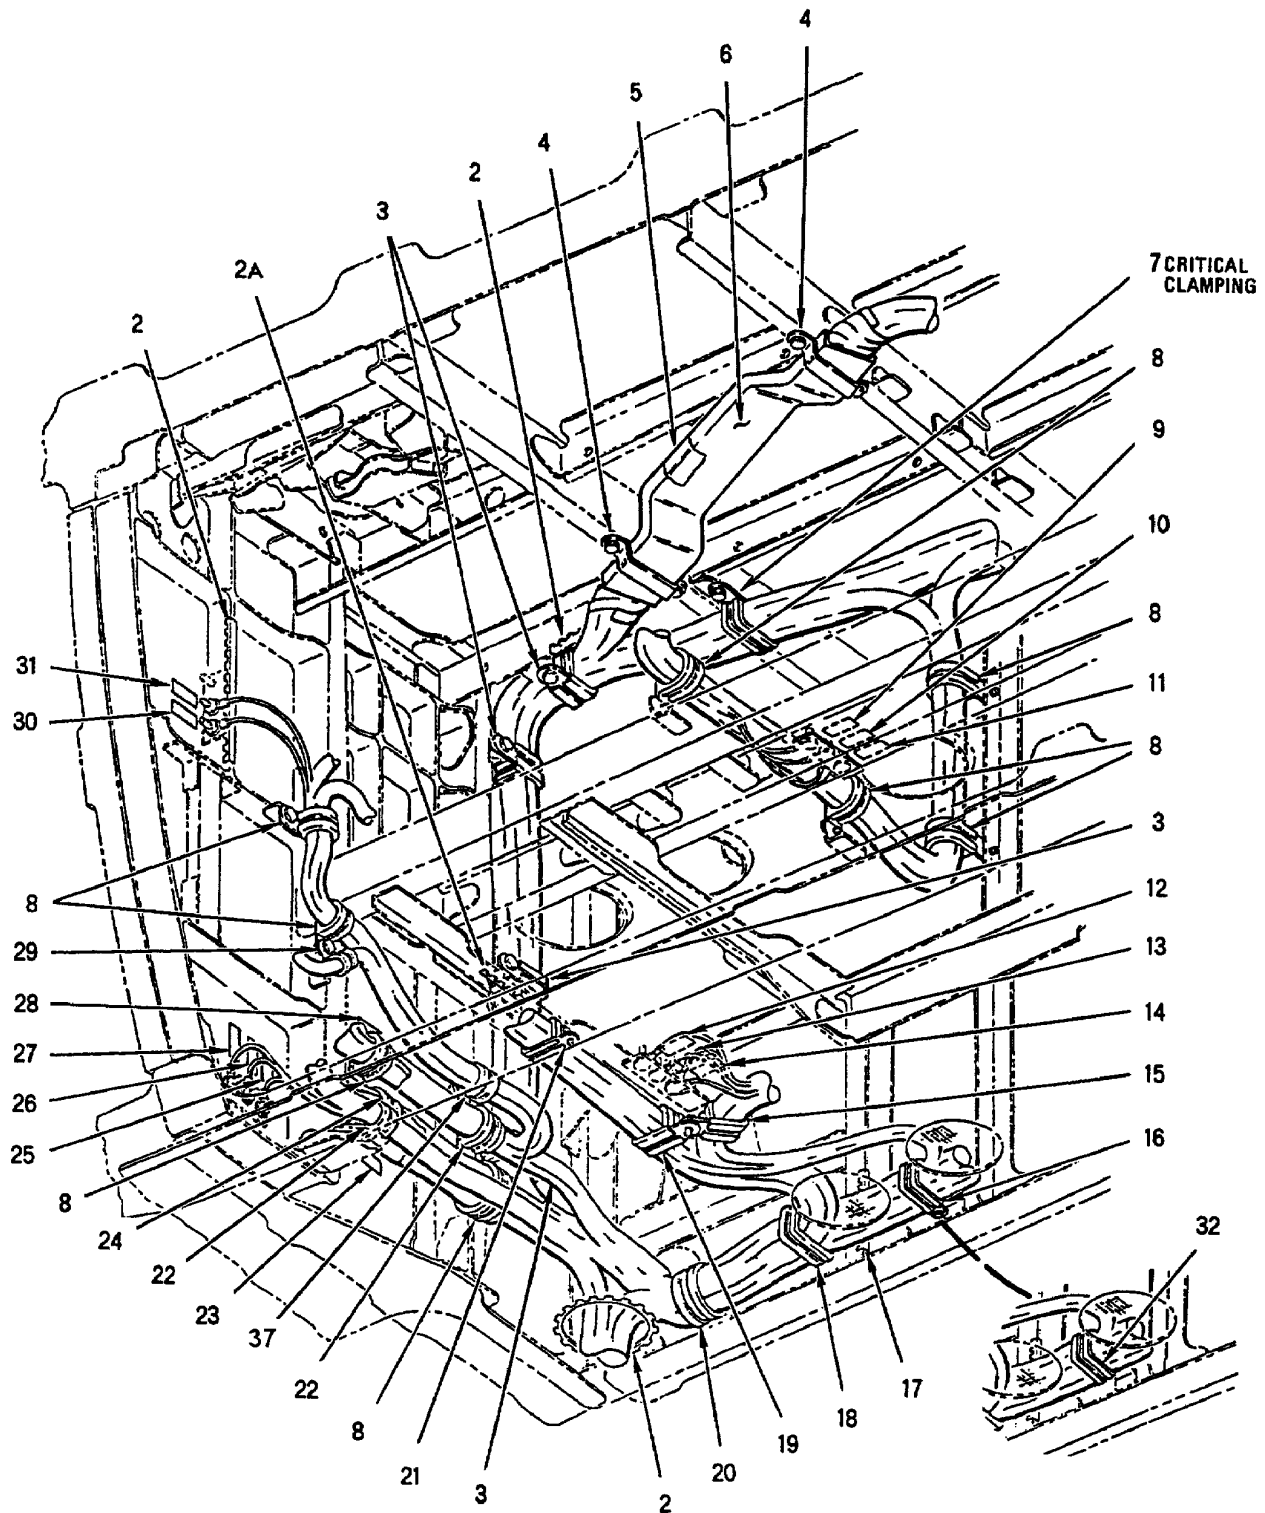

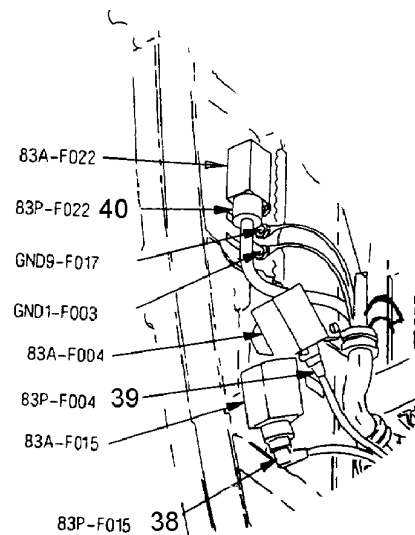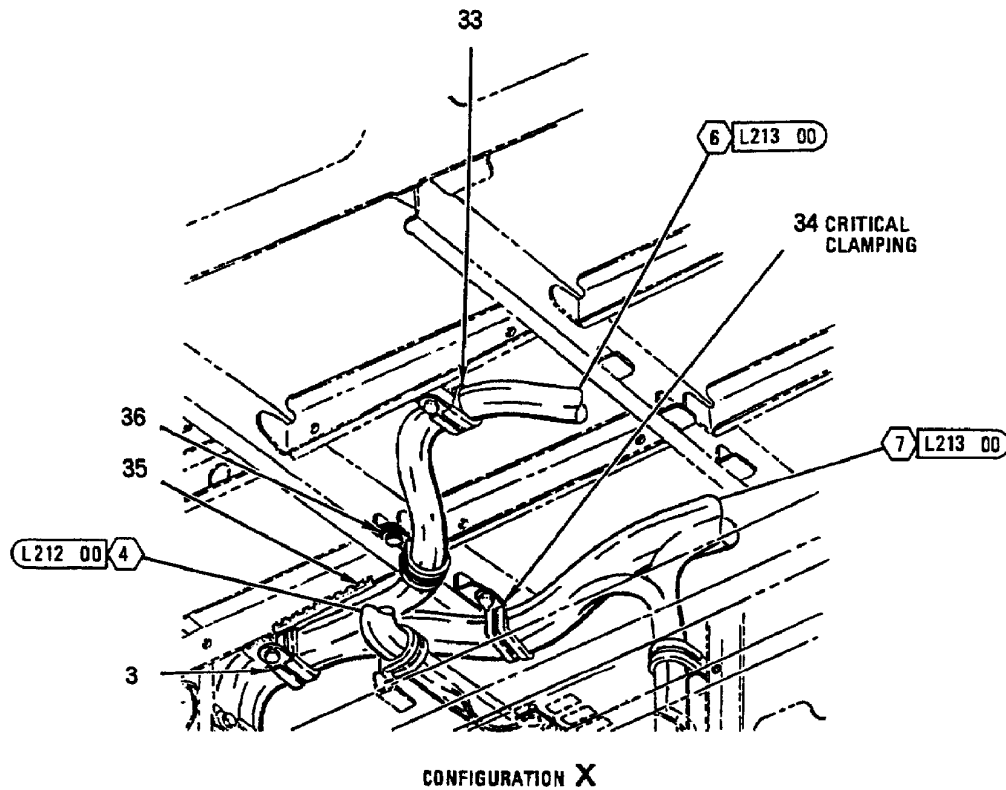

LEGEND

1 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

1 **CONFIGURATION Y**


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	11		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	11		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	11		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
2A	MS21266-2N	GROMMET	AR	K	PAOZZ
3	MS21919WDG #	CLAMP	4	C	-
	NAS1712D16-36N	CLAMP	4	D	PAOZZ
	NAS1712C16-36N	CLAMP	4	G	PAOZZ
	NAS1712D18-32N	CLAMP	4	L	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A600607-2001	BRACKET, SUPPORT - WIRE SHROUD	2	H	MGOZZ
		(76301)			
	NAS673V3	BOLT (AP)	2	H	PAOZZ
	AN960JD10L	WASHER (AP)	2	H	PAOZZ
5	74A600608-2001	SHROUD, WIRE SUPPORT - ELECTRICAL,	1	H	XBOZZ
		UPPER (76301)			
6	74A600608-2003	SHROUD, WIRE SUPPORT - ELECTRICAL,	1	H	XBOZZ
		LOWER (76301)			
7	NAS1677D16-32N	STRAP	1	H	PAOZZ
	NAS673V3	BOLT (AP)	2	H	PAOZZ
	AN960JD10L	WASHER (AP)	2	H	PAOZZ
8	MS21919WDG #	CLAMP	8		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	74A890601-2828	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-F013)			
10	74A890601-2408	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F029)			
11	74A890601-2810	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-F022)			
12	74A890601-2341	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F038)			
13	74A890601-2345	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-F006)			
14	74A890601-2344	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-F013)			
15	NAS1712D7-14N	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	NAS1712D8-28N	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
17	MS21266-5N	GROMMET	AR		PAOZZ
18	NAS1712D16-28N	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	NAS1712D8-18N	CLAMP	1		PAOZZ
20	MS21919WDG #	CLAMP	1		-
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
21	NAS1712D8-18N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	MS21919WDG #	CLAMP	2	M	-
	MS21919WDG18	CLAMP	2	L	PAOZZ
23	74A890601-2012	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES WTF002)			
24	MS21919WDG #	CLAMP	1		-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
25	74A890601-2349	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F036)			
26	74A890601-2455	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-F005)			
27	74A890601-2364	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-F015)			
28	74A890601-2014	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES WTF004)			
29	MS21919WDG #	CLAMP	1	B	-
30	74A890601-2343	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND1-F003)			
31	74A890601-2346	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-F017)			
32	NAS1712D8-28N	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
33	MS21919WDG #	CLAMP	1	J	-
	NAS673V #	BOLT (AP)	1	J	-
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	NAS42DD6-44	SPACER (AP)	1	J	PAOZZ
34	NAS1712D8-18N	CLAMP	1	E	PAOZZ
	NAS1677D16-32N	STRAP	1	F	PAOZZ
	NAS673V5	BOLT (AP)	1	E	PAOZZ
	NAS673V5	BOLT (AP)	2	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	2	F	PAOZZ
35	MS21266-2N	GROMMET	AR	J	PAOZZ
36	MS21919WDG #	CLAMP	1	J	-
	NAS673V #	BOLT (AP)	1	J	-
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
37	MS21919WDG #	CLAMP	1	M	PAOZZ
	MS21919WDG14	CLAMP	1	L	PAOZZ
	NAS673V #	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
38	MS27467T11B35S	CONNECTOR, PLUG (83P-F015)	1	L	PAOZZ
39	MS27467T13B35S	CONNECTOR, PLUG (83P-F004)	1	L	PAOZZ
40	MS27467T11B35SA	CONNECTOR, PLUG (83P-F022)	1	L	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


CODE	USABLE ON
A	161716 & UP
B	161353 THRU 161715
C	161353 THRU 161731
D	161732 THRU 161941
E	161353 THRU 161728
F	161729 THRU 161987
G	161942 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		H						162394 & UP			
		J						161353 THRU 161987			
		K						161941 & UP			
		L						162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292			
		M						161353 AND UP; ALSO 162394 THRU 161175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292			

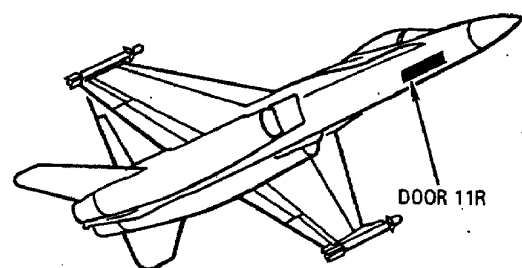

FWD FUSELAGE

DOOR 11R

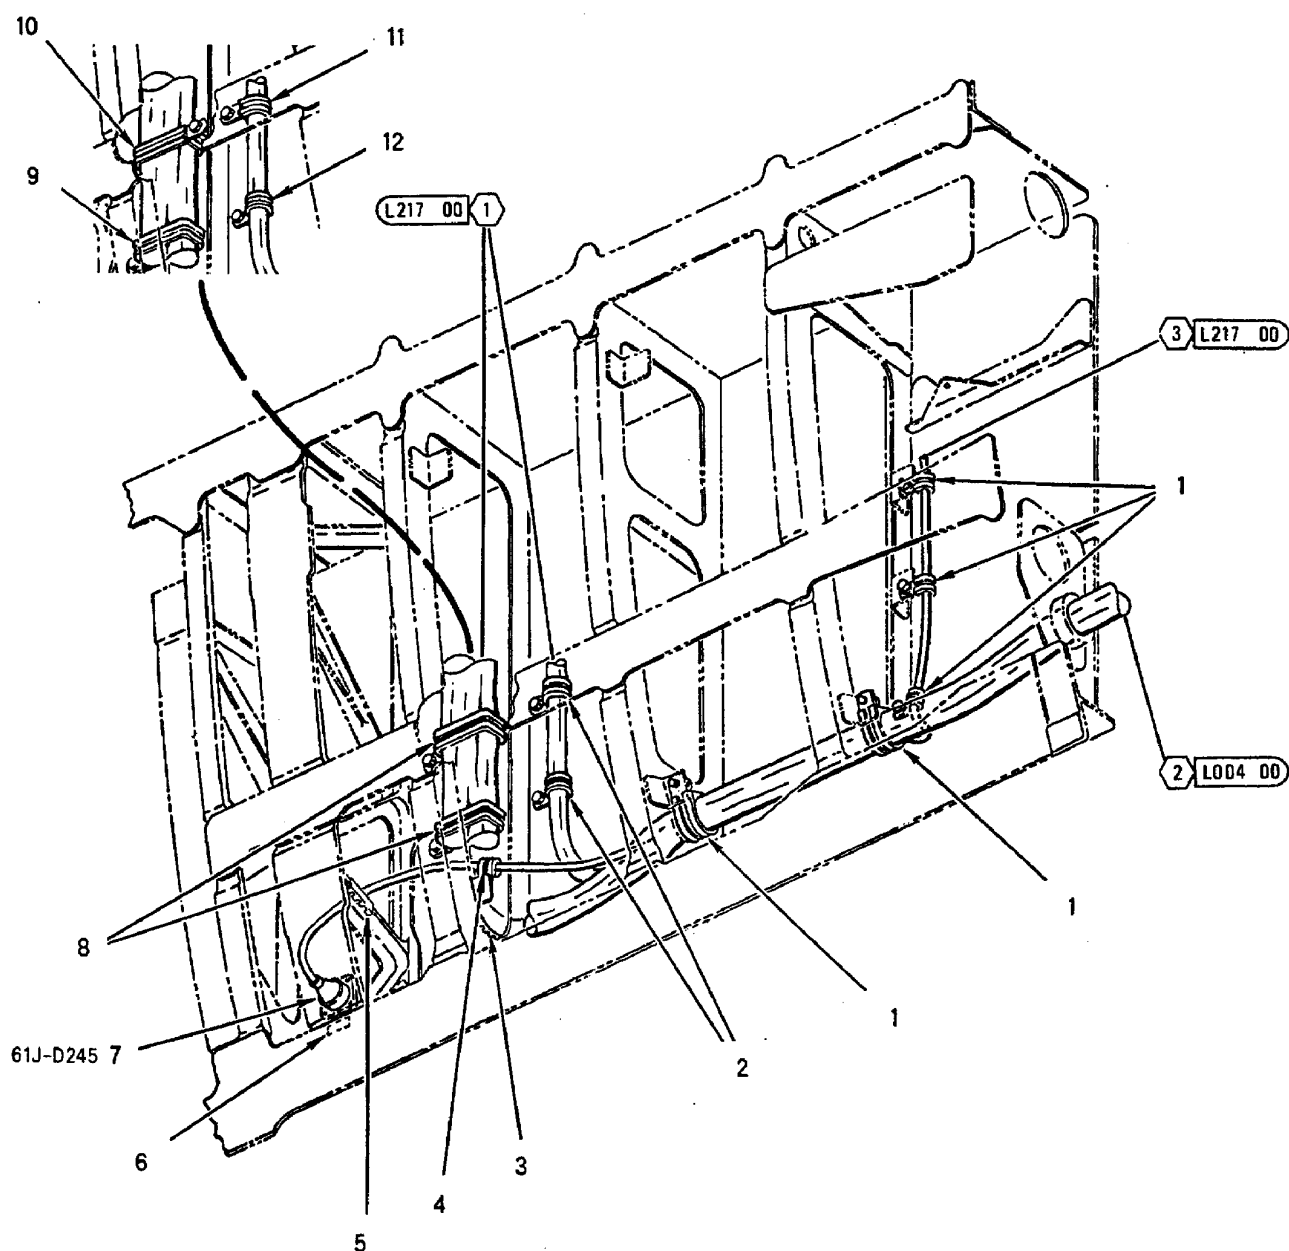

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	5		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21919WDG #	CLAMP	2	D	-
	TA519WD6-12	CLAMP, LOOP (84971) (MCDONNELLSPEC ST9M633WD6-12)	2	E*	PAOZZ
	487WD6-12	SEE ABOVE (83930)	2	E*	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	MS21266-1N	GROMMET	AR		PAOZZ
4	MS21919WDG #	CLAMP	1		-
	NAS673V9	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
	MS21266-3N	GROMMET	AR		PAOZZ
5	MS21266-3N	GROMMET	AR		PAOZZ
6	74A890601-2886	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-D245)	1		MDOZZ
7	4545-6010	CONNECTOR, RECEPTACLE, ELECTRICAL (95077) (MCDONNELL SPEC ST5M1397-001) (61J-D245)	1		PAOZZ
8	NAS1712D8-18N	CLAMP	2	D	PAOZZ
	NAS1712D8-24N	CLAMP	2	E	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1712D8-18N	CLAMP	1	B	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS1712D8-18N	CLAMP	1	B	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS679C3MW	NUT (AP)	1	C	PAOZZ
11	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS679C3MW	NUT (AP)	1	C	PAOZZ
	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
12	AN960JD10L	WASHER (AP)	1	B	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161755 & UP
B	161353 THRU 161754
C	161525 THRU 161754
D	161755 THRU 161987
E	162394 & UP

FWD FUSELAGE

NOSE WHEELWELL
INTERNAL DOOR-NWC
(RIGHT)

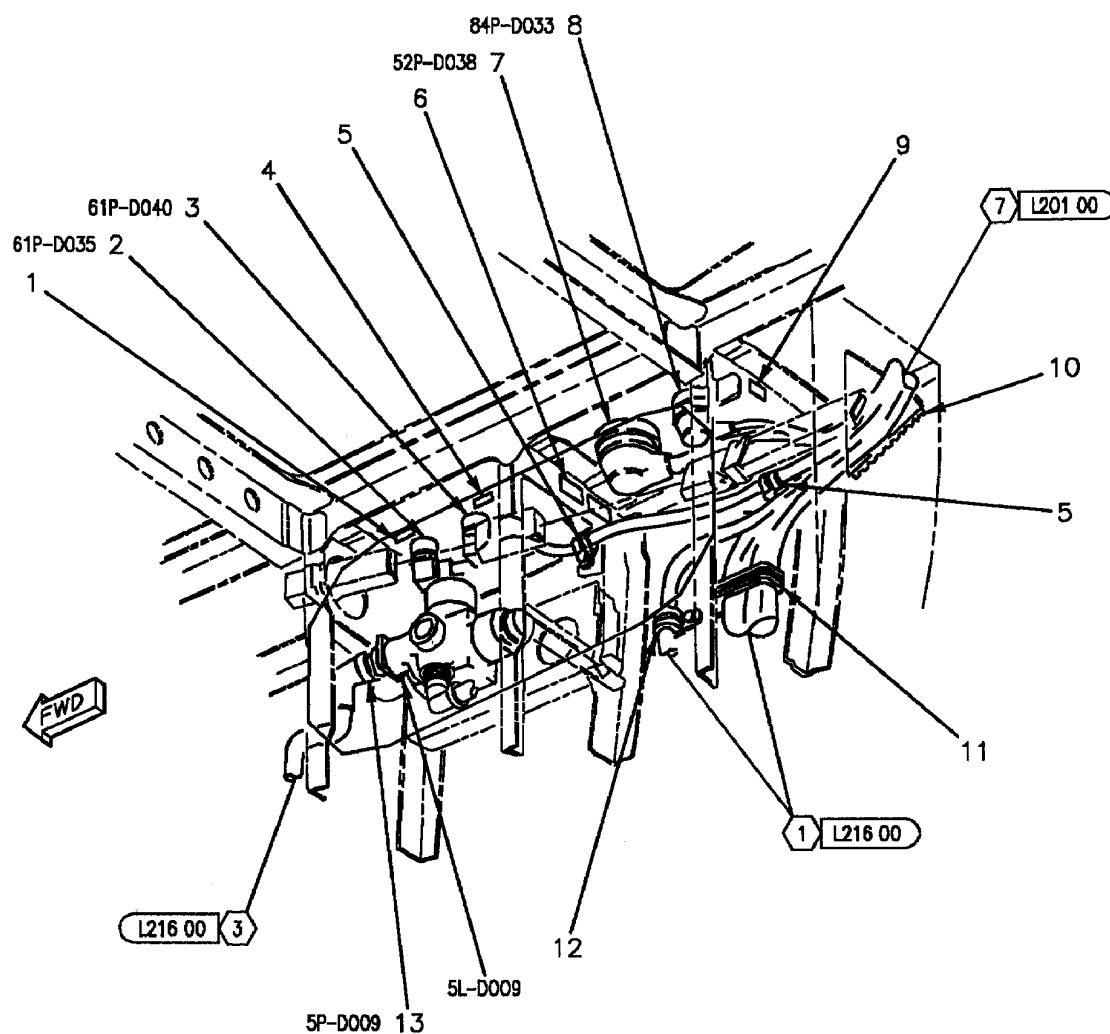

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2106	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-J035)	1		MDOZZ
2	31-33485-7	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344RS5B) (61P-D035)	1	*	PAOZZ
	4816-0905	SEE ABOVE (95077)	1	*	PAOZZ
3	31-33485-11	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344RS3B) (61P-D040)	1	*	PAOZZ
	4816-0903	SEE ABOVE (95077)	1	*	PAOZZ
4	74A890601-2111	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-J040)	1		MDOZZ
5	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	74A890601-2071	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J038)	1		MDOZZ
7	MS27467T25B35S	CONNECTOR, PLUG (52P-D038)	1		PAOZZ
8	MS27467T17B35SA	CONNECTOR, PLUG (84P-D033)	1		PAOZZ
9	74A890601-2510	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-J033)	1		MDOZZ
10	MS21266-3N	GROMMET	AR	A	PAOZZ
11	NAS1712D8-18N	CLAMP	1	B	PAOZZ
	NAS1712D8-24N	CLAMP	1	C	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	MS21919WDG #	CLAMP	1	B	-
	TA519WD6-12	CLAMP, LOOP (84971) (MCDONNELL SPEC ST9M633WD6-12)	1	C*	PAOZZ
	487WD6-12	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	MS27467T9B35S	CONNECTOR, PLUG (5P-D009)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON


A 161933 & UP

B 161353 THRU 161987

C 162394 & UP

FWD FUSELAGE DOOR 25R AND DOOR 30R


SEE CONFIGURATION X

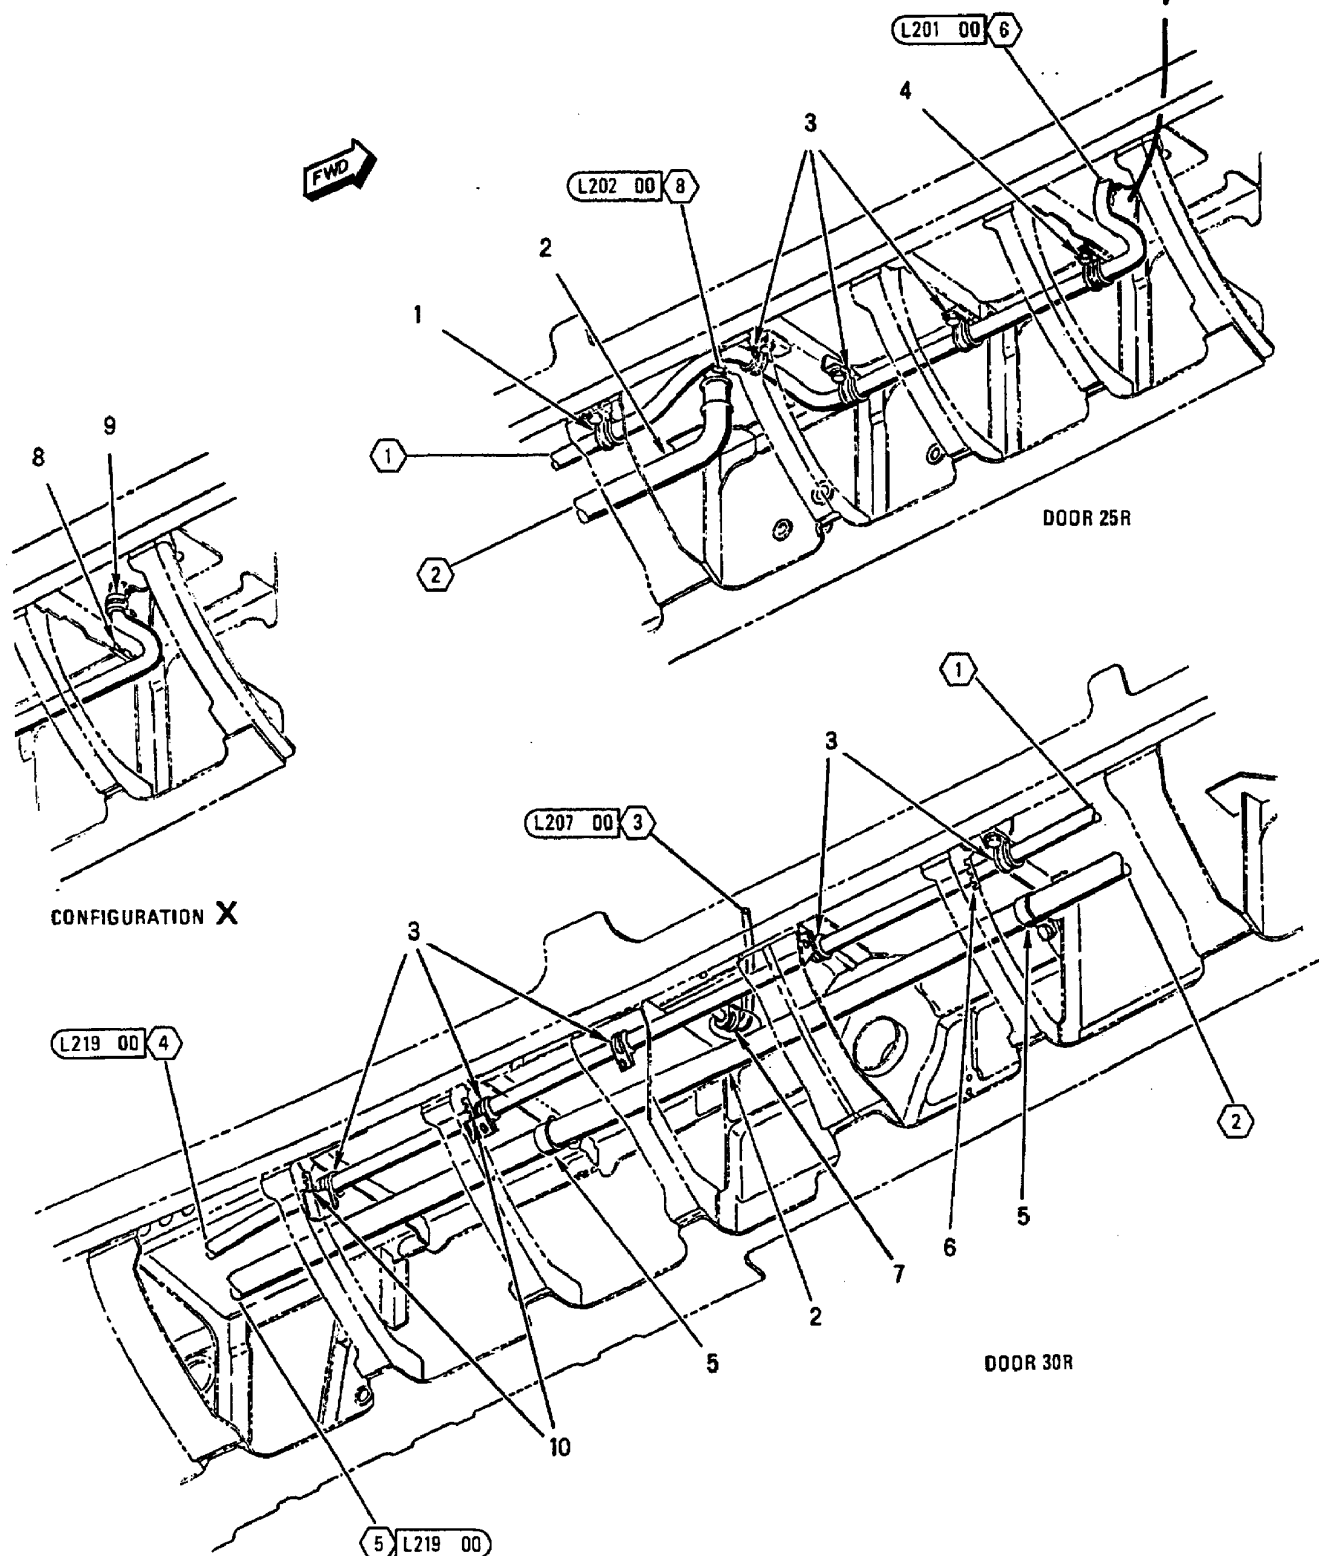

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21266-2N	GROMMET (USE WITH INDEX 1)	AR		PAOZZ
2	74A782464-1001	TUBE ASSY, METALLIC - RH GENERATOR ... (76301) (SUPERSEDES 74A782464-2003)	1		MGOZZ
3	MS21919WDG #	CLAMP	8		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
5	AN742D16	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	MS21266-2N	GROMMET	AR		PAOZZ
7	MS21919WDG #	CLAMP	1	C	-
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
8	MS21266-2N	GROMMET	AR	B	PAOZZ
9	MS21919WDG #	CLAMP	1	B	-
	NAS673V6	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-12	SPACER (AP)	1	B	PAOZZ
10	MS21266-2N	GROMMET	AR		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161524 & UP
B	161353 THRU 161523
C	162394 & UP

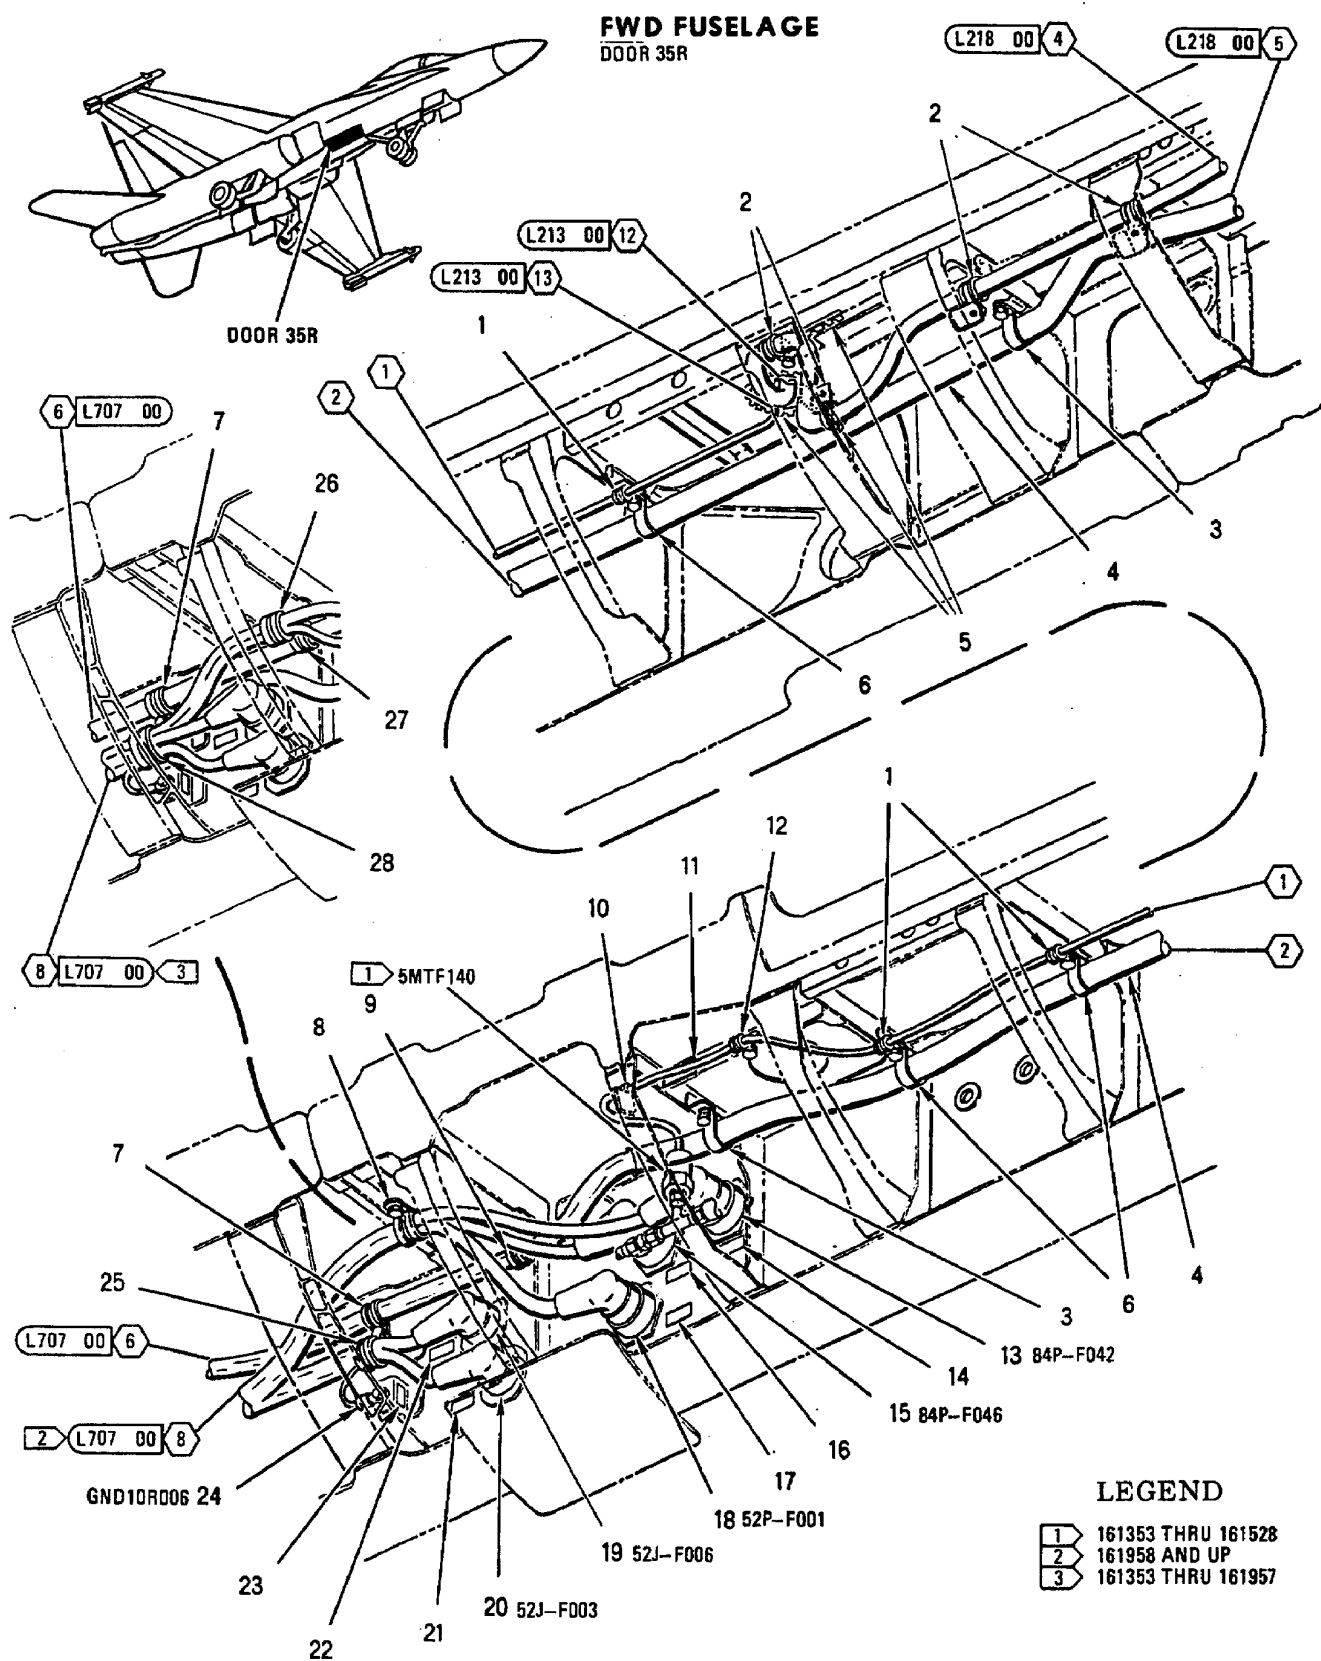

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	3	B	-
2	MS21919WDG #	CLAMP	4		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	AN742D16	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A782464-1001	TUBE ASSY, METALLIC - RH GENERATOR ... (76301) (SUPERSEDES 74A782464-2003)	1		MGOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	AN742D16	CLAMP	3		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ... ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
8	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
9	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
10	MS21919WDG #	CLAMP	1	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
11	74A890601-2195	MARKER, IDENTIFICATION - ELECTRICAL (76301)	1	B	MDOZZ
12	MS21919WDG #	CLAMP	1	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
13	MS27467T25B35P	CONNECTOR, PLUG (84P-F042)	1		PAOZZ
14	74A890601-2145	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-F042)	1		MDOZZ
15	MS27467T25B35SA	CONNECTOR, PLUG (84P-F046)	1		PAOZZ
16	74A890601-2149	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-F046)	1		MDOZZ
17	74A890601-2044	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F001)	1		MDOZZ
18	MS27467T23B21P	CONNECTOR, PLUG (52P-F001)	1		PAOZZ
19	MS27468T23B35PB	CONNECTOR, RECEPTACLE (52J-F006)	1		PAOZZ
20	MS27468T23B35PA	CONNECTOR, RECEPTACLE (52J-F003)	1		PAOZZ
21	74A890601-2303	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F003)	1		MDOZZ
22	74A890601-2048	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F006)	1		MDOZZ
23	74A885621-2425	MARKER, IDENTIFICATION - AVIONICS (76301) . (FOR REF DES GND10R006)	1		MDOZZ
24	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 24)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 24)	1		PAOZZ
25	JM44LC33WD17	CLAMP, LOOP (22175) (MCDONNELL SPEC ... ST9M630D17)	1	C*	PAOZZ
	830WD17G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V4	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	C	PAOZZ
26	MS21919WDG #	CLAMP	1	D	-
27	MS21919WDG #	CLAMP	1	D	-
	NAS673V4	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
28	JM44LC33WD #	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D)	1	D*	-
	830WD()G #	SEE ABOVE (83930)	1	D*	-
	NAS673V4	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161359
B	161353 THRU 161528
C	161958 & UP
D	161353 THRU 161957

FWD FUSELAGE

DOOR 23 AND DOOR 123
RIGHT LEX


LEGEND

1 162394 THRU 162417

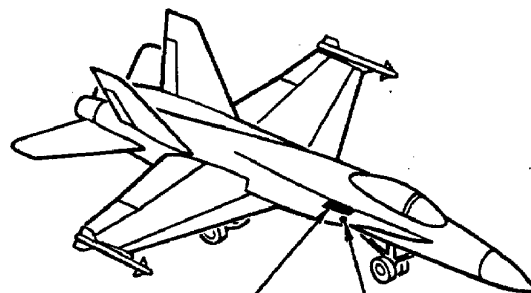

DOOR 123


DOOR 23

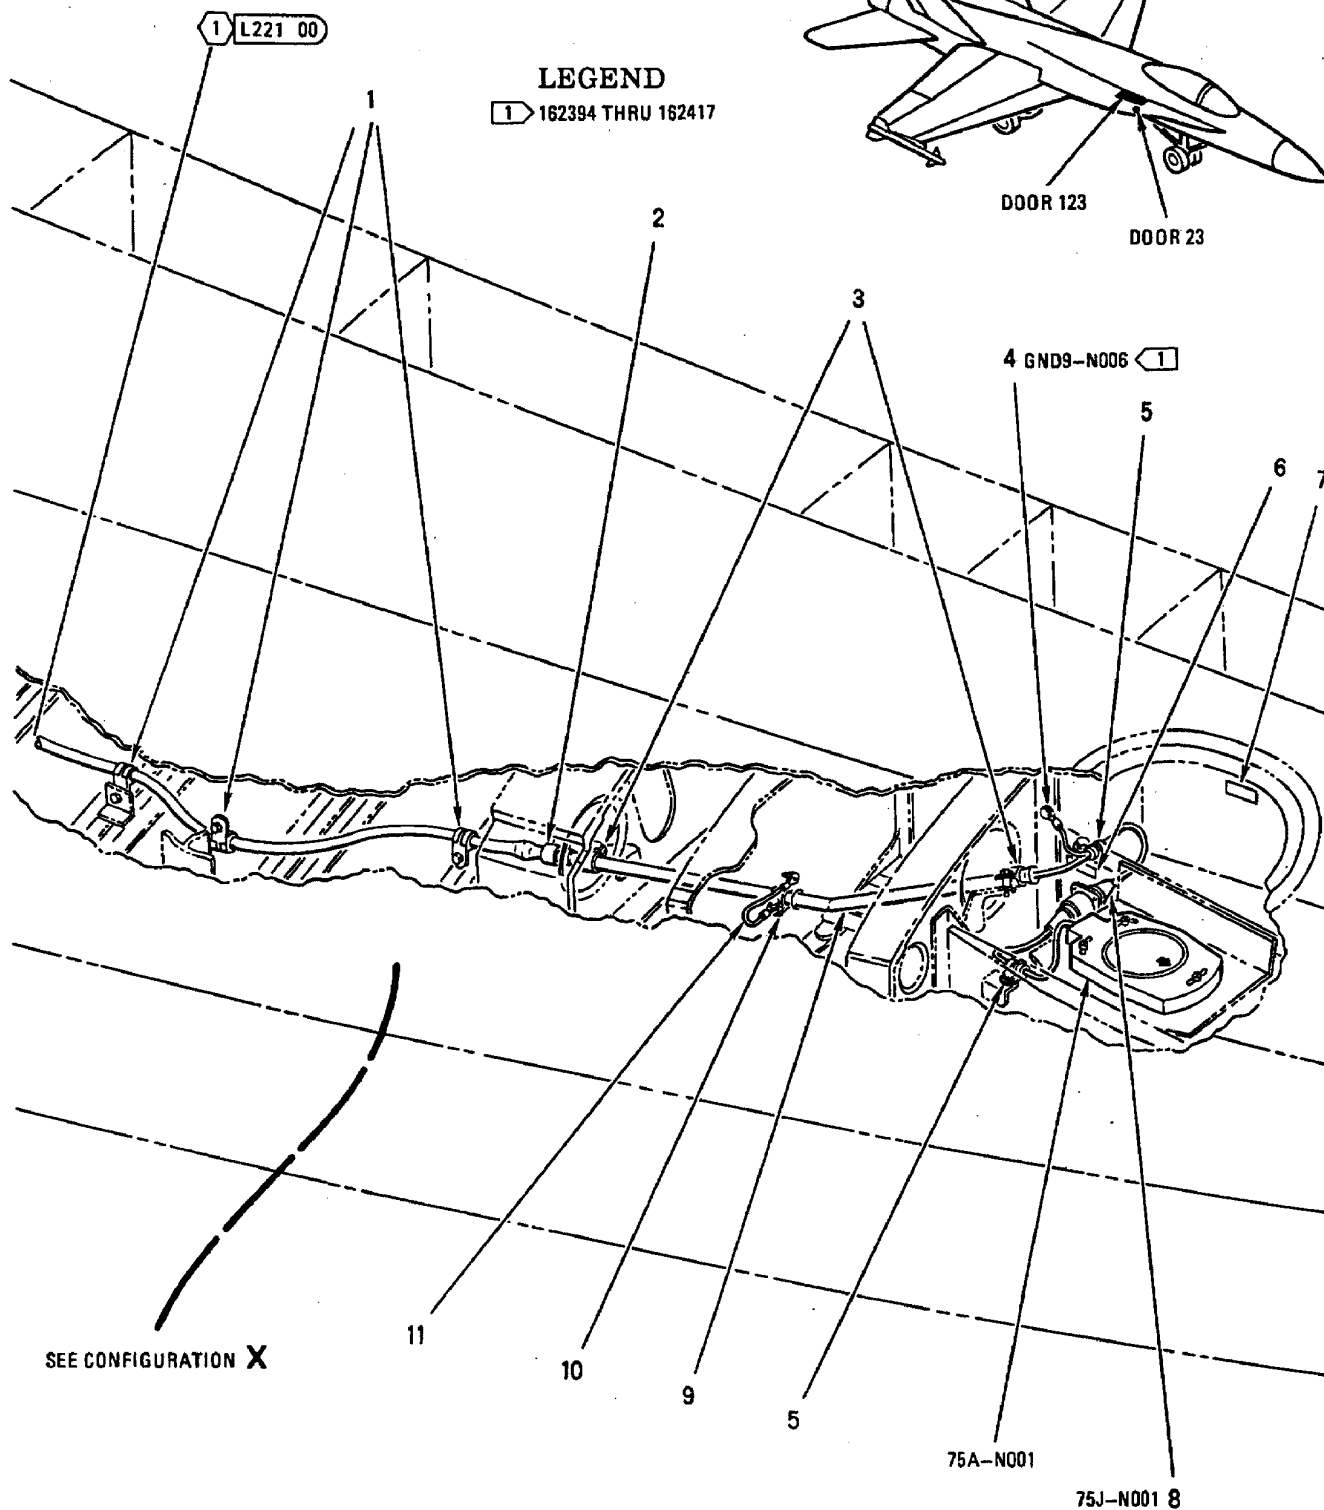

SEE CONFIGURATION X

75A-N001

75J-N001 8

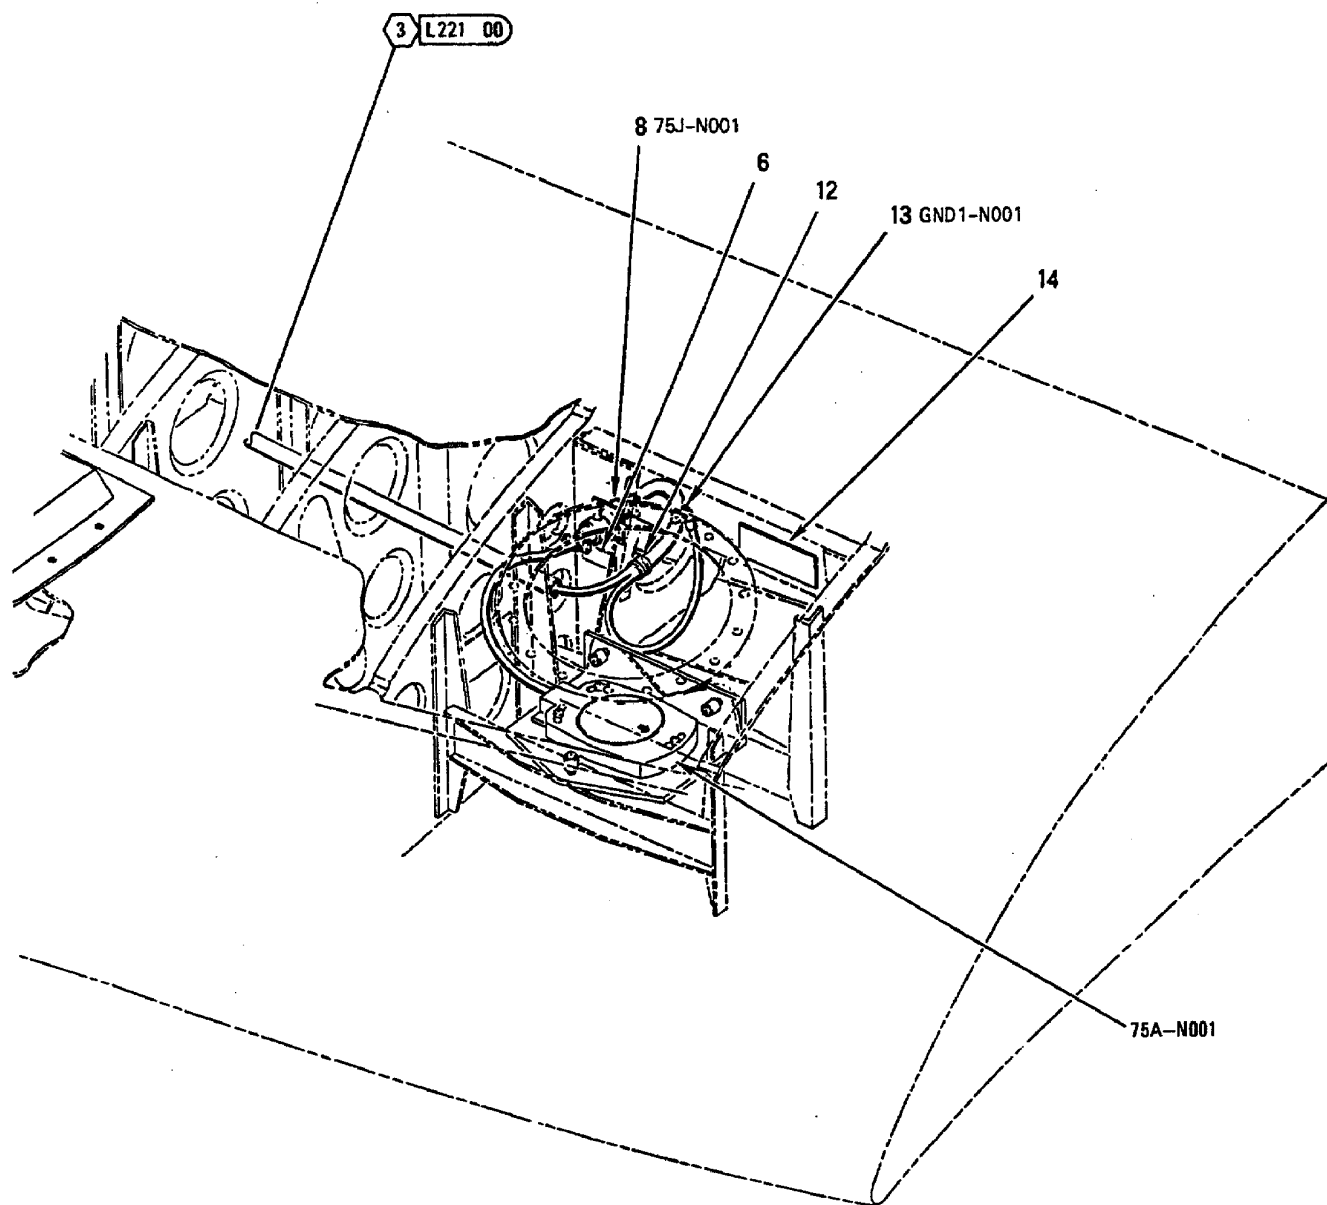

CONFIGURATION **X**
161353 THRU 161987


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG9	CLAMP	3	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
2	AN735D7	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	MS21042L3	NUT (AP)	1	B	PAOZZ
3	AN735D6	CLAMP	2	B	PAOZZ
	NAS673V7	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	B	PAOZZ
4	NAS673V3	BOLT	1	C	PAOZZ
	MS35338-138	WASHER (USE WITH INDEX 4)	1	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	1	C	PAOZZ
5	MS21919WDG3	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
6	74A890601-2739	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 75J-N001)	1		MDOZZ
7	74A890601-2912	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-N006)	1	C	MDDZZ
8	MS27656T11B35S	CONNECTOR, RECEPTACLE (75J-N001)	1		PAOZZ
	MS51957-16	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	NAS1291C04M	NUT (AP)	4		PAOZZ
9	74A600123-1003	TUBE, METALLIC - ELECTRICAL	1	B	XBOZZ
		CONDUIT,, Y328.200 (76301)			
10	AN735D6	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
11	MS25083-2BB4	LEAD, ELECTRICAL (JUMPER WIRE)	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	MS35338-138	WASHER (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
12	MS21919WDG #	CLAMP	1	A	-
	NAS6303U2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
13	NAS6303U3	BOLT	1	A	PAOZZ
	MS35338-138	WASHER (USE WITH INDEX 13)	1	A	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 13)	1	A	PAOZZ
14	74A890601-2570	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-N001)	1	A	MDDZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161353 THRU 161987
B	162394 & UP
C	162394 THRU 162417

FWD FUSELAGE

DOOR 123 AND DOOR 127
RIGHT LEX
NAVIGATION LIGHT ACCESS

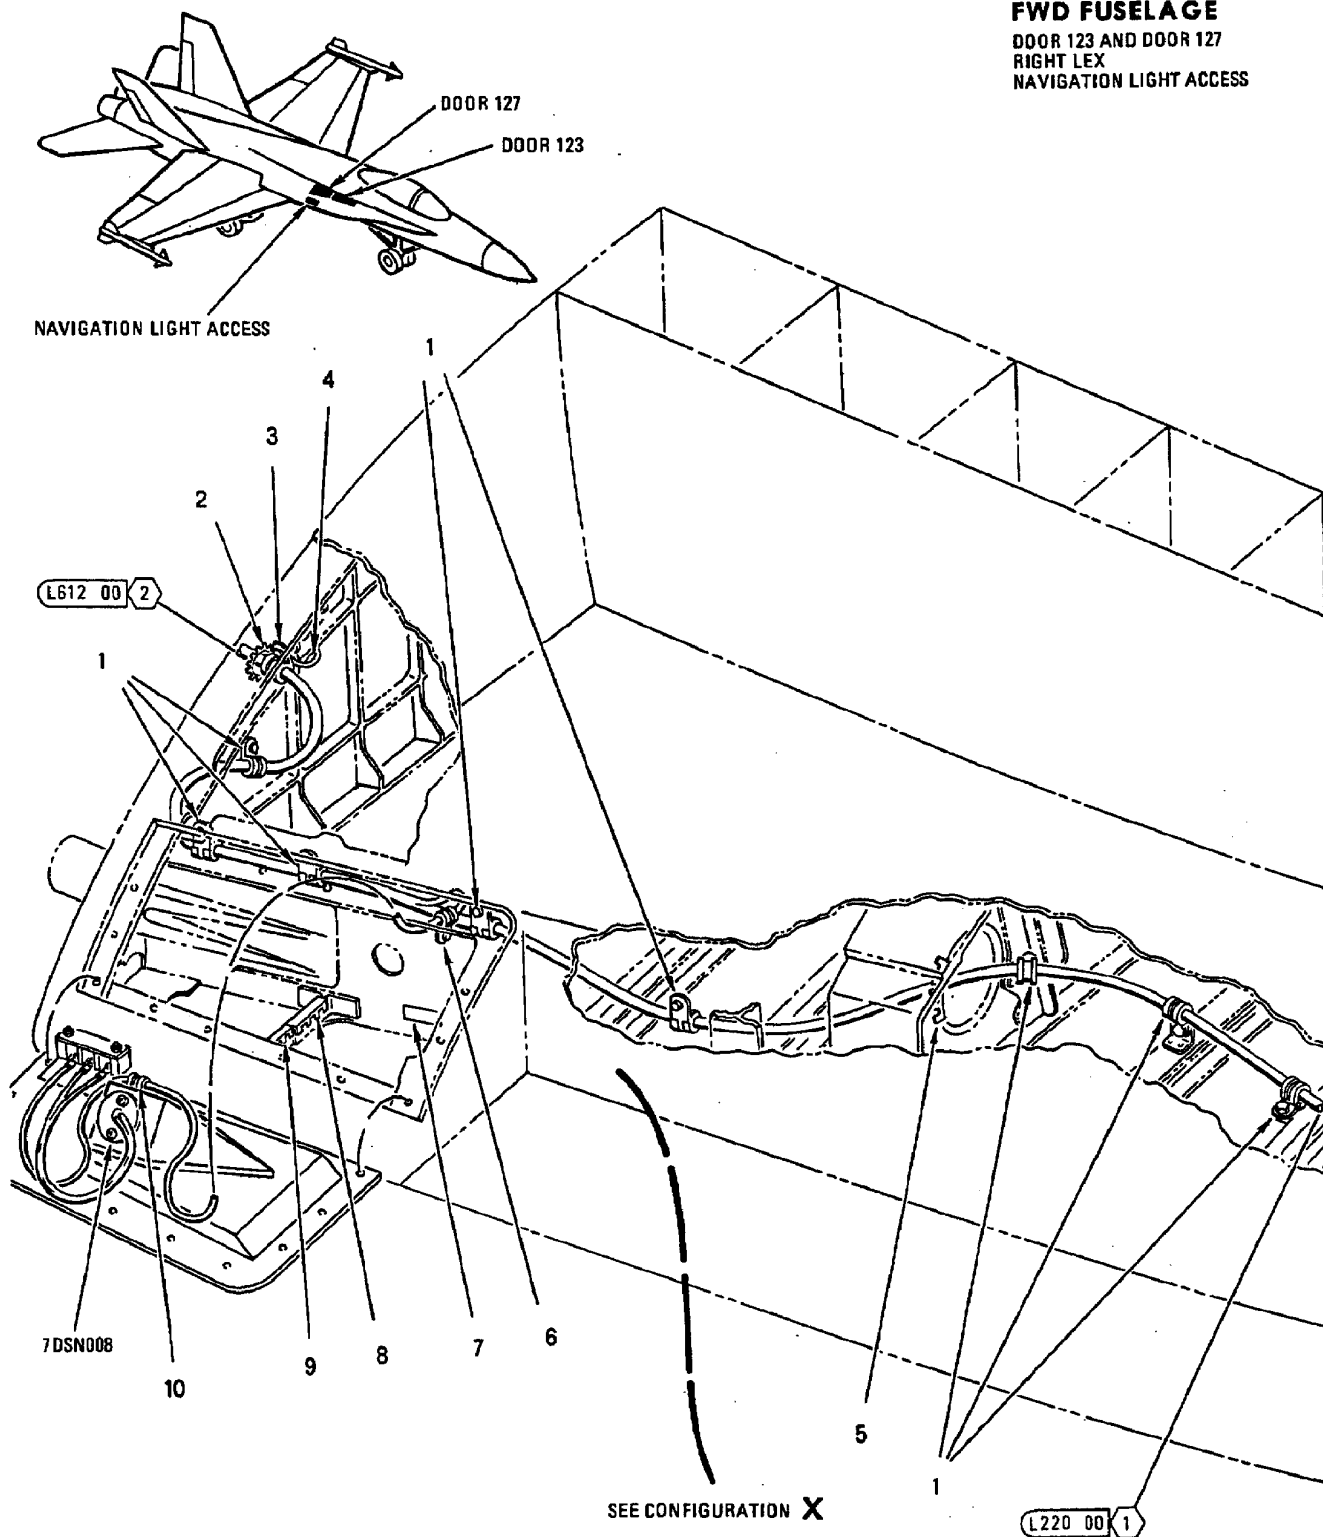

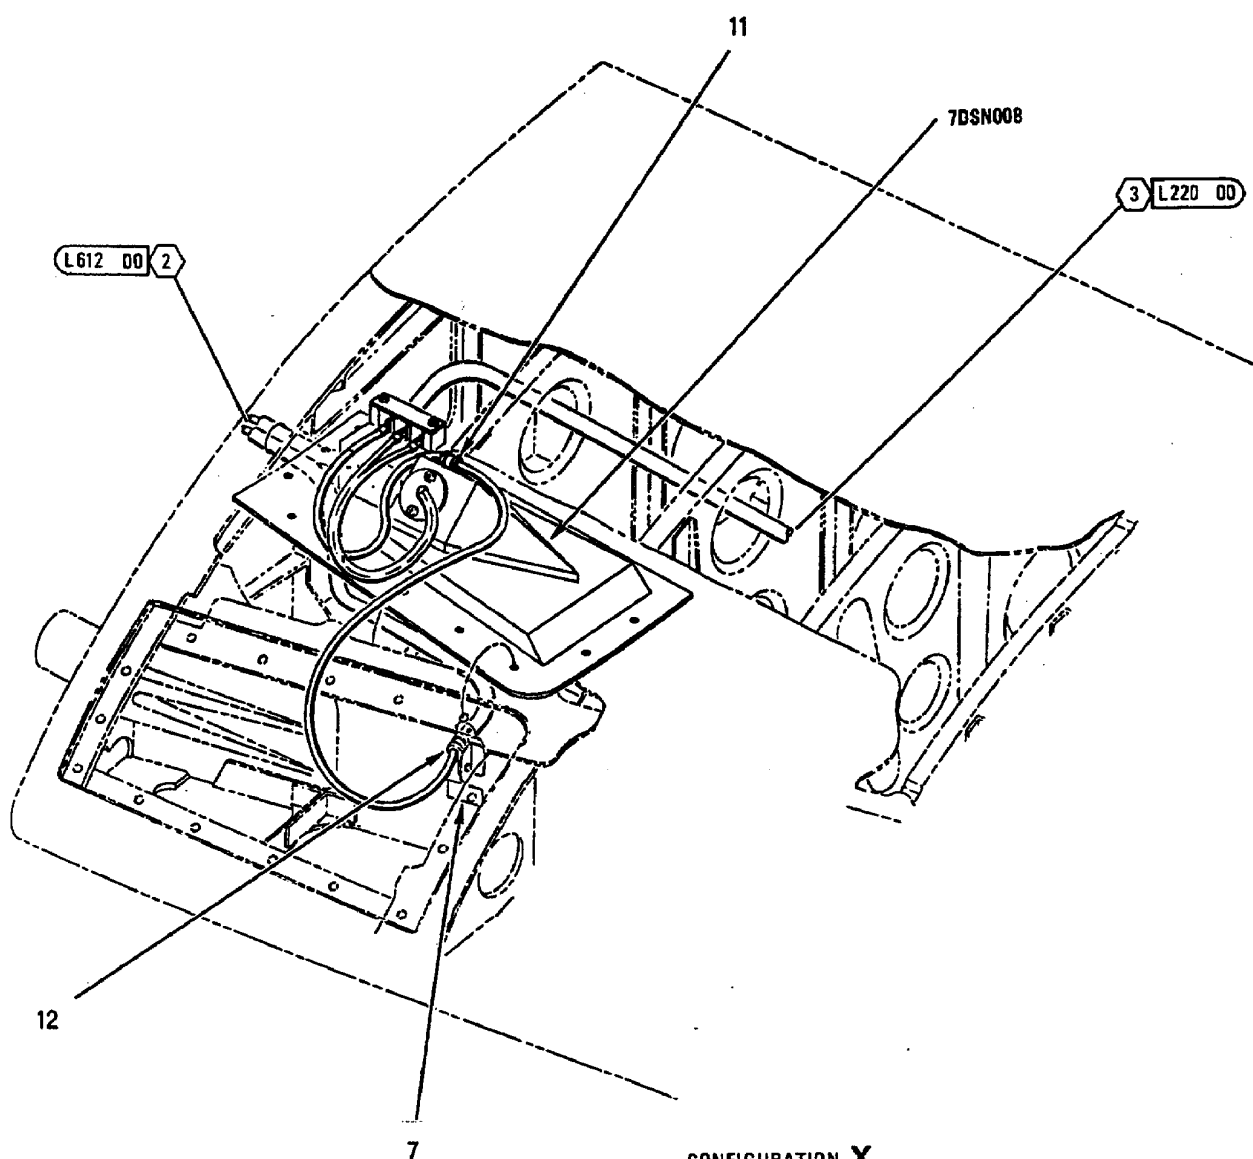

CONFIGURATION **X**
161353 THRU 161987

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG9	CLAMP	8	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
2	MS21266-2N	GROMMET	AR	B	PAOZZ
3	AN735D11	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
	MS21042L3	NUT (AP)	1	B	PAOZZ
4	MS25083-2BB6	LEAD, ELECTRICAL (JUMPER WIRE)	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	MS35338-138	WASHER (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
5	MS21266-2N	GROMMET	AR	B	PAOZZ
6	AN735D7	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	MS21042L3	NUT (AP)	1	B	PAOZZ
7	74A890601-2791	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 7DSN008)			
8	MS21266-3N	GROMMET	AR	B	PAOZZ
9	MS21266-1N	GROMMET	AR	B	PAOZZ
10	MS21919WDG #	CLAMP	1	B	-
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
11	MS21919WDG #	CLAMP	1	A	-
	NAS6303U1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
12	MS21919WDG #	CLAMP	1	A	-
	NAS6303U2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


CODE	USABLE ON
A	161353 THRU 161987
B	162394 & UP


FWD FUSELAGE

DOOR 7L, DOOR 7R, DOOR 17L,
DOOR 17R, AND DOOR 96

LEGEND

- 1 161520 AND UP, ALSO 161353 THRU 161519
AFTER F18 AFC 39
- 2 161353 THRU 161519 BEFORE F18 AFC 39

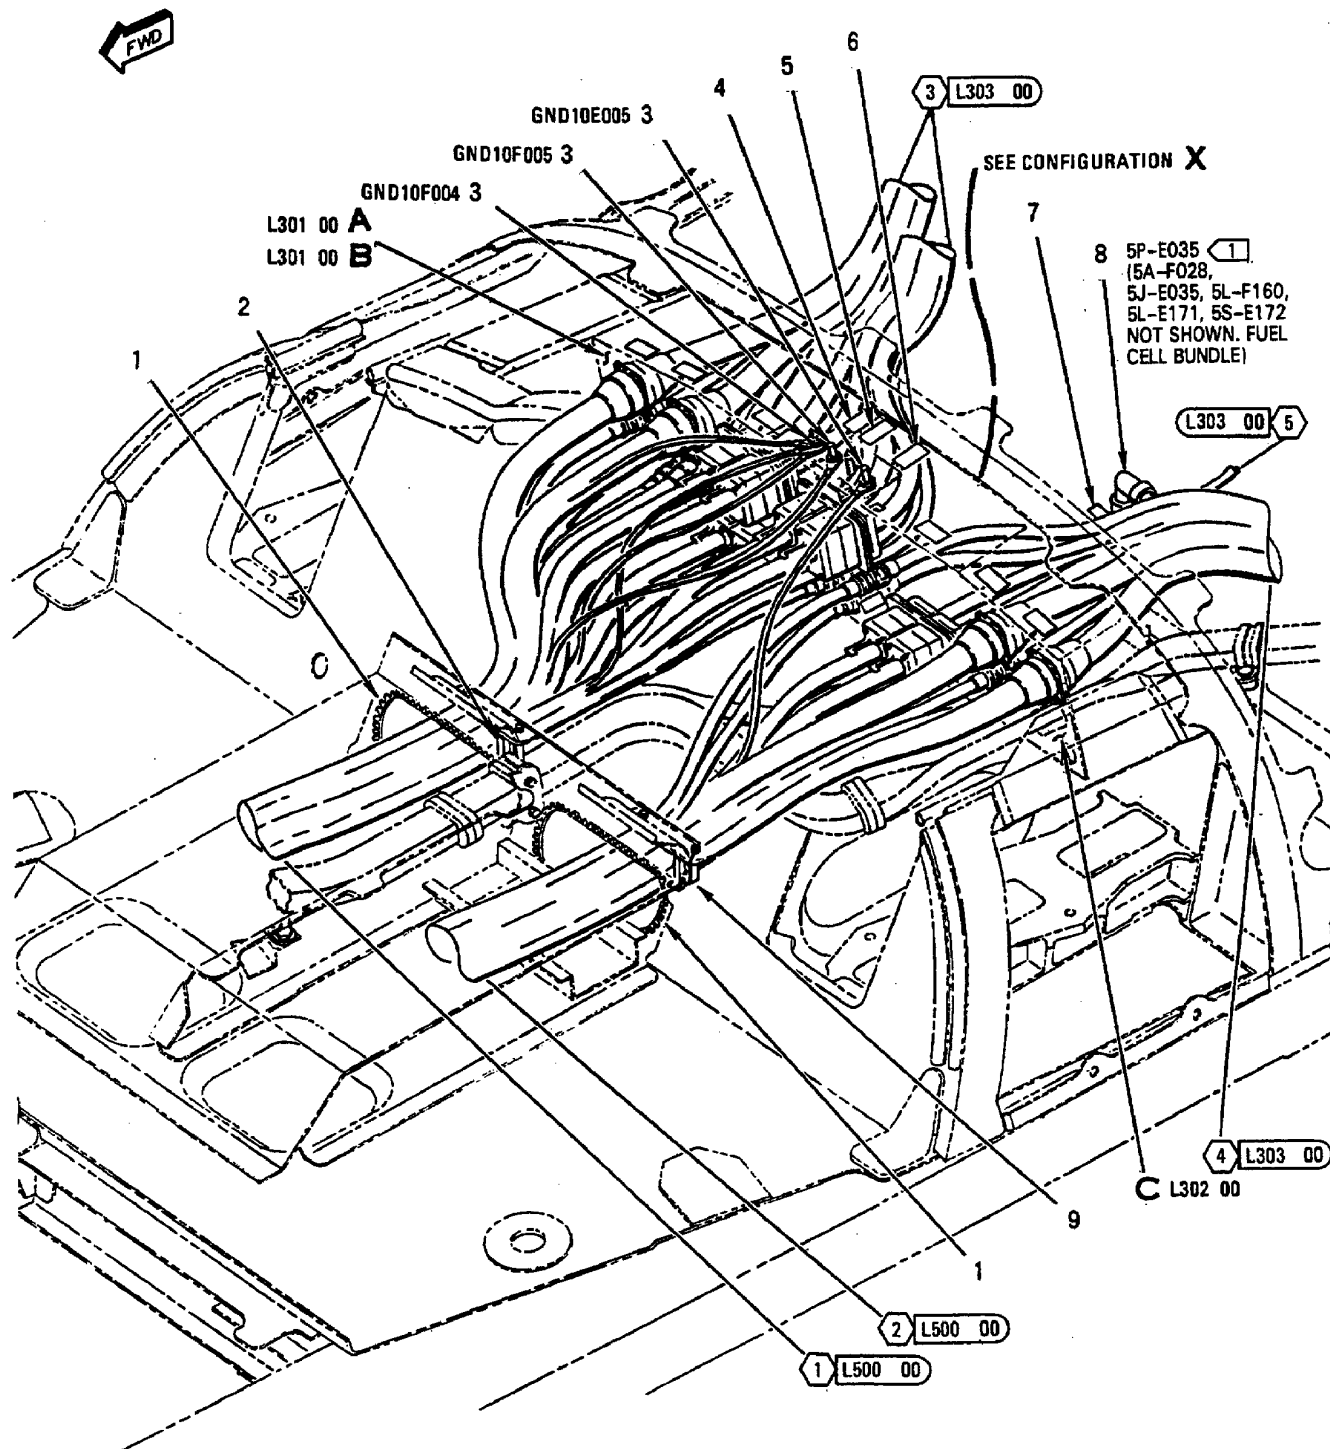

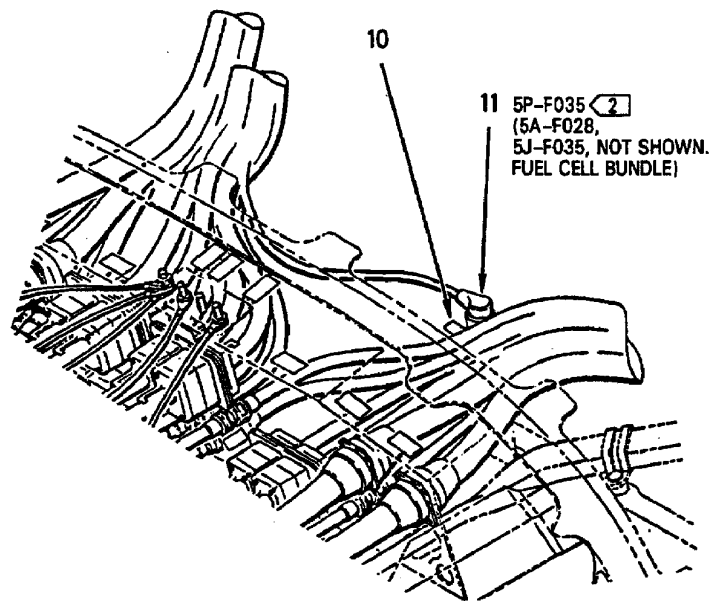

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR		PAOZZ
2	NAS1677D24W30N	STRAP	1	C	PAOZZ
	NAS1677D20-43N	STRAP	1	D	PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
3	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	3		PAOZZ
4	74A890601-2322	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND10F004)			
5	74A890601-2323	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND10F005)			
6	74A890601-2325	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND10E005)			
7	74A890601-2623	MARKER, IDENTIFICATION -	1	A	MDOZZ
		ELECTRICAL (76301) (FOR REF DES 5J-E035)			
8	MS27467T11B35S	CONNECTOR, PLUG (5P-E035)	1	A	PAOZZ
9	NAS1677D10W30N	STRAP	1		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
10	74A890601-2037	MARKER, IDENTIFICATION -	1	B	MDOZZ
		ELECTRICAL (76301) (FOR REF DES 5J-F035)			
11	MS27467T11B35S	CONNECTOR, PLUG (5P-F035)	1	B	PAOZZ


CODE	USABLE ON
A	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 39
B	161353 THRU 161519 BEFORE F18 AFC 39
C	161353 THRU 161720
D	161721 & UP

FWD FUSELAGE

DOOR 7L, DOOR 7R, DOOR 17L,
DOOR 17R, AND DOOR 96
(DETAILS OF L300 00)

LEGEND

- | | |
|---|--------------------|
| 1 | 161353 THRU 161528 |
| 2 | 161702 AND UP |

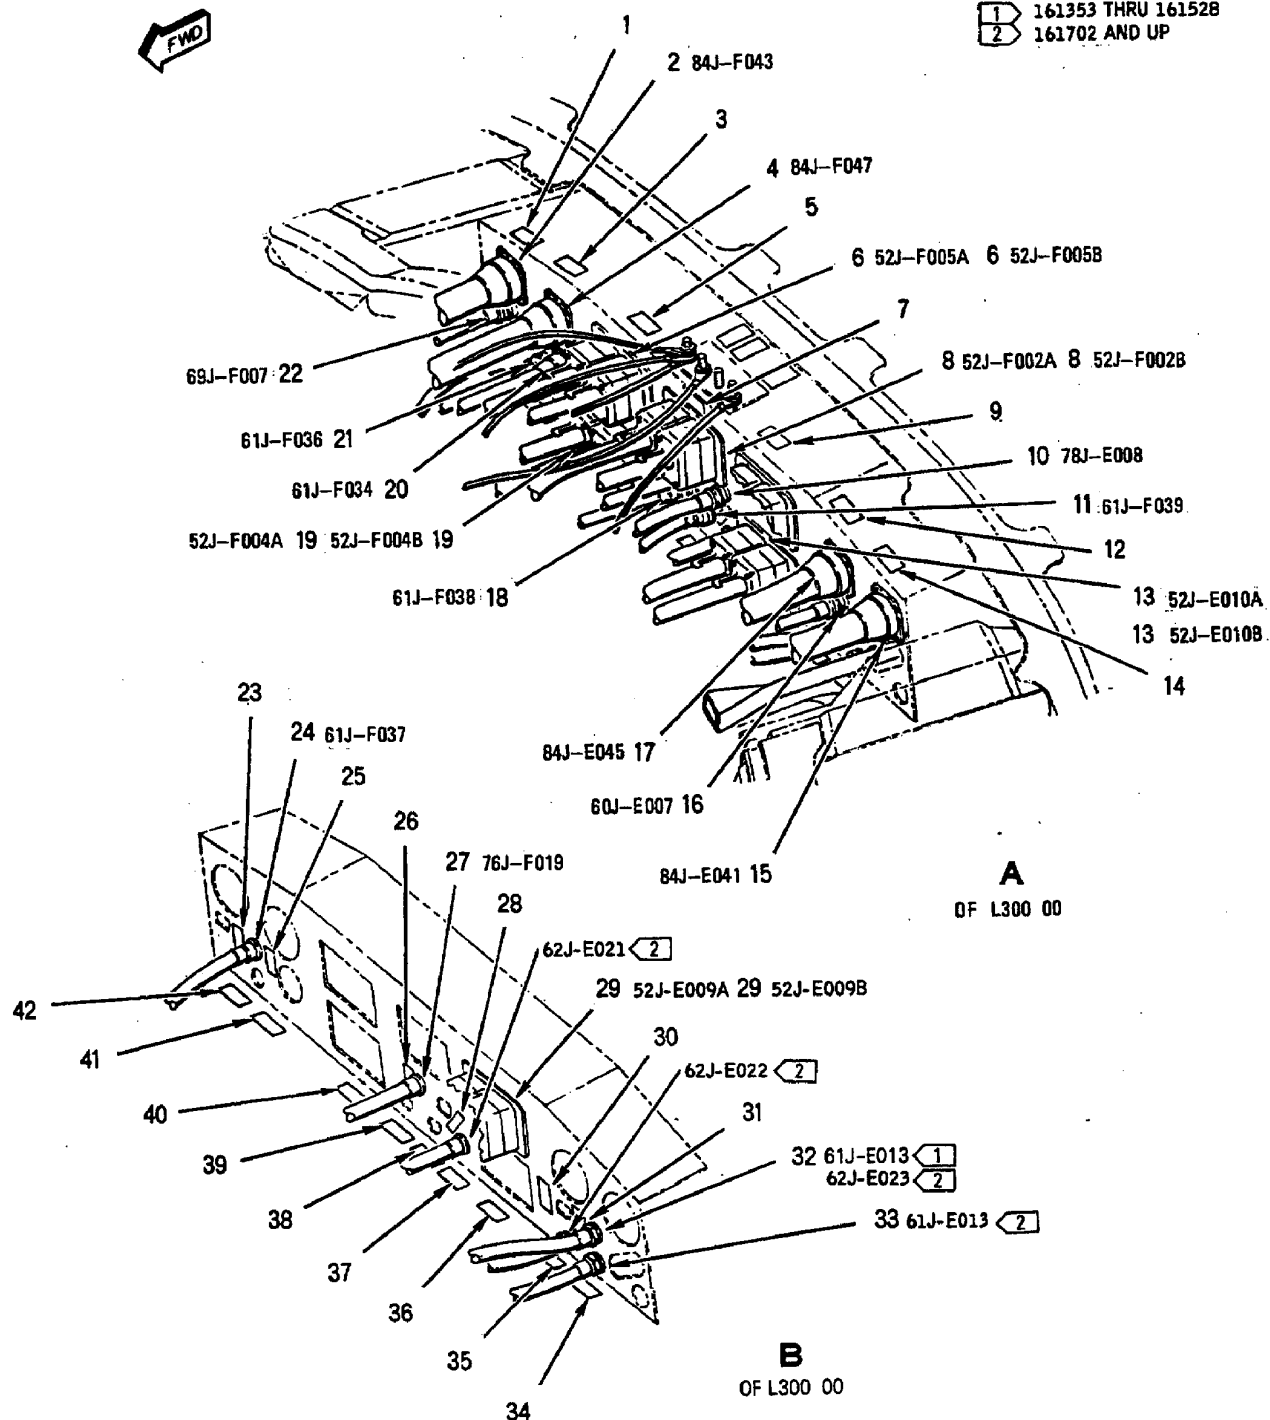

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2146	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-F043)	1		MDOZZ
2	MS27656T25B35S	CONNECTOR, RECEPTACLE (84J-F043)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
3	74A890601-2150	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-F047)	1		MDOZZ
4	MS27656T25B35PA	CONNECTOR, RECEPTACLE (84J-F047)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
5	74A890601-2047	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-F005)	1		MDOZZ
6	207595-1	CONNECTOR, RECEPTACLE, ELECTRI- CAL (00779) (MCDONNELL SPEC ST5M1526-01P06S) (52J-F005A, 52J-F005B)	1	*	PAOZZ
	C-2118-01	SEE ABOVE (55104)	1	*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	NAS679A04W	NUT (AP)	4		PAOZZ
7	74A890601-2045	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-F002)	1		MDOZZ
8	207595-2	CONNECTOR, RECEPTACLE, ELECTRICAL (00779) (MCDONNELL SPEC ST5M1526-01P02S) (52J-F002A, 52J-F002B)	1	*	PAOZZ
	C-2119-01	SEE ABOVE (55104)	1	*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	NAS679A04W	NUT (AP)	4		PAOZZ
9	74A890601-2312	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-E009A)	1	B	MDOZZ
10	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL (91836) (MCDONNELL SPEC STSM1544-0001) (78J-E008)	1	*	PAOZZ
11	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A001) (61J-F039)	1	*	PAOZZ
	5841-0904	SEE ABOVE (95077)	1	*	PAOZZ
12	74A890601-2148	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-E045)	1		MDOZZ
13	207595-2	CONNECTOR, RECEPTACLE, ELECTRICAL (00779) (MCDONNELL SPEC ST5M1526-01P02S) (52J-E010A, 52J-E010B)	1	*	PAOZZ
	C-2119-01	SEE ABOVE (55104)	1	*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	NAS679A04W	NUT (AP)	4		PAOZZ
14	74A890601-2144	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-E041)	1		MDOZZ
15	MS27656T25B35S	CONNECTOR, RECEPTACLE (84J-E041)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
16	150311-1350	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC ST5M1544-0001) (60J-E007)	1	*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1544-0001) (60J-E007)	1	*	PAOZZ
17	MS27656T25B35PA	CONNECTOR, RECEPTACLE (84J-E045)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
18	31-33819-13	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A003) (61J-F038)	1	*	PAOZZ
	5841-0906	SEE ABOVE (95077)	1	*	PAOZZ
19	207595-3	CONNECTOR, RECEPTACLE, ELECTRI- CAL (00779) (MCDONNELL SPEC ST5M1526-01P01P) (52J-F004A, 52J-F004B)	1	*	PAOZZ
	C-2117-01	SEE ABOVE (55104)	1	*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	NAS679A04W	NUT (AP)	4		PAOZZ
20	MS27656T15B35S	CONNECTOR, RECEPTACLE (61J-F034)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
21	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A001) (61J-F036)	1	*	PAOZZ
	5841-0904	SEE ABOVE (95077)	1	*	PAOZZ
22	150311-1350	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC ST5M1544-0001) (69J-F007)	1	*	PAOZZ
	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1544-0001) (69J-F007)	1	*	PAOZZ
23	74A890601-2120	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 69J-F007)	1		MDOZZ
24	31-33819-12	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A002) (61J-F037)	1	*	PAOZZ
	5841-0905	SEE ABOVE (95077)	1	*	PAOZZ
25	74A890601-2108	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 61J-F037)	1		MDOZZ
26	74A890601-2131	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 76J-F019)	1		MDOZZ
27	150311-1350	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC ST5M1544-0001) (76J-F019)	1	*	PAOZZ
	KN-19-186-M07	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC ST5M1544-0001) (76J-F019)	1	*	PAOZZ
	150393-0005	ADAPTER, CABLE CLAMP TO CONNEC- TOR (71468) (MCDONNELL SPEC ST5M1377N30) (USE WITH INDEX 27)	1	*	PAOZZ
	KN-89-63-M07	ADAPTER, CABLE CLAMP TO CONNEC- TOR (91836) (MCDONNELL SPEC ST5M1377N30) (USE WITH INDEX 27)	1	*	PAOZZ
	1161-000-A000-3	SEE ABOVE (00795)	1	*	PAOZZ
	MS16624-4059	RETAINER (USE WITH INDEX 27)	1		-
28	74A890601-2136	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 78J-E008)	1		MDOZZ
29	1-207595-0	CONNECTOR, RECEPTACLE, ELECTRI- CAL (00779) (MCDONNELL SPEC ST5M1526-01P12S) (52J-E009A, 52J-E009B)	1	B*	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	C-2120-01	SEE ABOVE (55104)	1	B*	PAOZZ
	NAS600-8P	SCREW (AP)	4	B	PAOZZ
	AN960JD4L	WASHER (AP)	4	B	PAOZZ
	NAS679A04W	NUT (AP)	4	B	PAOZZ
30	74A890601-2093	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-E007)	1	B	MDOZZ
31	74A890601-2171	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E023)	1	B	MDOZZ
32	M39012/28-0503	CONNECTOR, RECEPTACLE (61J-E013)	1	A	MDOZZ
33	M39012/28-0503	CONNECTOR, RECEPTACLE (61J-E013)	1	B	PAOZZ
34	74A890601-2098	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-E013)	1		MDOZZ
35	74A890601-2093	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-E007)	1	A	MDOZZ
	74A890601-2170	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E022)	1	B	MDOZZ
36	74A890601-2052	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-E010)	1		MDOZZ
37	74A890601-2169	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E021)	1	B	MDOZZ
38	74A890601-2110	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F039)	1		MDOZZ
39	74A890601-2109	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F038)	1		MDOZZ
40	74A890601-2046	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F004)	1		MDOZZ
41	74A890601-2105	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F034)	1		MDOZZ
42	74A890601-2107	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F036)	1		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP


FWD FUSELAGE

DOOR 18
DORSAL DECK (FWD)
(DETAIL OF L300 00)

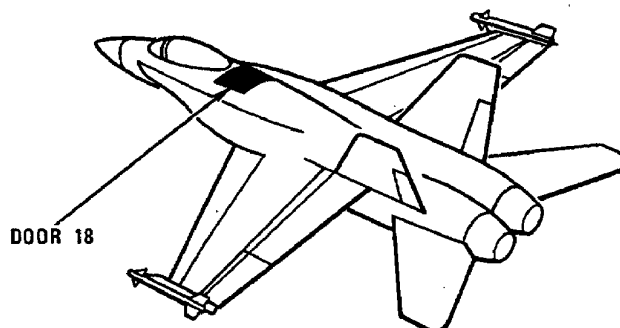

LEGEND



- | | |
|---|--------------------|
| 1 | 161353 THRU 161528 |
| 2 | 161702 AND UP |

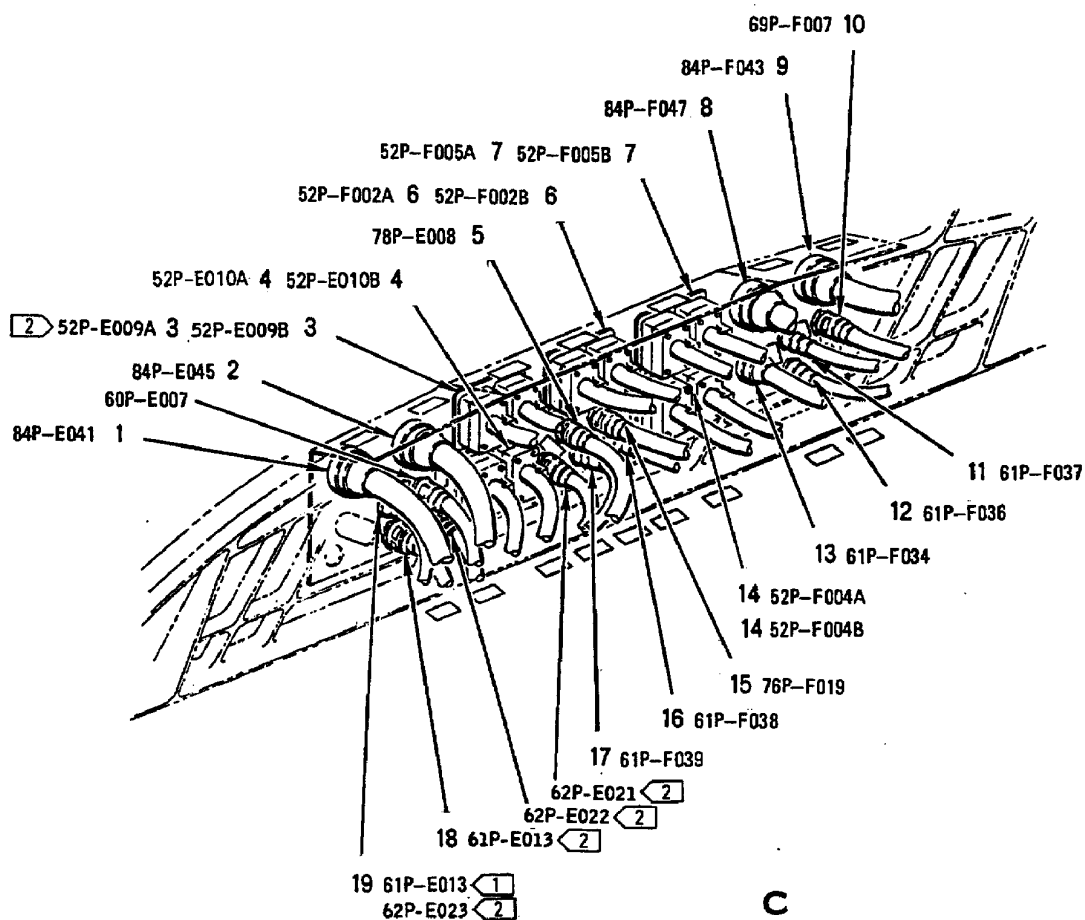

C
OF L300 00

FWD FUSELAGE

DOOR 18
DORSAL DECK (FWD)
(DETAIL OF L300 00)

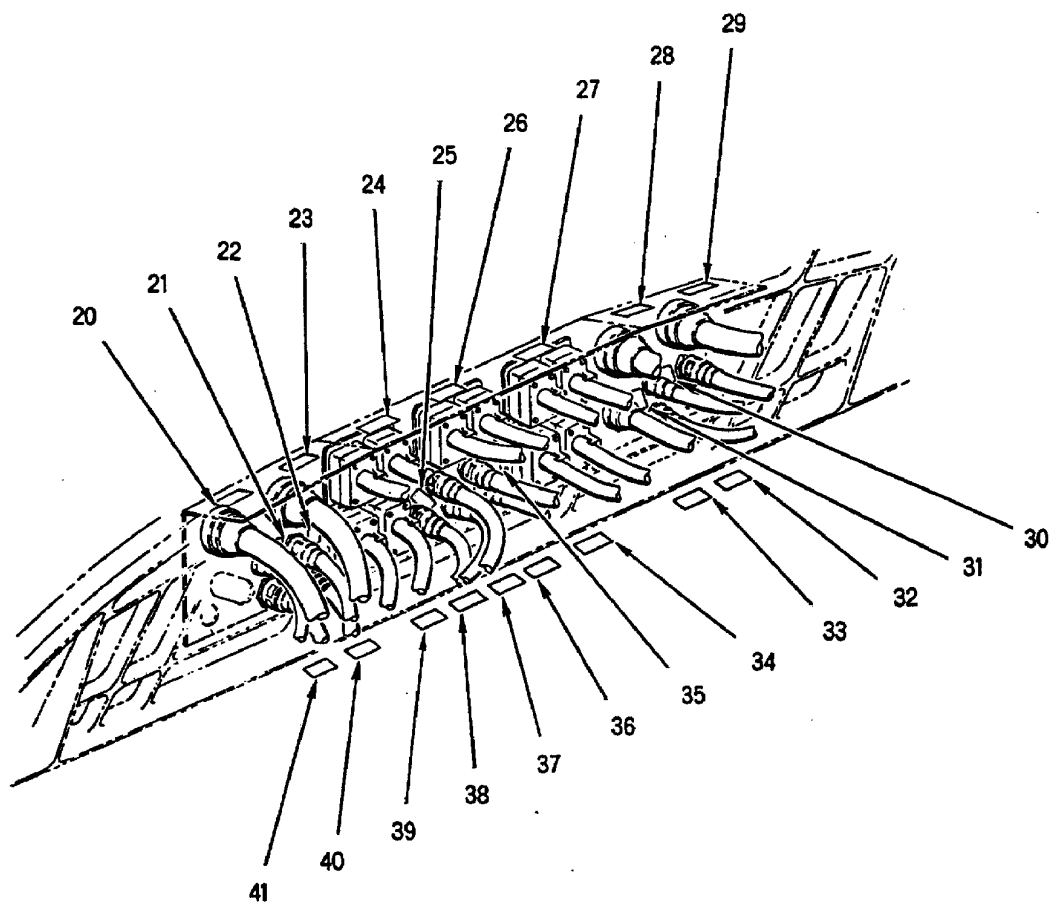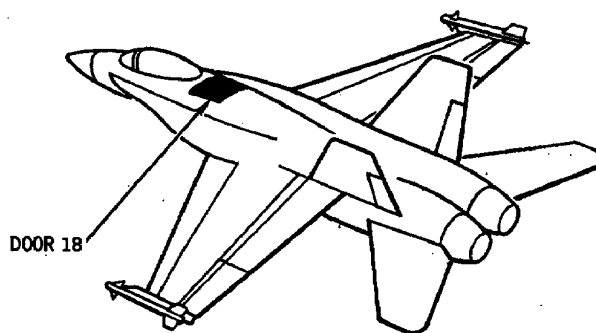

C

OF L300 00

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B35P	CONNECTOR, PLUG (84P-E041)	1		PAOZZ
2	MS27467T25B35SA	CONNECTOR, PLUG (84P-E045)	1		PAOZZ
3	1-207596-0	CONNECTOR, PLUG, ELECTRICAL (00779) ... (MCDONNELL SPEC ST5M1527-01S12P) (52P-E009A, 52P-E009B)	1	B*	PAOZZ
	C-2301-01	SEE ABOVE (55104)	1	B*	PAOZZ
4	207596-2	CONNECTOR, PLUG, ELECTRICAL (00779) ... (MCDONNELL SPEC ST5M1527-01S02P) (52P-E010A, 52P-E010B)	1	*	PAOZZ
	C-2298-01	SEE ABOVE (55104)	1	*	PAOZZ
5	82-3223-2	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1348NS2A) (78P-E008)	1	*	PAOZZ
	1205-1-2	CONNECTOR, PLUG, ELECTRICAL (91836) ... (MCDONNELL SPEC ST5M1348NS2A) (78P-E008)	1	*	PAOZZ
	1103-097-A00E-2	SEE ABOVE (00795)	1	*	PAOZZ
6	207596-2	CONNECTOR, PLUG, ELECTRICAL (00779) ... (MCDONNELL SPEC ST5M1527-01S02P) (52P-F002A, 52P-F002B)	1	*	PAOZZ
	C-2298-01	SEE ABOVE (55104)	1	*	PAOZZ
7	207596-1	CONNECTOR, PLUG, ELECTRICAL (00779) ... (MCDONNELL SPEC ST5M1527-01S06P) (52P-F005A, 52P-F005B)	1	*	PAOZZ
	C-2297-01	SEE ABOVE (55104)	1	*	PAOZZ
8	MS27467T25B35SA	CONNECTOR, PLUG (84P-F047)	1		PAOZZ
9	MS27467T25B35P	CONNECTOR, PLUG (84P-F043)	1		PAOZZ
10	82-3223-4	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1348NS4A) (69P-F007)	1	*	PAOZZ
	1205-1-4	CONNECTOR, PLUG, ELECTRICAL (91836) ... (MCDONNELL SPEC ST5M1348NS4A) (69P-F007)	1	*	PAOZZ
	1103-097-A00E-4	SEE ABOVE (00795)	1	*	PAOZZ
11	31-33449-4	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1425-02S) (61P-F037)	1	*	PAOZZ
	5801-0902	SEE ABOVE (95077)	1	*	PAOZZ
12	31-33449-3	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1425-01S) (61P-F036)	1	*	PAOZZ
	5801-0901	SEE ABOVE (95077)	1	*	PAOZZ
13	MS27467T15B35P	CONNECTOR, PLUG (61P-F034)	1		PAOZZ
14	207596-3	CONNECTOR, PLUG, ELECTRICAL (00779) ... (MCDONNELL SPEC ST5M1527-01S01S) (52P-F004A, 52P-F004B)	1	*	PAOZZ
	C-2299-01	SEE ABOVE (55104)	1	*	PAOZZ
15	82-3223-3	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1348NS3A) (76P-F019)	1	*	PAOZZ
	1205-1-3	SEE ABOVE (91836)	1	*	PAOZZ
16	31-33449-5	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1425-03S) (61P-F038)	1	*	PAOZZ
	5801-0903	SEE ABOVE (95077)	1	*	PAOZZ
17	31-33449-3	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1425-01S) (61P-F039)	1	*	PAOZZ
	5801-0901	SEE ABOVE (95077)	1	*	PAOZZ
18	M39012/26-0503	CONNECTOR, PLUG (61P-E013)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
19	M39012/26-0503	CONNECTOR, PLUG (61P-E013)	1	A	PAOZZ
20	74A890601-2144	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-E041)	1		MDOZZ
21	74A890601-2171	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E023)	1	B	MDOZZ
22	74A890601-2093	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-E007)	1	B	MDOZZ
23	74A890601-2148	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-E045)	1		MDOZZ
24	74A890601-2312	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-E009A, 52J-E009B)	1	B	MDOZZ
25	74A890601-2136	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 78J-E008)	1		MDOZZ
26	74A890601-2045	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F002)	1		MDOZZ
27	74A890601-2047	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F005)	1		MDOZZ
28	74A890601-2150	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-F047)	1		MDOZZ
29	74A890601-2146	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-F043)	1		MDOZZ
30	74A890601-2120	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 69J-F007)	1		MDOZZ
31	74A890601-2108	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F037)	1		MDOZZ
32	74A890601-2107	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F036)	1		MDOZZ
33	74A890601-2105	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F034)	1		MDOZZ
34	74A890601-2046	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F004)	1		MDOZZ
35	74A890601-2131	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 76J-F019)	1		MDOZZ
36	74A890601-2109	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F038)	1		MDOZZ
37	74A890601-2110	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-F039)	1		MDOZZ
38	74A890601-2169	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E021)	1	B	MDOZZ
39	74A890601-2052	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-E010)	1		MDOZZ
40	74A890601-2093	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 60J-E007)	1	A	MDOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE

	74A890601-2170	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-E022)	1	B	MDOZZ
41	74A890601-2098	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-E013)	1		MDOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP

FWD FUSELAGE
DOOR 18
DORSAL DECK (CENTER)

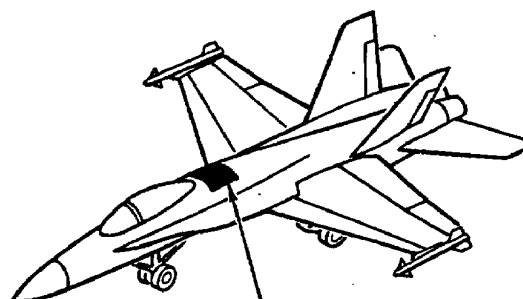

DOOR 18

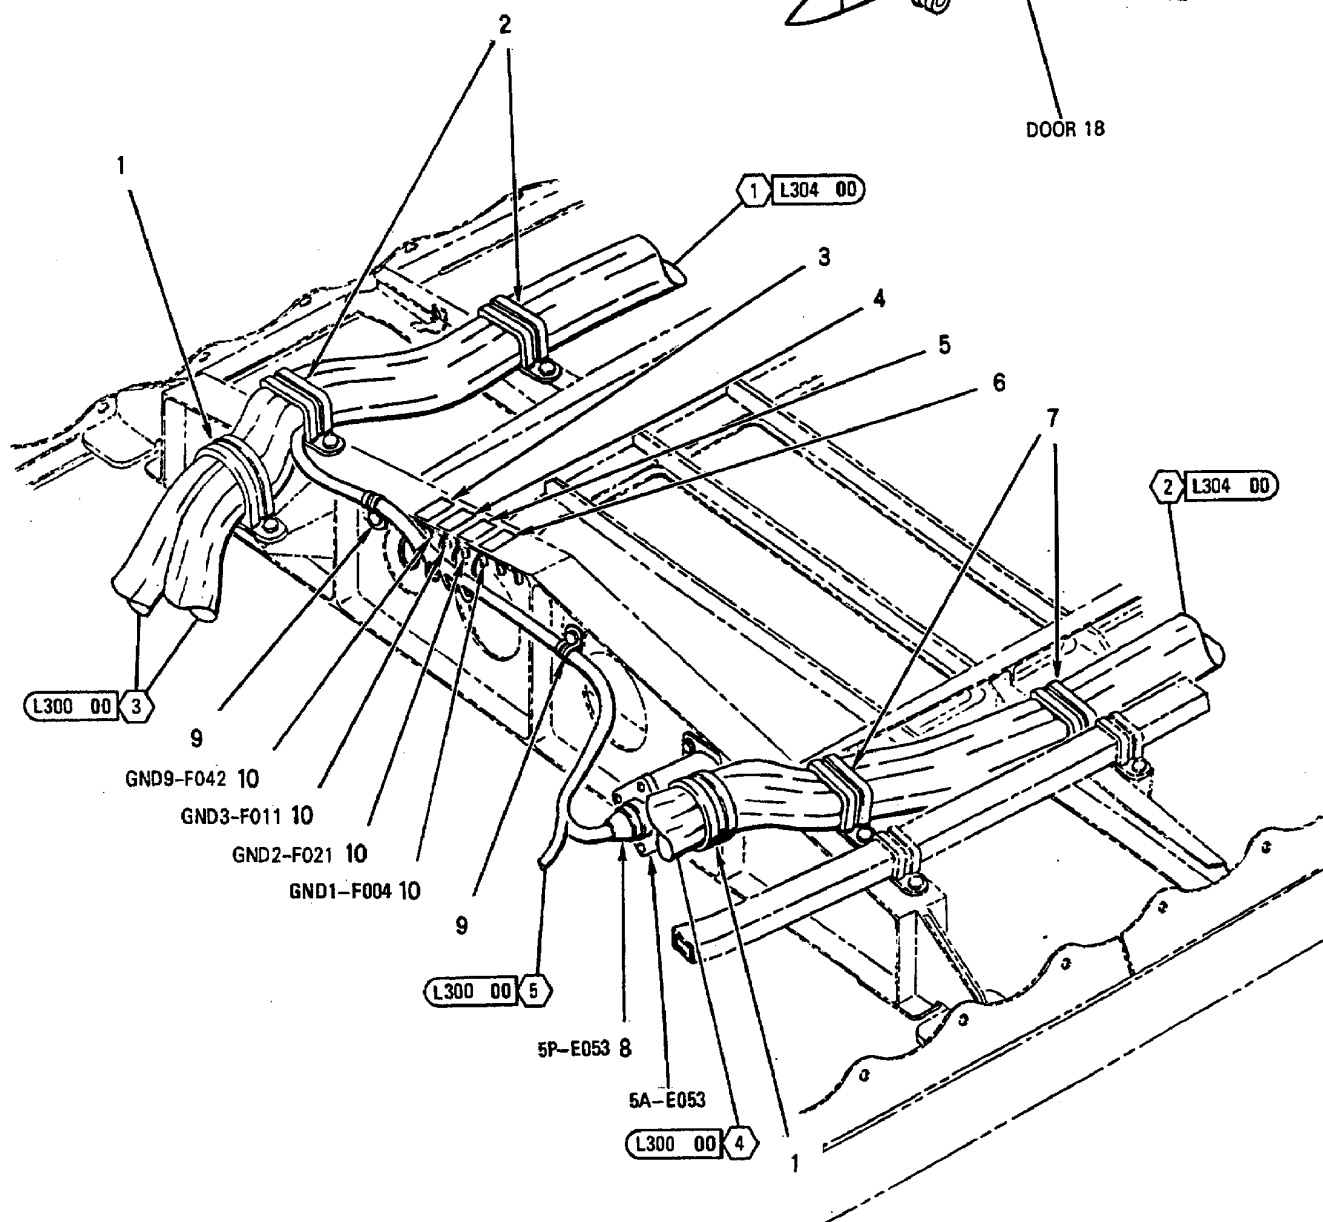


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	2		-
	NAS673V12	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
2	NAS1677D15W30N	STRAP	2		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
3	74A890601-2541	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-F042)			
4	74A890601-2542	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND3-F011)			
5	74A890601-2540	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-F021)			
6	74A890601-2539	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND1-F004)			
7	NAS1677D10W30N	STRAP	2		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
8	MS27467T13B35S	CONNECTOR, PLUG (5P-E053)	1		PAOZZ
9	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	4		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE

DOOR 18

DORSAL DECK (AFT)

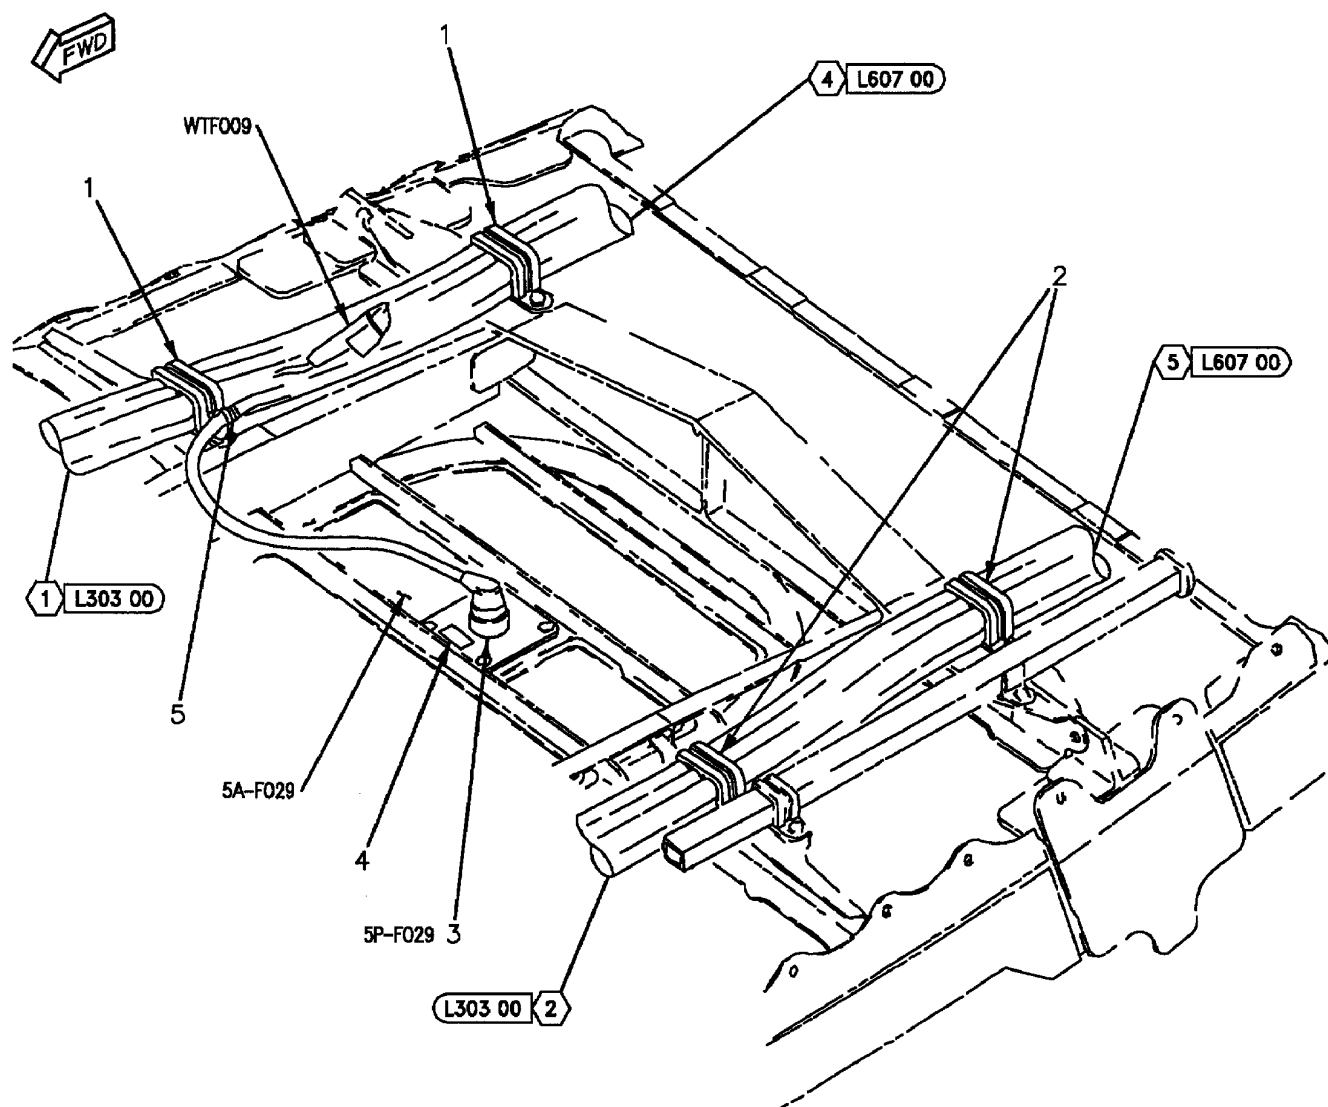

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1677D15W30N	STRAP	2		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
2	NAS1677D10W30N	STRAP	2		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
3	MS27467T9B35S	CONNECTOR, PLUG (5P-F029)	1		PAOZZ
4	74A890601-2326	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 5A-F029)			
5	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE

NOSE GEAR
FWD SIDE


LEGEND

1 161737 AND UP

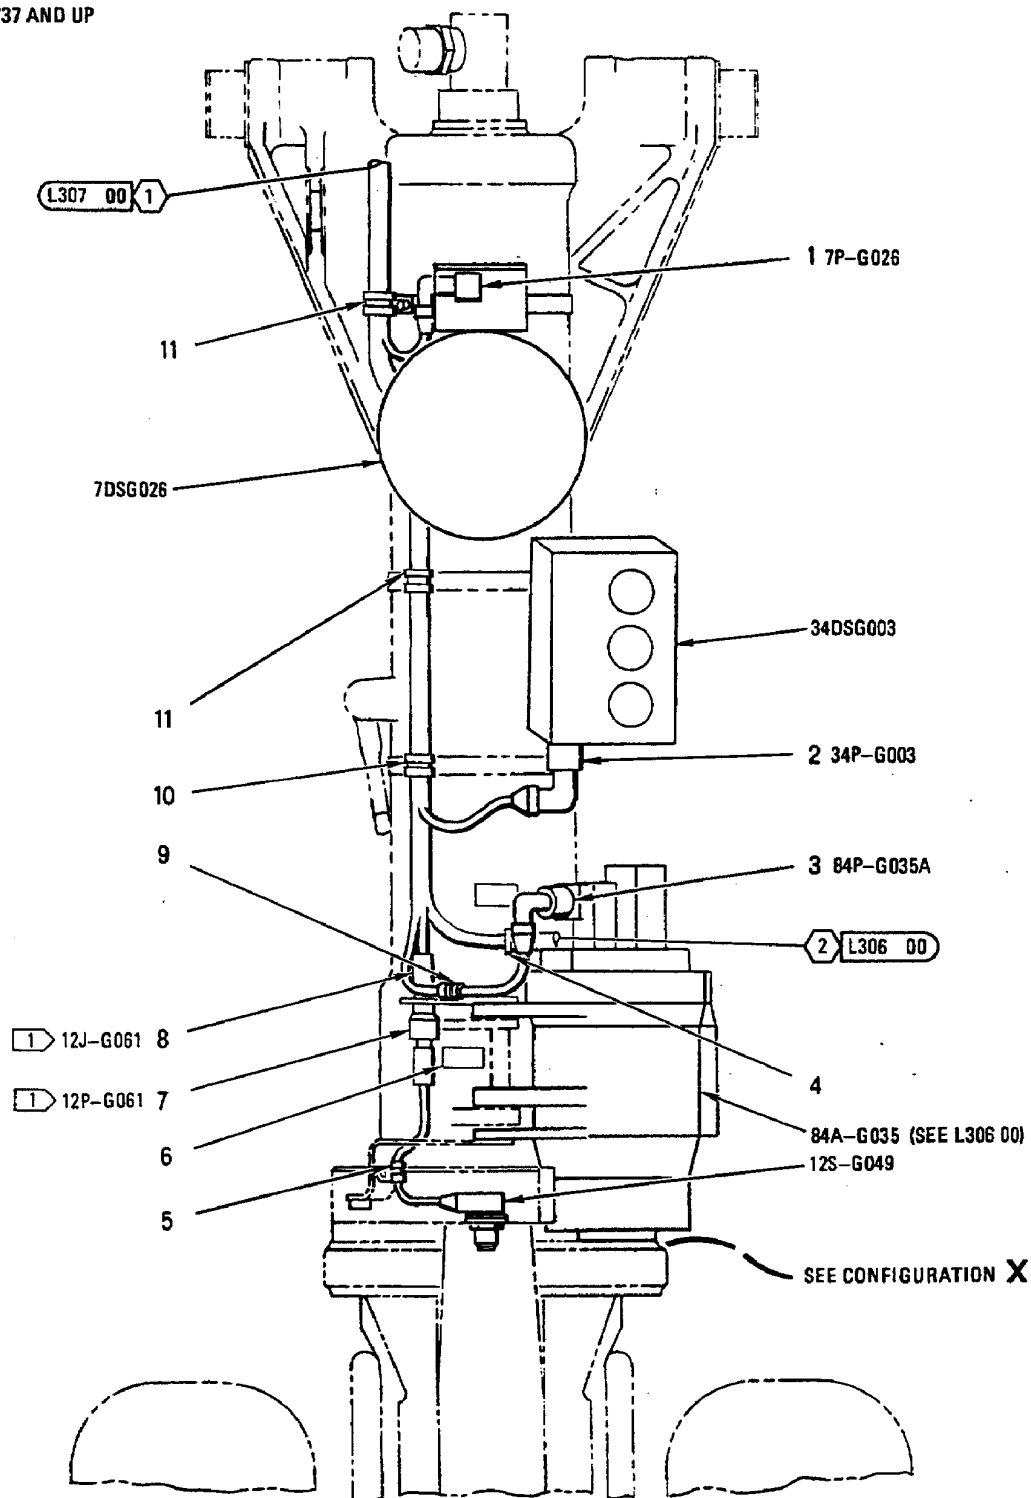

FWD FUSELAGE

NOSE GEAR
FWD SIDE

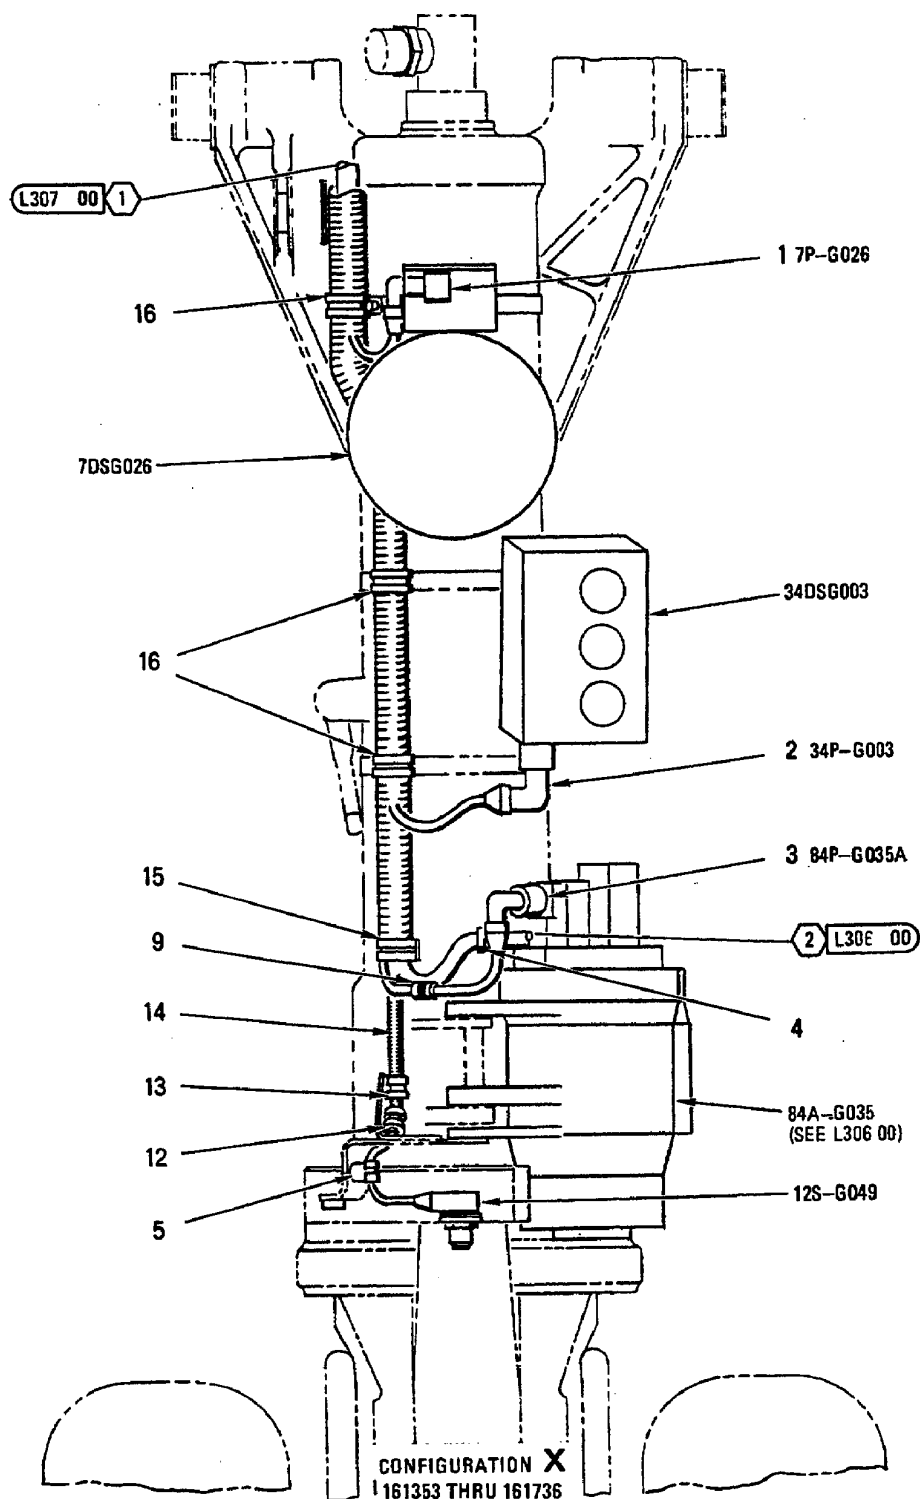

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B98S	CONNECTOR, PLUG (7P-G026)	1		PAOZZ
2	MS27467T13B98S	CONNECTOR, PLUG (34P-G003)	1		PAOZZ
3	MS27467T11B35S	CONNECTOR, PLUG (84P-G035A)	1		PAOZZ
4	MS21919WDG9	CLAMP	1	A	PAOZZ
	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS653V4	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	MS21919WDG2	CLAMP	1		PAOZZ
	NAS653V5	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	74A890601-2889	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MDOZZ
		(76301) (FOR REF DES 12J-G061)			
7	MS27467T9B35P	CONNECTOR, PLUG (12P-G061)	1	B	PAOZZ
8	MS27656T9B35S	CONNECTOR, RECEPTACLE (12J-G061)	1	B	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER	4		PAOZZ
	SS916-10CP	PLATE, RETAINING, ELECTRICAL CONNECTOR	1		PAOZZ
		(19904) (MCDONNELL SPEC ST3M823C2) (USE WITH INDEX)			
	1008-1001	SEE ABOVE (04967)	1		PAOZZ
9	MS21919WDG4	CLAMP	1		PAOZZ
	NAS653V4	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
10	NAS1713C10N	CLAMP	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
	NK1003696-05	LUG ASSEMBLY (98625) (MCDONNELL SPEC ST9M504-1) (USE WITH INDEX 10)	1	B	PAOZZ
11	NAS1713C7N	CLAMP	2	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
	NK1003696-05	LUG ASSEMBLY (98625) (MCDONNELL SPEC ST9M504-1) (USE WITH INDEX 11)	2	B	PAOZZ
12	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	1	A*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002) (USE WITH INDEX 12)			
	CTR6612-002	SEE ABOVE (64590)	1	A*	PAOZZ
13	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
14	200038-00-09	TUBING, NON-METALLIC (05593) (MCDONNELL SPEC ST5M1330-09)	AR	A*	PAOZZ
	N11000-018	SEE ABOVE (81482)	AR	A*	PAOZZ
	22A00010-00009	SEE ABOVE (07418)	AR	A*	PAOZZ
	32A00001-00900	SEE ABOVE (56963)	AR	A*	PAOZZ
15	MS21919WDG15	CLAMP	1	A	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
16	NAS1713C13N	CLAMP	3	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			

AN960JD10L	WASHER (AP)	2	A	PAOZZ
NK1003696-05	LUG ASSEMBLY (98625) (MCDONNELL SPEC	1	A	PAOZZ
	ST9M504-1) (USE WITH INDEX 16)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161736
B	161737 & UP

FWD FUSELAGE NOSE GEAR LEFT SIDE


LEGEND

1 161737 AND UP

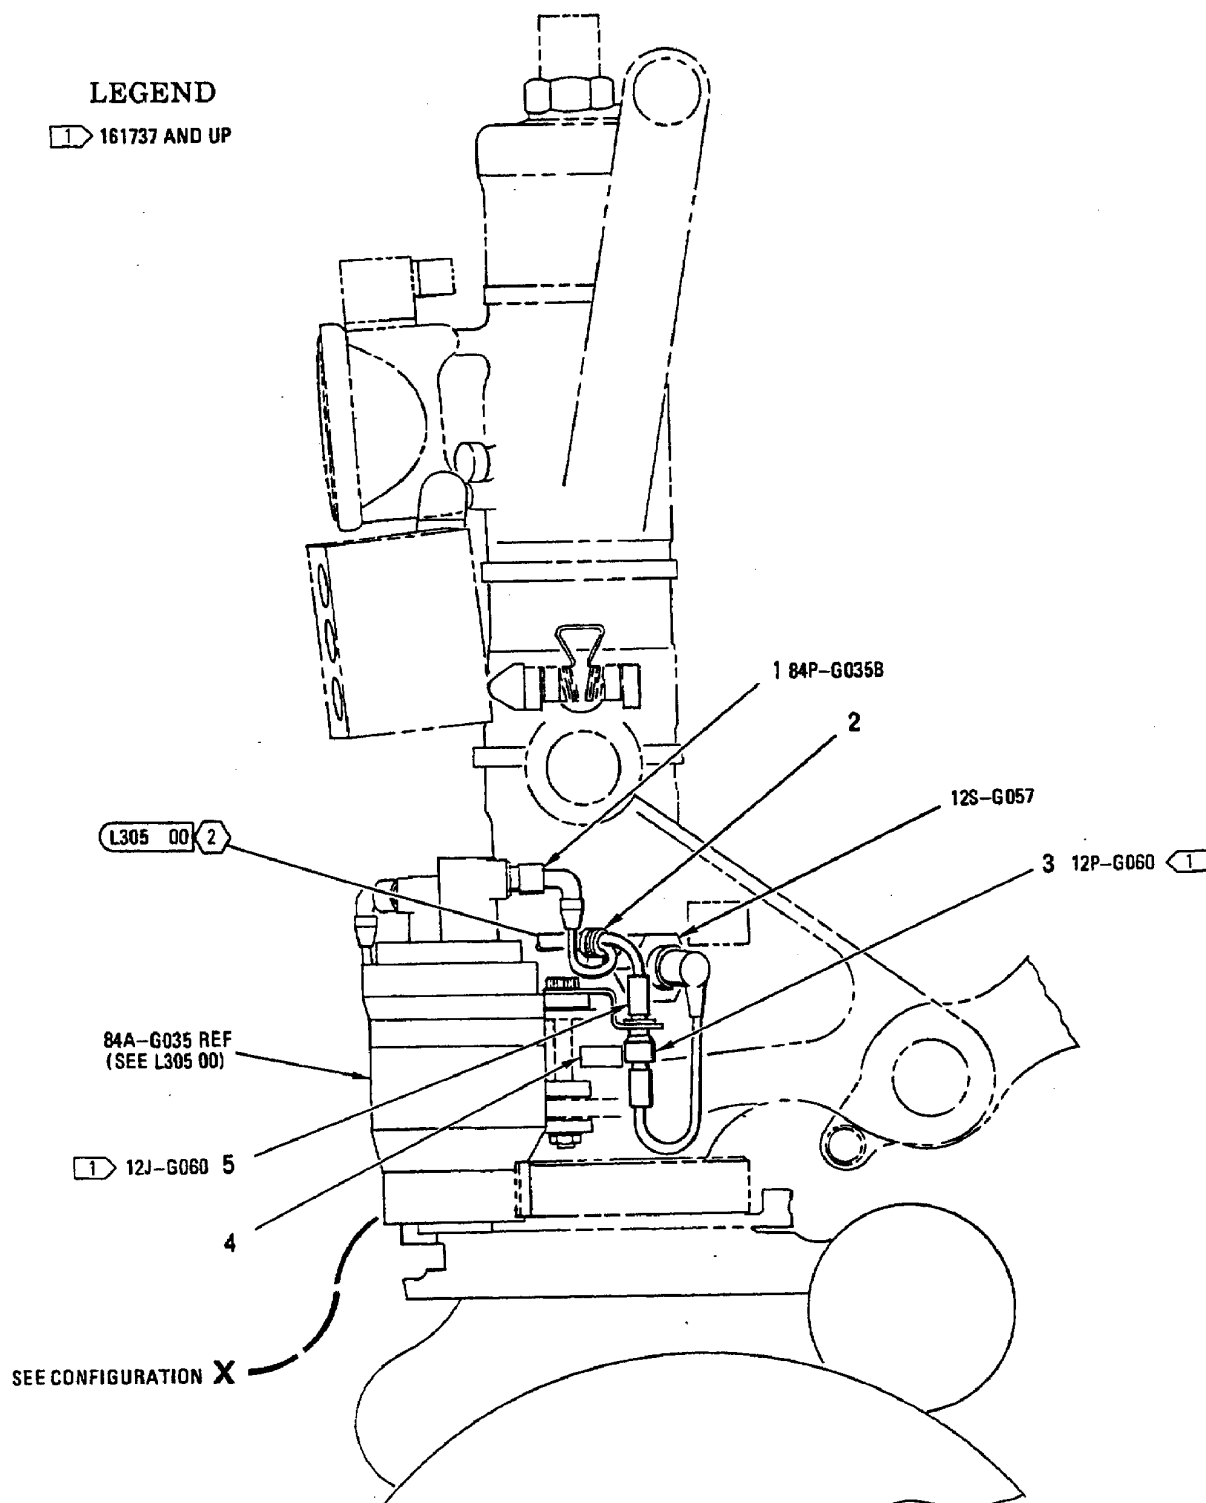

FWD FUSELAGE


NOSE GEAR
LEFT SIDE

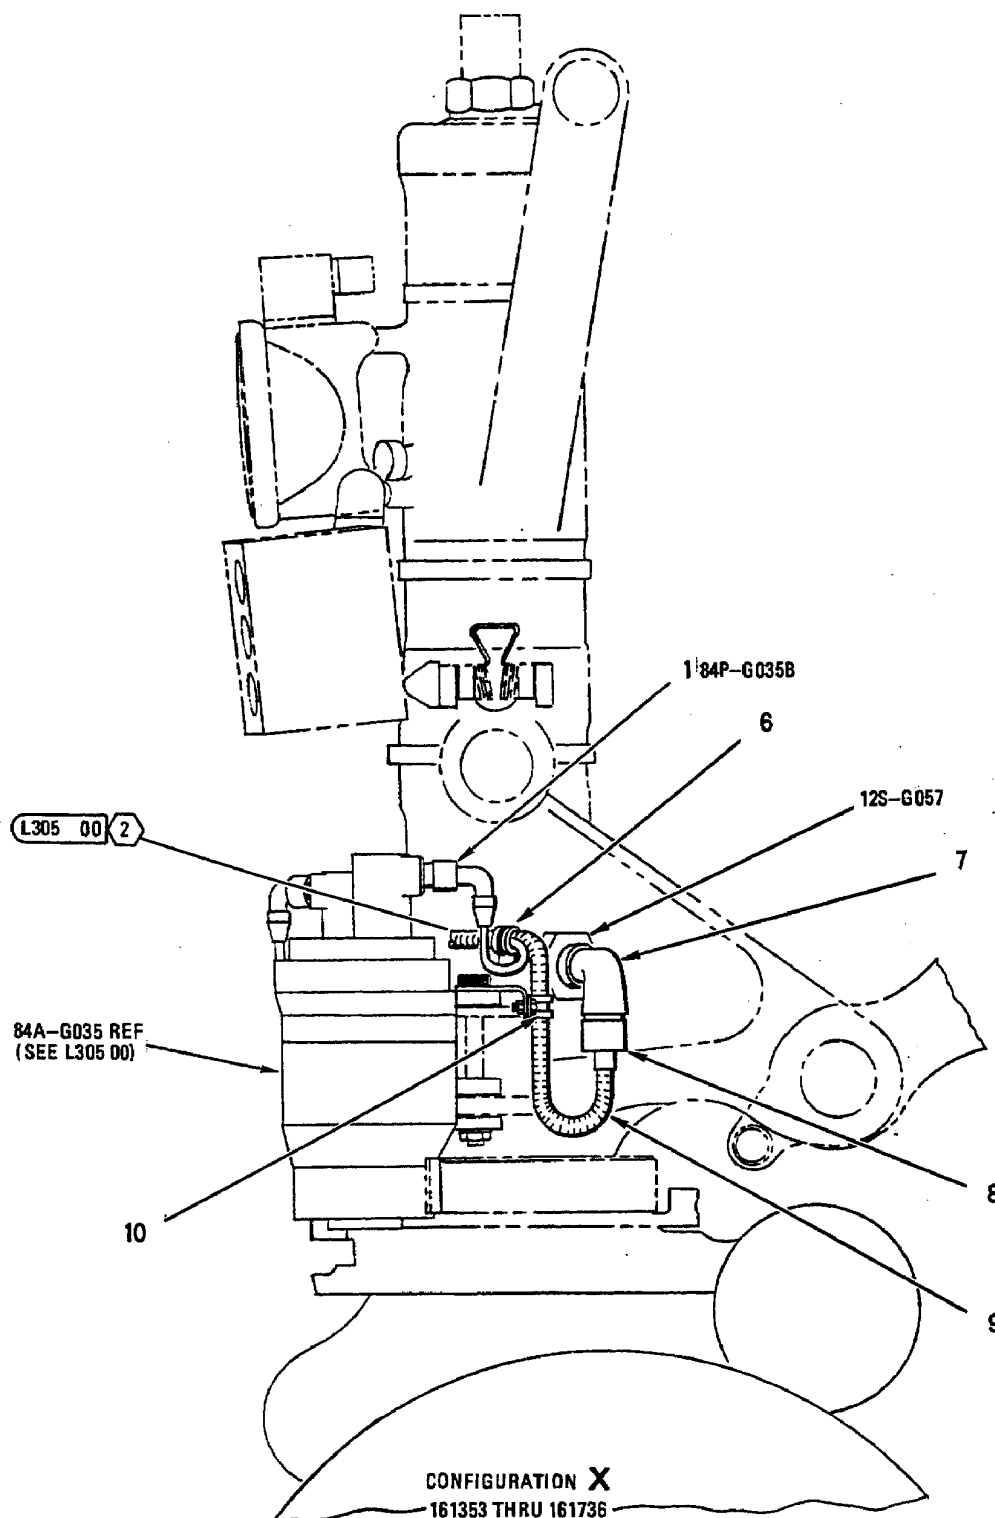


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B35SA	CONNECTOR, PLUG (84P-G035B)	1		PAOZZ
2	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS653V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
3	MS27467T9B35P	CONNECTOR, PLUG (12P-G060)	1	B	PAOZZ
4	74A890601-2888	MARKER, IDENTIFICATION -	1	B	MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12J-G060)			
5	MS27656T9B35S	CONNECTOR, RECEPTACLE (12J-G060)	1	B	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	SS916-10CP	PLATE, RETAINING, ELECTRICAL	1		PAOZZ
		CONNECTOR (19904) (MCDONNELL SPEC ST3M823C2) (USE WITH INDEX 5)			
	1008-1001	SEE ABOVE (04967)	1		PAOZZ
6	MS21919WDG9	CLAMP	1	A	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
7	CRN2795-5	ADAPTER, CABLE CLAMP TO	1	A*	PAOZZ
		CONNECTOR (05593) (MCDONNELL SPEC ST5M1571-19)			
	J627-18L-13DS	ADAPTER, CABLE CLAMP TO	1	A*	PAOZZ
		CONNECTOR (07418) (MCDONNELL SPEC ST5M1571-19)			
8	CRN3444-33	ADAPTER, ELECTRICAL CONDUIT (05593) ..	1	A*	PAOZZ
		(MCDONNELL SPEC ST5M1331L20C12)			
9	200038-00-12	TUBING, NON-METALLIC (05593)	AR	A*	PAOZZ
		(MCDONNELL SPEC ST5M1330-12)			
	N11000-024	SEE ABOVE (81482)	AR	A*	PAOZZ
	22A00010-00012	SEE ABOVE (07418)	AR	A*	PAOZZ
	32A00001-01200	SEE ABOVE (56963)	AR	A*	PAOZZ
	ZCT-TE-024	SEE ABOVE (32039)	AR	A*	PAOZZ
10	MS21919WDG8	CLAMP	1	A	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161736
B	161737 & UP

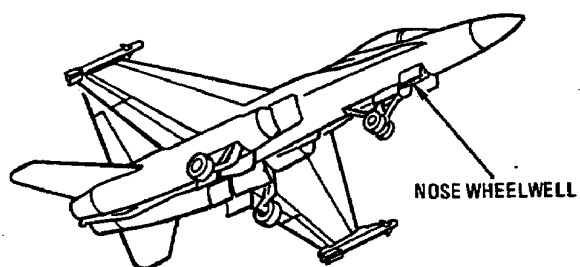


FWD FUSELAGE NOSE WHEELWELL AREA LEFT AFT

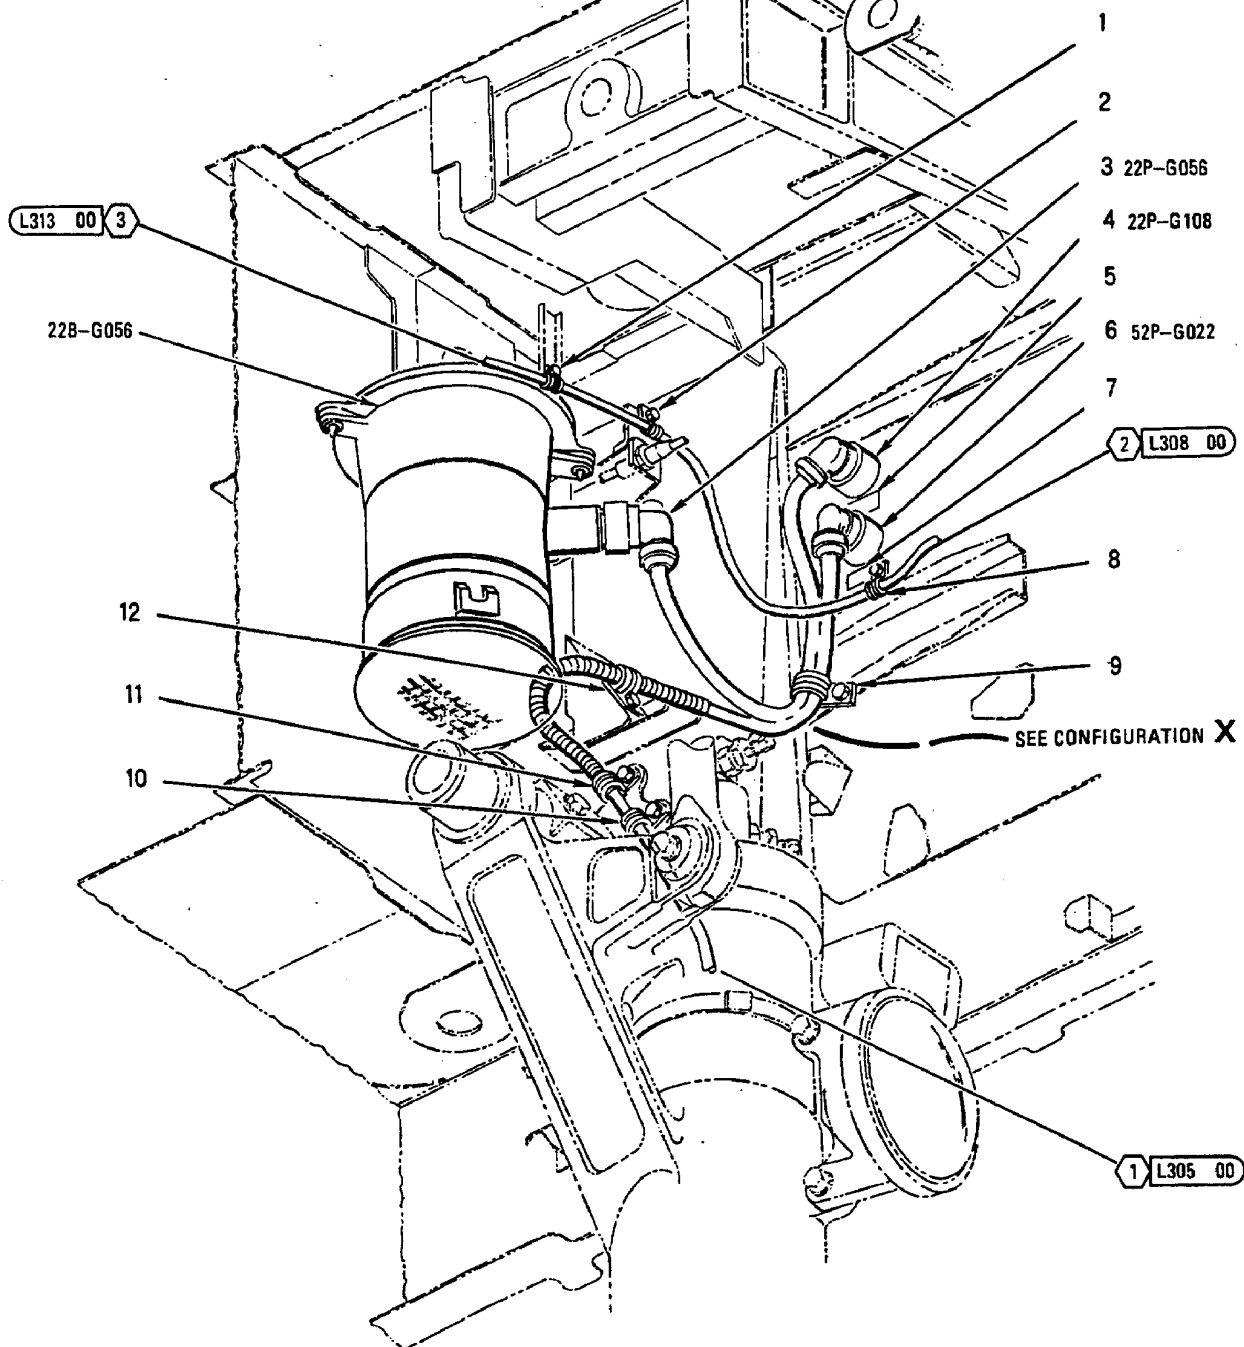

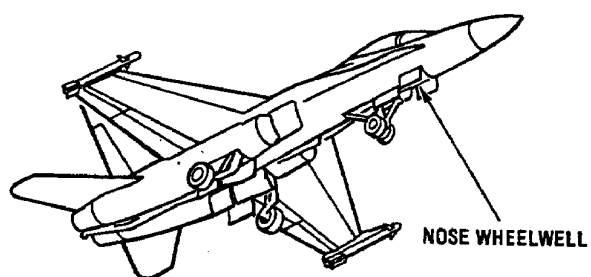

FWD FUSELAGE
NOSE WHEELWELL AREA
LEFT AFT

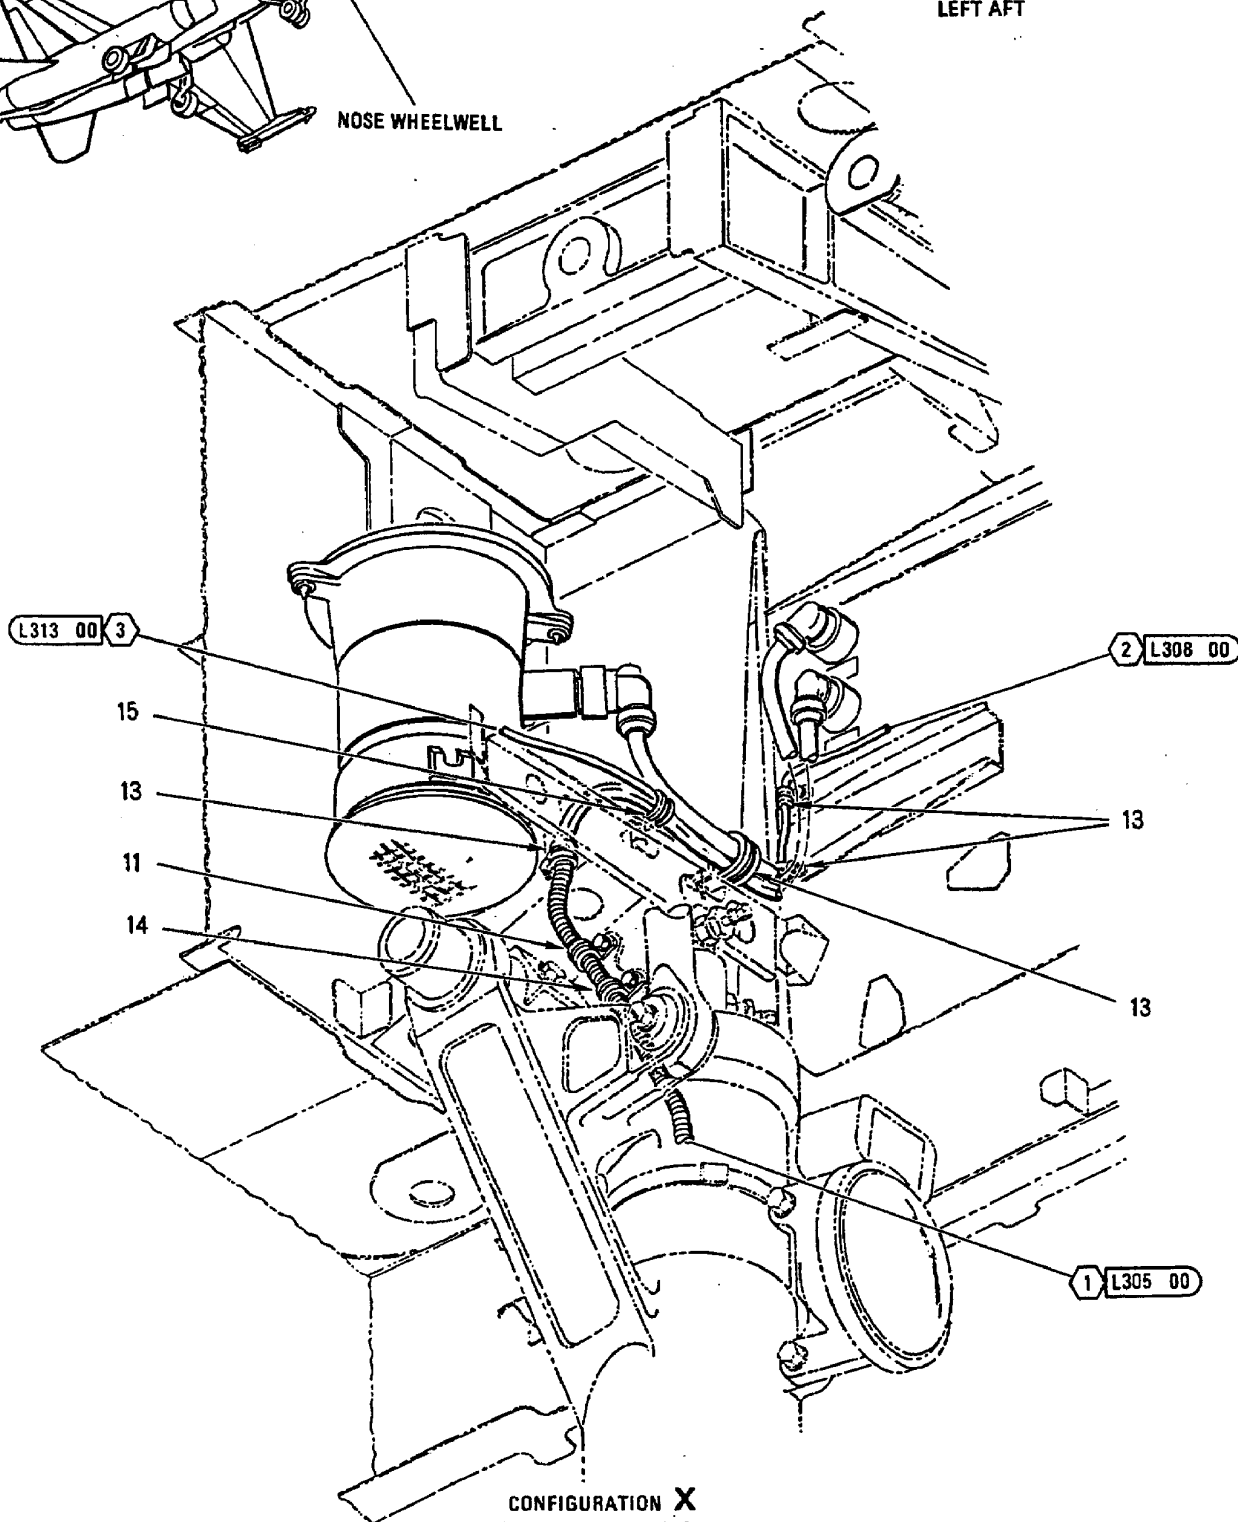


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1	E	-
	NAS673V10	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS42DD6-28	SPACER (AP)	1	E	PAOZZ
2	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
3	MS27467T21B11S	CONNECTOR, PLUG (22P-G056)	1		PAOZZ
4	MS27467T17B6P	CONNECTOR, PLUG (22P-G108)	1		PAOZZ
5	74A890601-2518	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 22J-C108)			
6	MS27467T19B35P	CONNECTOR, PLUG (52P-G022)	1		PAOZZ
7	74A890601-2489	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REP DES 52J-C022)			
8	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-48	SPACER (AP)	1	A	PAOZZ
9	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
10	MS21919WDG16	CLAMP	1	C	PAOZZ
	MS21919WDG10	CLAMP	1	D	PAOZZ
	NAS653V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
11	MS21919WDG12	CLAMP	1		PAOZZ
	NAS653V4	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
12	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
13	MS21919WDG #	CLAMP	4	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
14	MS21919WDG16	CLAMP	1	B	PAOZZ
	NAS653V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
15	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161361 & UP
B	161353 THRU 161359
C	161361 THRU 161736
D	161737 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

E 161710 & UP

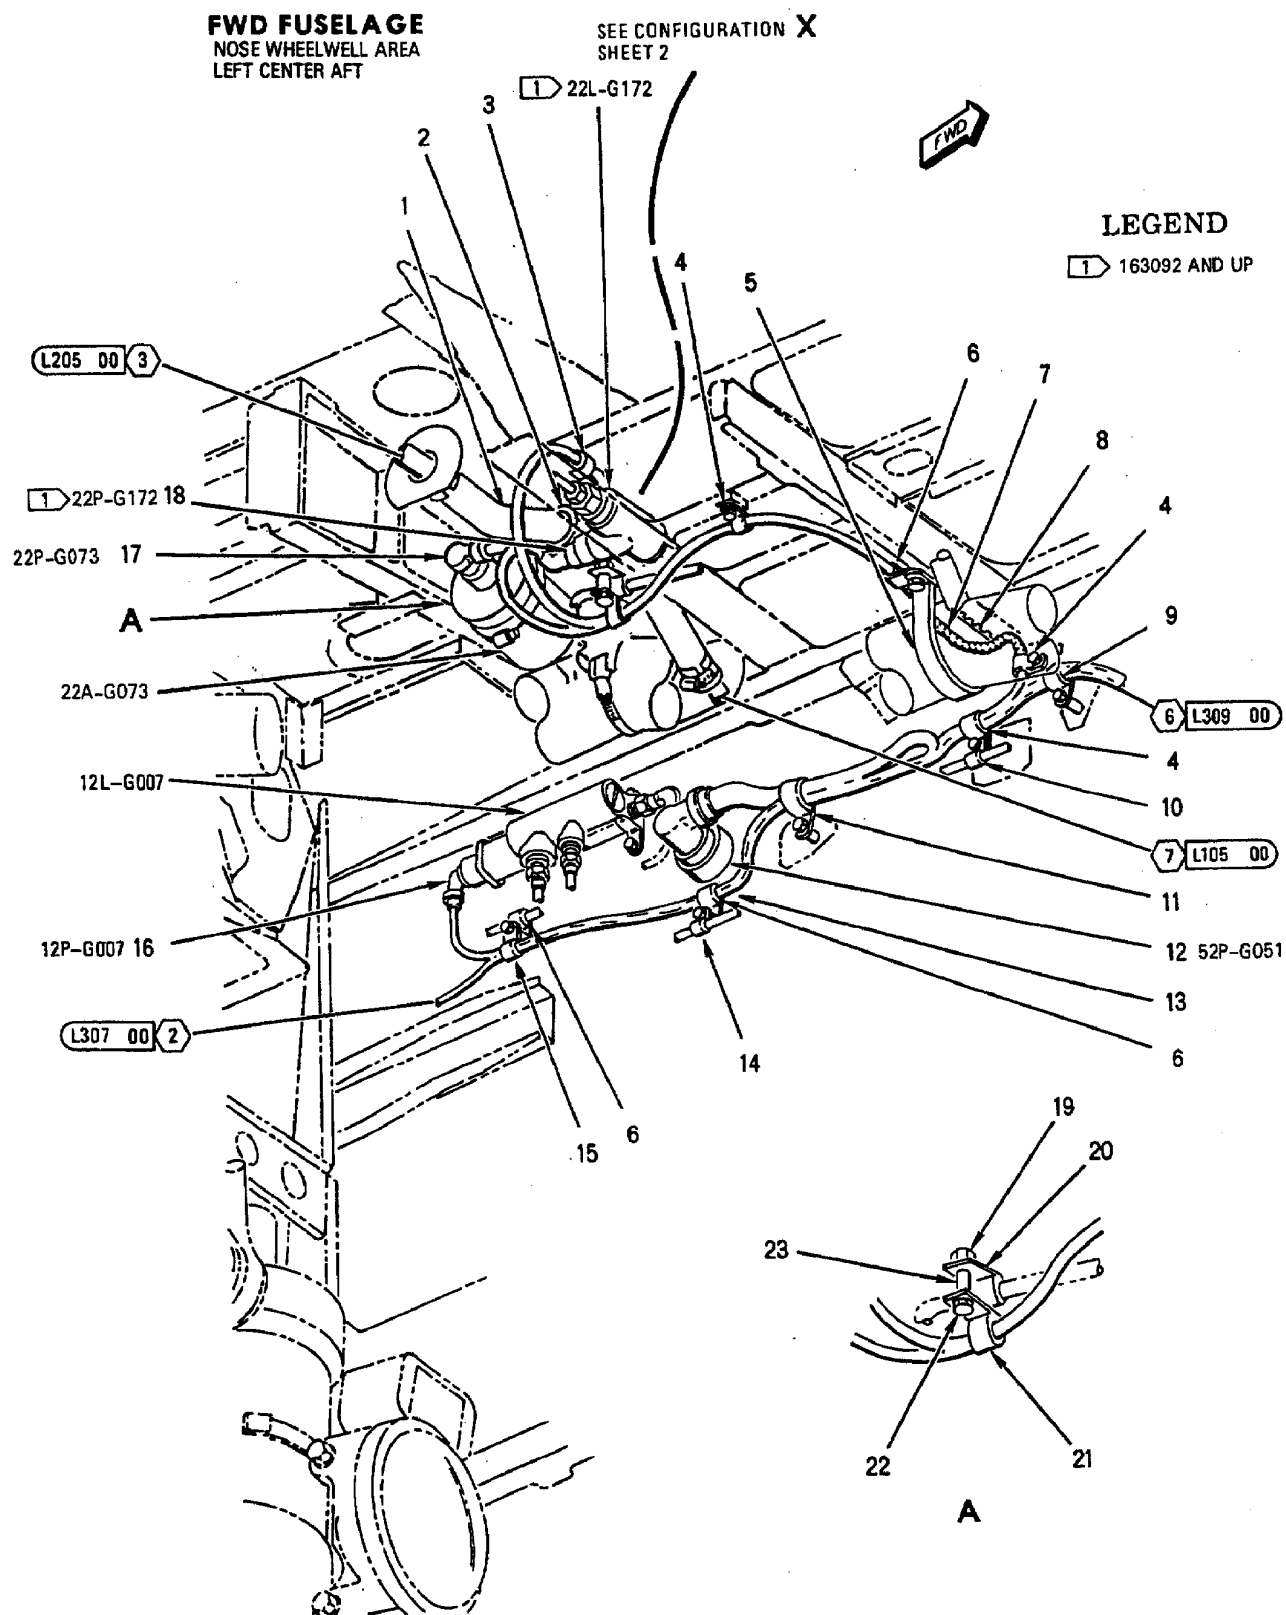

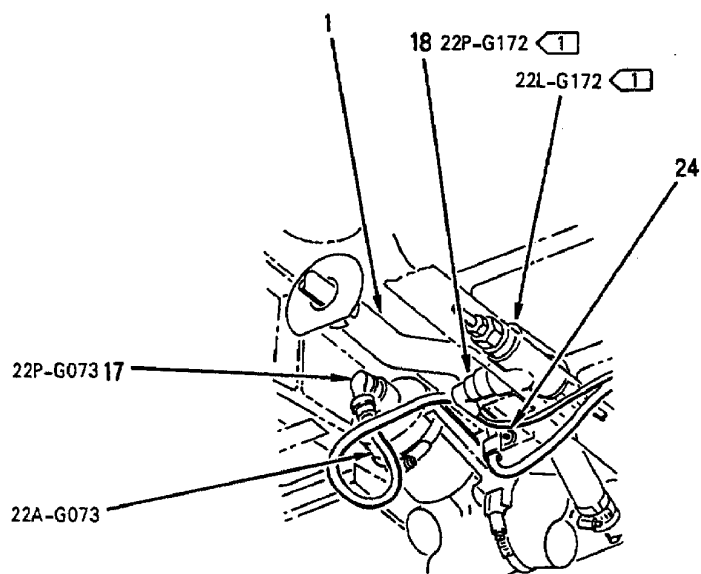

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A782422-1003	CONDUIT ASSEMBLY, METAL, RIGID-ELECTRICAL (76301)	1		XBOZZ
	WWD48	CLAMP, HOSE (66295) (MCDONNELL SPEC ST9M540-48) (SUPERSEDES ST9M540-44) (USE WITH INDEX 1)	2	*	PAOZZ
	9216	SEE ABOVE (08484)	2	*	PAOZZ
2	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
3	MS21919WDG #	CLAMP	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
4	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	751-44-8	STRAP, RETAINING (83930) (MCDONNELL SPEC 9M368D44)	1	*	PAOZZ
	JM44SC13D44	STRAP, RETAINING (22175) (MCDONNELL SPEC 9M368D44)	1	*	PAOZZ
	TA12653D44	STRAP, RETAINING (84971) (MCDONNELL SPEC 9M368D44)	1	*	PAOZZ
	NAS673V #	BOLT (AP)	2		-
	AN960JD10L	WASHER (AP)	2		PAOZZ
6	MS21919WDG #	CLAMP	4		-
7	95340	TUBING, PLASTIC, SPIRAL (78570) (MCDONNELL SPEC 14M912TB6)	AR		PAOZZ
	500024-2	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TB6)	AR		PAOZZ
8	MS21266-2N	GROMMET	AR		PAOZZ
9	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
10	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-64	SPACER (AP)	1		PAOZZ
12	MS27467T21B35P	CONNECTOR, PLUG (52P-6051)	1		PAOZZ
13	74A890601-2517	MARKER, IDENTIFICATION-ELECTRICAL (76301) (FOR REF DES 52J-C051)	1		MDOZZ
14	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-26	SPACER (AP)	1		PAOZZ
15	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
16	MS27467T9B98S	CONNECTOR, PLUG (12P-6007)	1		PAOZZ
17	MS27467T11B35S	CONNECTOR, PLUG (22P-6073)	1		PAOZZ
18	MS27467T11B35S	CONNECTOR, PLUG (22P-6172)	1	A	PAOZZ
19	NAS673V #	BOLT	1	A	-
20	M85052/1-4	CLAMP	1	A	PAOZZ
21	MS21919WDG #	CLAMP	1	A	-
22	NAS1291C3M	NUT	1	A	PAOZZ
23	NAS42DD6-32	SPACER	1	A	PAOZZ
24	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(WP002 00)

CODE	USABLE ON
A	163092 & UP
B	161353 THRU 162909


FWD FUSELAGE
NOSE WHEELWELL AREA
LEFT CENTER FWD

LEGEND

1 163119 AND UP

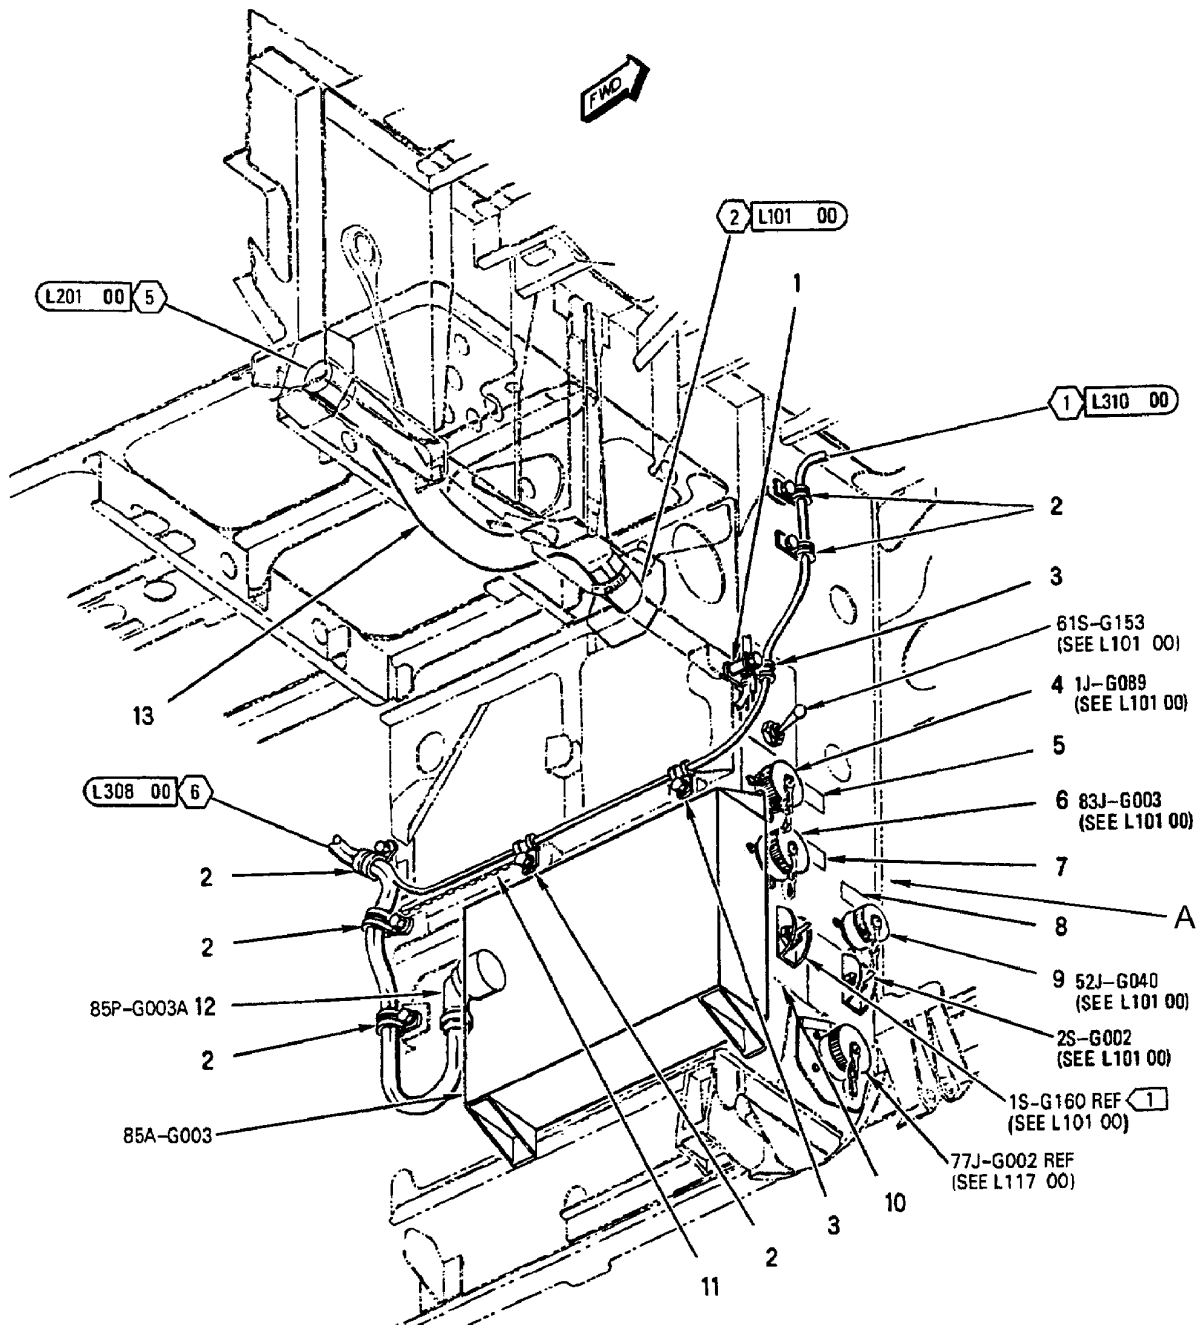

FWD FUSELAGE
NOSE WHEELWELL AREA
LEFT CENTER FWD

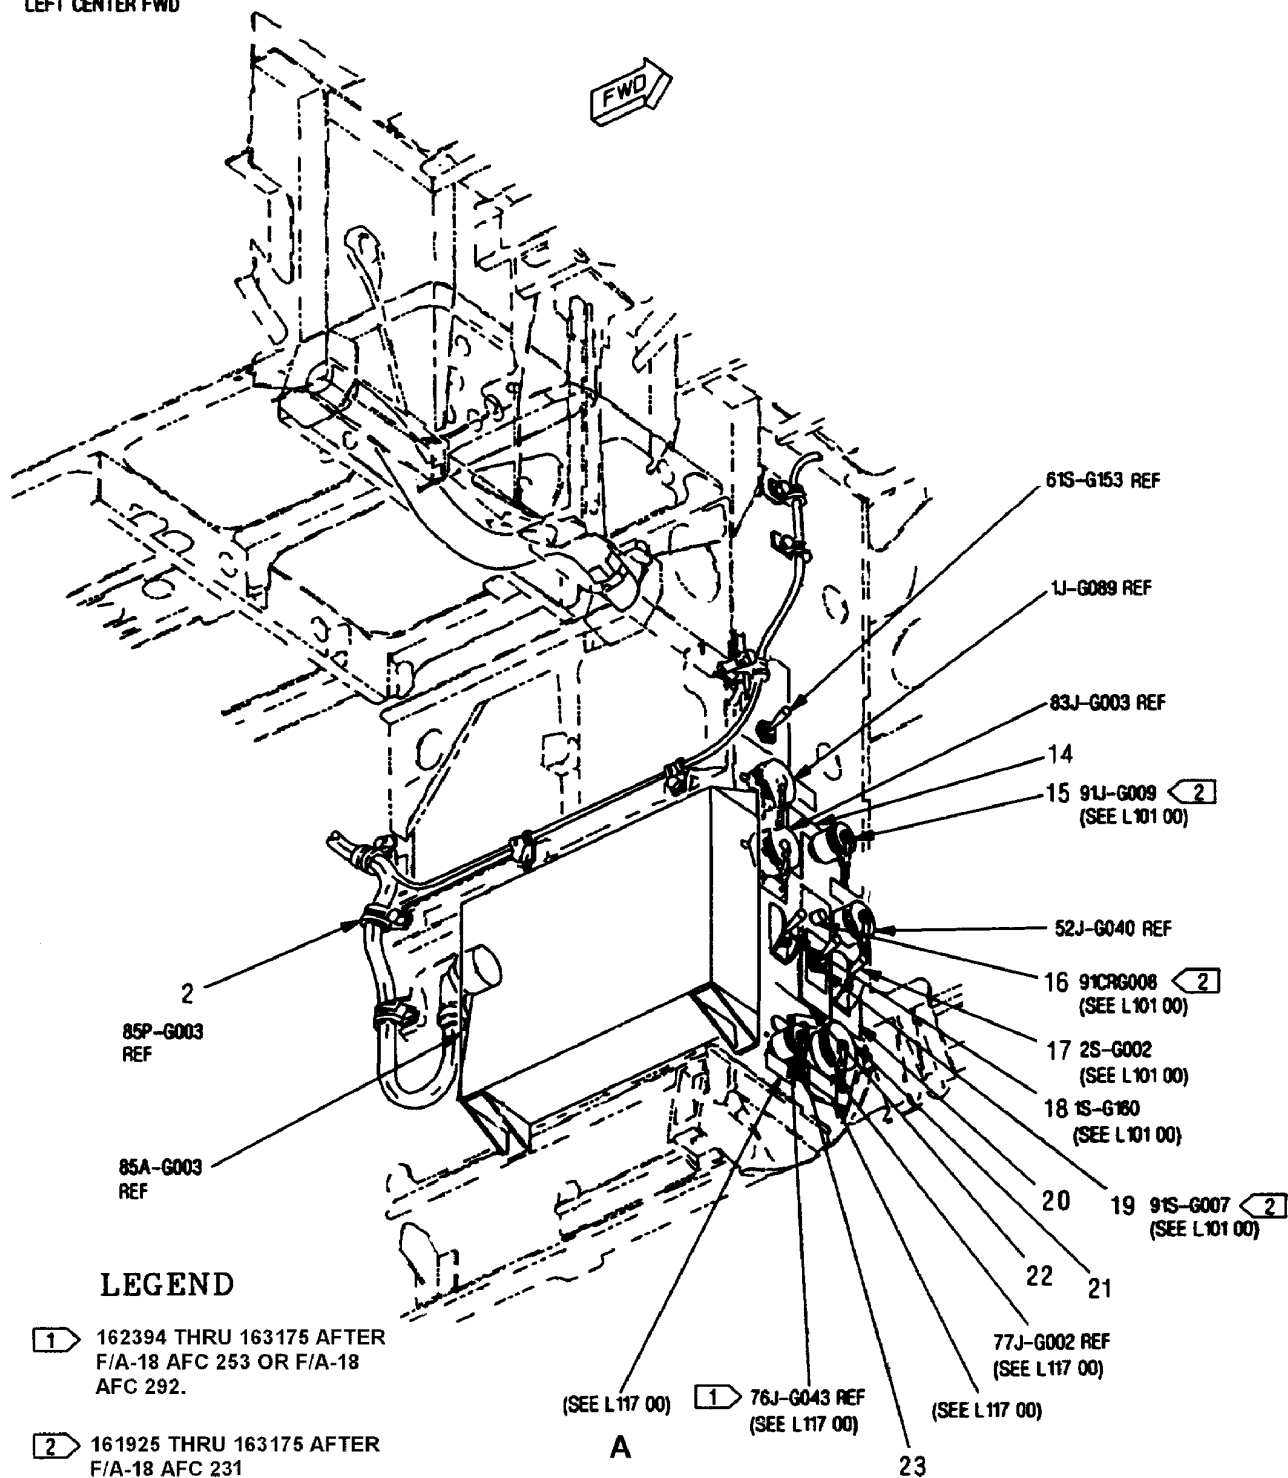

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-4	CLAMP	1		PAOZZ
2	MS21919WDG #	CLAMP	6		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
4	MS3450W18-9S	CONNECTOR, RECEPTACLE (1J-G089)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS25043-18DA	COVER (SUPERSEDES MS25043-18D)	1		PAOZZ
		(USE WITH INDEX 4)			
5	74A890601-2318	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		1J-G089)			
6	MS27656T15B35S	CONNECTOR, RECEPTACLE (83J-G003)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS27502B15C	COVER (USE WITH INDEX 6)	1		PAOZZ
7	74A890601-2320	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		83J-G003)			
8	74A890601-2395	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		52J-G040)			
9	MS27656T13B35S	CONNECTOR, RECEPTACLE (52J-G040)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS27502B13CL	COVER (USE WITH INDEX 9)	1		PAOZZ
10	74A890068-2051	PLATE, IDENTIFICATION - UPPER	1	A	MDOZZ
		EQUIPMENT BAY, ZONE 12 (76301)			
11	MS21266-1N	GROMMET	AR		PAOZZ
12	MS27467T15B35S	CONNECTOR, PLUG (85P-G003A)	1		PAOZZ
13	74A782421-1003	CONDUIT ASSEMBLY, METAL,	1		PBOZZ
		RIGID-NLG WHEEL WELL, ELECTRICAL			
		(76301)			
	WWD48	CLAMP, HOSE (66295) (MCDONNELL SPEC ...	2	*	PAOZZ
		ST9M540-48) (SUPERSEDES ST9M540-44)			
		(USE WITH INDEX 13)			
	9216	SEE ABOVE (08484)	2	*	PAOZZ
14	74A890198-2007	PLATE, INSTRUCTION (76301)	1	B	MGOZZ
15	MS27656T9B35S	CONNECTOR, RECEPTACLE (91J-G009)	1	B	PAOZZ
	FSC/MD-10A0106	SEE ABOVE (04967)	1	*	PAOZZ
	AT340-10	SEE ABOVE (0A554)	1	*	PAOZZ
	S935-10A	SEE ABOVE (19904)	1	*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
	MS27502B15C	COVER (USE WITH INDEX 15)	1		PAOZZ
16	M19500/521-02	DIODE, LIGHT (91CRG008)	1	B	PAOZZ
17	MS24523-26	SWITCH, TOGGLE (2S-G002)	1		PAOZZ
	NAS1149D0863J	WASHER (AP)	1	C	PAOZZ
	74A600606-2001	SWITCH, GUARD (USE WITH INDEX 17)	1		MGOZZ
18	MS24523-26	SWITCH, TOGGLE (1S-G160)	1		PAOZZ
	NAS1149D0863J	WASHER (AP)	1	C	PAOZZ
19	MS24523-26	SWITCH, TOGGLE (91S-G007)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
20	74A890198-2001	PLATE, INSTRUCTION (76301)	1	B	MGOZZ
21	MS3181-16C	COVER	1		PAOZZ
	NAS600-6P	SCREW (AP)	1		PAOZZ
	NAS1149DN416J	WASHER (AP)	2	*	PAOZZ
	AN960JD4L	WASHER (AP)	2	*	PAOZZ
	MS21042L04	NUT (AP)	1		PAOZZ
22	74A890198-2009	PLATE, INSTRUCTION (76301)	1	B	MGOZZ
23	MS27502B9C	COVER	1	C	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE USABLE ON

A 161520 & UP

B 161925 THRU 163175 AFTER
F/A-18 AFC 231

C 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18
AFC 292

FWD FUSELAGE NOSE WHEEL WELL AREA (LEFT FWD)

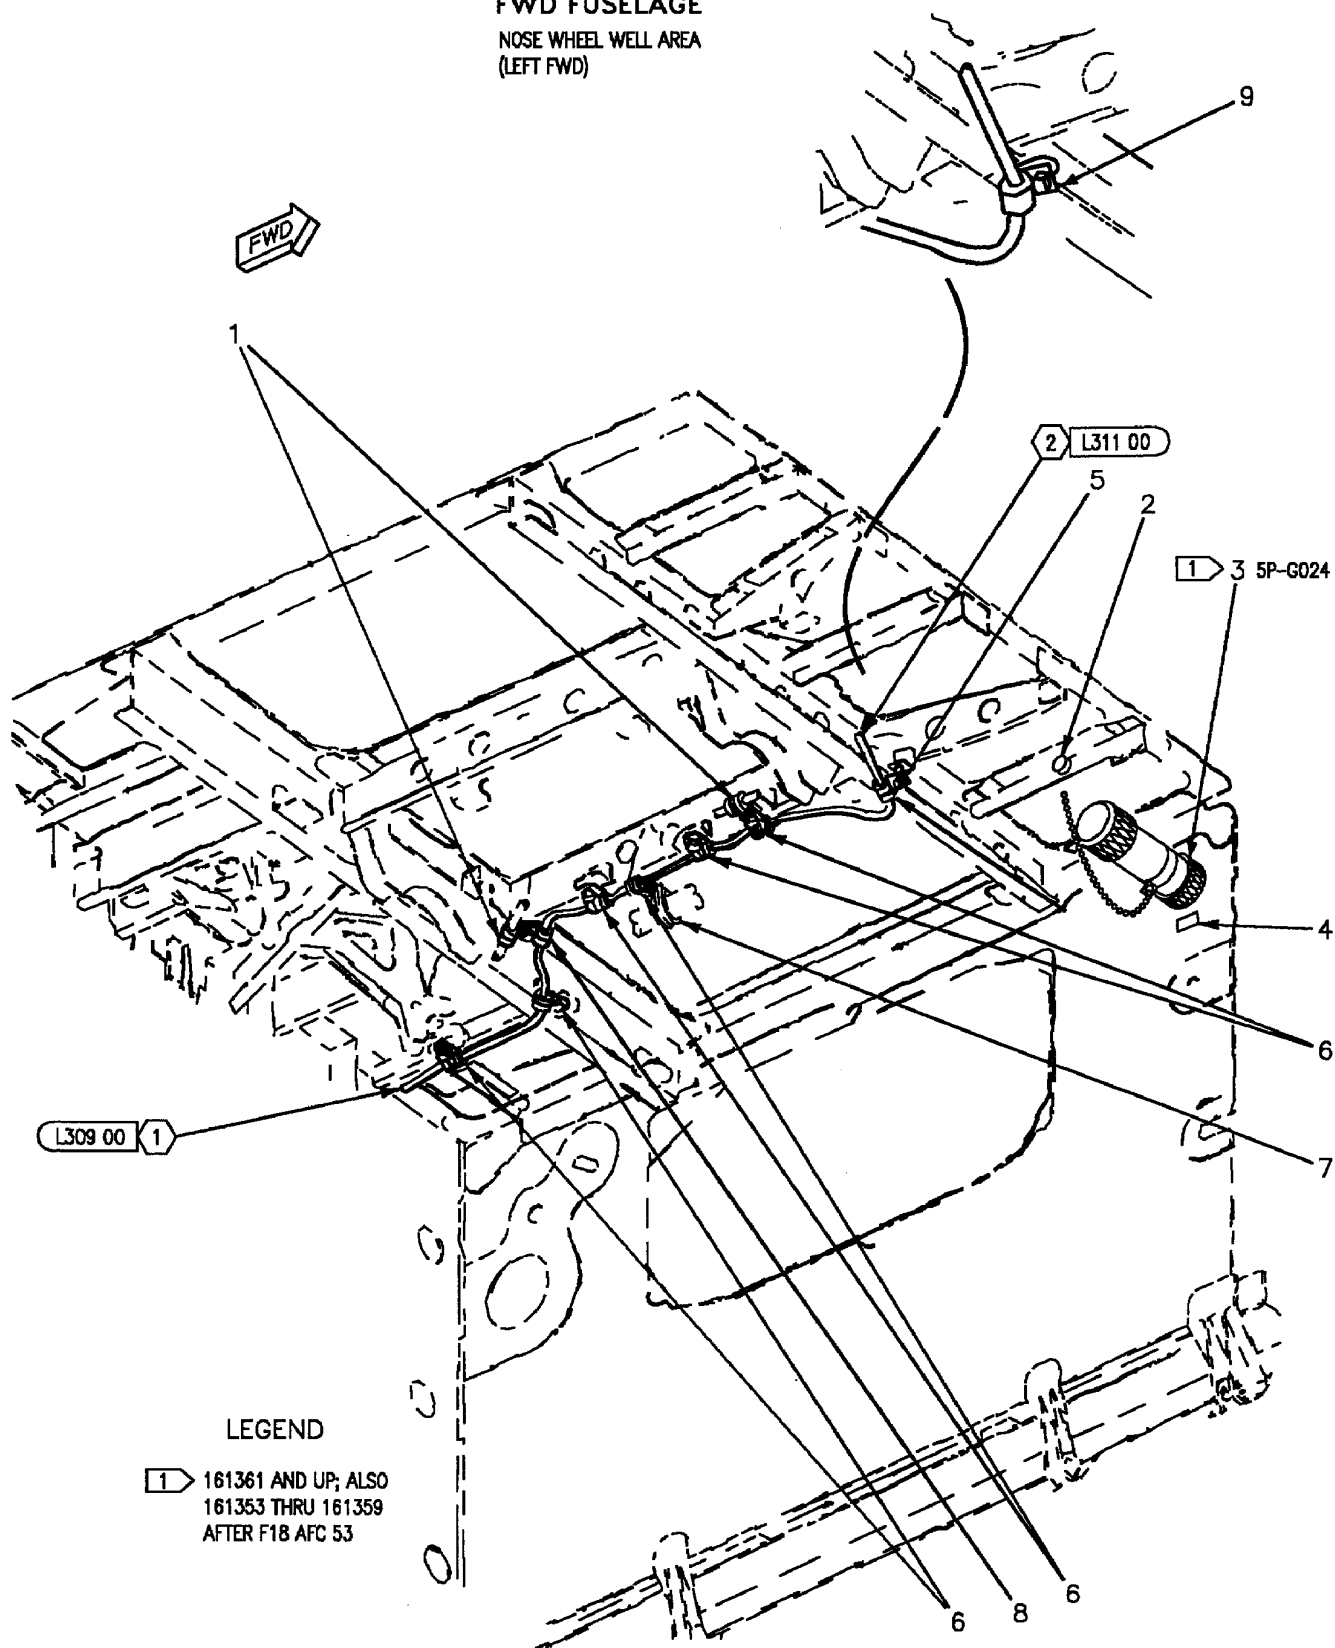

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-4	CLAMP	2		PAOZZ
2	NAS600-6P	SCREW	1	A	PAOZZ
	AN960JD4L	WASHER (USE WITH INDEX 2)	2	A	PAOZZ
	NAS679A04MW	NUT (USE WITH INDEX 2)	1	A	PAOZZ
3	MS27467T17B35PA	CONNECTOR, PLUG (5P-G024)	1	A	PAOZZ
4	74A890601-2863	MARKER, IDENTIFICATION -	1	A	MDOZZ
		ELECTRICAL (76301) (FOR REF DES 5J-G024)			
5	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-8	SPACER (AP)	1	C	PAOZZ
6	MS21919WDG #	CLAMP	6		-
	NAS673V #	BOLT (AP)			
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	M85052/1-12	CLAMP	1		PAOZZ
8	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
9	MS21919WDG #	CLAMP	1	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161361 & UP; ALSO 161353 THRU 161359 AFTER F18 AFC 53
B	162394 & UP
C	162895 & UP
D	161353 THRU 162894


FWD FUSELAGE NOSE WHEELWELL AREA (FWD END)

LEGEND

- | | |
|---|--------------------|
| 1 | 161945 AND UP |
| 2 | 161353 THRU 161944 |

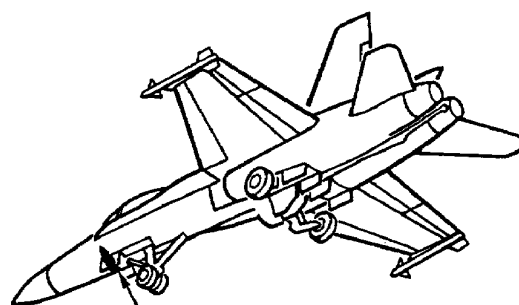

NOSE WHEELWELL

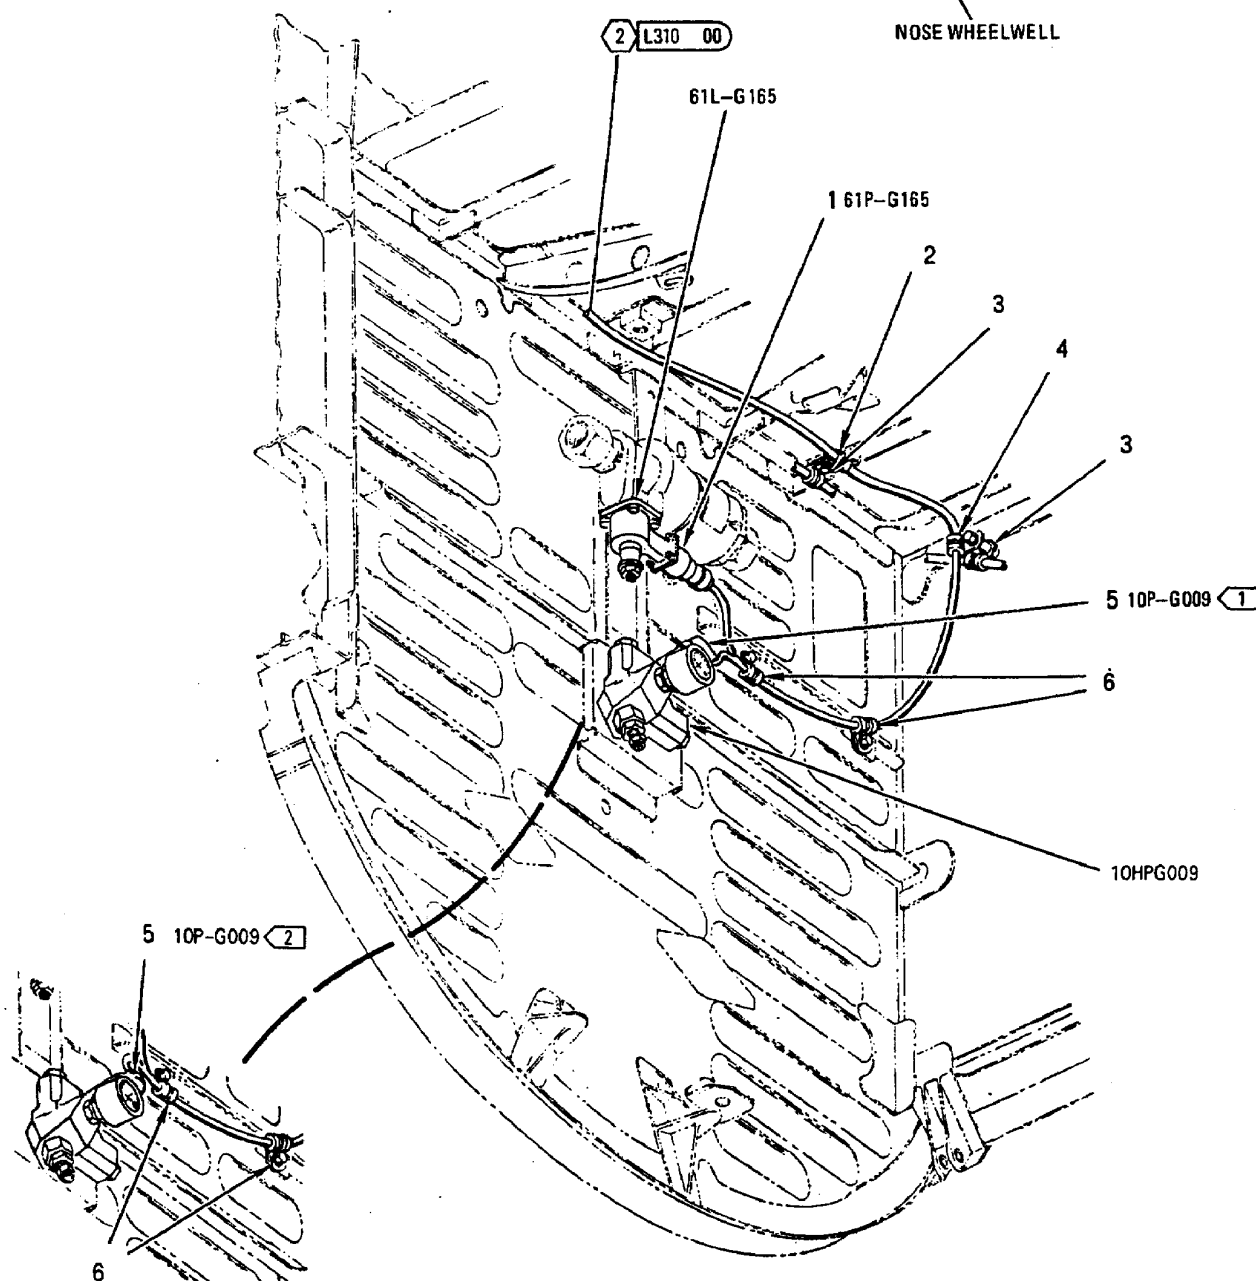


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B98S	CONNECTOR, PLUG (61P-G165)	1		PAOZZ
2	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
3	M85052/1-4	CLAMP	2		PAOZZ
4	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (10P-G009)	1		PAOZZ
6	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE

NOSE GEAR DOOR
(FWD RIGHT)

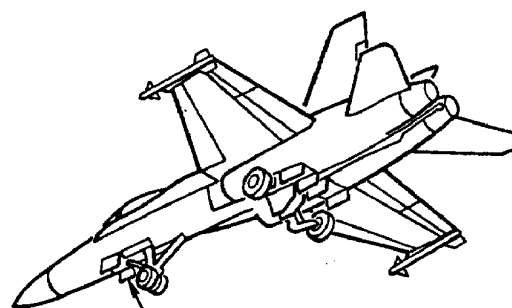


NOSE GEAR
DOOR

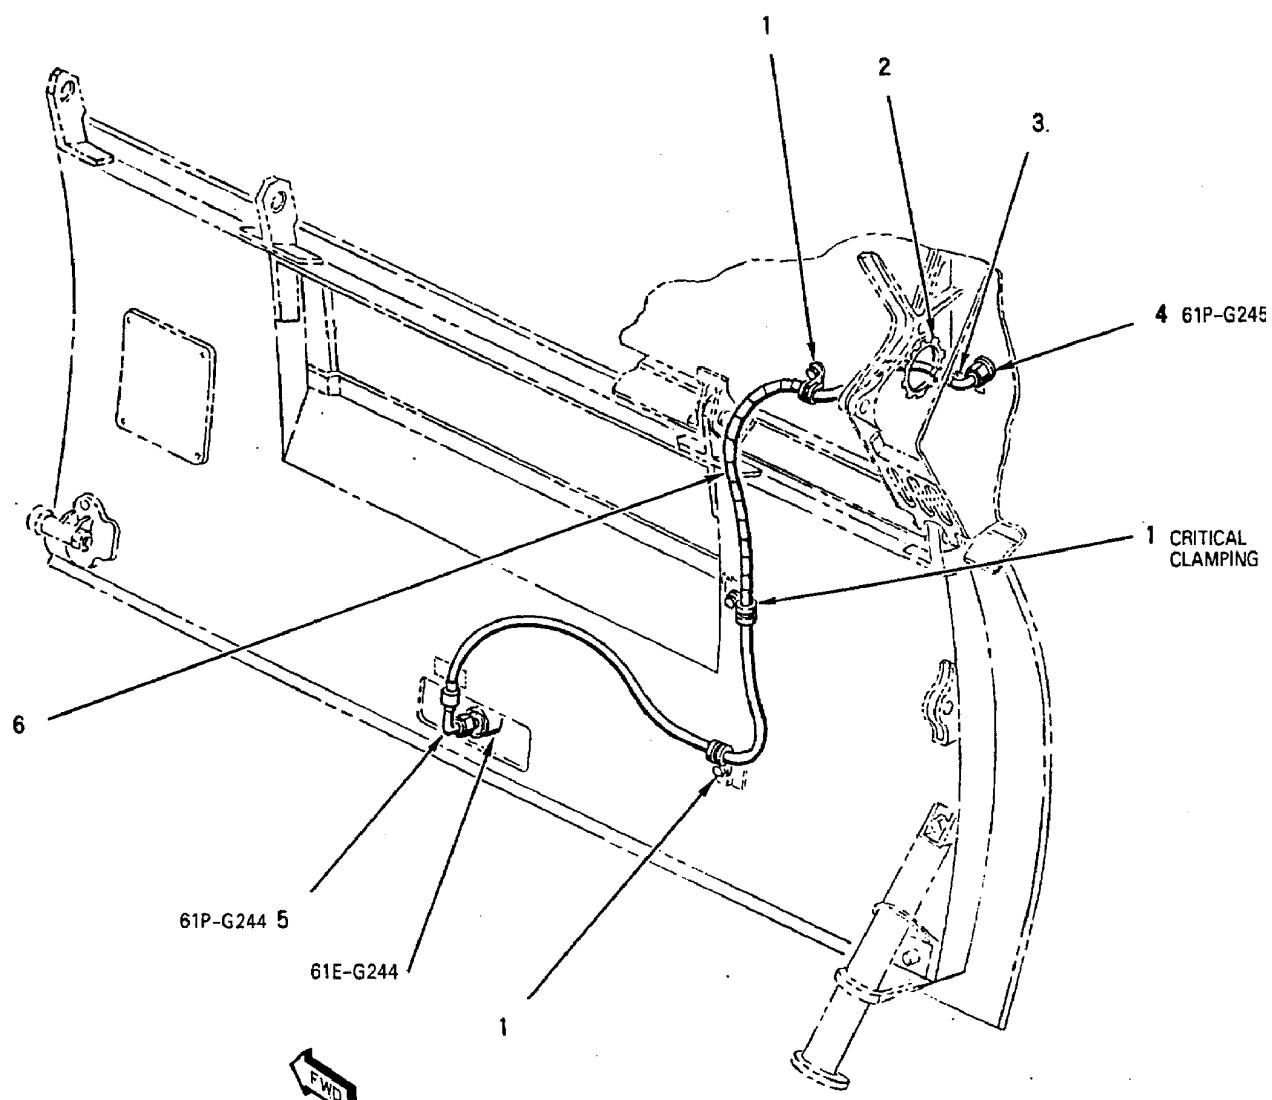




INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG5	CLAMP	3		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-4N	GROMMET	AR		PAOZZ
3	74A890601-2886	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 61J-D245)			
4	SF4592-6005	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(95077) (MCDONNELL SPEC ST5M1396-0R) (61P-G245)			
5	SF4592-6005	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(95077) (MCDONNELL SPEC ST5M1396-0R) (61P-G244)			
6	T25T	TUBING, PLASTIC, SPIRAL (06383)	AR	*	-
		(MCDONNELL SPEC 14M912TN4)			
	500024-1	SEE ABOVE (13577)	AR	*	-

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

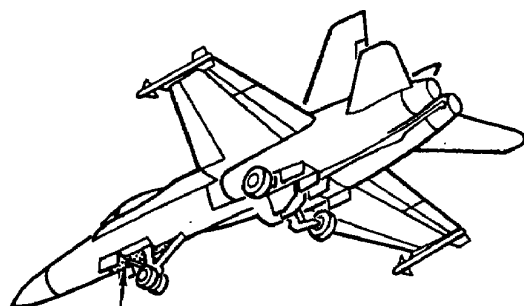



FWD FUSELAGE NOSE WHEELWELL AREA (RIGHT CENTER)

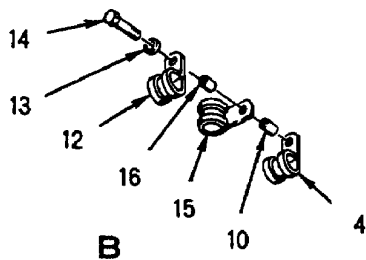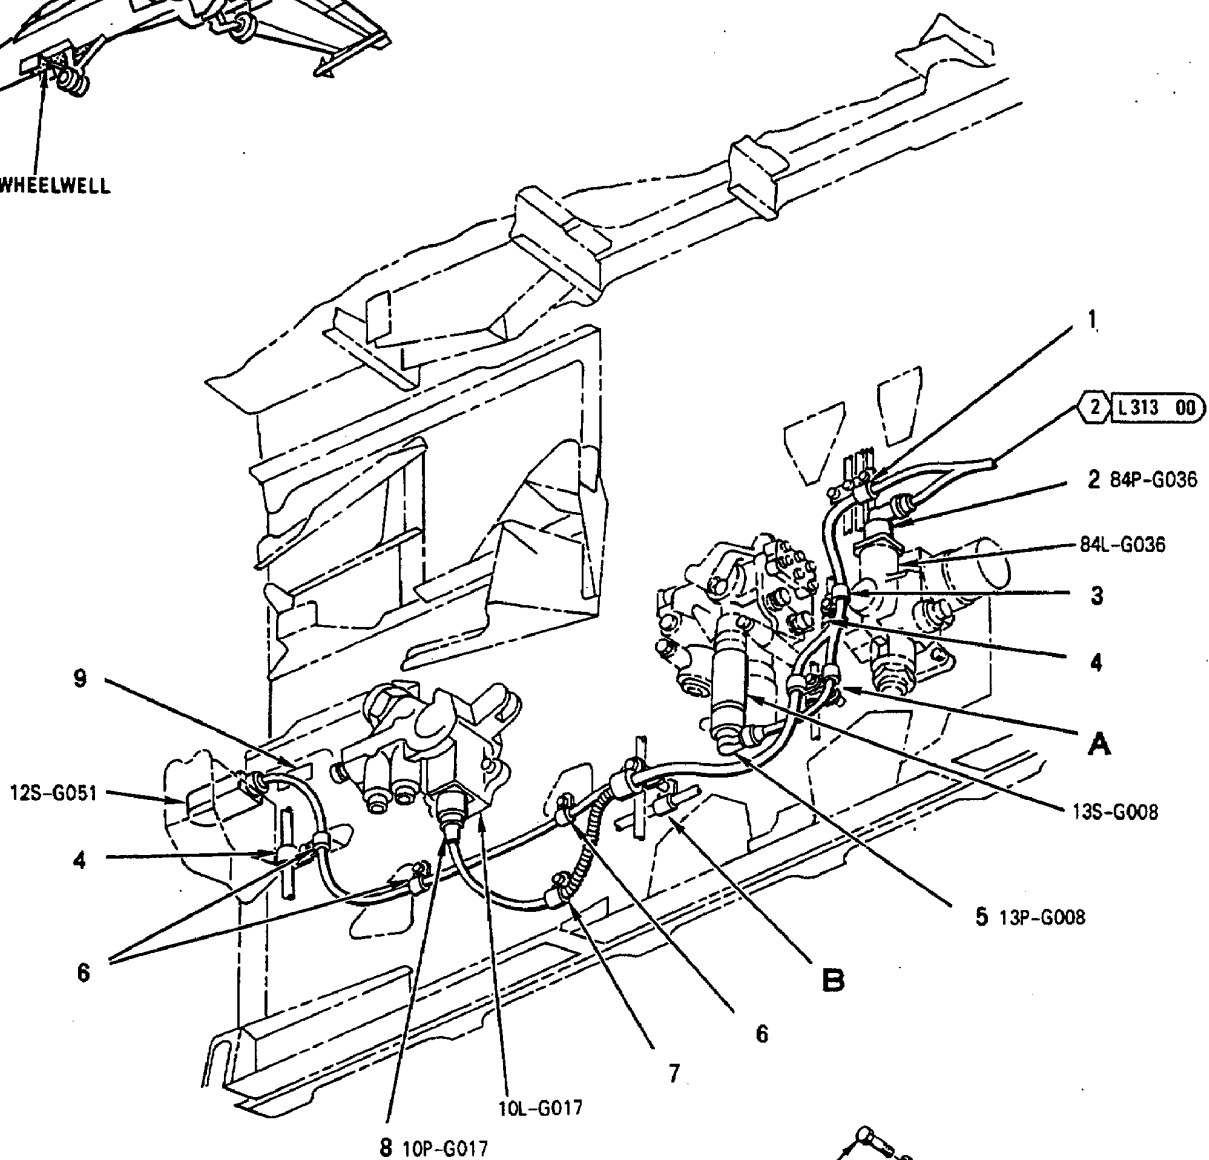

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1		-
	NAS673V15	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27467T9B35S	CONNECTOR, PLUG (84P-G036)	1		PAOZZ
3	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-64	SPACER (AP)	1		PAOZZ
4	M85052/1-4	CLAMP	4		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (13P-G008)	1		PAOZZ
6	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
8	MS27467T9B35S	CONNECTOR, PLUG (10P-G017)	1		PAOZZ
9	74A890601-2746	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-G051)			
10	NAS42DD6-23	SPACER	2		PAOZZ
11	NAS42DD6-48	SPACER	1		PAOZZ
12	MS21919WDG #	CLAMP	3		-
13	AN960JD10L	WASHER	2		PAOZZ
14	NAS673V #	BOLT	2		-
15	M85052/1-6	CLAMP	1		PAOZZ
16	NAS42DD6-24	SPACER	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

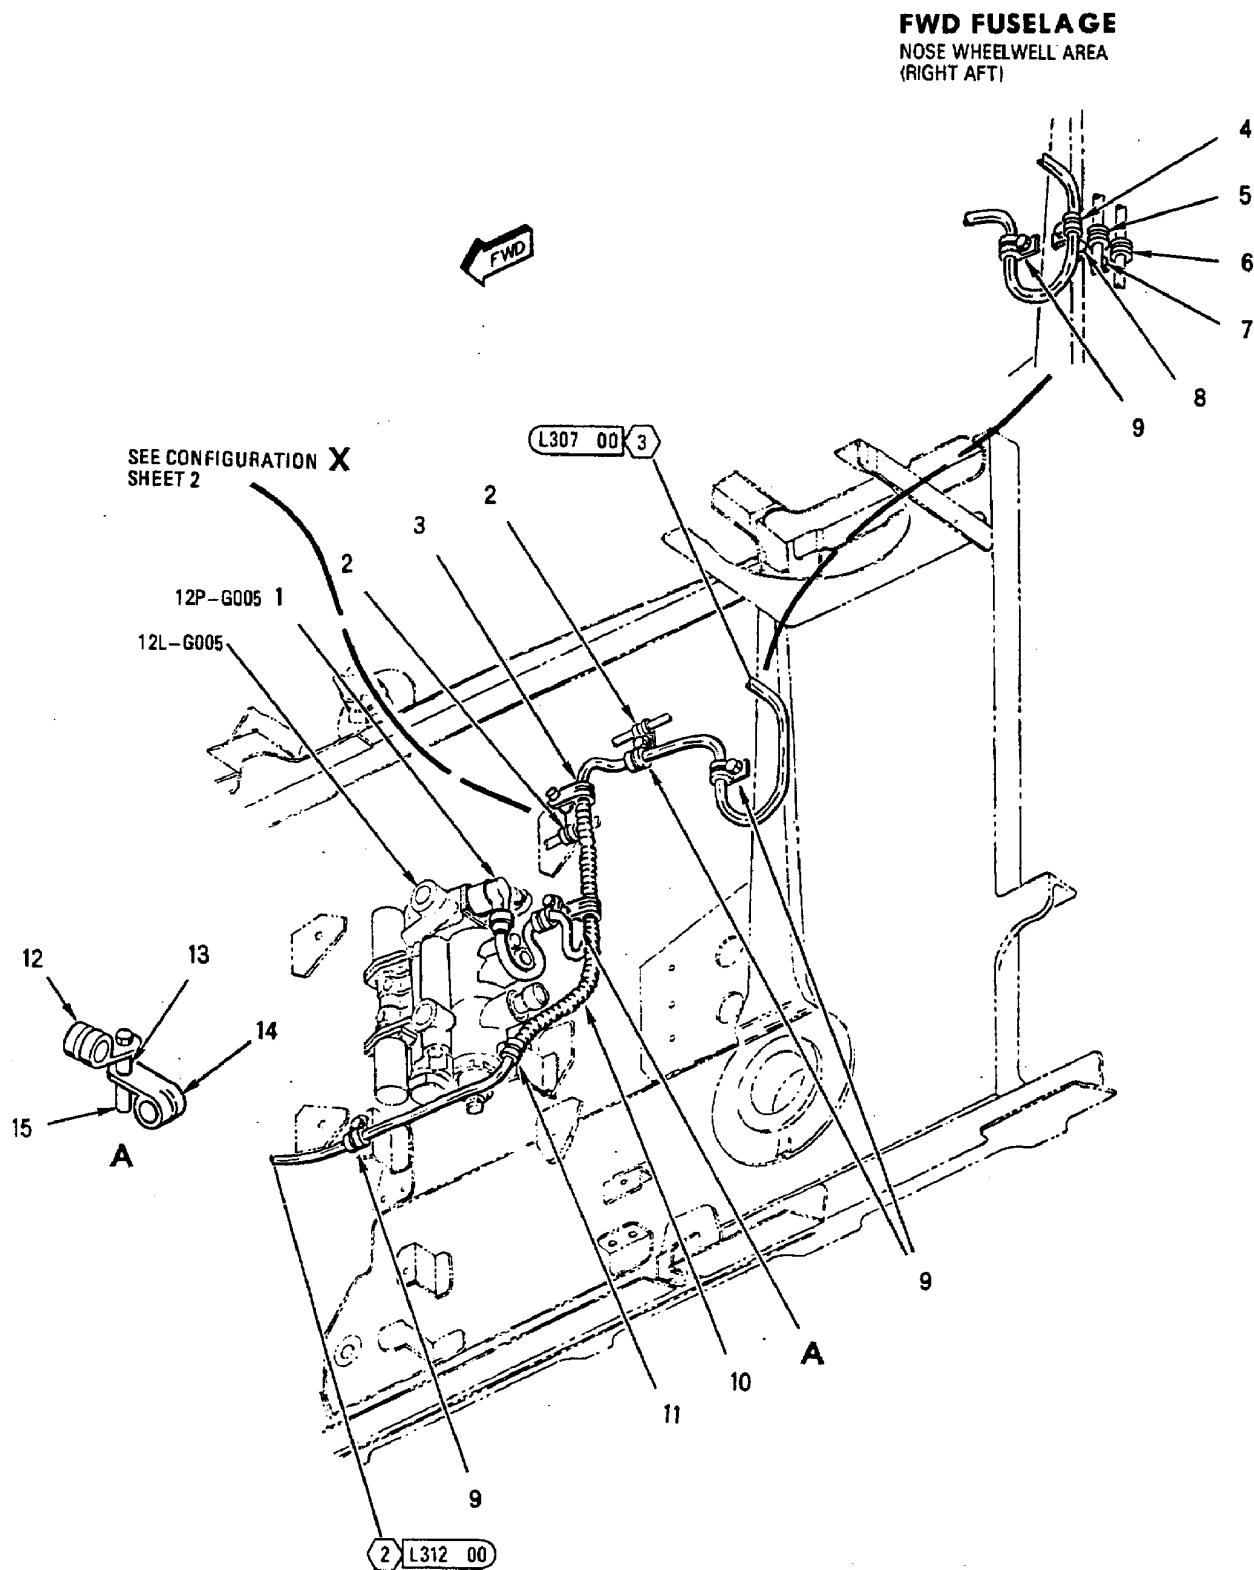

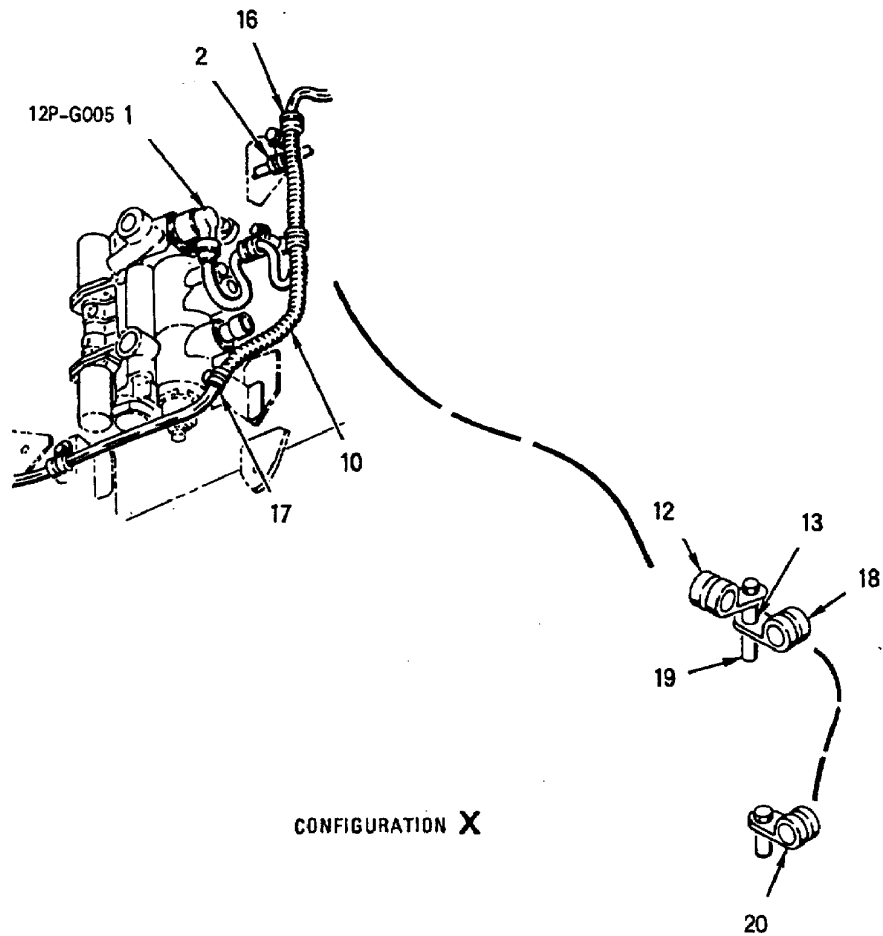

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B98S	CONNECTOR, PLUG (12P-G005)	1		PAOZZ
2	M85052/1-4	CLAMP	2		PAOZZ
3	MS21919WDG #	CLAMP	1	G	-
	NAS673V #	BOLT (AP)	1	G	-
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	G	PAOZZ
4	MS21919WDG #	CLAMP	1	A	-
	NAS673V15	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
5	M85052/1-4	CLAMP	1	A	PAOZZ
6	M85052/1-6	CLAMP	1	A	PAOZZ
7	NAS42DD6-32	SPACER	1	A	PAOZZ
8	NAS42DD6-24	SPACER	1	A	PAOZZ
9	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	95340	TUBING, PLASTIC, SPIRAL (78570)	AR	C*	PAOZZ
		(MCDONNELL SPEC 14M912TB6)			
	500024-2	TUBING, PLASTIC, SPIRAL (13577)	AR	C*	PAOZZ
		(MCDONNELL SPEC 14M912TB6)			
11	MS21919WDG #	CLAMP	1	G	-
	NAS673V #	BOLT (AP)	1	G	-
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	G	PAOZZ
12	MS21919WDG #	CLAMP	1	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
13	NAS42DD6-16	SPACER	1	D	PAOZZ
14	MS21919WDG #	CLAMP	1	G	-
15	NAS42DD6-64	SPACER	1	G	PAOZZ
16	MS21919WDG #	CLAMP	1	H	-
	NAS673V #	BOLT (AP)	1	H	-
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	H	PAOZZ
17	MS21919WDG #	CLAMP	1	H	-
	NAS673V #	BOLT (AP)	1	H	-
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	B	PAOZZ
	NAS42DD6-40	SPACER (AP)	1	K	PAOZZ
18	MS21919WDG #	CLAMP	1	J	-
19	NAS42DD6-32	SPACER	1	J	PAOZZ
20	MS21919WDG #	CLAMP	1	E	-
	NAS673V #	BOLT (AP)	1	E	-
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	F	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.



* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161361 THRU 161709
B	161353 THRU 161365

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161366 & UP			
		D						162394 & UP			
		E						161353 THRU 161987			
		F						161366 THRU 161987			
		G						163092 & UP			
		H						161353 THRU 162909			
		J						162394 THRU 162909			
		K						161366 THRU 162909			

FWD FUSELAGE


DOOR 16 AND DOOR 33

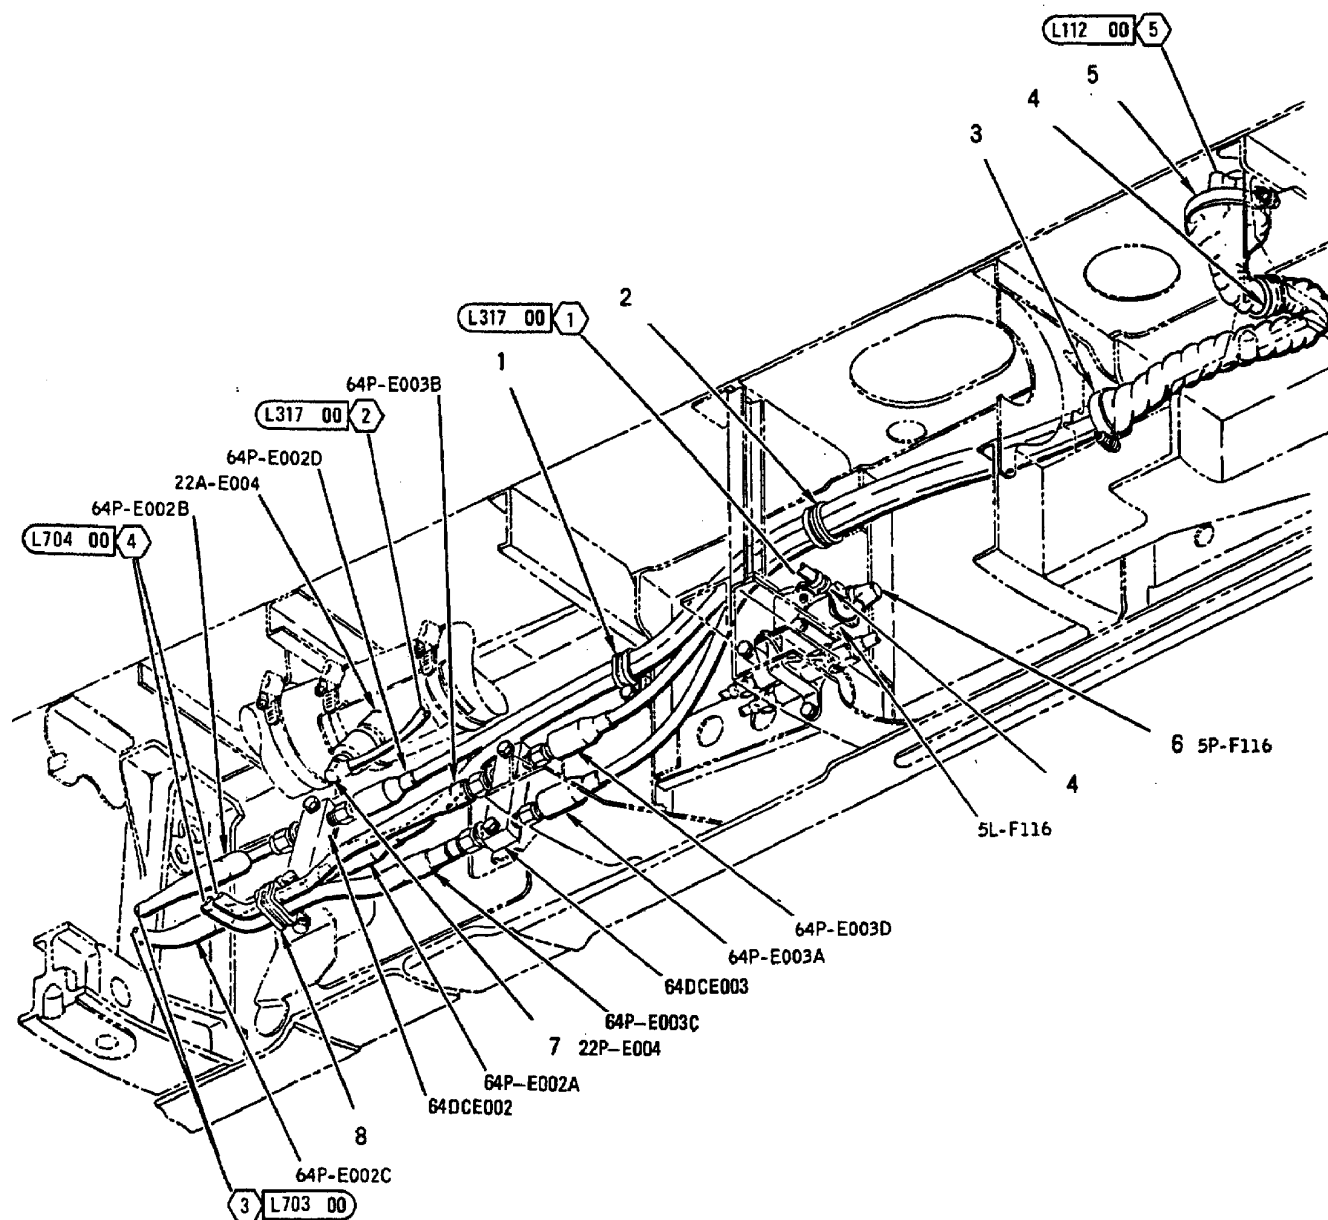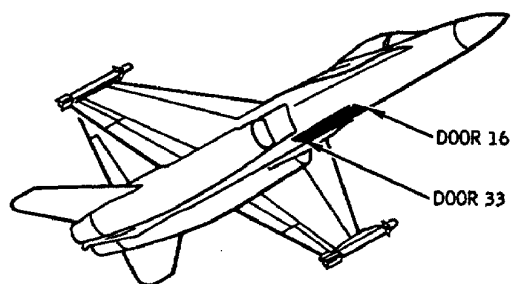

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1714D2-6N	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
3	AN735D24	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	AN735D #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	MS27467T11B98S	CONNECTOR, PLUG (5P-F116)	1		PAOZZ
7	MS27467T11B35SA	CONNECTOR, PLUG (22P-E004)	1		PAOZZ
8	NAS1714D2-6NW	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

FWD FUSELAGE DOOR 16 AND DOOR 33

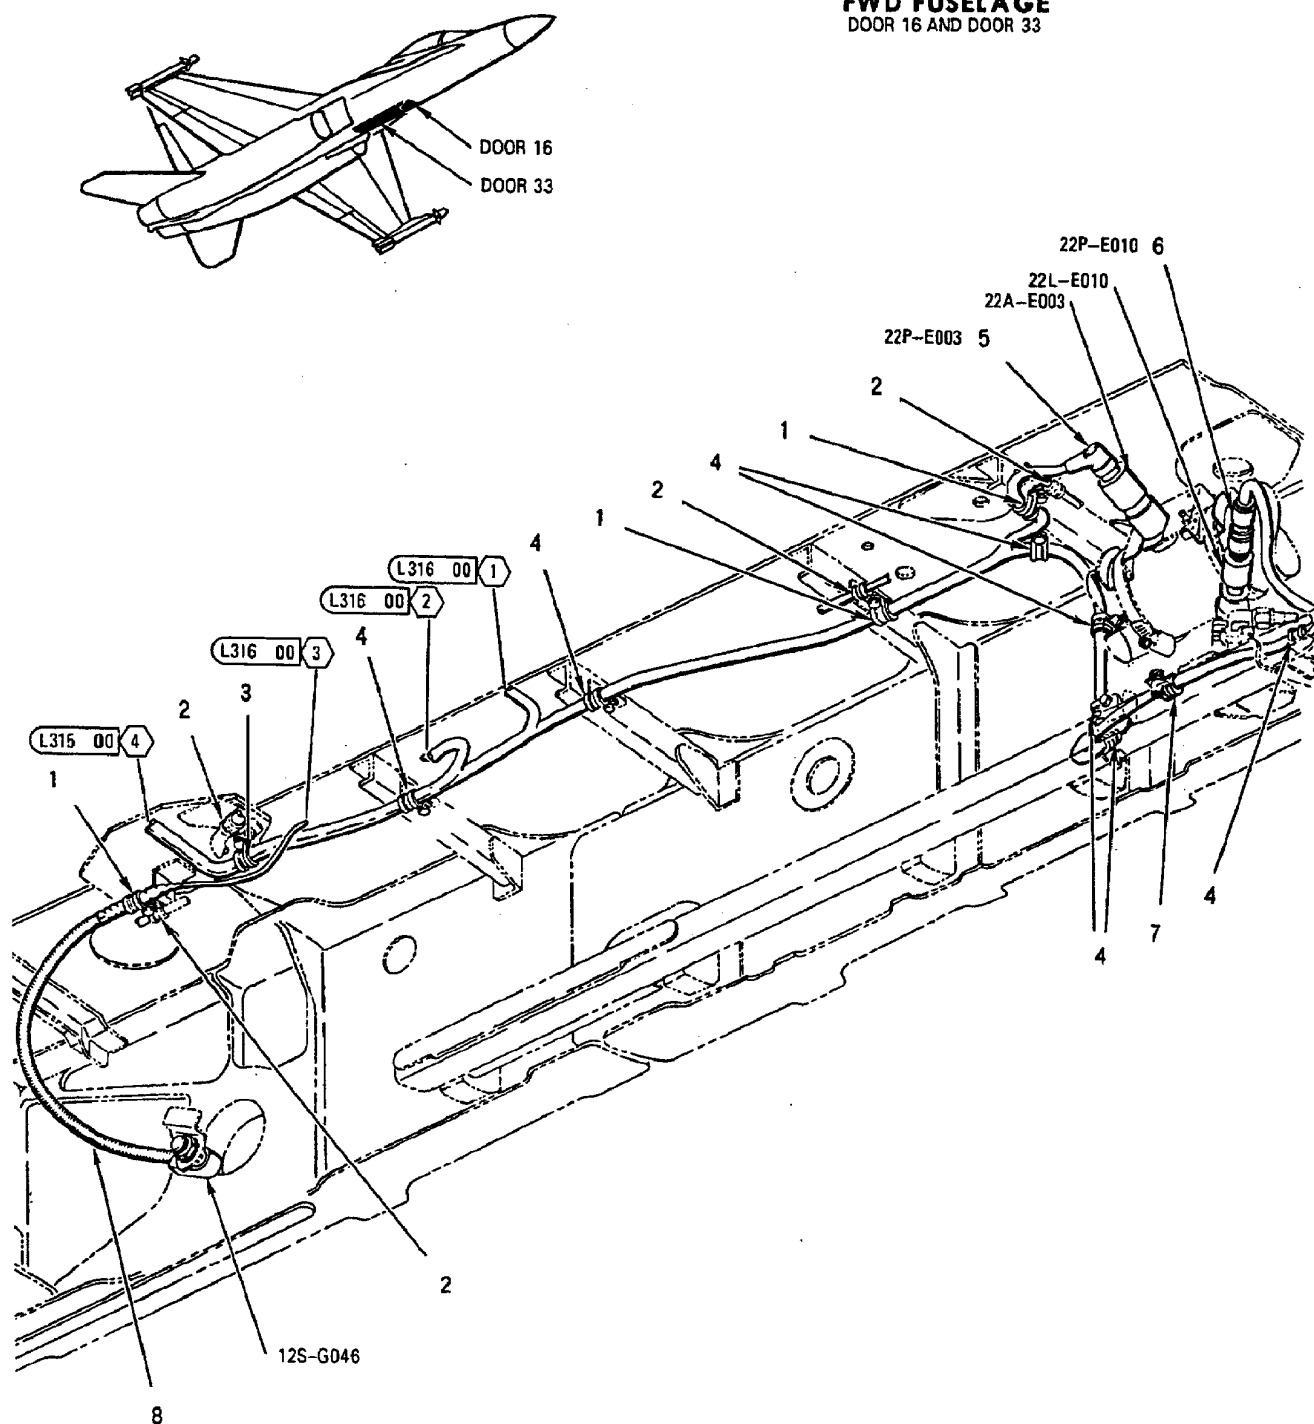


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	3		-
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	M85052/1-4	CLAMP	4		PAOZZ
3	MS21919WDG #	CLAMP	1		-
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-21	SPACER (AP)	1		PAOZZ
4	MS21919WDG #	CLAMP	7		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (22P-E003)	1		PAOZZ
6	MS27467T9B35S	CONNECTOR, PLUG (22P-E010)	1		PAOZZ
7	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
8	200038-00-06	TUBING, NONMETALLIC (05593)	AR	*	PAOZZ
		(MCDONNELL SPEC ST5M1330-06)			
	N11000-012	SEE ABOVE (81482)	AR	*	PAOZZ
	22A00010-00006	SEE ABOVE (07418)	AR	*	PAOZZ
	32A00001-00600	SEE ABOVE (56963)	AR	*	PAOZZ
	ZCT-TE-012	SEE ABOVE (32039)	AR	*	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

FWD FUSELAGE DOOR 16 AND DOOR 33

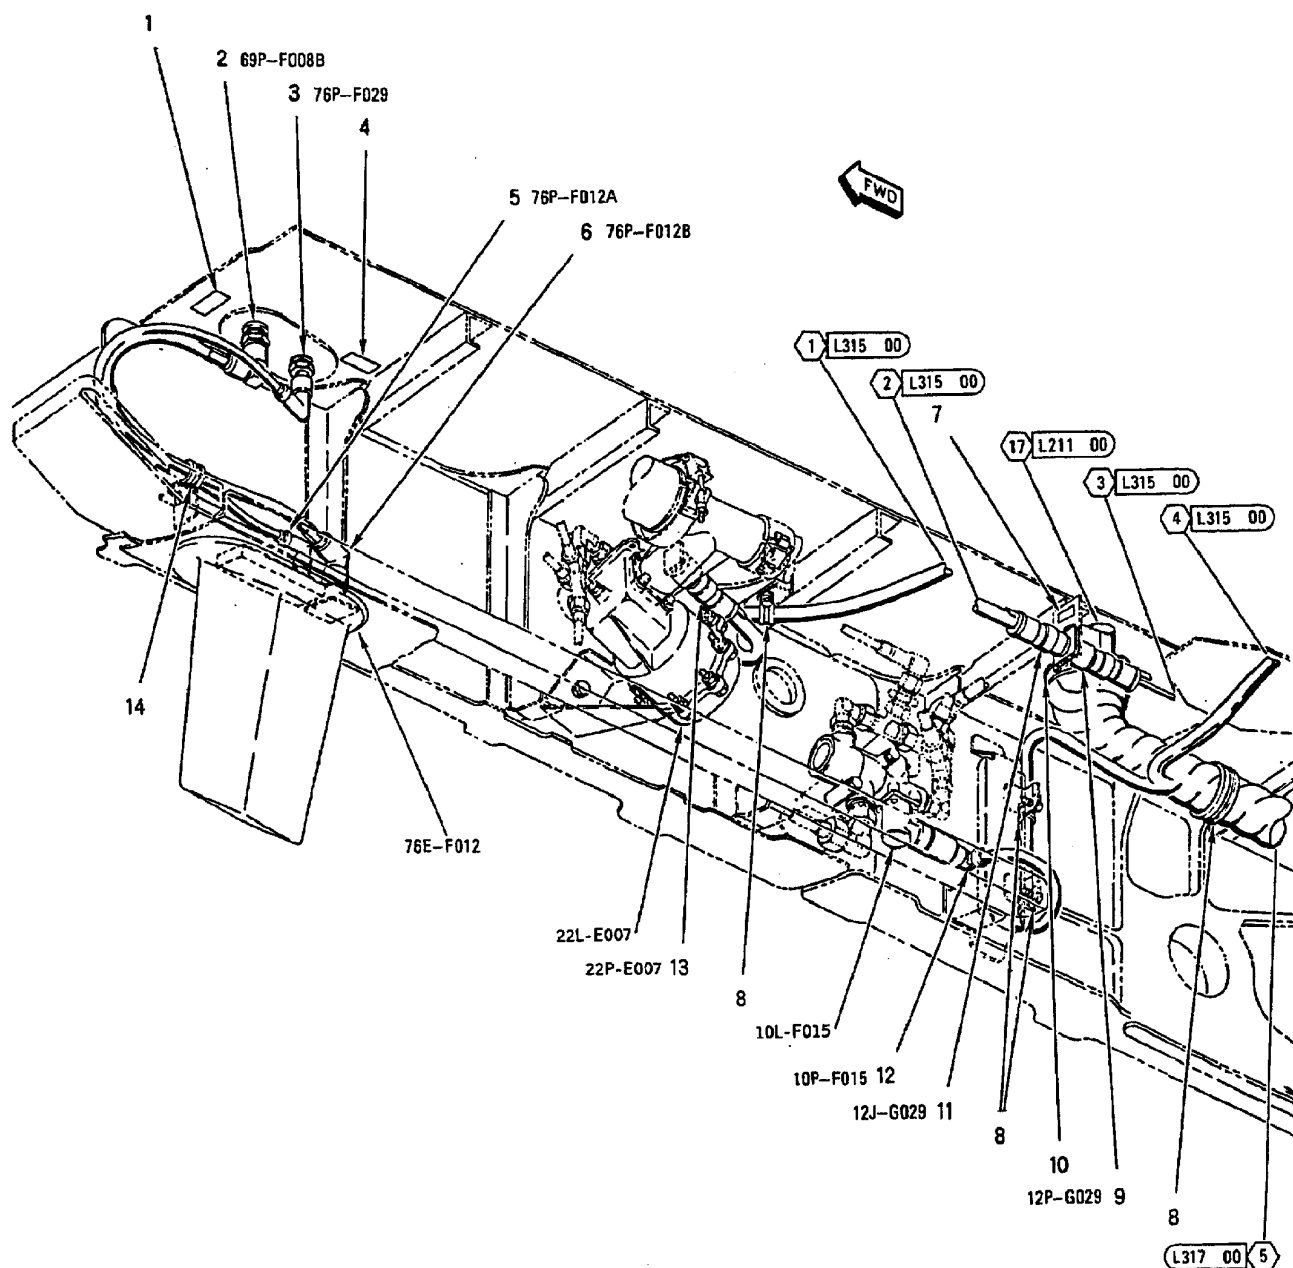

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A890601-2818	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 69CPF008)	1		MGOZZ
2	M39012/05-0501	CONNECTOR, PLUG (69P-F008B)	1		PAOZZ
3	31-3229-1004	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC ST5M1348TR4B) (76P-F029)	1	*	PAOZZ
	126-1-4	CONNECTOR, PLUG, ELECTRICAL (91836) ... (MCDONNELL SPEC ST5M1348TR4B) (76P-F029)	1	*	PAOZZ
	1207-034-A00E-4	SEE ABOVE (00795)	1	*	PAOZZ
4	74A890601-2133	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 76J-F029)	1		MGOZZ
5	M39012/30-0503	CONNECTOR, PLUG (76P-F012A)	1		PAOZZ
6	M39012/39-0501	CONNECTOR, PLUG (76P-F012B)	1		PAOZZ
7	74A890601-2614	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 12J-G029)	1		MGOZZ
8	MS21919WDG #	CLAMP	4		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS27467T9B35P	CONNECTOR, PLUG (12P-G029)	1		PAOZZ
10	MS21266-2N	GROMMET	AR	C	PAOZZ
	MS21266-6N	GROMMET	AR	D	PAOZZ
11	MS27656T9B35S	CONNECTOR, RECEPTACLE (12J-G029)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
12	MS27467T9B98S	CONNECTOR, PLUG (10P-F015)	1		PAOZZ
13	MS27467T9B35S	CONNECTOR, PLUG (22P-E007)	1		PAOZZ
14	NAS1714D2-6N	CLAMP	1	A	PAOZZ
	MS21919WDG #	CLAMP	1	B	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161736
B	161737 & UP
C	161353 THRU 161761
D	161925 & UP


FWD FUSELAGE

DOOR 16 AND DOOR 33

LEGEND


- 1 161353 THRU 161528
- 2 161702 AND UP

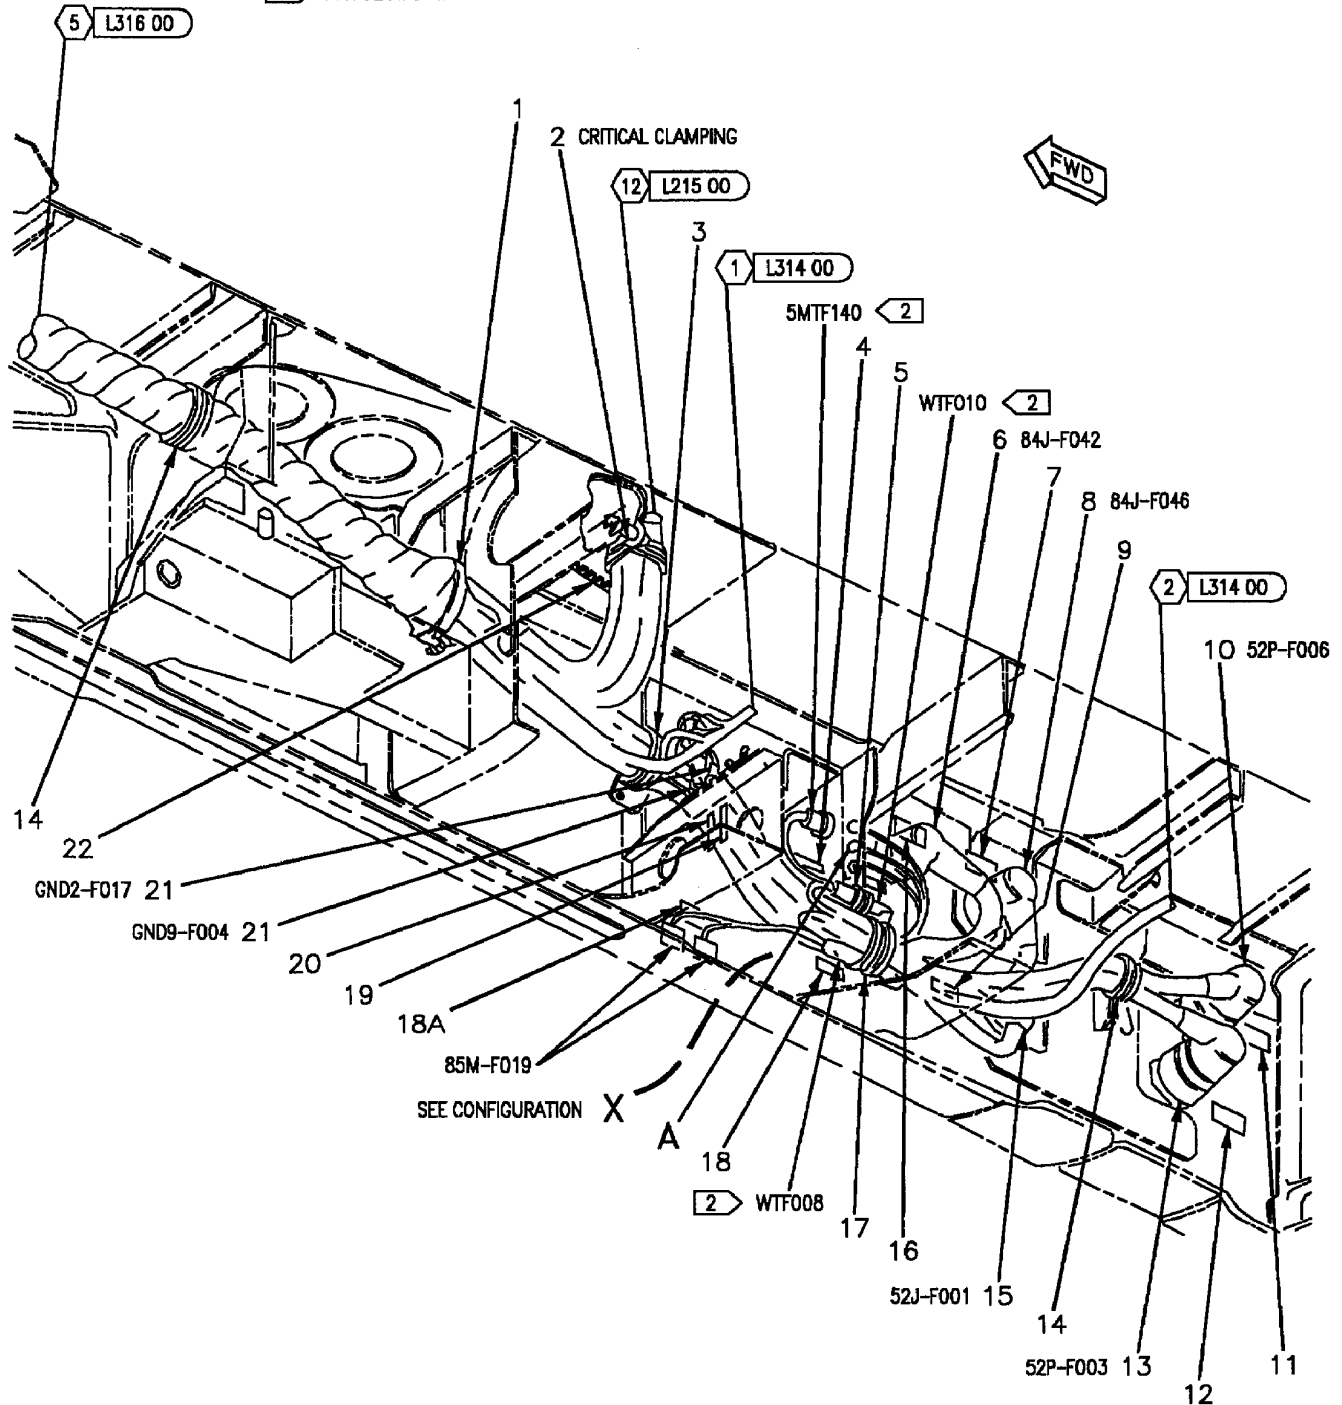

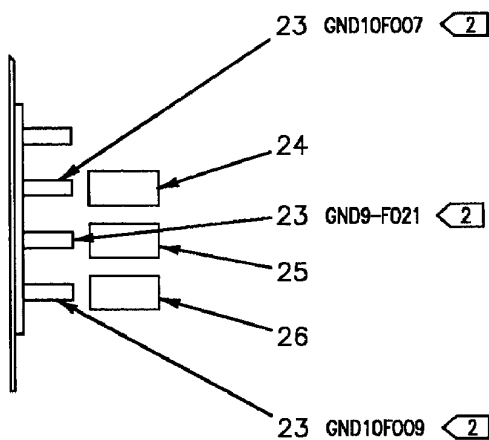

A

VIEW LOOKING OUT'BD

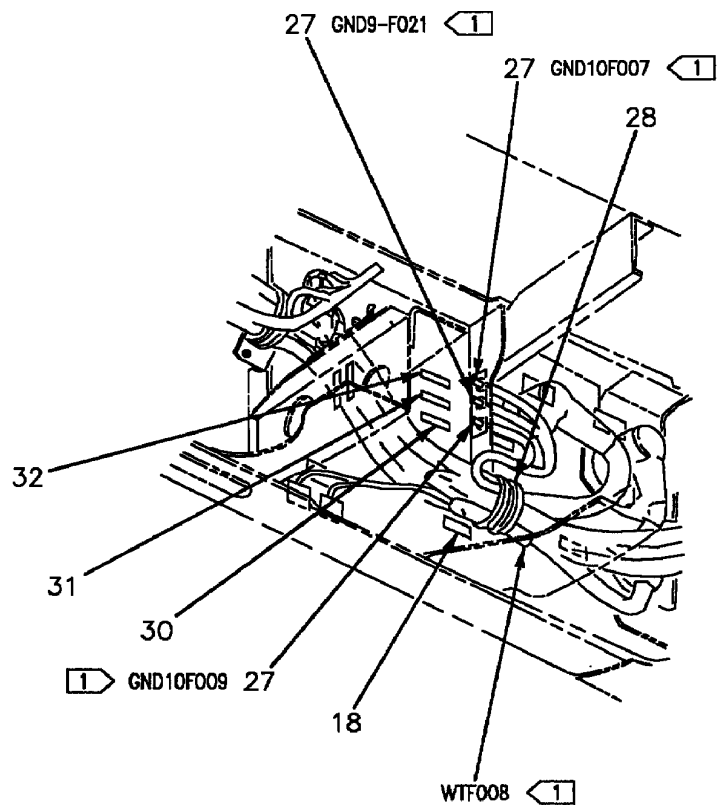

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN735D40	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
2	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
3	MS21919WDG16	CLAMP	1		PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
4	74A890601-2163	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTF010)	1	B	MGOZZ
5	MS21919WDG #	CLAMP	1	B	-
6	MS27468T25B35S	CONNECTOR, RECEPTACLE (84J-F042)	1		PAOZZ
7	74A890601-2149	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-F046)	1		MGOZZ
8	MS27468T25B35PA	CONNECTOR, RECEPTACLE (84J-F046)	1		PAOZZ
9	74A890601-2044	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F001)	1		MGOZZ
10	MS27467T23B35SB	CONNECTOR, PLUG (52P-F006)	1		PAOZZ
11	74A890601-2048	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F006)	1		MGOZZ
12	74A890601-2303	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-F003)	1		MGOZZ
13	MS27467T23B35SA	CONNECTOR, PLUG (52P-F003)	1		PAOZZ
14	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	MS27468T23B21S	CONNECTOR, RECEPTACLE (52J-F001)	1		PAOZZ
16	74A890601-2145	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-F042)	1		MGOZZ
17	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
18	74A890601-2243	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTF008)	1		MGOZZ
18A	74A890601-2500	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 85M-F019)	1		MGOZZ
19	74A890601-2699	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-F017)	1		MGOZZ
20	74A890601-2231	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-F004)	1		MGOZZ
21	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 21)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 21)	2		PAOZZ
22	MS21266-2N	GROMMET	AR		PAOZZ
23	MS21042L3	NUT	3	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 23)	3	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 23)	3	B	PAOZZ
24	74A890601-2234	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10F007)	1	B	MGOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
25	74A890601-2700	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F021)	1	B	MGOZZ
26	74A890601-2575	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10F009)	1	B	MGOZZ
27	MS21042L3	NUT	3	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 27)	3	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 27)	3	A	PAOZZ
28	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
29		DELETED			
30	74A890601-2575	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10F009)	1	A	MGOZZ
31	74A890601-2700	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-F021)	1	A	MGOZZ
32	74A890601-2234	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10F007)	1	A	MGOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP

COCKPIT MAIN INSTRUMENT PANEL ARRANGEMENT


LEGEND

- | | |
|---|--------------------|
| 1 | 161353 THRU 161528 |
| 2 | 161702 AND UP |
| 3 | 161353 THRU 161519 |
| 4 | 161520 AND UP |

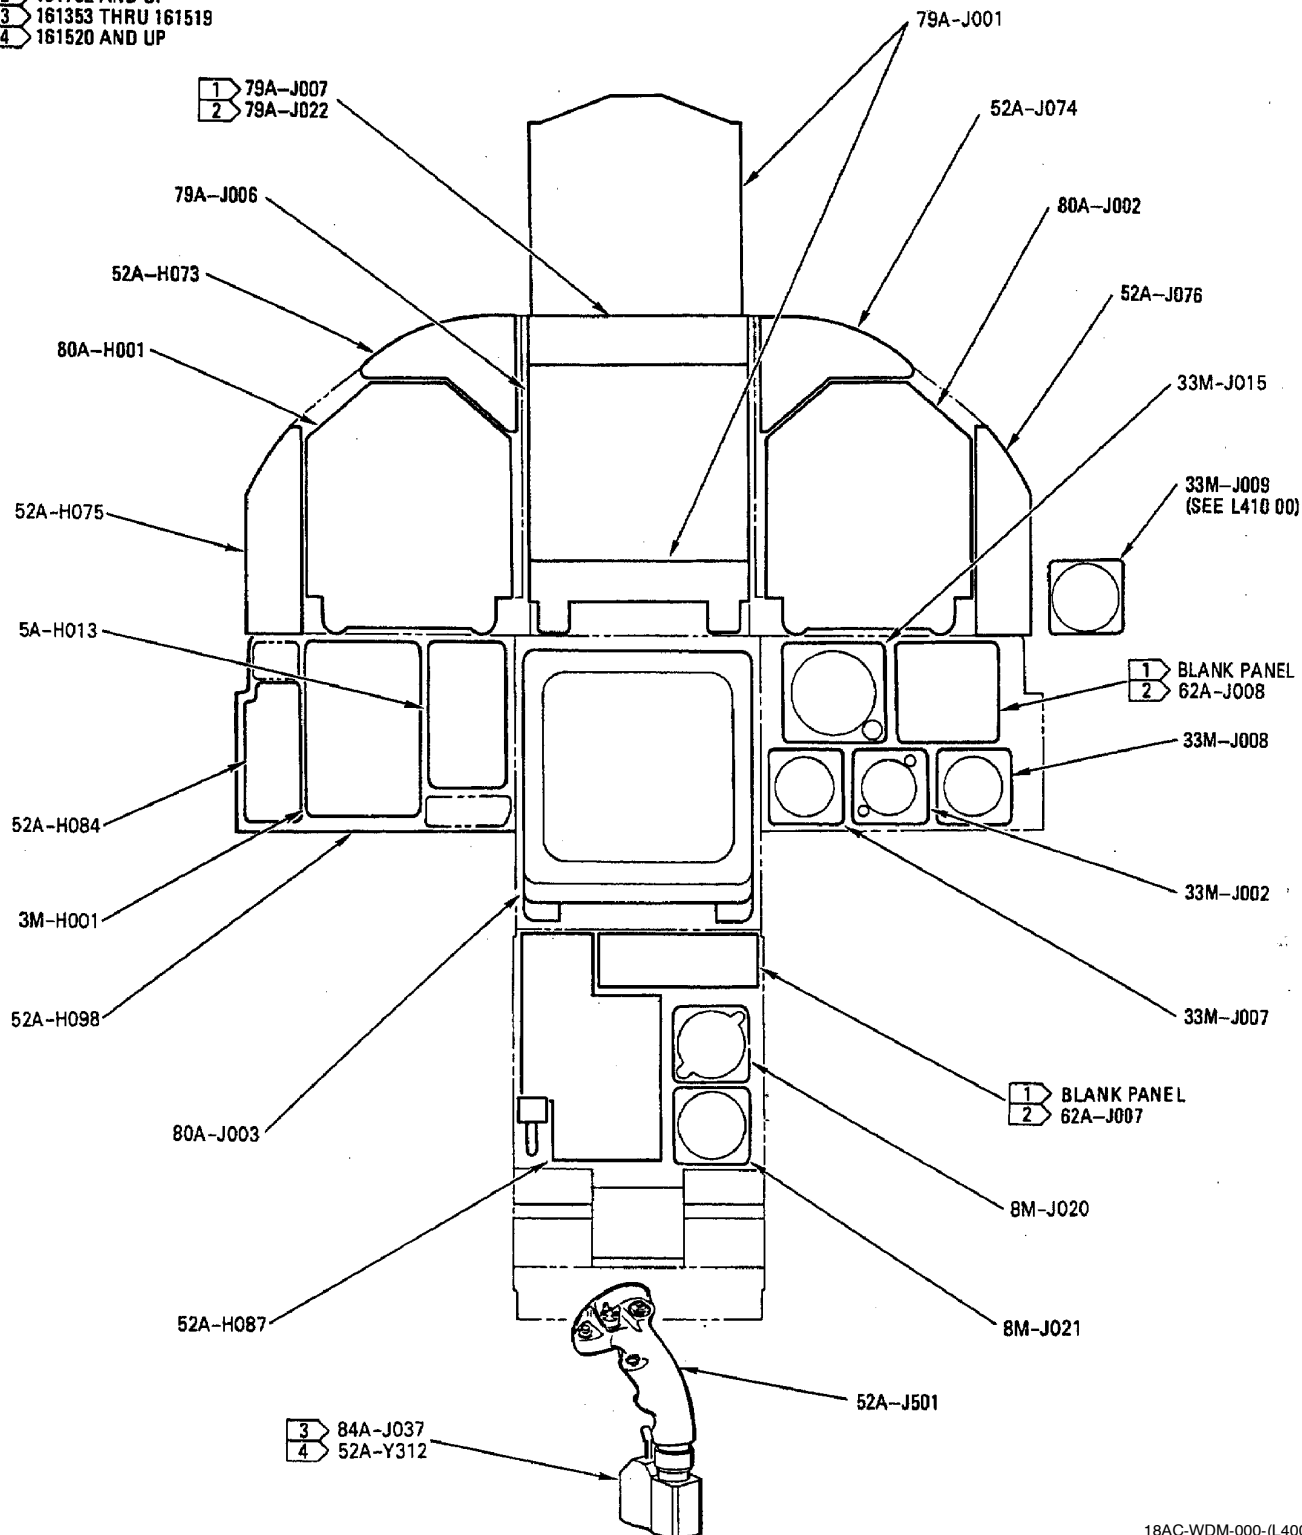


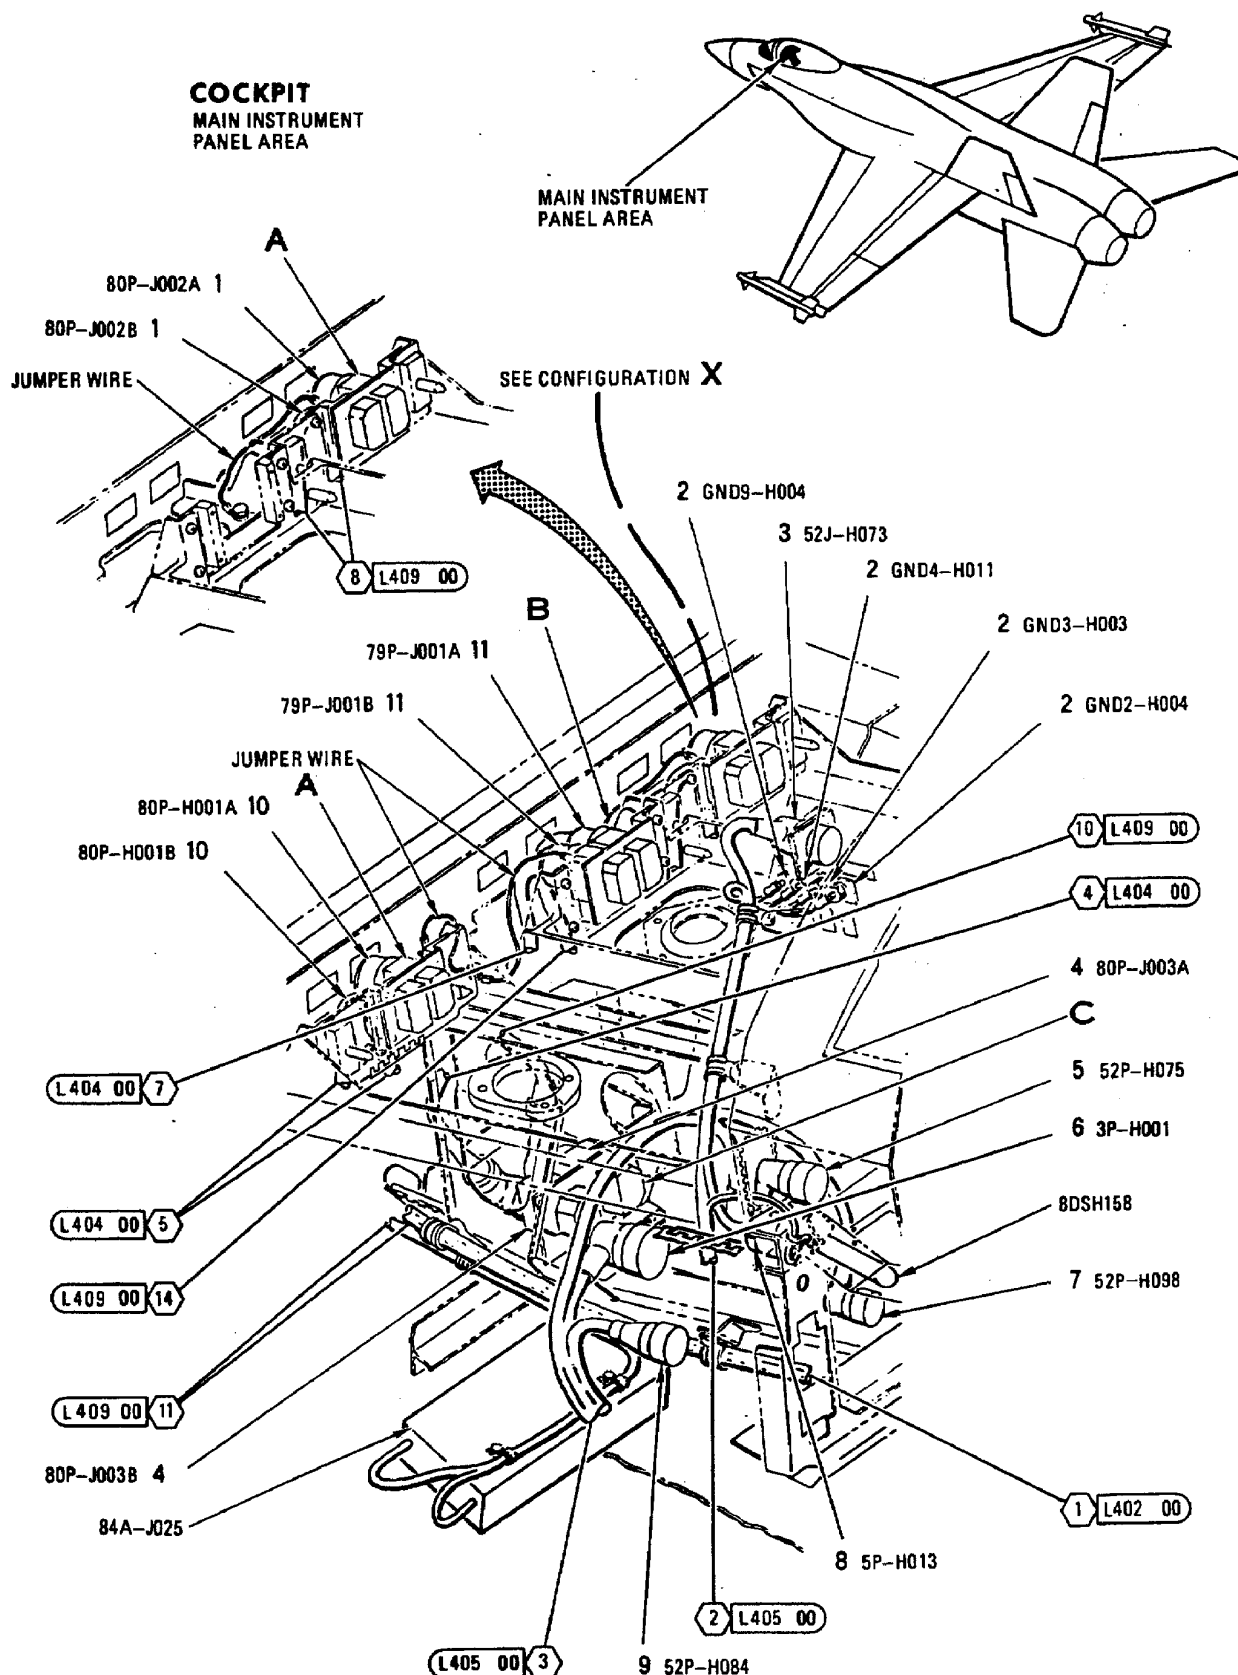


COCKPIT MAIN INSTRUMENT PANEL AREA





A




B



C

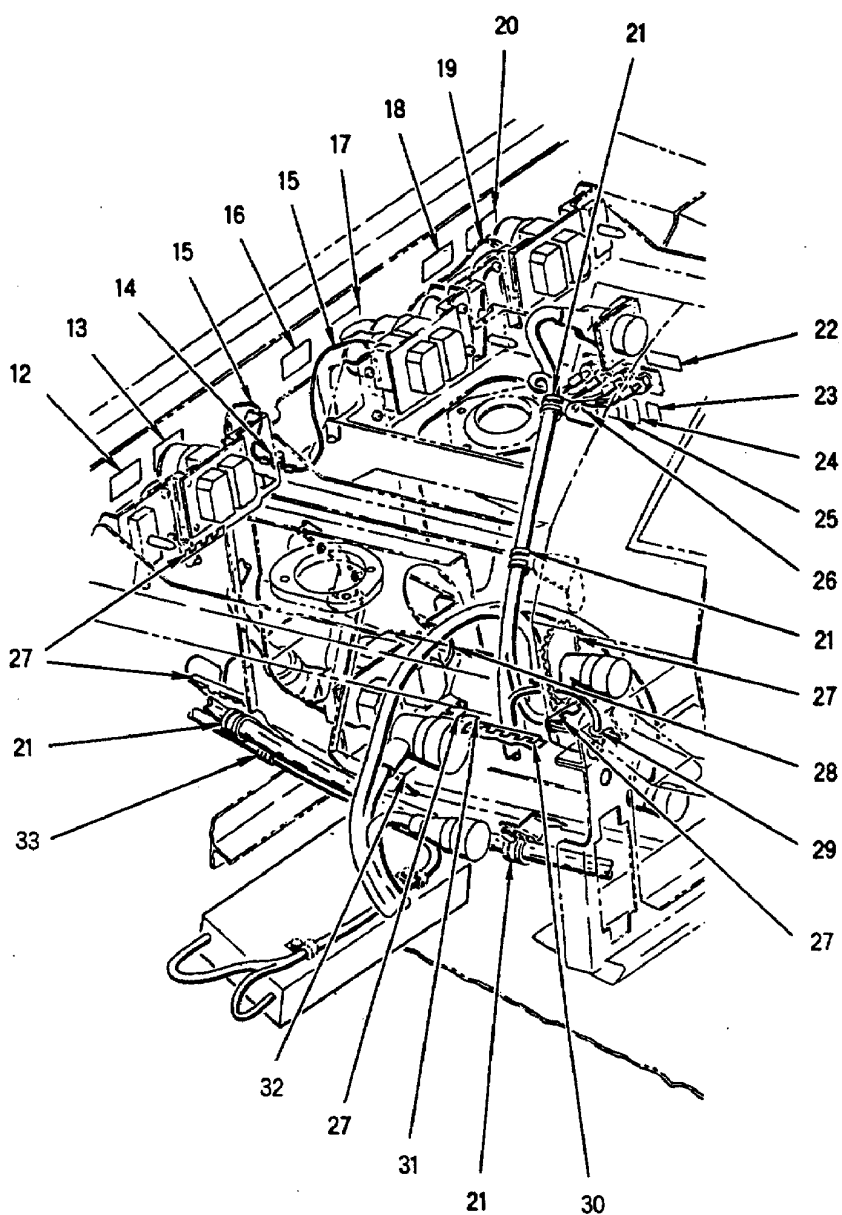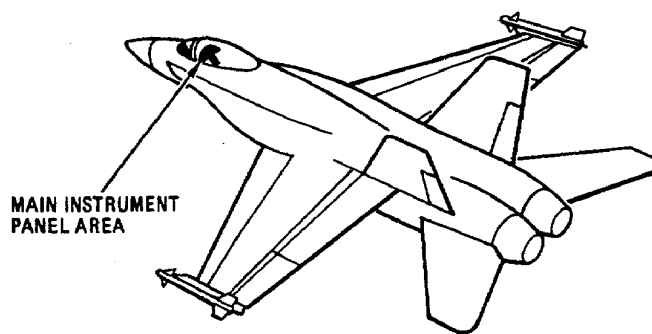

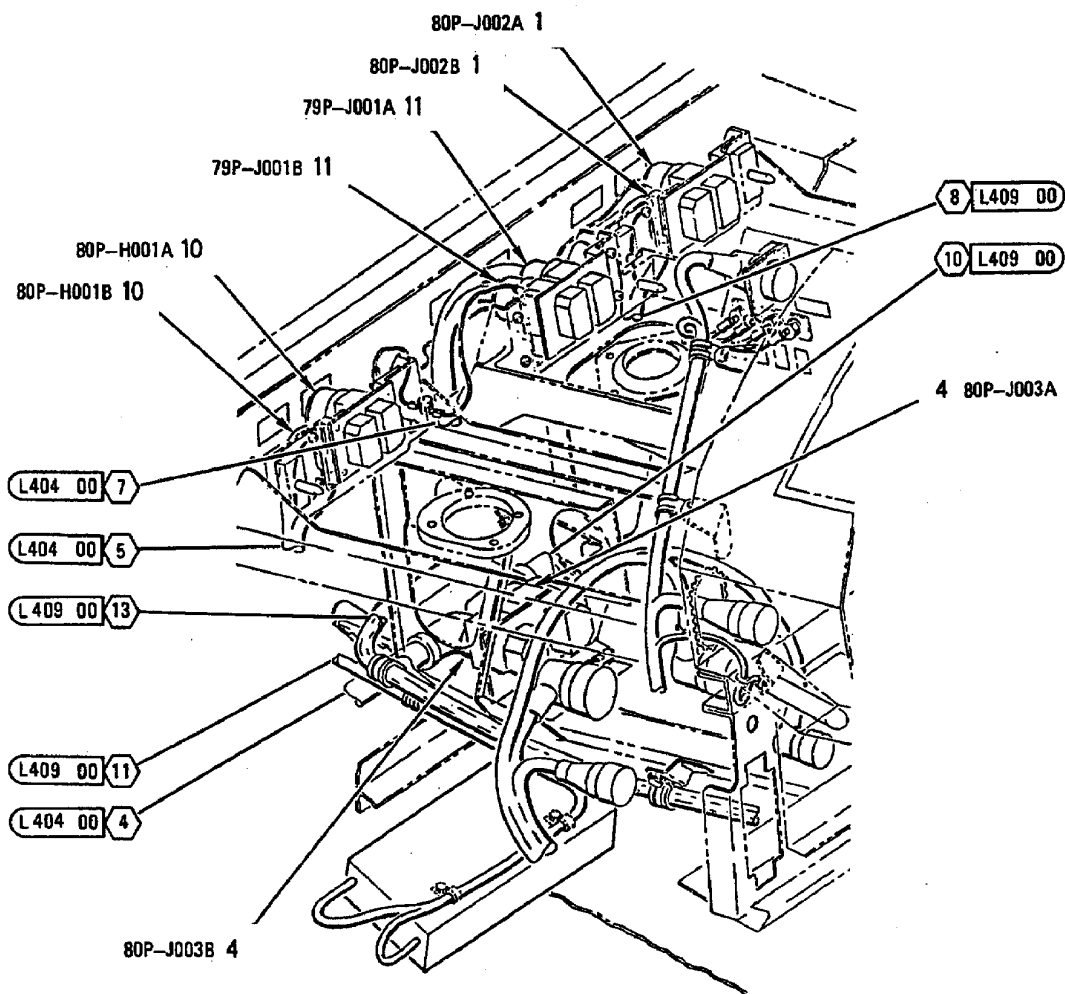


CONFIGURATION X
161353 THRU 161359


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	DPX2NE41723-139	CONNECTOR, PLUG, ELECTRICAL (71468) ... (MCDONNELL SPEC 5M1972-01P02P) (80P-J002A, 80P-J002B)	1		PAOZZ
	MS24693C9	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS21042L04	NUT (AP)	2		PAOZZ
2	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	4		PAOZZ
3	MS27656T17B35S	CONNECTOR, RECEPTACLE (52J-H073)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
4	DPX2NE41723-139	CONNECTOR, PLUG, ELECTRICAL (71468) ... (MCDONNELL SPEC 5M1972-01P02P) (80P-J003A, 80P-J003B)	1		PAOZZ
	MS24693C9	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS21042L04	NUT (AP)	2		PAOZZ
5	MS27467T15B35S	CONNECTOR, PLUG (52P-H075)	1		PAOZZ
6	MS27467T19B35S	CONNECTOR, PLUG (3P-H001)	1		PAOZZ
7	MS27467T11B35S	CONNECTOR, PLUG (52P-H098)	1		PAOZZ
8	MS27467T17B35S	CONNECTOR, PLUG (5P-H013)	1		PAOZZ
9	MS27467T13B35S	CONNECTOR, PLUG (52P-H084)	1		PAOZZ
10	DPX2NE41723-139	CONNECTOR, PLUG, ELECTRICAL (71468) ... (MCDONNELL SPEC 5M1972-01P02P) (80P-H001A, 80P-H001B)	1		PAOZZ
	MS24693C9	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS21042L04	NUT (AP)	2		PAOZZ
11	DPX2NE41723-140	CONNECTOR, PLUG, ELECTRICAL (71468) ... (MCDONNELL SPEC 5M1972-01P01P) (79P-J001A, 79P-J001B)	1		PAOZZ
	MS24693C9	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS21042L04	NUT (AP)	2		PAOZZ
12	74A890601-2533	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 80P-H001B)	1		MDOZZ
13	74A890601-2532	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 80P-H001A)	1		MDOZZ
14	NAS673V4	BOLT	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 14)	1		PAOZZ
15	MS25083-2AB6	LEAD, ELECTRICAL (JUMPER WIRE)	2		PAOZZ
16	74A890601-2531	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 79P-J001B)	1		MDOZZ
17	74A890601-2530	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 79P-J001A)	1		MDOZZ
18	74A890601-2535	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 80P-J002B)	1		MDOZZ
19	MS25083-2AB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
20	74A890601-2534	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 80P-J002A)	1		MDOZZ
21	MS21919WDG #	CLAMP	4		-
	NAS673V #	BOLT (AP)	1		-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	74A890601-2521	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H073)	1		MDOZZ
23	74A890601-2251	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-H004)	1		MDOZZ
24	74A890601-2252	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-H003)	1		MDOZZ
25	74A890601-2253	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-H011)	1		MDOZZ
26	74A890601-2279	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-H004)	1		MDOZZ
27	MS21266-2N	GROMMET	AR		PAOZZ
28	MS25083-2AB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
29	NAS557-4B	GROMMET	1		PAOZZ
30	MS21266-1N	GROMMET	AR	A	PAOZZ
31	74A890601-2528	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 80P-J003A)	1		MDOZZ
32	74A890601-2529	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 80P-J003B)	1		MDOZZ
33	MS21919WDG #	CLAMP	1		-



LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE USABLE ON
A 161702 & UP

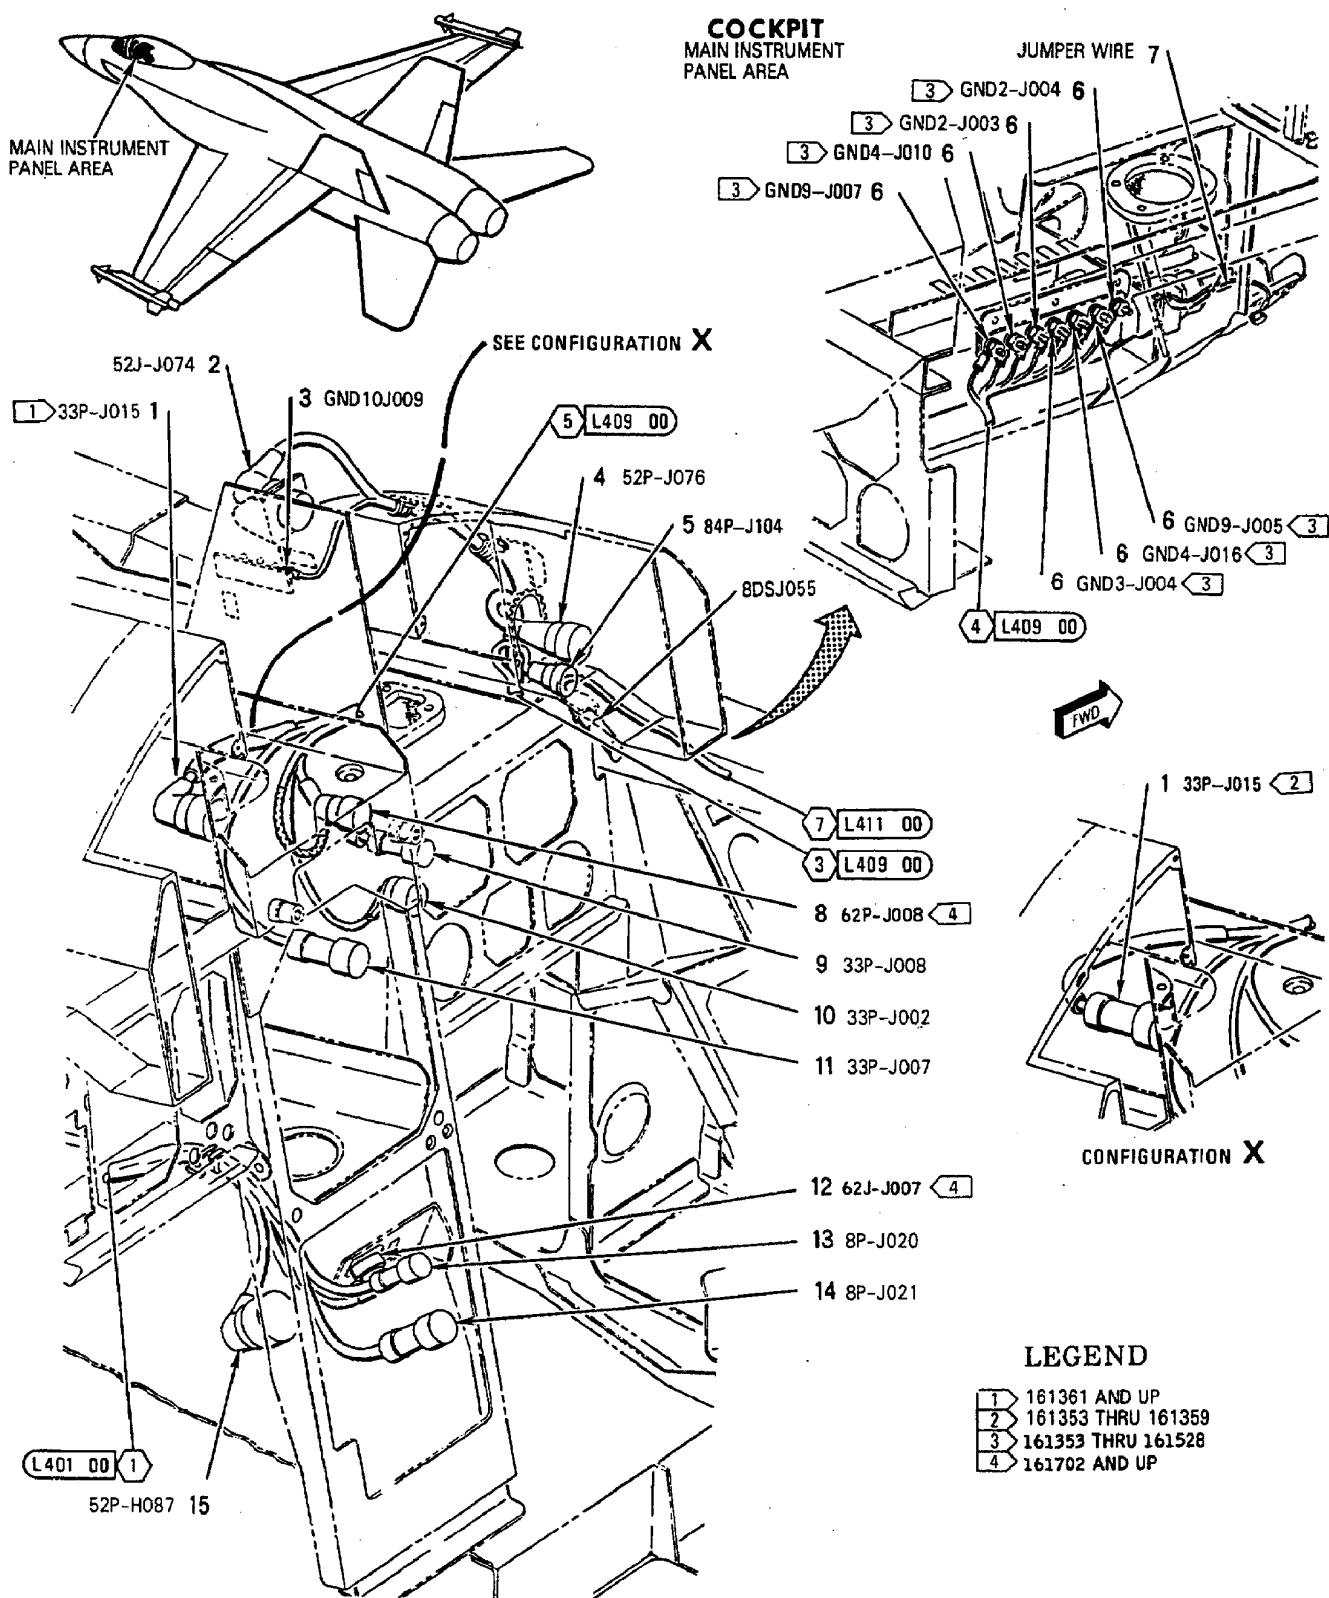

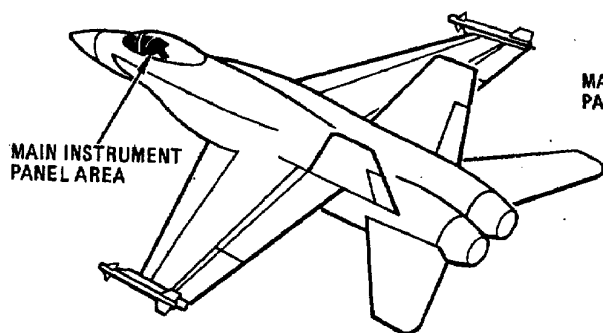

COCKPIT MAIN INSTRUMENT PANEL AREA

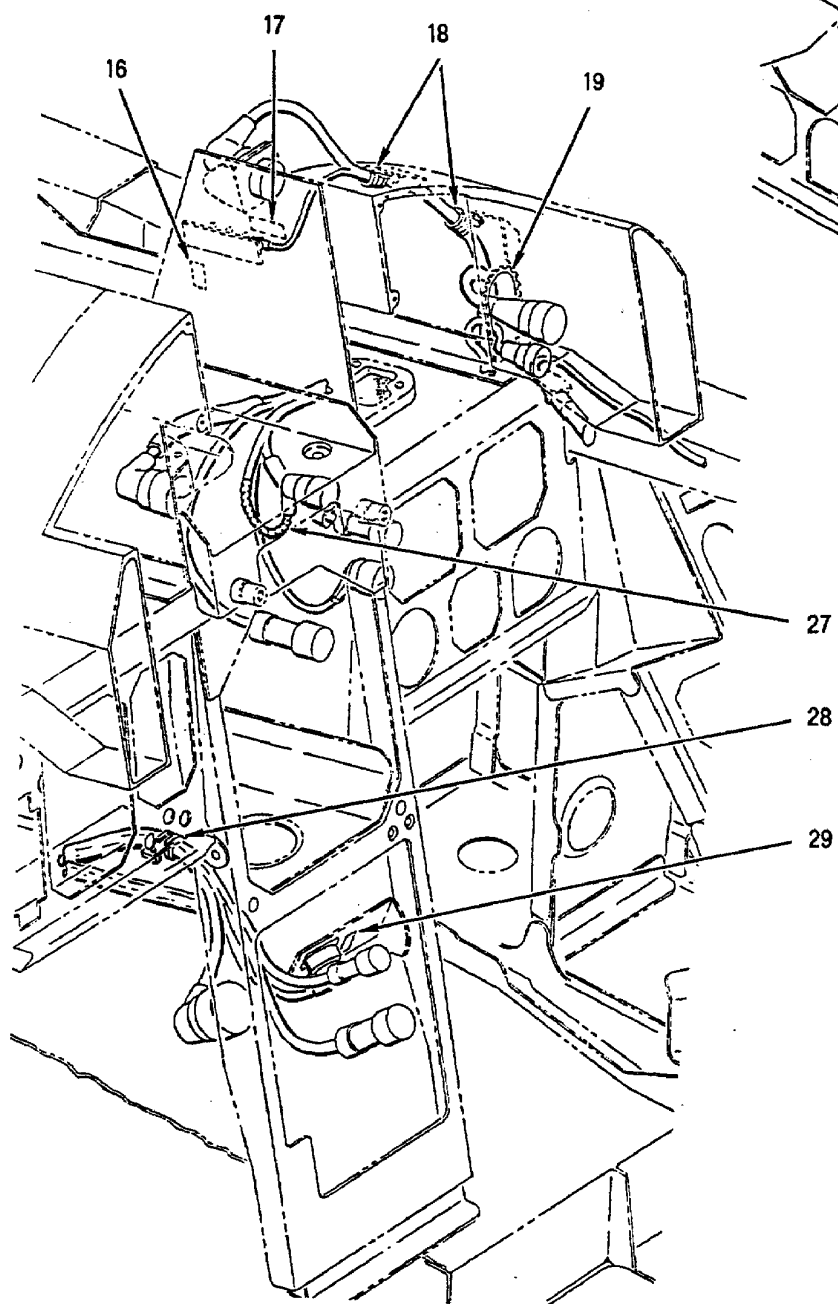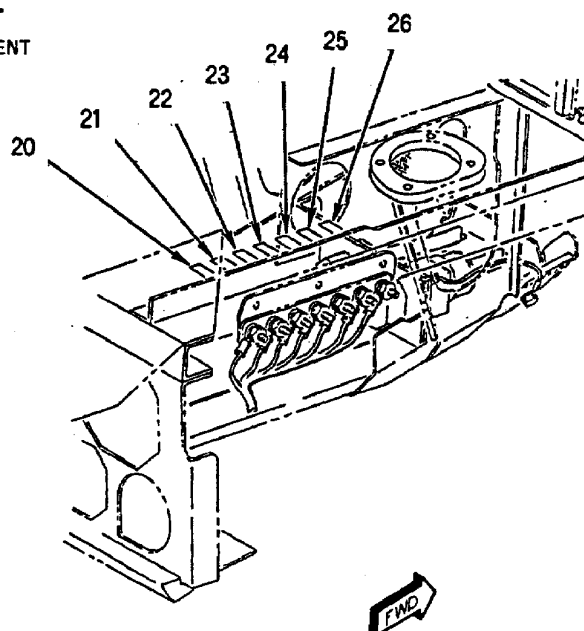

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M81511-56WD01S1	CONNECTOR, PLUG (33P-J015)	1		PAOZZ
2	MS27656T17B35S	CONNECTOR, RECEPTACLE (52J-J074)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
3	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	1		PAOZZ
4	MS27467T13B35S	CONNECTOR, PLUG (52P-J076)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (84P-J104)	1		PAOZZ
6	MS21042L3	NUT	7	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	7	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	7	A	PAOZZ
7	MS25083-2AB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	MS27467T13B35SA	CONNECTOR, PLUG (62P-J008)	1	B	PAOZZ
9	MS3116F8-3S	CONNECTOR, PLUG (33P-J008)	1		PAOZZ
10	MS27467T11B35S	CONNECTOR, PLUG (33P-J002)	1		PAOZZ
11	MS3147E3-50S	CONNECTOR, PLUG (33P-J007)	1		PAOZZ
12	MS27656T15B35S	CONNECTOR, RECEPTACLE (62J-J007)	1	B	PAOZZ
	NAS600-8P	SCREW (AP)	4	B	PAOZZ
	AN960JD4L	WASHER (AP)	4	B	PAOZZ
	MS27502B15A	COVER (USE WITH INDEX 12)	1	B	PAOZZ
13	MS3147E3-50S	CONNECTOR, PLUG (8P-J020)	1		PAOZZ
14	MS3147E3-50S	CONNECTOR, PLUG (8P-J021)	1		PAOZZ
15	MS27467T17B35S	CONNECTOR, PLUG (52P-H087)	1		PAOZZ
16	74A890601-2780	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10J009)	1		MDOZZ
17	74A890601-2085	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J074)	1		MDOZZ
18	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	MS21266-2N	GROMMET	AR		PAOZZ
20	74A890601-2775	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J007)	1	A	MDOZZ
21	74A890601-2774	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-J010)	1	A	MDOZZ
22	74A890601-2274	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-J003)	1	A	MDOZZ
23	74A890601-2276	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-J004)	1	A	MDOZZ
24	74A890601-2272	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-J016)	1	A	MDOZZ
25	74A890601-2273	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-J005)	1	A	MDOZZ
26	74A890601-2773	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-J004)	1	A	MDOZZ
27	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
28	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			

29	74A890601-2172	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 62J-J007)	2	B	MDOZZ
----	----------------	--	---	---	-------

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP

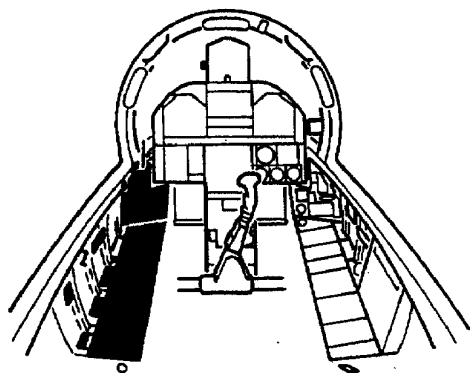


COCKPIT
LEFT CONSOLE AND
LEFT VERTICLE
PANEL ARRANGEMENT

LEGEND

1 162394 AND UP

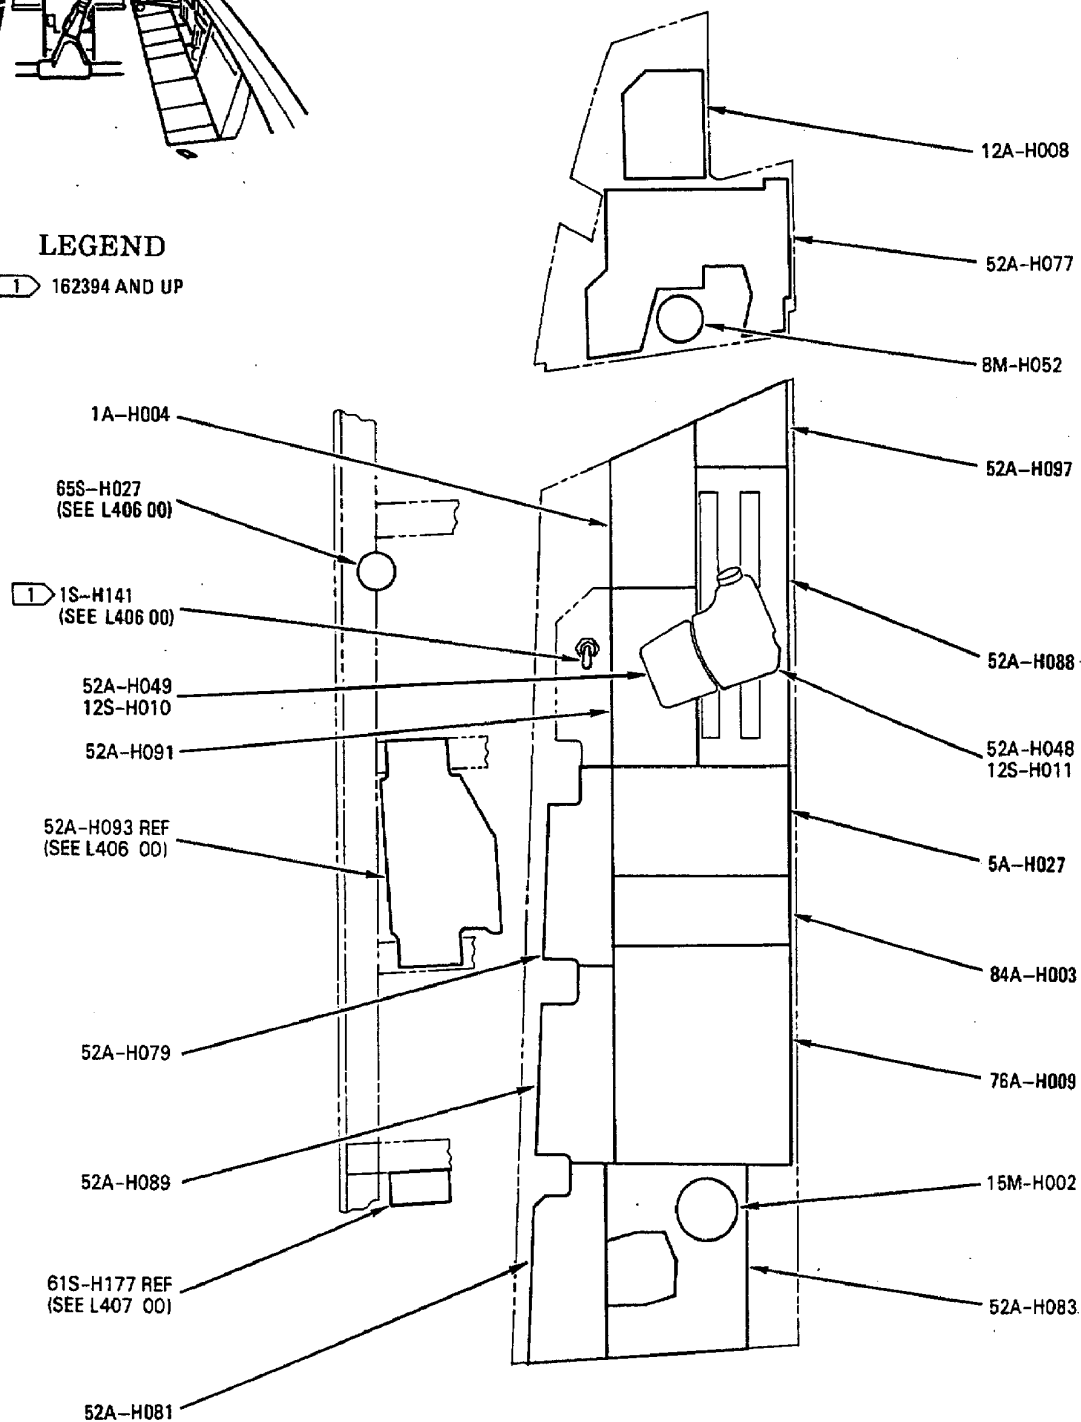


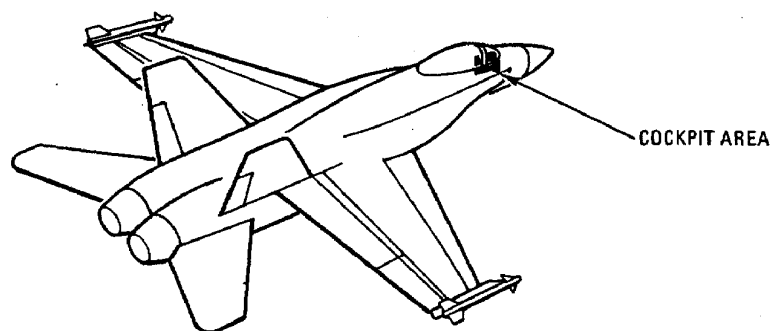


COCKPIT LEFT FWD

LEGEND

- 1 161361 AND UP
- 2 161353 THRU 161359

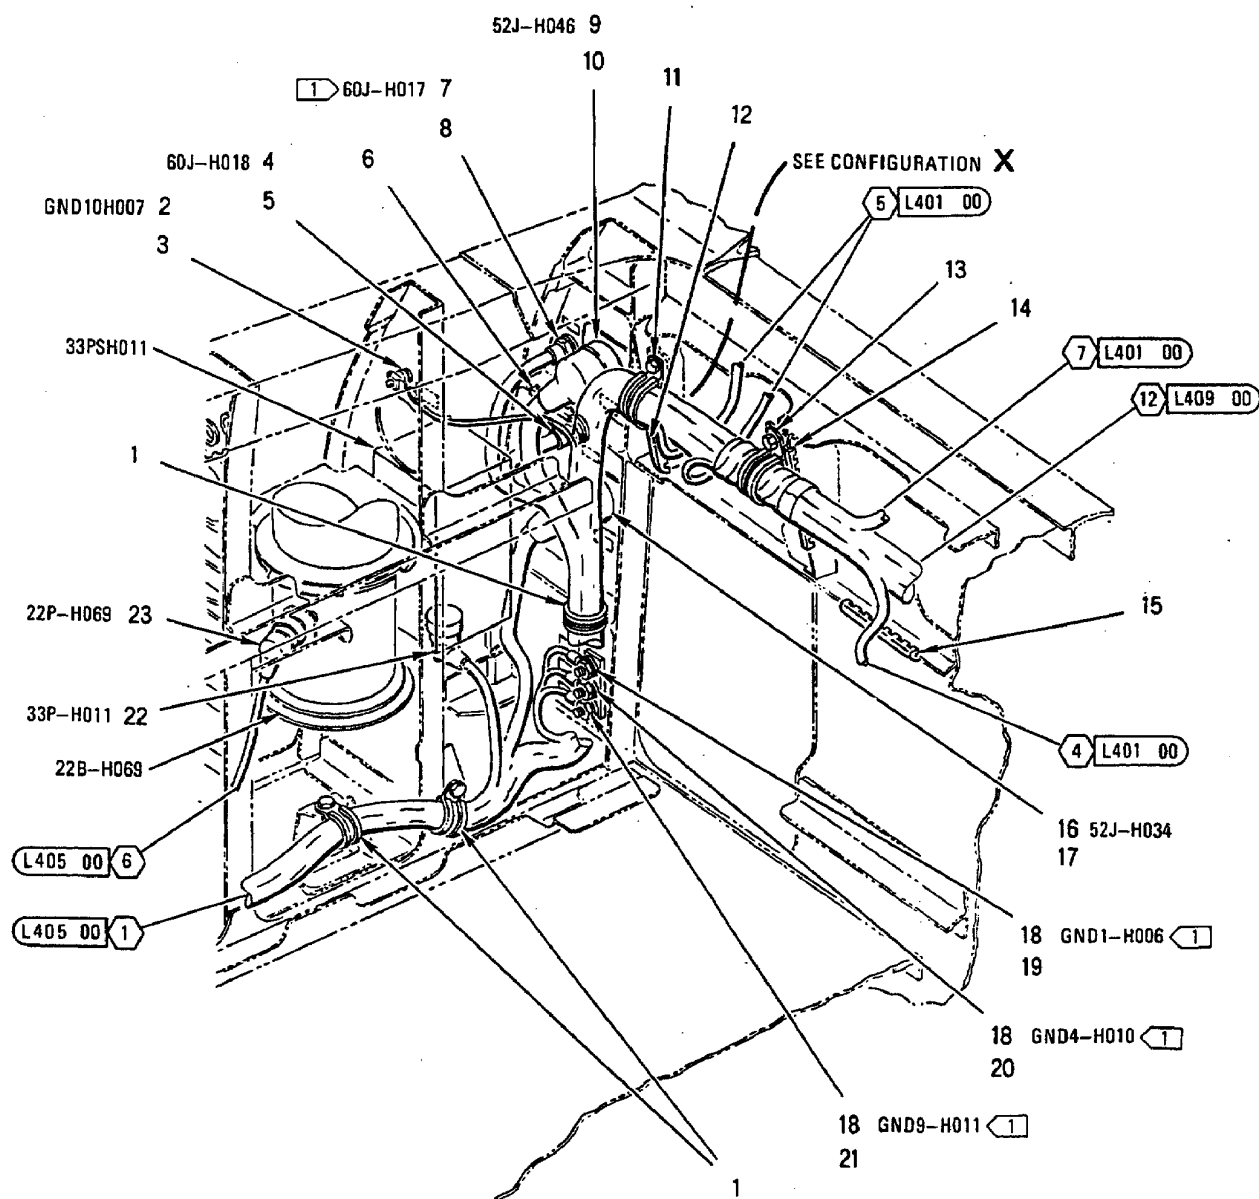

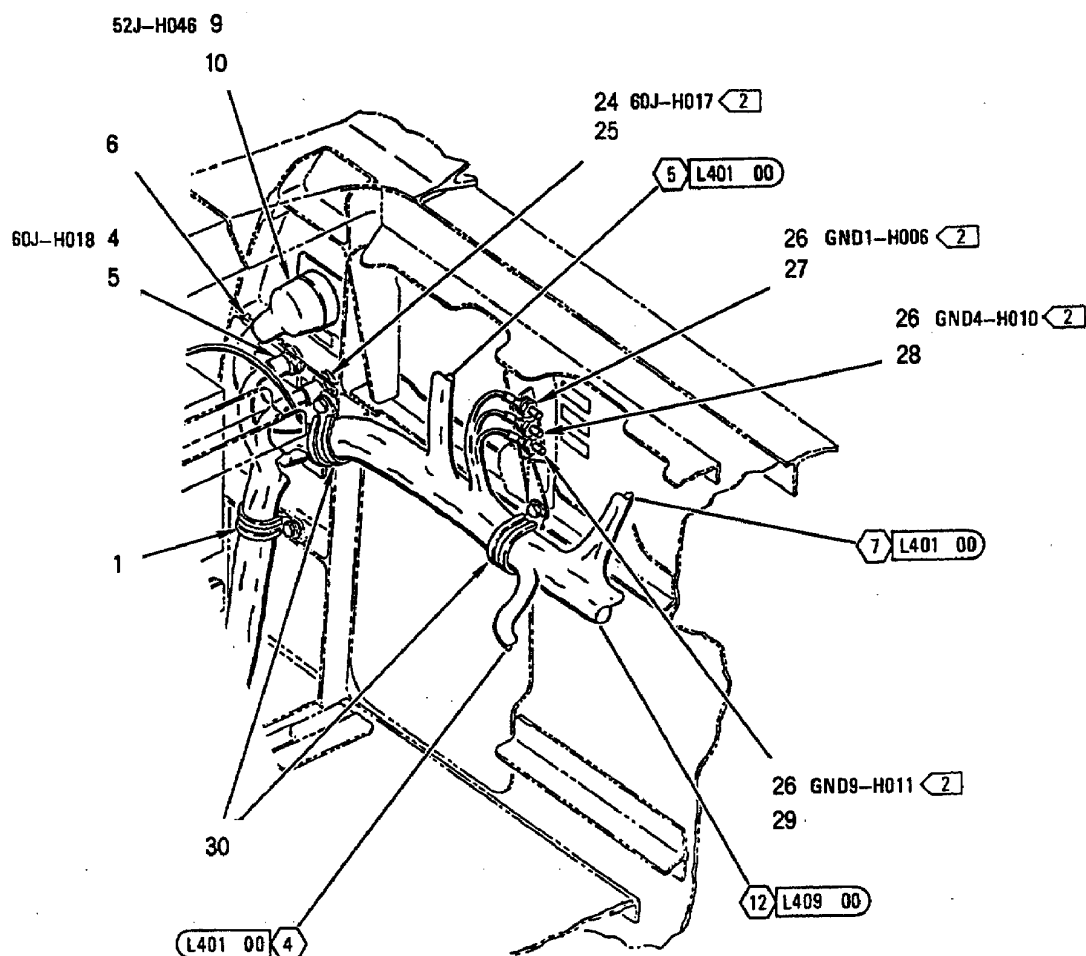

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	NAS1801-3-11	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	2		PAOZZ
3	74A890601-2527	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10H007)	1		MDOZZ
4	31-33546-8	CONNECTOR, RECEPTACLE,	1	*	PAOZZ
		ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344JP5B) (60J-H018)			
	4841-0905	SEE ABOVE (95077)	1	*	PAOZZ
5	74A890601-2097	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 60J-H018)	1		MDOZZ
6	MS21266-2N	GROMMET	AR		PAOZZ
7	31-33546-7	CONNECTOR, RECEPTACLE,	1	A*	PAOZZ
		ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344JP3B) (60J-H017)			
	4841-0903	SEE ABOVE (95077)	1	A*	PAOZZ
8	74A890601-2096	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 60J-H017)	1	A	MDOZZ
9	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-H046)	1	C	PAOZZ
	MS27656T25B35PA	CONNECTOR, RECEPTACLE (52J-H046)	1	D	PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL	1		PAOZZ
		(57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 9)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
10	74A890601-2074	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-H046)	1		MDOZZ
11	MS21919WDG17	CLAMP	1	A	PAOZZ
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
12	MS21266-2N	GROMMET	AR	F	PAOZZ
13	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
14	MS21266-2N	GROMMET	AR	E	PAOZZ
15	MS21266-2N	GROMMET	AR	D	PAOZZ
16	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-H034)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	6		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL	1		PAOZZ
		(57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 16)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
17	74A890601-2070	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-H034)	1		MDOZZ
18	MS21042L3	NUT	3	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 18)	3	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 18)	3	A	PAOZZ
19	74A890601-2664	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-H006)	1	A	MDOZZ
20	74A890601-2280	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-H010)	1	A	MDOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
21	74A890601-2250	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-H011)	1	A	MDOZZ
22	MS27467T13B35S	CONNECTOR, PLUG (33P-H011)	1		PAOZZ
23	MS27467T11B35S	CONNECTOR, PLUG (22P-H069)	1		PAOZZ
24	31-33546-7	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1344JP3B) (60J-H017)	1	B*	PAOZZ
	4841-0903	SEE ABOVE (95077)	1	B*	PAOZZ
25	74A890601-2096	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 60J-H017)	1	B	MDOZZ
26	MS21042L3	NUT	3	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 26)	3	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 26)	3	B	PAOZZ
27	74A890601-2664	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-H006)	1	B	MDOZZ
28	74A890601-2280	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-H010)	1	B	MDOZZ
29	74A890601-2250	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-H011)	1	B	MDOZZ
30	MS21919WDG #	CLAMP	2	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE USABLE ON

A	161361 & UP
B	161353 THRU 161359
C	161353 THRU 161528
D	161702 & UP
E	161941 & UP
F	162394 & UP

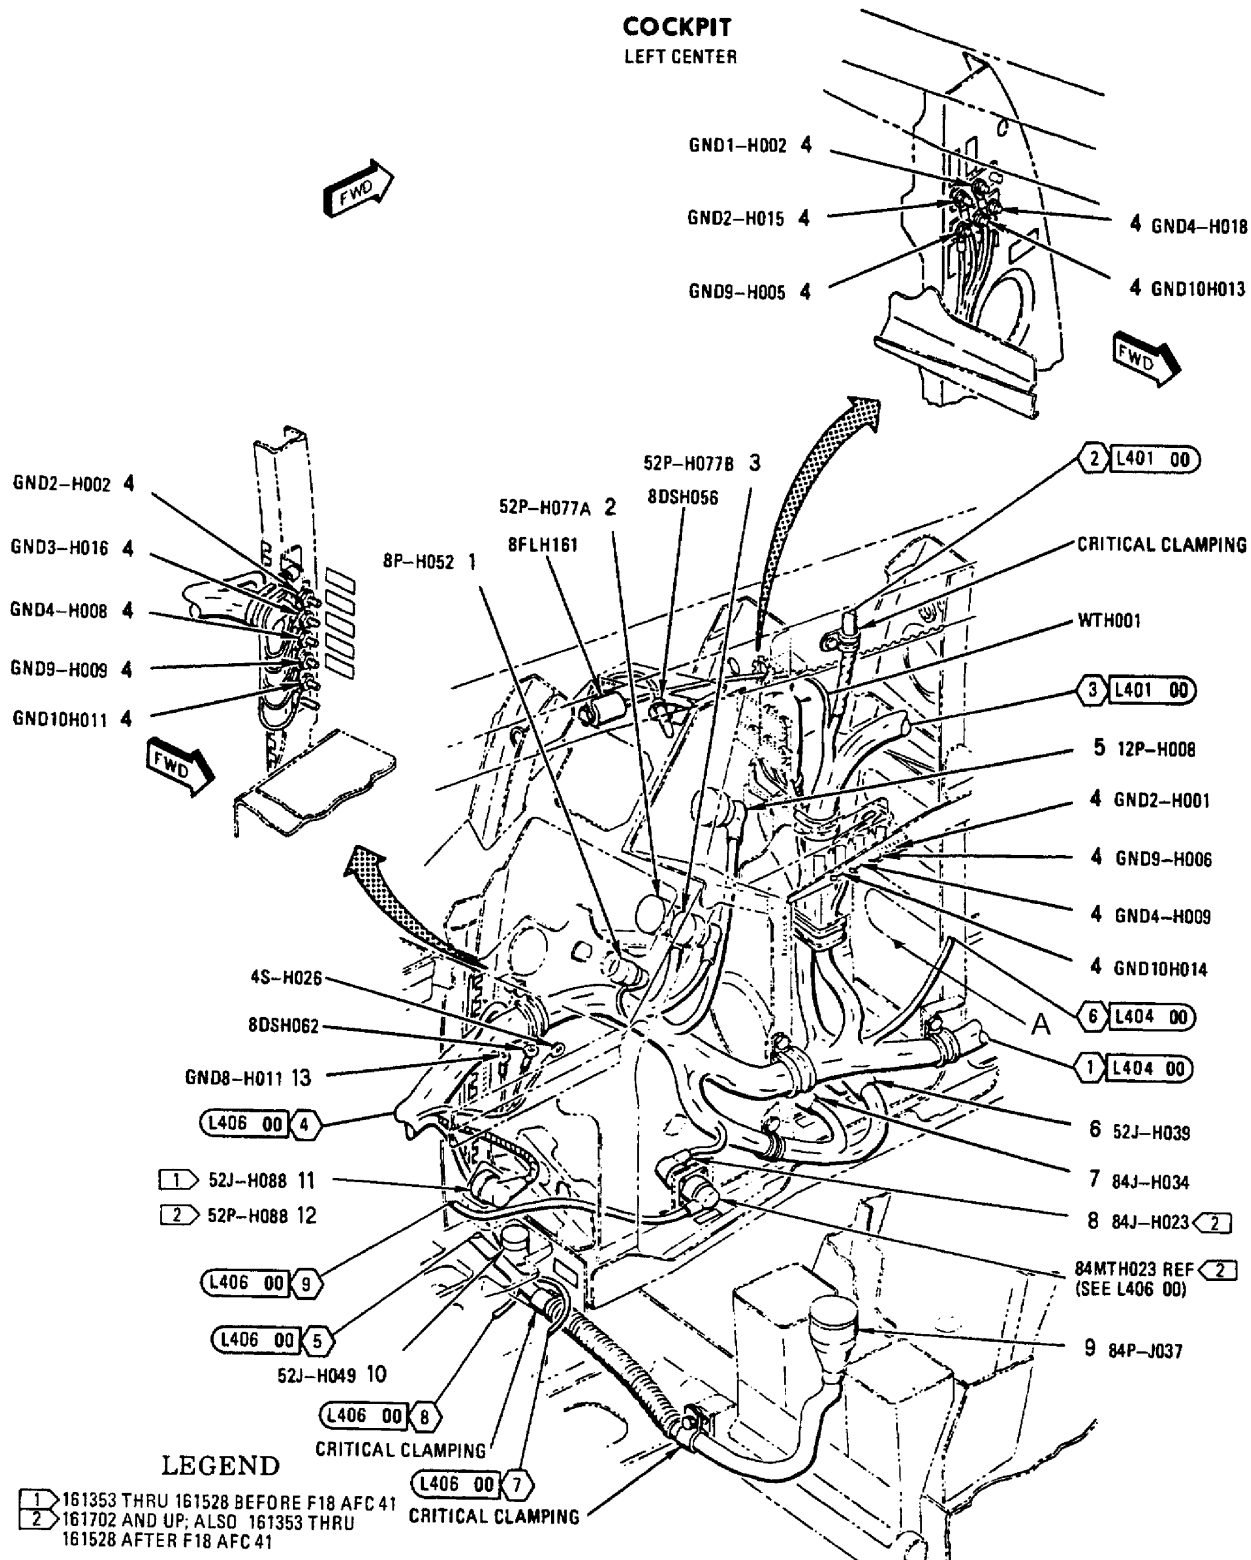

COCKPIT LEFT CENTER

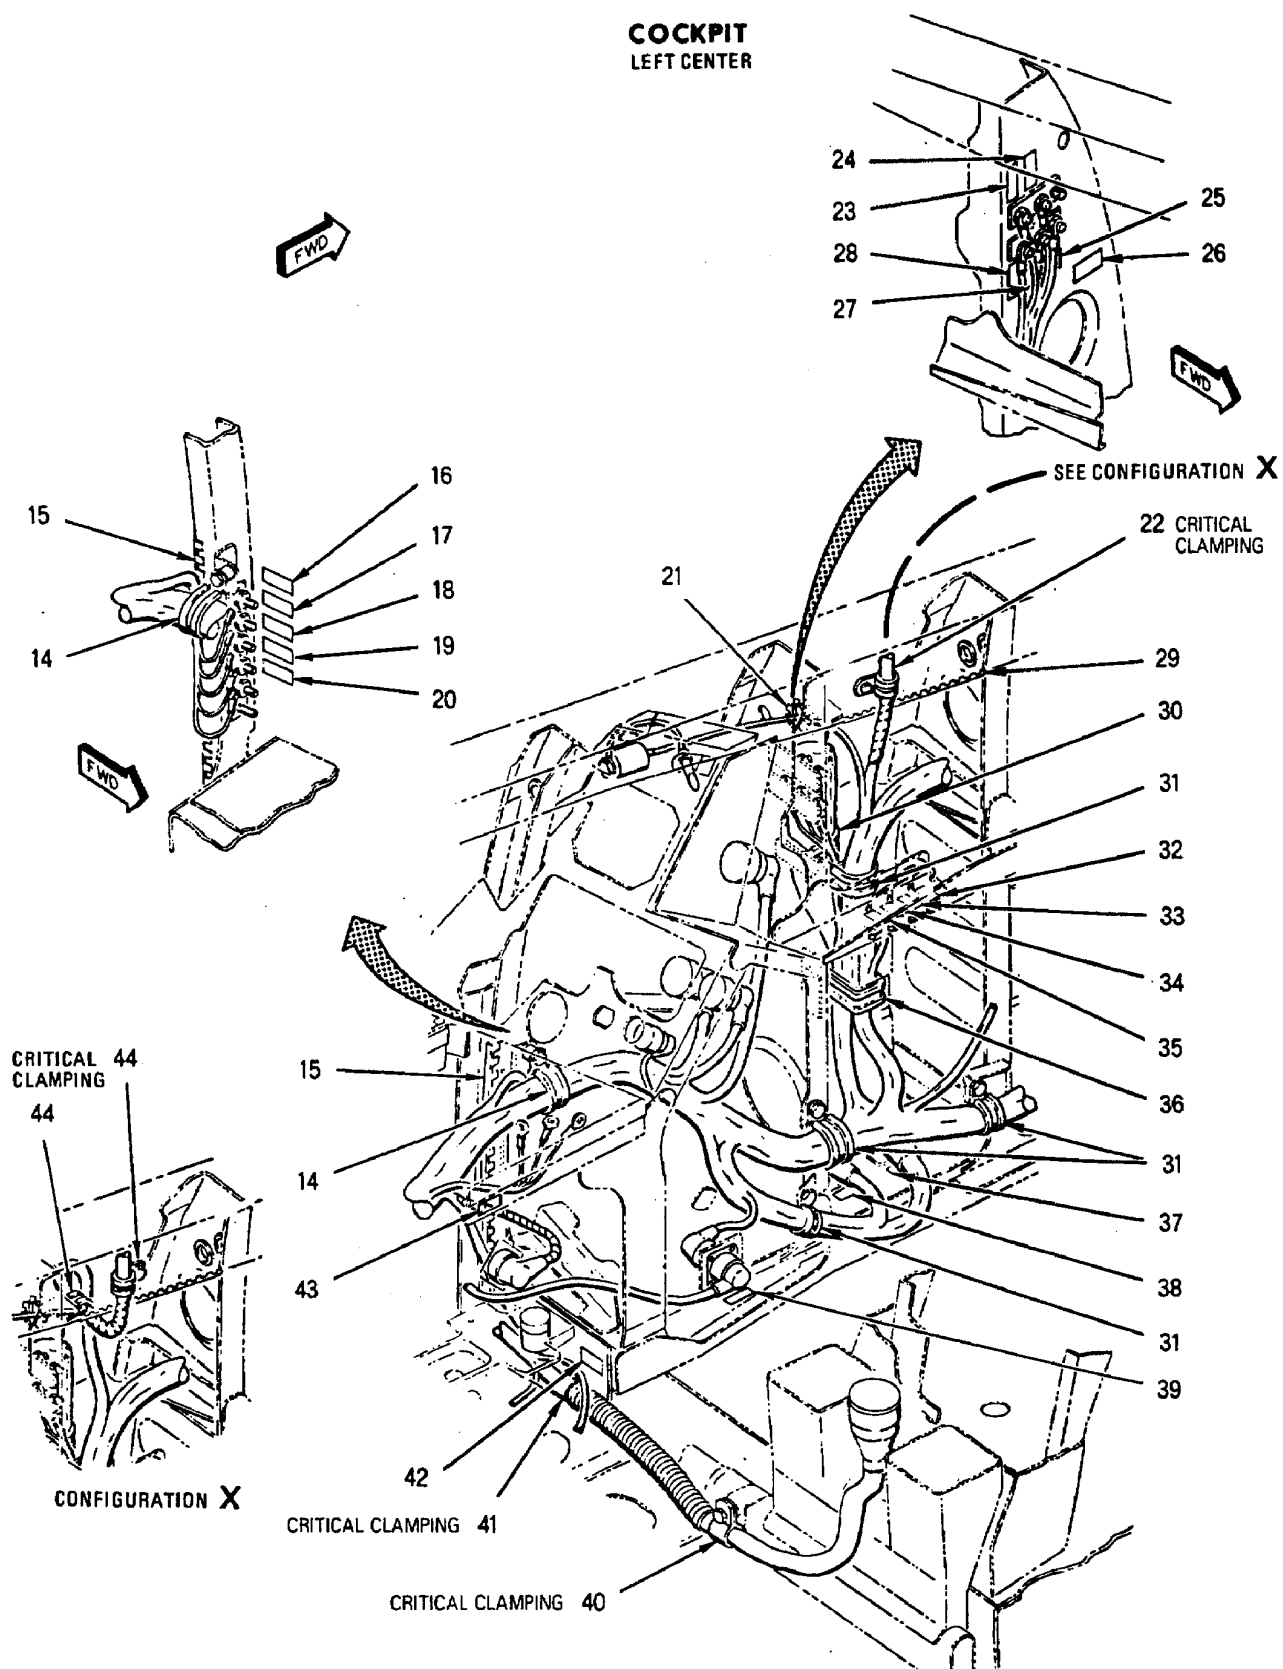

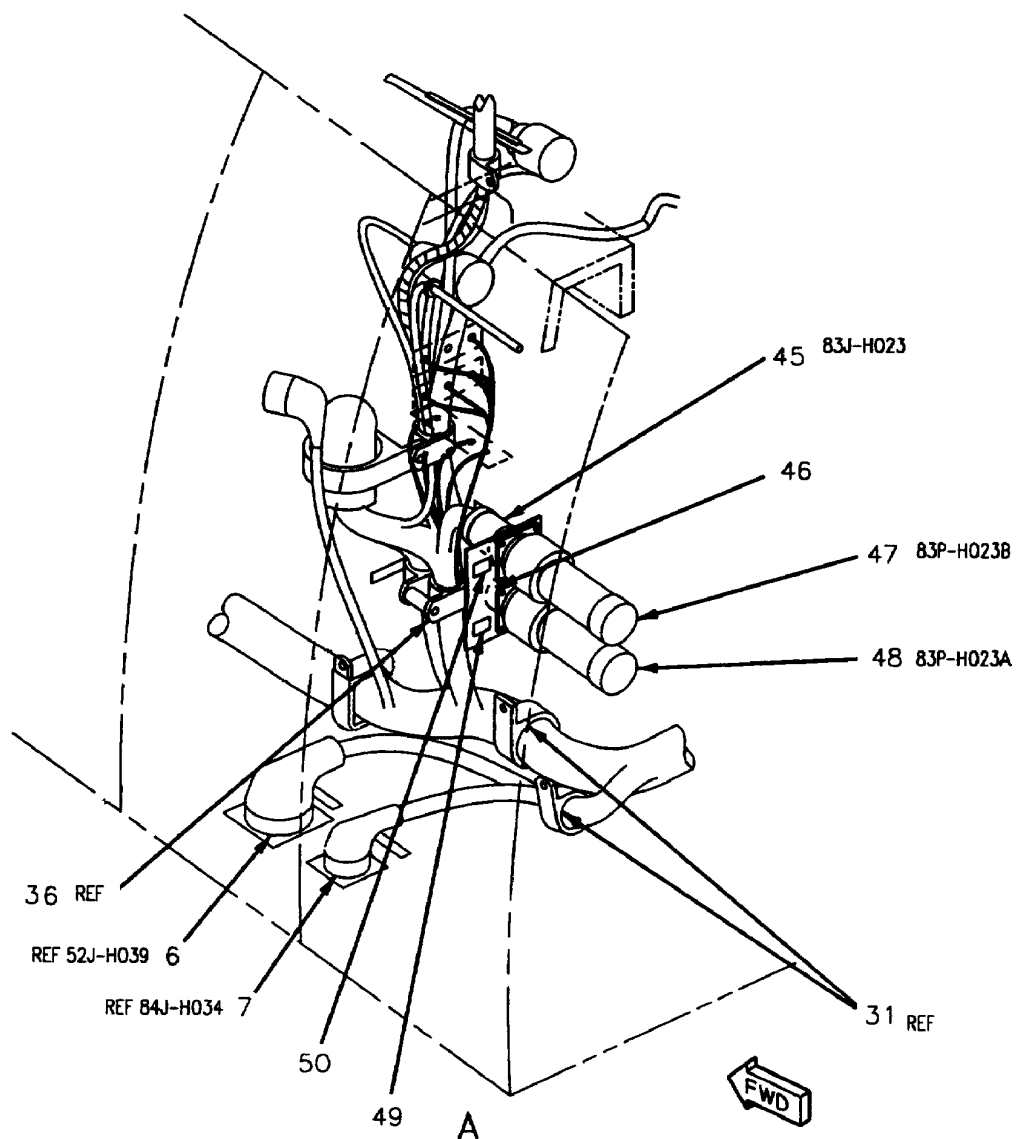

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B35S	CONNECTOR, PLUG (8P-H052)	1		PAOZZ
2	MS27467T15B35SA	CONNECTOR, PLUG (52P-H077A)	1		PAOZZ
3	MS27467T13B35S	CONNECTOR, PLUG (52P-H077B)	1		PAOZZ
4	MS21042L3	NUT	14		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	14		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	14		PAOZZ
5	MS27467T15B35S	CONNECTOR, PLUG (12P-H008)	1		PAOZZ
6	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-H039)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL (57003)	1		PAOZZ
		(MCDONNELL SPEC 5M988-26) (USE WITH INDEX 6)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
7	MS27656T17B35PA	CONNECTOR, RECEPTACLE (84J-H034)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0018	SHIELDING GASKET, ELECTRICAL (57003)	1		PAOZZ
		(MCDONNELL SPEC 5M988-7) (USE WITH INDEX 7)			
	1214-0507	SEE ABOVE (64098)	1	*	PAOZZ
8	MS27656T11B35S	CONNECTOR, RECEPTACLE (84J-H023)	1	B	PAOZZ
	NAS600-8P	SCREW (AP)	4	B	PAOZZ
	AN960JD4L	WASHER (AP)	4	B	PAOZZ
9	74B790095-1001	CONNECTOR, PLUG, ELECTRICAL (76301)	1	C	PAOZZ
		(84P-J037)			
	MS27467T17B35S	CONNECTOR, PLUG (84P-J037)	1	D	PAOZZ
10	MS27656T13B35S	CONNECTOR, RECEPTACLE (52J-H049)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
11	MS27656T11B35S	CONNECTOR, RECEPTACLE (52J-H088)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
12	MS27467T11B35S	CONNECTOR, PLUG (52P-H088)	1	B	PAOZZ
13	NAS673V2	BOLT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 13)	1		PAOZZ
14	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
15	MS21266-2N	GROMMET	AR		PAOZZ
16	74A890601-2512	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-H002)			
17	74A890601-2283	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-H016)			
18	74A890601-2248	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-H008)			
19	74A890601-2254	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-H009)			
20	74A890601-2520	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND10H011)			
21	NAS557-3A	GROMMET	1		PAOZZ
22	MS21919WDG #	CLAMP	1	E	-
	NAS673V #	BOLT (AP)	1	E	-
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS42DD6-10	SPACER (AP)	1	E	PAOZZ
23	74A890601-2284	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-H015)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	74A890601-2450	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-H002)	1		MDOZZ
25	74A890601-2282	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-H018)	1		MDOZZ
26	74A890601-2015	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTH001)	1		MDOZZ
27	74A890601-2513	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10H013)	1		MDOZZ
28	74A890601-2661	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-H005)	1		MDOZZ
29	MS21266-5N	GROMMET	AR		PAOZZ
30	MS21919WDG #	CLAMP	1		-
31	MS21919WDG #	CLAMP	4		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
32	74A890601-2784	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-H001)	1		MDOZZ
33	74A890601-2677	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-H006)	1		MDOZZ
34	74A890601-2676	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-H009)	1		MDOZZ
35	74A890601-2577	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10H014)	1		MDOZZ
36	NAS1712D14-24N	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
37	74A890601-2072	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H039)	1		MDOZZ
38	74A890601-2511	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H034)	1		MDOZZ
39	74A890601-2845	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H023)	1	B	MDOZZ
40	AN735D8	CLAMP	1		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-20	SPACER (AP)	1		PAOZZ
41	AN735D8	CLAMP	1		PAOZZ
	NAS673V14	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
42	74A890601-2836	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H049)	1		MDOZZ
43	74A890601-2515	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H088)	1		MDOZZ
44	NS21919WDG #	CLAMP	2	F	-
	NAS673V #	BOLT (AP)	1	F	-
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
45	MS27656T25B35S	CONNECTOR, RECEPTACLE (83J-H023)	1	G	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	MGOZZ
46	10-427405-179	DUMMY CONNECTOR, RECEPTACLE (77820) (MCDONNELL SPEC ST5M1402-17)	1	G	PAOZZ
	650FS001NF17	SEE ABOVE (06324)	1	G*	PAOZZ
	1107-001-17	SEE ABOVE (59976)	1	G*	PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
	1009-18	PLATE, RETAINING, ELECTRICAL CONNECTOR (04967) (MCDONNELL SPEC ST3M546B6) (USE WITH INDEX 46)	1	G*	PAOZZ
	FSC/MD-18A016	SEE ABOVE (04967)	1	G*	PAOZZ
	AT340-18	SEE ABOVE (0A554)	1	G*	PAOZZ
	S935-18A	SEE ABOVE (19904)	1	G*	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
47	MS27467T17B35P	CONNECTOR, PLUG (83P-H023B)	1	G	PAOZZ
48	MS27467T17B35P	CONNECTOR, PLUG (83P-H023A)	1	G	PAOZZ
49	74A890601-3224	MARKER, IDENTIFICATION, ELECTRICAL	1		MDOZZ
		(76301) (STOWAGE RECP FOR 83P-H023A OR B)			
50	74A890601-3228	MARKER, IDENTIFICATION, ELECTRICAL	1	G	MDOZZ
		(76301) (FOR REF DES 83J-H023)			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528 BEFORE F18 AFC 41
B	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 41
C	161353 THRU 161519
D	161520 & UP
E	161716 & UP
F	161353 THRU 161715
G	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

COCKPIT LEFT CENTER

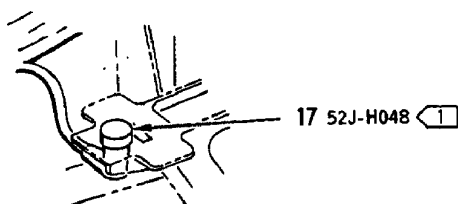

CONFIGURATION X


LEGEND


- 1 161353 THRU 161528 BEFORE F18 AFC 41
- 2 161702 AND UP; ALSO 161353 THRU 161528 AFTER F18 AFC 41
- 3 162394 AND UP

52A-H093
8DHS029
8DHS063
12CBH003
18CBH001
84CBH008
84CBH009
(SEE L403 00)

3 1S-H141 REF
(SEE L403 00)

65S-H027 REF
(SEE L403 00)

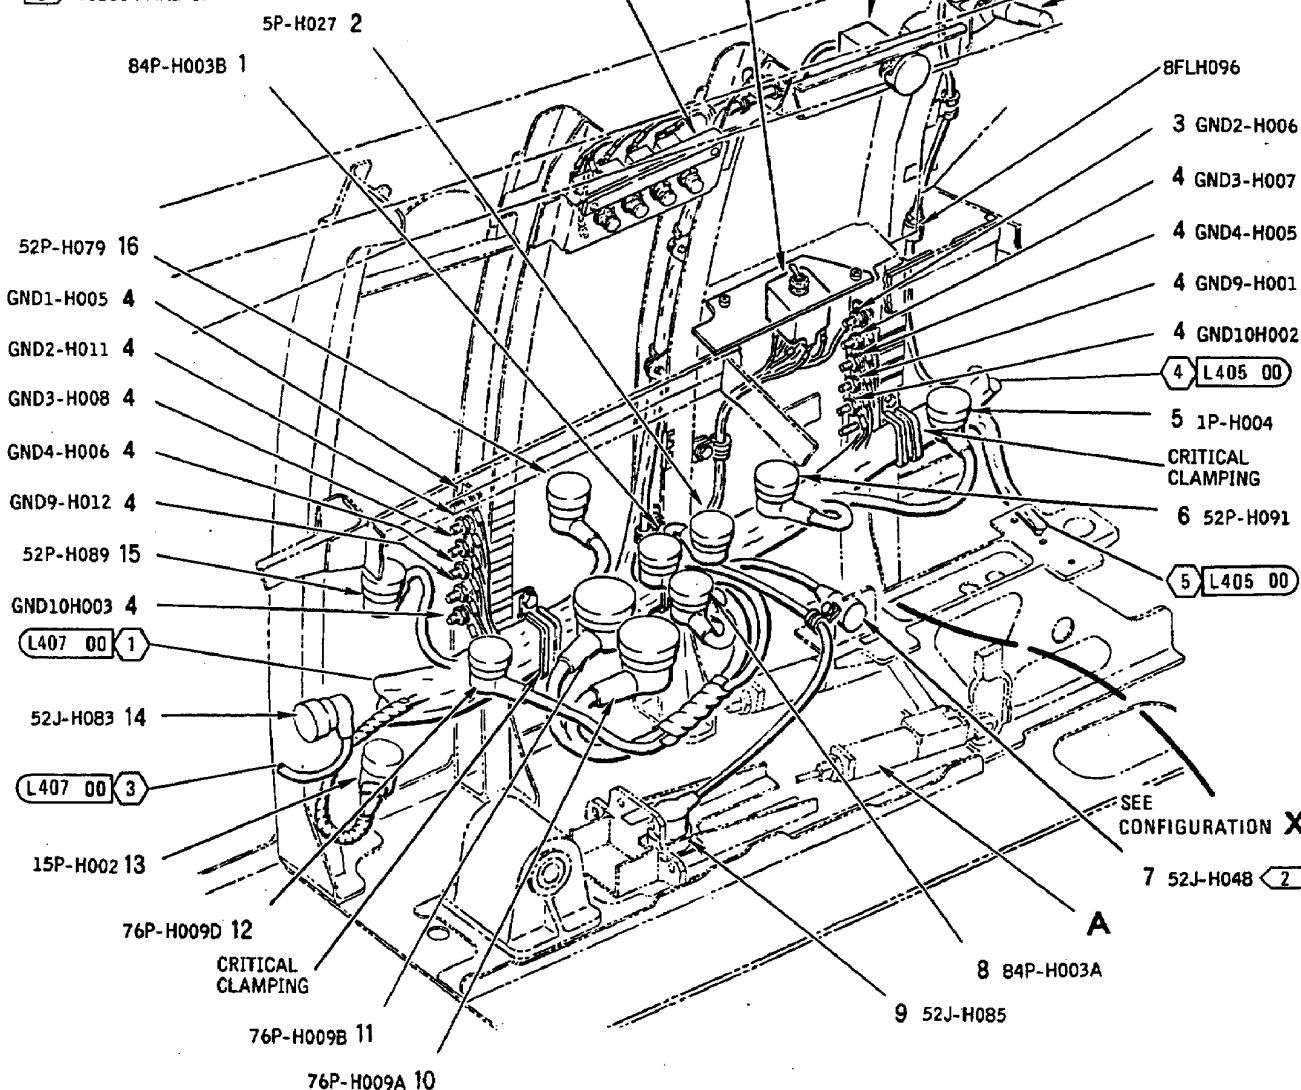


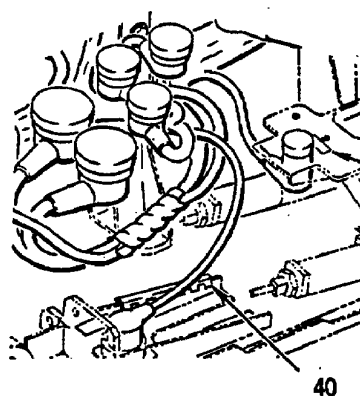


COCKPIT
LEFT CENTER

29 

CONFIGURATION Y

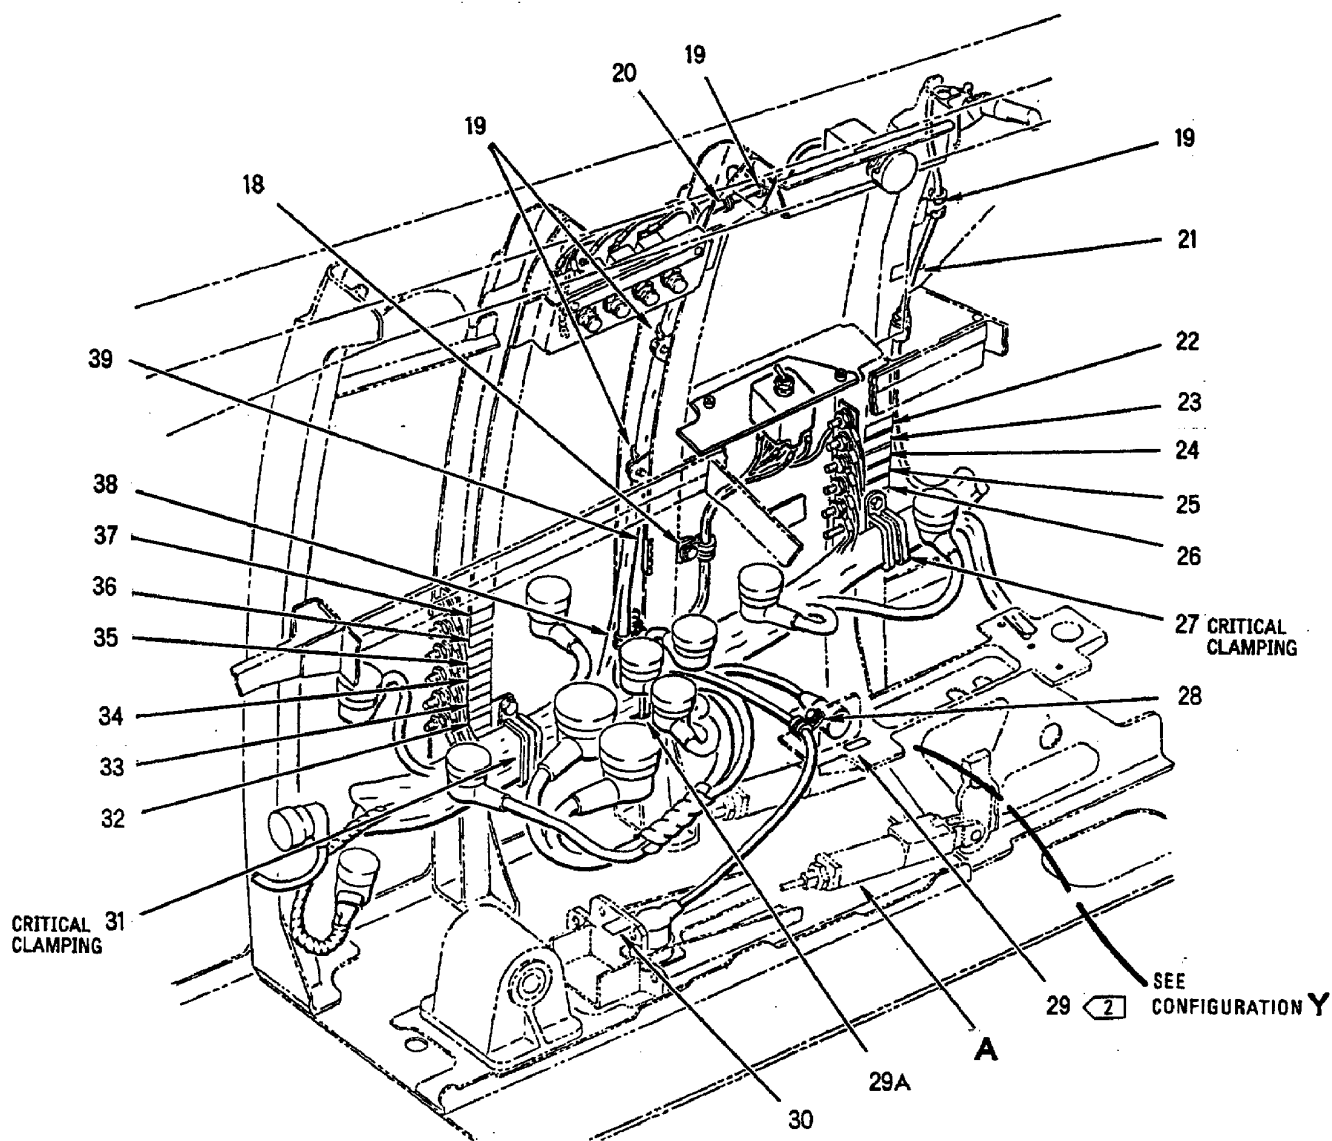

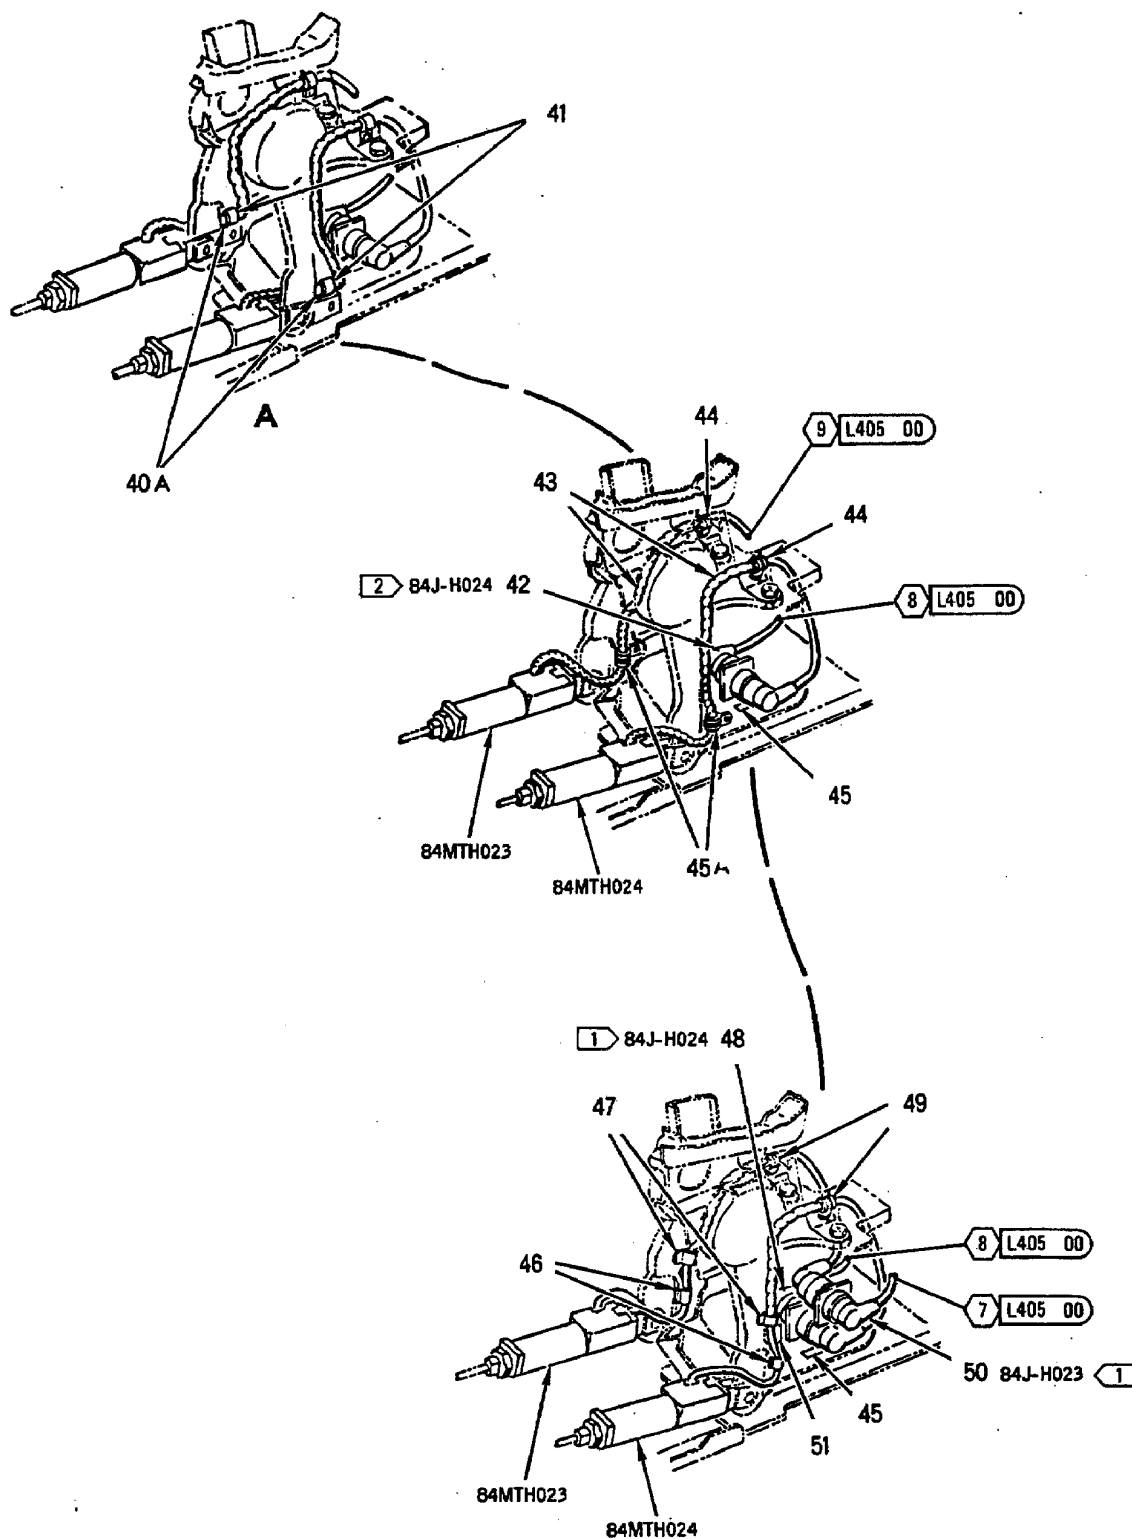

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B35SC	CONNECTOR, PLUG (84P-H003B)	1		PAOZZ
2	MS27467T15B35SA	CONNECTOR, PLUG (5P-H027)	1		PAOZZ
3	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	1		PAOZZ
4	MS21042L3	NUT	10		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	10		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	10		PAOZZ
5	MS27467T15B35SB	CONNECTOR, PLUG (1P-H004)	1		PAOZZ
6	MS27467T15B35SD	CONNECTOR, PLUG (52P-H091)	1		PAOZZ
7	MS27656T15B35S	CONNECTOR, RECEPTACLE (52J-H048)	1	G	PAOZZ
	NAS600-8P	SCREW (AP)	4	G	PAOZZ
	AN960JD4L	WASHER (AP)	4	G	PAOZZ
8	MS27467T15B35SB	CONNECTOR, PLUG (84P-H003A)	1		PAOZZ
9	MS27468T13B4PA	CONNECTOR, RECEPTACLE (52J-H085)	1		PAOZZ
10	MS27467T25B35S	CONNECTOR, PLUG (76P-H009A)	1		PAOZZ
11	MS27467T25B35SA	CONNECTOR, PLUG (76P-H009B)	1		PAOZZ
12	MS27467T15B35S	CONNECTOR, PLUG (76P-H009D)	1	H	PAOZZ
	MS27467T21B35S	CONNECTOR, PLUG (76P-H009D)	1	J	PAOZZ
13	165-62	CONNECTOR, PLUG, ELECTRICAL (02660) ... (MCDONNELL SPEC 5M30-62) (15P-H002)	1		PAOZZ
14	MS27656T9B35S	CONNECTOR, RECEPTACLE (52J-H083)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
15	MS27467T11B35SA	CONNECTOR, PLUG (52P-H089)	1		PAOZZ
16	MS27467T13B35S	CONNECTOR, PLUG (52P-H079)	1		PAOZZ
17	MS27656T15B35S	CONNECTOR, RECEPTACLE (52J-H048)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	AN960JD4L	WASHER (AP)	4	F	PAOZZ
18	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
19	MS21919WDG #	CLAMP	4		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
20	MS35489-4S	GROMMET	1		PAOZZ
21	74A890601-2609	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES 8FLH096)			
22	74A890601-2257	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND2-H006)			
23	74A890601-2247	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND3-H007)			
24	74A890601-2258	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND4-H005)			
25	74A890601-2256	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND9-H001)			
26	74A890601-2452	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES GND10H002)			
27	NAS1712D8-14N	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
28	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
29	74A890601-2835	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
		CAL (76301) (FOR REF DES 52J-H048)			
29A	NAS1712D8-18N	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
30	74A890601-2086	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-H085)	1		MDOZZ
31	NAS1712D8-24N	CLAMP	1		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
32	74A890601-2719	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10H003)	1		MDOZZ
33	74A890601-2678	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-H012)	1		MDOZZ
34	74A890601-2255	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-H006)	1		MDOZZ
35	74A890601-2679	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-H008)	1		MDOZZ
36	74A890601-2249	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-H011)	1		MDOZZ
37	74A890601-2246	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-H005)	1		MDOZZ
38	MS21919WDG #	CLAMP	1	B	-
	NAS673V24	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-56	SPACER (AP)	1	B	PAOZZ
39	MS21266-2N	GROMMET	AR	C	PAOZZ
40	MS21266-2N	GROMMET	AR	A	PAOZZ
40A	74A600613-2001	CONDUIT, ELECTRICAL, THROTTLE (76301)	1	E	MGOZZ
41	NMC-ST9M529-6	CLAMP, LOOP (03296) (MCDONNELL SPEC ... ST9M529-6)	2	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
42	MS27656T11B35S	CONNECTOR, RECEPTACLE (84J-H024)	1	G	PAOZZ
	NAS600-8P	SCREW (AP)	4	G	PAOZZ
	AN960JD4L	WASHER (AP)	4	G	PAOZZ
43	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	G*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	G*	PAOZZ
44	MS21919WDG #	CLAMP	2	G	-
	NAS673V #	BOLT (AP)	1	G	-
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
45	74A890601-2846	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-H024)	1		MDOZZ
45A	MS21919WDG #	CLAMP	2	D	-
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
46	74A800795-2009	CLIP, SPRING TENSION - WIRE BUNDLE, LOWER (76301)	2	F	PAOZZ
47	74A800795-2007	CLIP, SPRING TENSION - WIRE BUNDLE, LOWER (76301)	2	F	PAOZZ
48	MS27656T11B35S	CONNECTOR, RECEPTACLE (84J-H024)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	AN960JD4L	WASHER (AP)	4	F	PAOZZ
49	MS21919WDG #	CLAMP	2	F	-
	NAS673V #	BOLT (AP)	1	F	-
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
50	MS27656T11B35S	CONNECTOR, RECEPTACLE (84J-H023)	1	F	PAOZZ
	NAS600-8P	SCREW (AP)	4	F	PAOZZ
	AN960JD4L	WASHER (AP)	4	F	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE

51	74A890601-2845	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H023)	1	F	MDOZZ
----	----------------	--	---	---	-------


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	162394 & UP
D	161702 THRU 162856; ALSO 161353 THRU 161528 AFTER F18 AFC 41
E	162858 & UP
F	161353 THRU 161528 BEFORE F18 AFC 41
G	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 41
H	161353 & UP BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292
J	162394 THRU 16375 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

COCKPIT

LEFT AFT

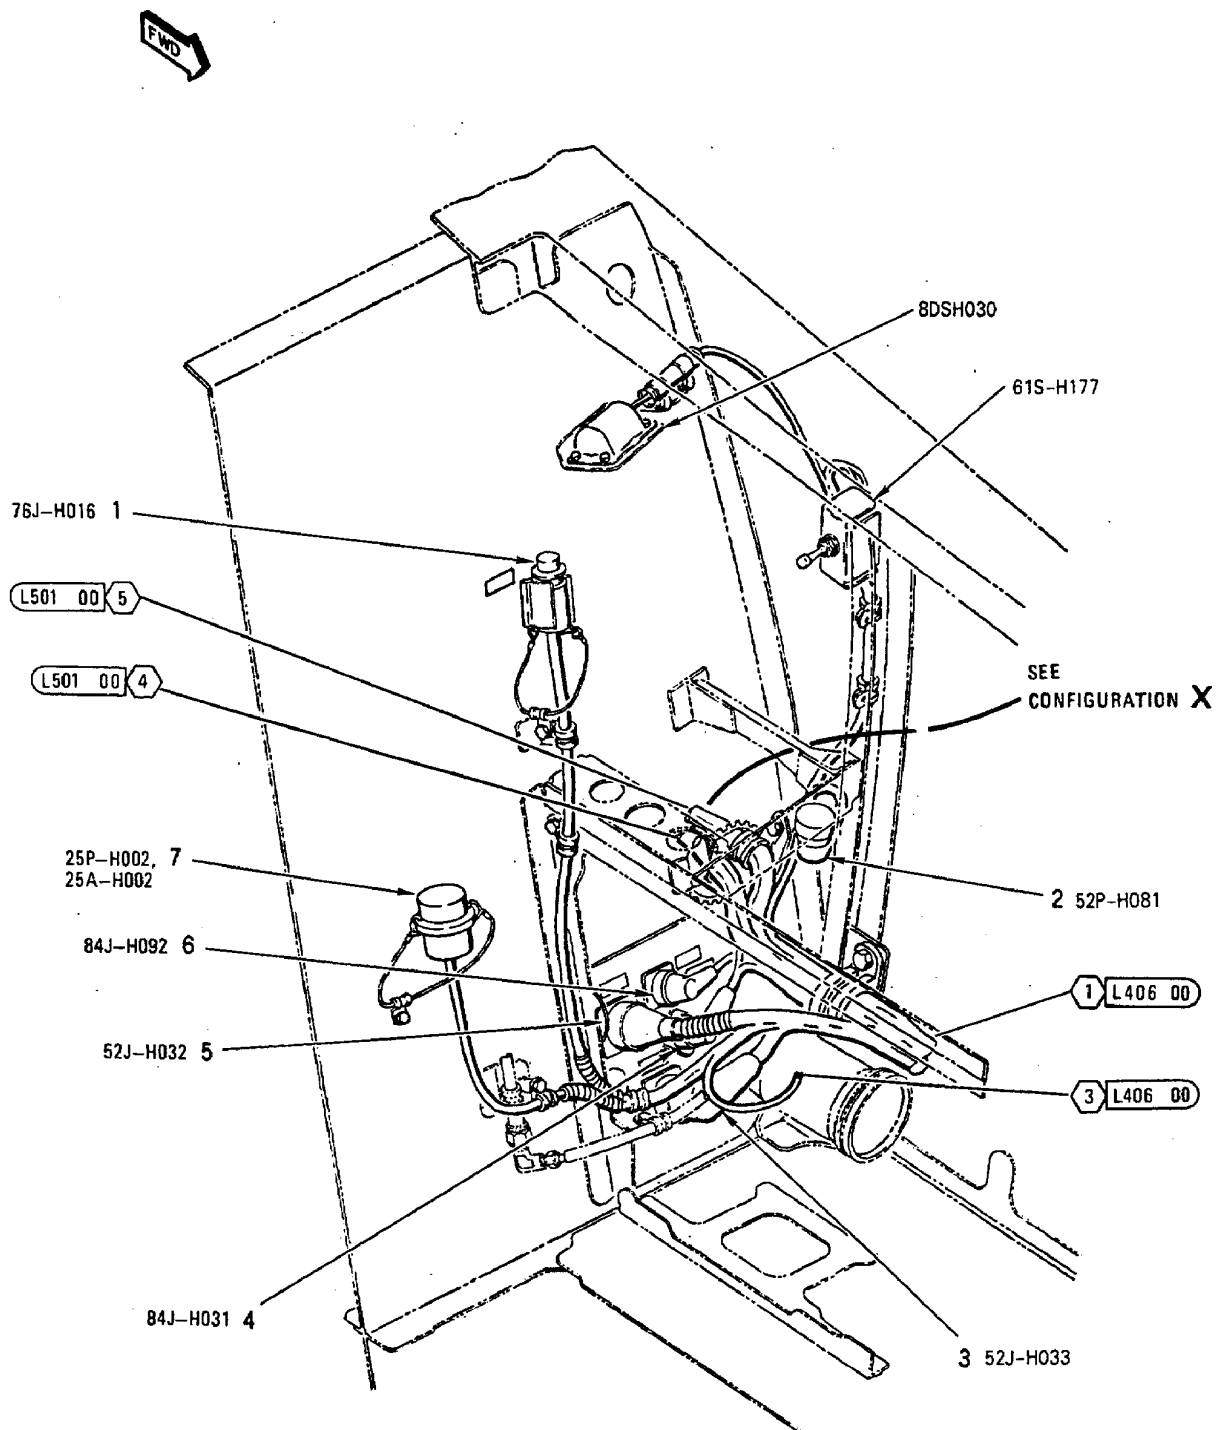

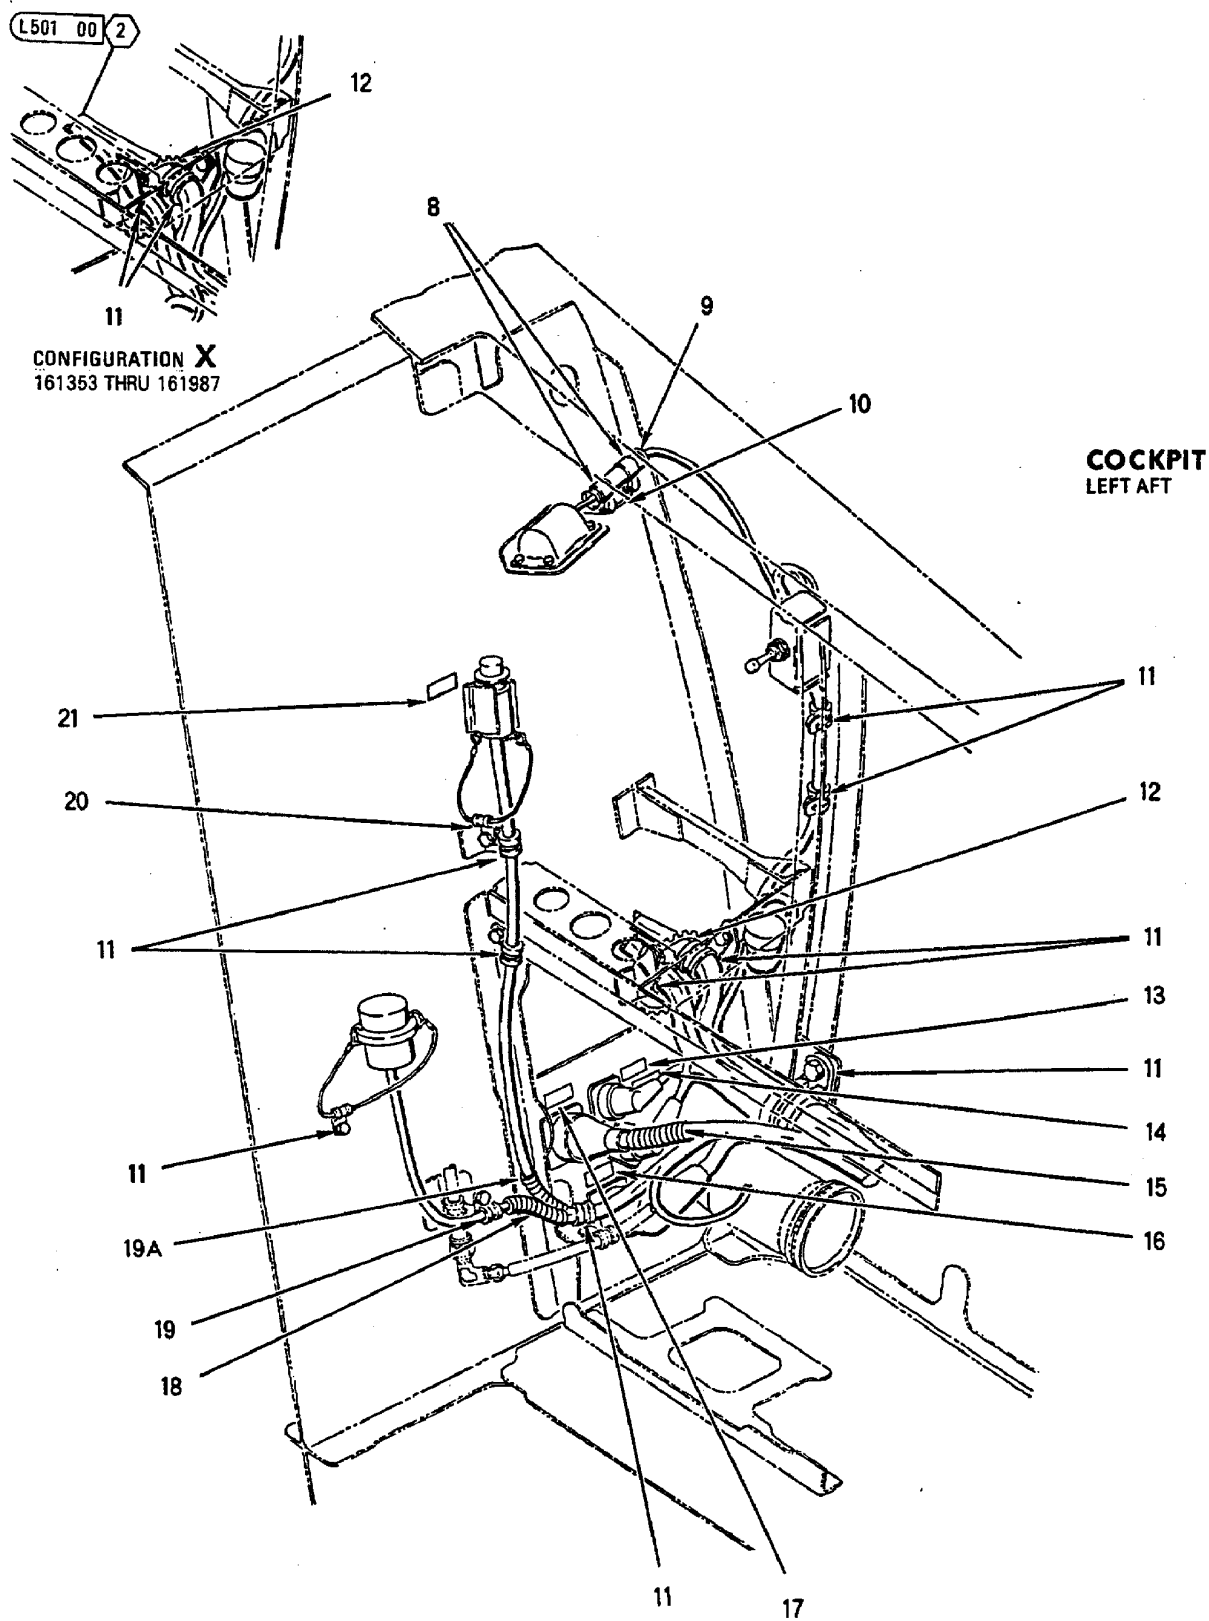

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	GA 121-1	CONNECTOR, RECEPTACLE, ELECTRICAL (06324) (MCDONNELL SPEC ST5M1584-002) (76J-H016)	1		PAOZZ
2	MS27467T13B35S	CONNECTOR, PLUG (52P-H081)	1		PAOZZ
3	MS27656T25B61SA	CONNECTOR, RECEPTACLE (52J-H033)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL (57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 3)	1	*	PAOZZ
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
4	MS27656T17B35PA	CONNECTOR, RECEPTACLE (84J-H031)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0018	SHIELDING GASKET, ELECTRICAL (57003) (MCDONNELL SPEC 5M988-7) (USE WITH INDEX 4)	1	*	PAOZZ
	1214-0507	SEE ABOVE (64098)	1	*	PAOZZ
5	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-H032)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4	B	PAOZZ
	NAS601-7P	SCREW	4	C	PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL (57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 5)	1	*	PAOZZ
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
6	MS27656T13B4S	CONNECTOR, RECEPTACLE (84J-H092)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0014	SHIELDING GASKET, ELECTRICAL (57003) (MCDONNELL SPEC 5M988-5) (USE WITH INDEX 6)	1	*	PAOZZ
	1214-0505	SEE ABOVE (64098)	1	*	PAOZZ
7	88-488707-80S	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1258B4SNB80) (25P-H002)	1		PAOZZ
8	AN735D8	CLAMP	2		PAOZZ
	NAS673V18	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-62	SPACER (AP)	1		PAOZZ
9	74A782455-2003	CONDUIT - ELECTRICAL, FWD COCKPIT (76301) (SUPERSEDES 74A782455-2001)	1		MGOZZ
10	MS25083-2BB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
11	MS21919WDG #	CLAMP	9		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	MS21266-3N	GROMMET	AR		PAOZZ
13	74A890601-2295	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H092)	1		MDOZZ
14	74A890601-2140	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-H031)	1		MDOZZ
15	95340	TUBING, PLASTIC, SPIRAL (78570)	AR	*	PAOZZ
	500024-2	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
16	74A890601-2069	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H033)	1		MDOZZ
17	74A890601-2068	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-H032)	1		MDOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	500024-0	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14N912TB3)	AR		PAOZZ
	95339	SEE ABOVE (78570)	AR	*	PAOZZ
19	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
19A	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	A*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ
20	MS21919WDG #	CLAMP	1		-
21	74A890601-2129	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 76J-H016)	1		MDOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	162394 & UP
B	161353 THRU 161528
C	161702 & UP

COCKPIT RIGHT CONSOLE AND RIGHT VERTICAL PANEL ARRANGEMENT

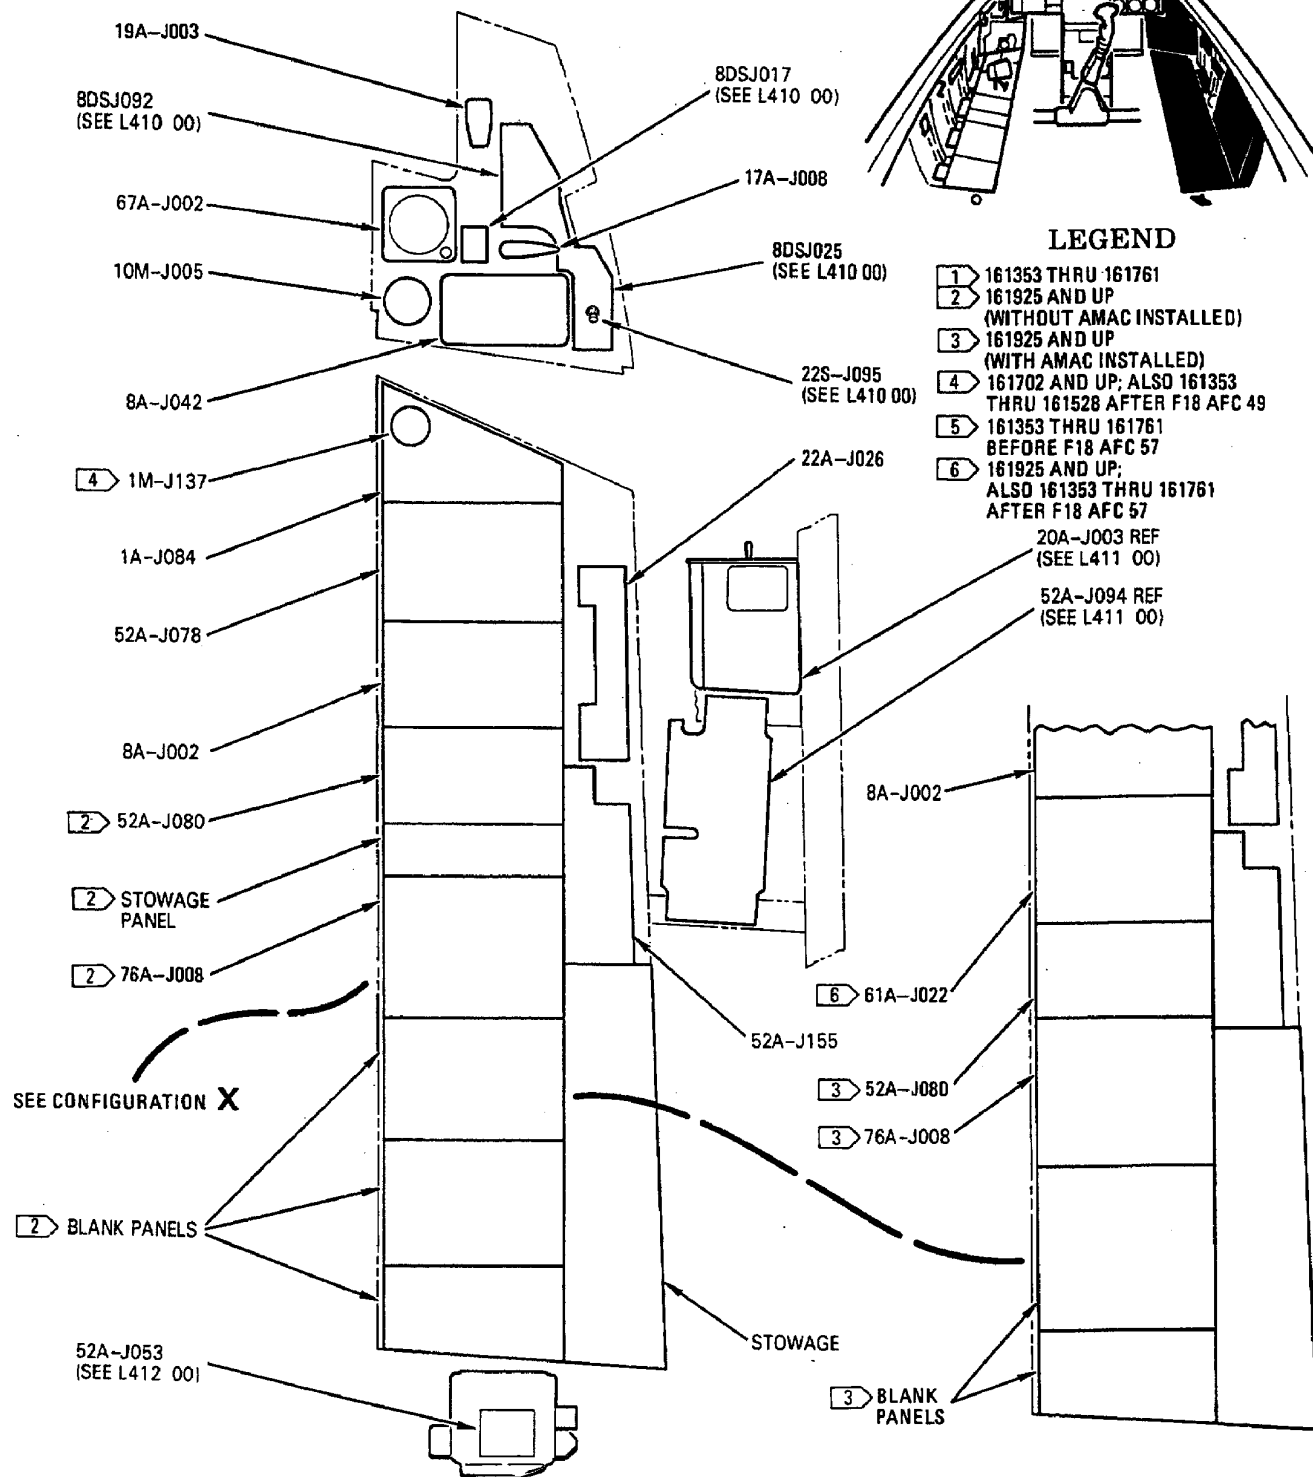

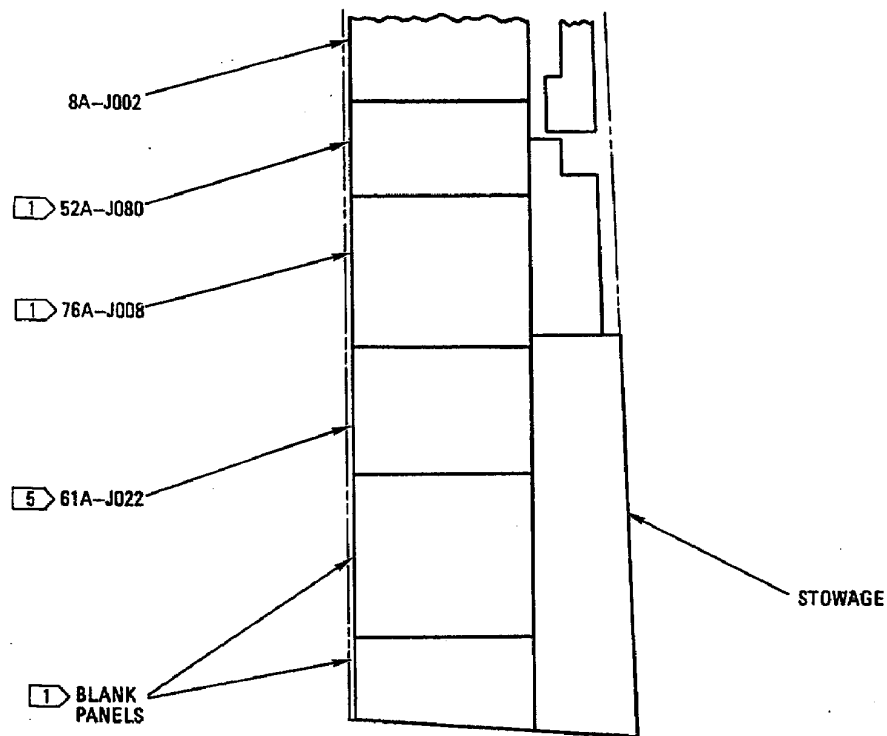


CONFIGURATION X

COCKPIT RIGHT SIDE


LEGEND


- 1 161361 AND UP
- 2 161353 THRU 161359
- 3 161702 THRU 161715
- 4 LOCATION FOR 161353 THRU 161715

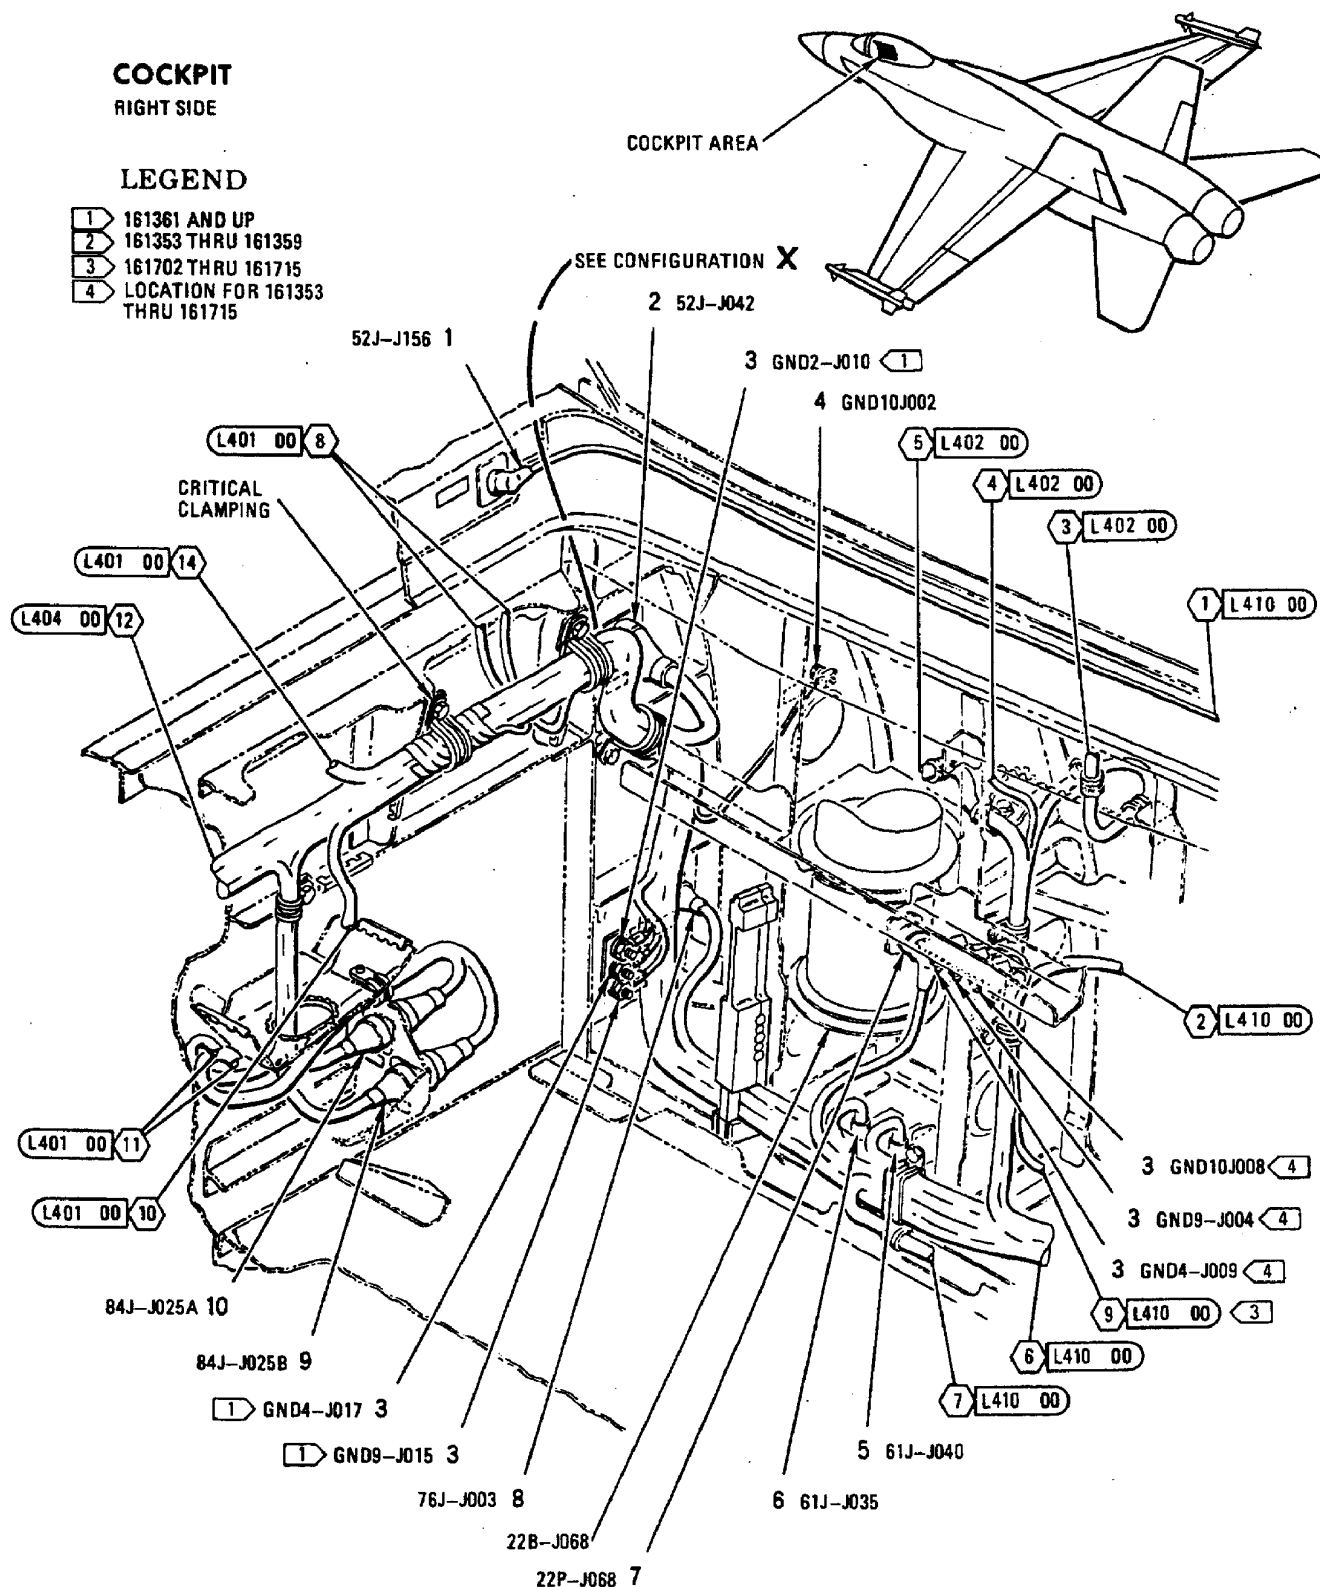

COCKPIT RIGHT SIDE

COCKPIT AREA

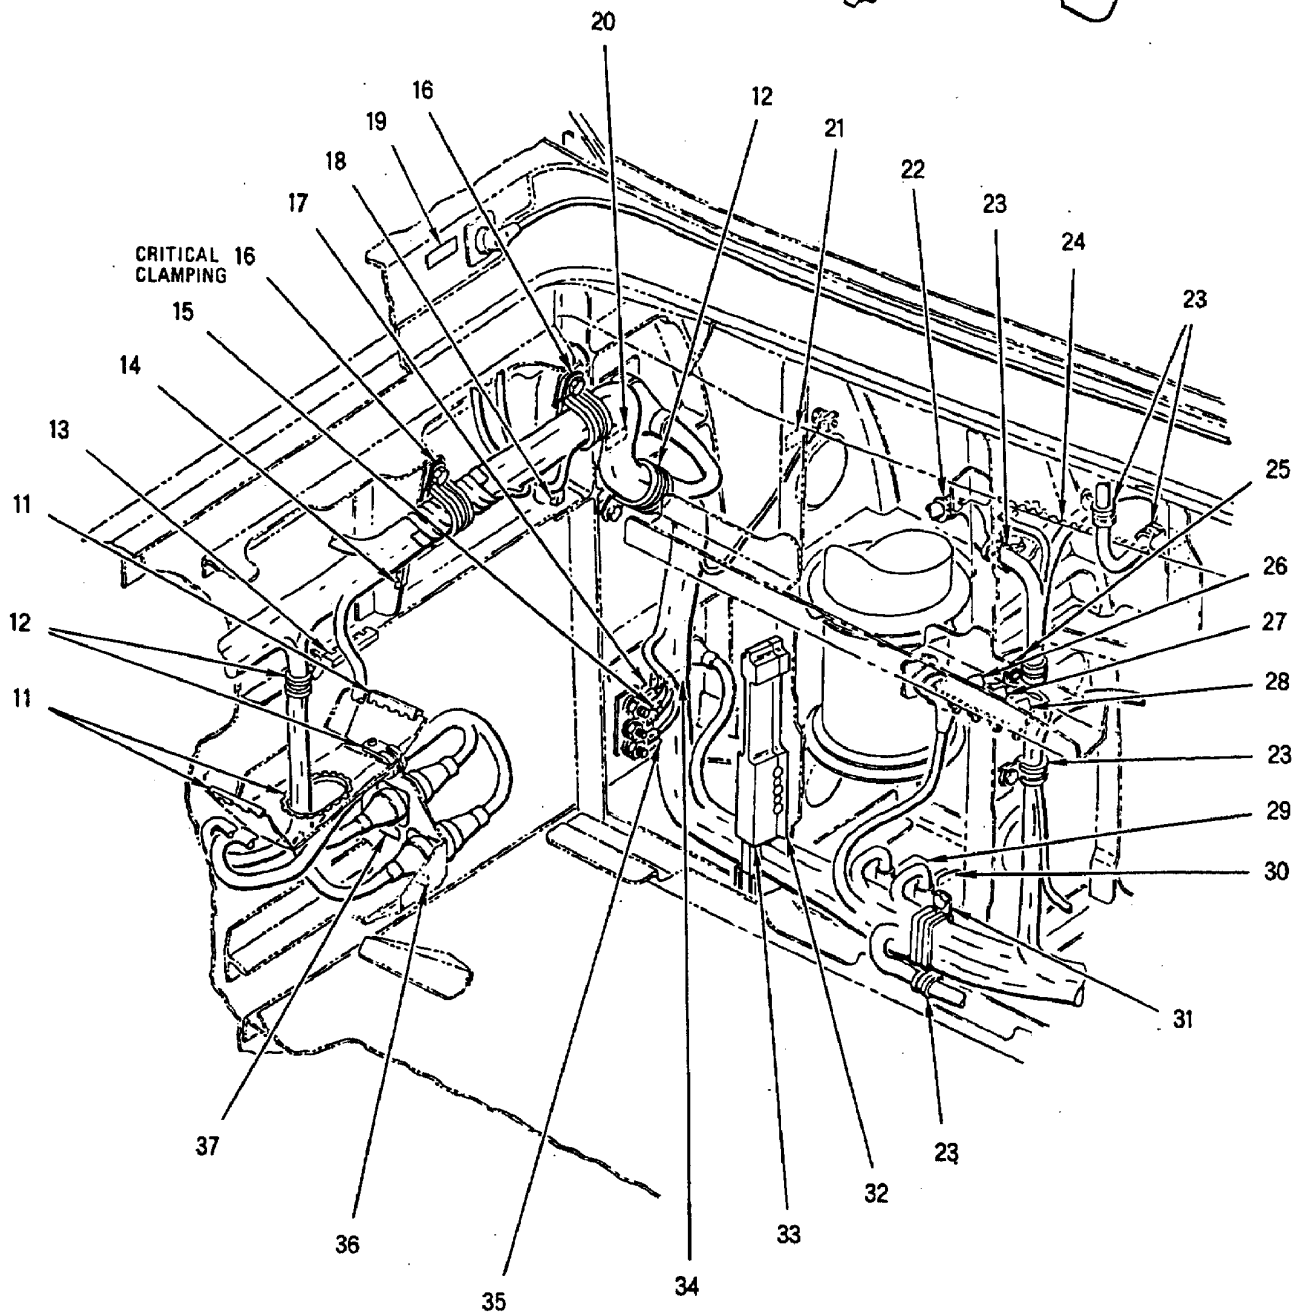

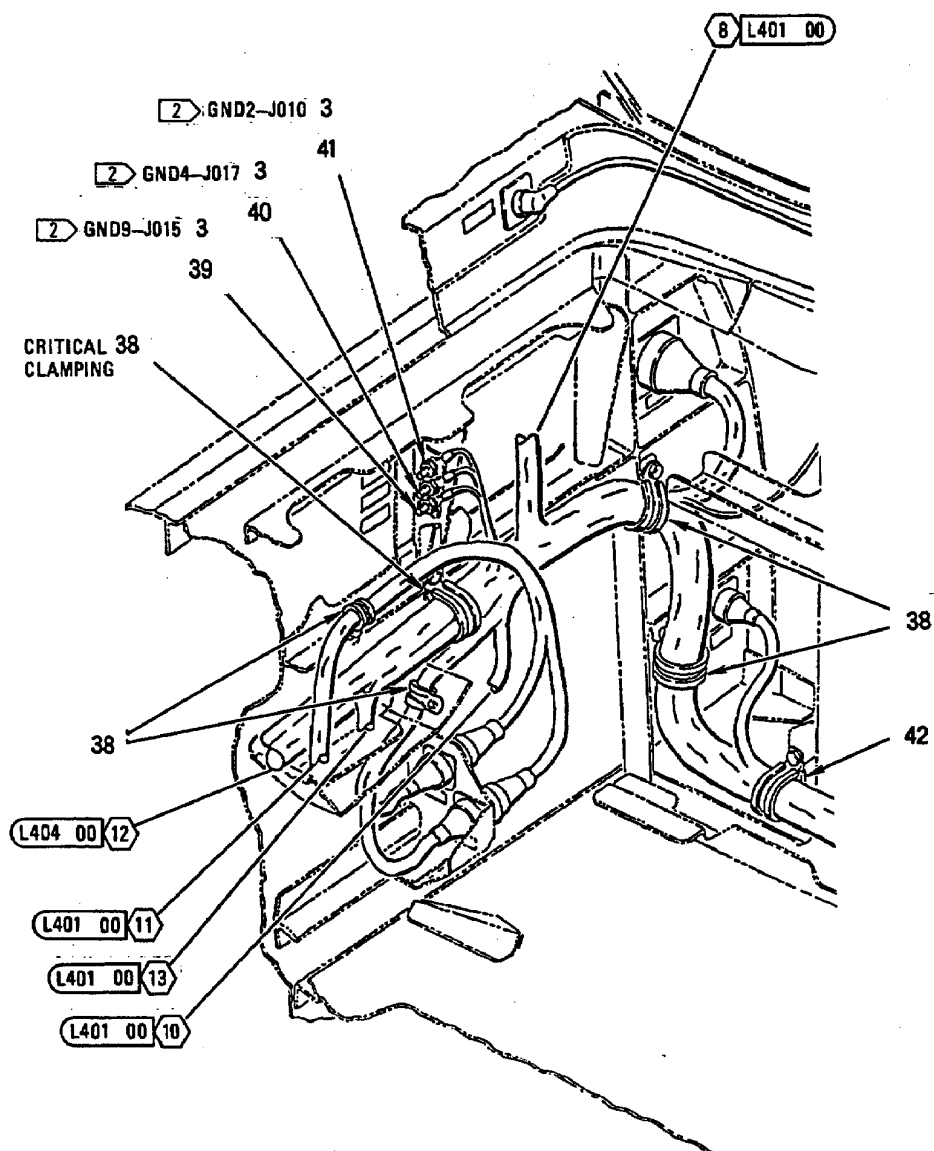

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T9B35P	CONNECTOR, RECEPTACLE (52J-J156)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0062	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-29) (USE WITH INDEX 1)			
	1214-0529	SEE ABOVE (64098)	1	*	PAOZZ
2	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-J042)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-26) (USE WITH INDEX 2)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
3	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	6		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	6		PAOZZ
4	NAS1801-3-11	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	2		PAOZZ
5	31-33546-7	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1344JP3B) (61J-J040)			
	4841-0903	SEE ABOVE (95077)	1	*	PAOZZ
	AN960JD816	WASHER (USE WITH INDEX 5)	1		PAOZZ
6	31-33546-8	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1344JP5B) (61J-J035)			
	4841-0905	SEE ABOVE (95077)	1	*	PAOZZ
	AN960JD816	WASHER (USE WITH INDEX 6)	1		PAOZZ
7	MS27467T11B35S	CONNECTOR, PLUG (22P-J068)	1		PAOZZ
8	MS27656T11B35S	CONNECTOR, RECEPTACLE (76J-J003)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0063	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-30) (USE WITH INDEX 8)			
	1214-0529	SEE ABOVE (64098)	1	*	PAOZZ
9	MS27656T13B35S	CONNECTOR, RECEPTACLE (84J-J025B)	1		PAOZZ
	NAS600-8P	SCREW (AP)	1		PAOZZ
	AN960JD4L	WASHER (AP)	1		PAOZZ
10	MS27656T13B35SA	CONNECTOR, RECEPTACLE (84J-J025A)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
11	MS21266-2N	GROMMET	AR		PAOZZ
12	MS21919WDG #	CLAMP	3	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
13	MS21266-2N	GROMMET	AR	E	PAOZZ
13	MS21266-2N	GROMMET	AR	E	PAOZZ
14	MS21266-2N	GROMMET	AR	F	PAOZZ
15	74A890601-2278	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES GND4-J017)			
16	MS21919WDG17	CLAMP	2	A	PAOZZ
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
17	74A890601-2663	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MDOZZ
		(76301) (FOR REF DES GND2-J010)			
18	MS21266-2N	GROMMET	AR	G	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
19	74A890601-2813	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J156)	1		MDOZZ
20	74A890601-2073	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J042)	1		MDOZZ
21	74A890601-2448	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10J002)	1		MDOZZ
22	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1	E	PAOZZ
23	MS21919WDG #	CLAMP	5		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
24	MS21266-5N	GROMMET	AR		PAOZZ
25	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
26	74A890601-2275	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-J009)	1	D	MDOZZ
27	74A890601-2270	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J004)	1	D	MDOZZ
28	74A890601-2447	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10J008)	1	D	MDOZZ
29	74A890601-2106	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-J035)	1		MDOZZ
30	74A890601-2111	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-J040)	1		MDOZZ
31	MS21919WDG17	CLAMP	1	D	PAOZZ
	NAS1712D14-24N	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
32	74A810601-2005	BLOCK, TUBE SUPPORT (76301)	1	C	MDOZZ
33	74A810601-2003	BLOCK, TUBE SUPPORT (76301)	1	C	MDOZZ
	NAS603-26P	SCREW (AP)	3	C	-
	AN960C10L	WASHER (AP)	3	C	PAOZZ
34	74A890601-2128	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 76J-J003)	1		MDOZZ
35	74A890601-2277	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J015)	1	A	MDOZZ
36	74A890601-2139	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-J025B)	1		MDOZZ
37	74A890601-2138	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-J025A)	1		MDOZZ
38	MS21919WDG #	CLAMP	5	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
39	74A890601-2277	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J015)	1	B	MDOZZ
40	74A890601-2278	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-J017)	1	B	MDOZZ

INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			
41	74A890601-2663	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-J010)	1	B	MDOZZ
42	MS21919WDG #	CLAMP	1	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161361 & UP
B	161353 THRU 161359
C	161716 & UP
D	161353 THRU 161715
E	161702 & UP
F	161941 & UP
G	162394 & UP

COCKPIT RIGHT CENTER

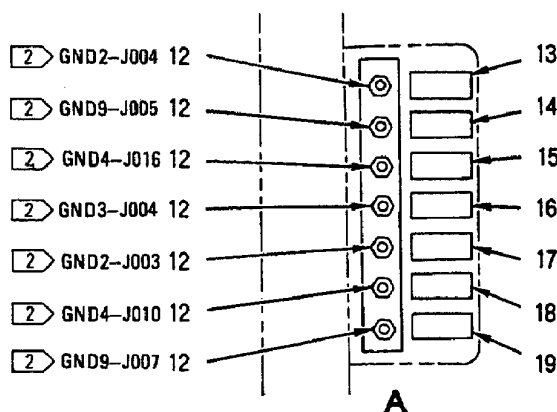


A

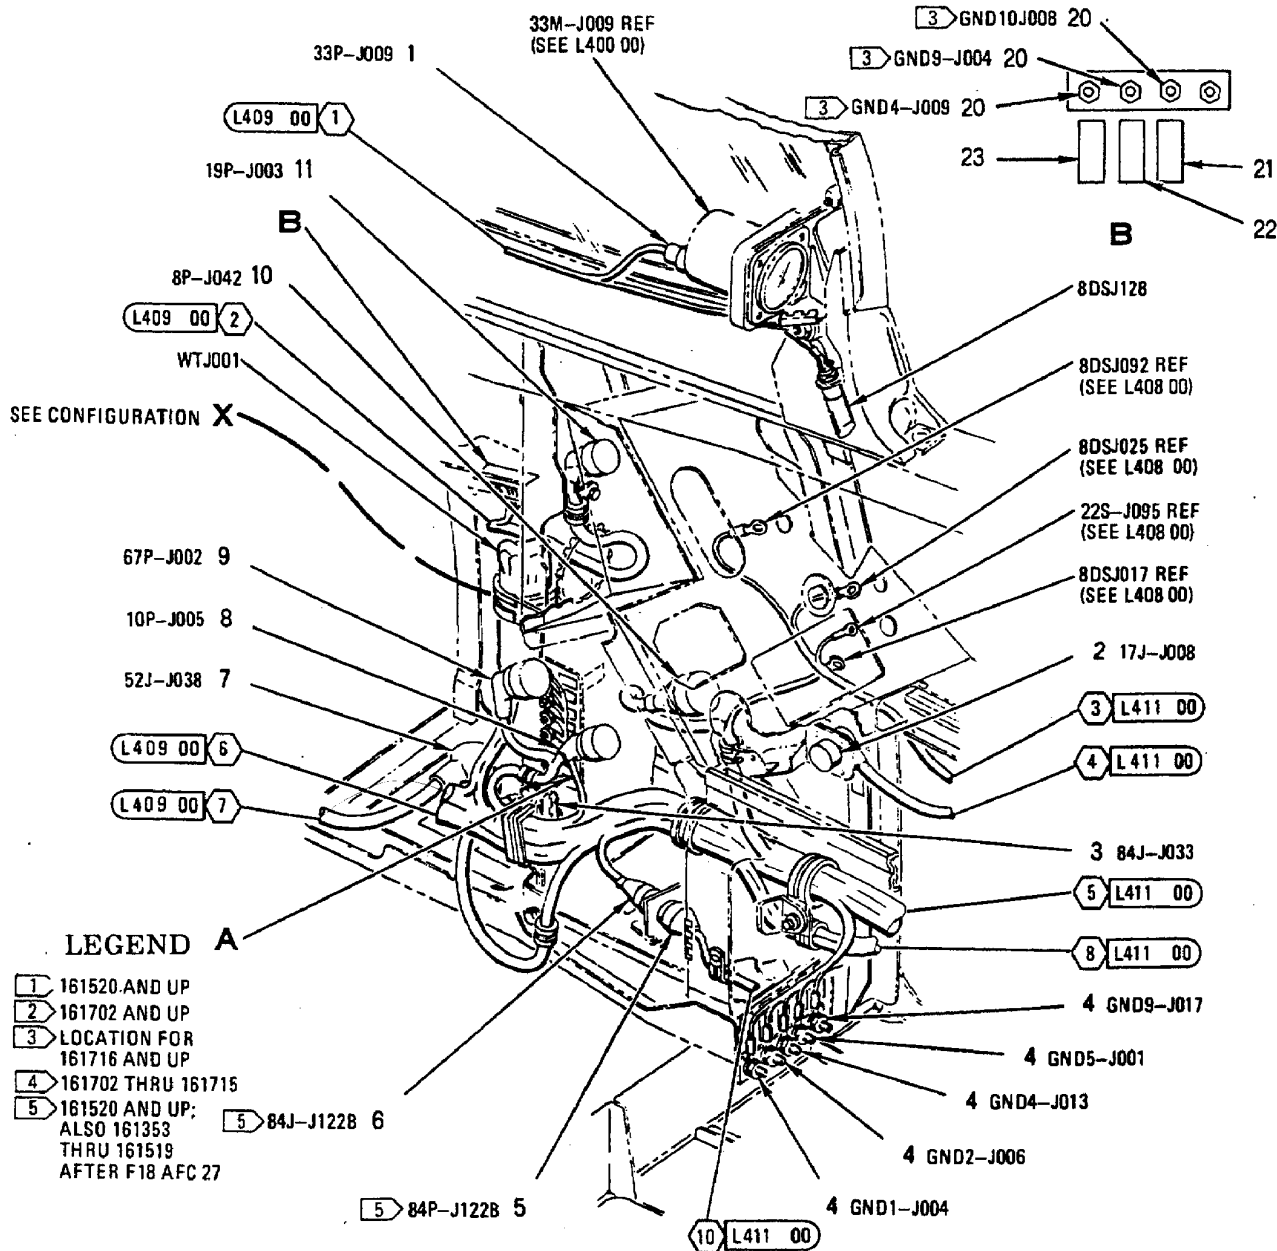


LEGEND A

- 1 161520 AND UP
- 2 161702 AND UP
- 3 LOCATION FOR 161716 AND UP
- 4 161702 THRU 161715
- 5 161520 AND UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27

COCKPIT
RIGHT CENTER

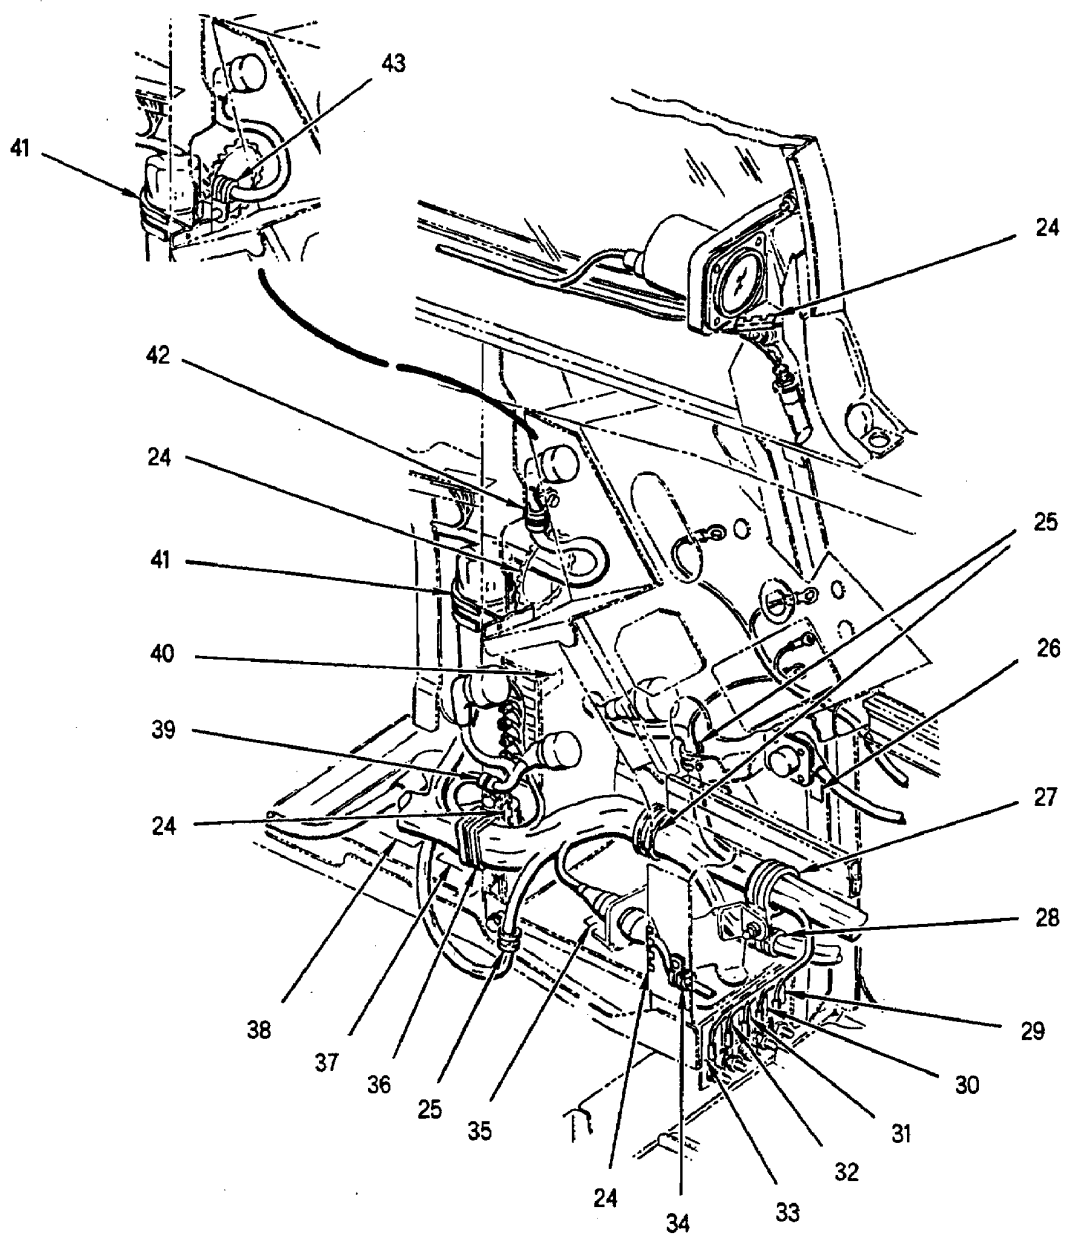

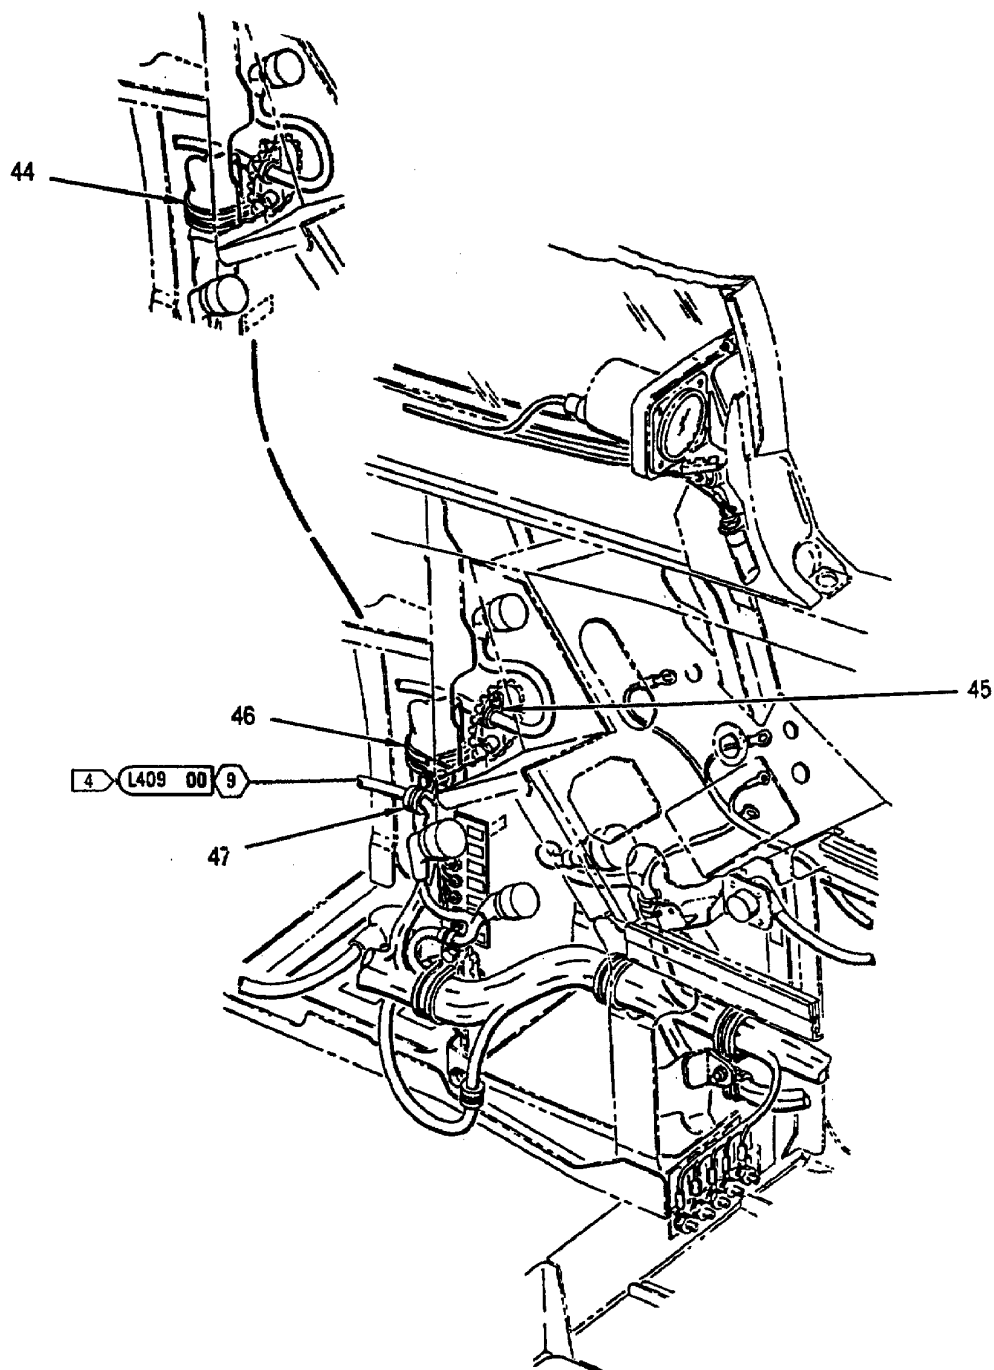

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN3116-2	CONNECTOR, PLUG (33P-J009)	1		PAOZZ
2	MS27656T11B35S	CONNECTOR, RECEPTACLE (17J-J008)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
3	MS27656T17B35PA	CONNECTOR, RECEPTACLE (84J-J033)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0018	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-7)			
		(USE WITH INDEX 3)			
	1214-0507	SEE ABOVE (64098)	1	*	PAOZZ
4	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	5		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	5		PAOZZ
5	MS27467T13B35P	CONNECTOR, PLUG (84P-J122B)	1	A	PAOZZ
6	MS27656T13B35S	CONNECTOR, RECEPTACLE (84J-J122B)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
7	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-J038)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-26)			
		(USE WITH INDEX 7)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
8	MS27467T13B35S	CONNECTOR, PLUG (10P-J005)	1		PAOZZ
9	MS27467T15B35S	CONNECTOR, PLUG (67P-J002)	1		PAOZZ
10	MS27467T17B35S	CONNECTOR, PLUG (8P-J042)	1		PAOZZ
11	MS27467T13B35S	CONNECTOR, PLUG (19P-J003)	1		PAOZZ
12	MS21042L3	NUT	7	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 12)	7	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 12)	7	B	PAOZZ
13	74A890601-2773	MARKER, IDENTIFICATION -	1	B	MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		GND2-J004)			
14	74A890601-2273	MARKER, IDENTIFICATION -	1	B	MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		GND9-J005)			
15	74A890601-2272	MARKER, IDENTIFICATION -	1	B	MDOZZ
		ELECTRICAL (76301) (FOR REF DES			
		GND4-J016)			
16	74A890601-2276	MARKER, IDENTIFICATION - ELECTRI-	1	B	MDOZZ
		CAL (76301) (FOR REF DES GND3-J004)			
17	74A890601-2274	MARKER, IDENTIFICATION - ELECTRI-	1	B	MDOZZ
		CAL (76301) (FOR REF DES GND2-J003)			
18	74A890601-2274	MARKER, IDENTIFICATION - ELECTRI-	1	B	MDOZZ
		CAL (76301) (FOR REF DES GND4-J010)			
19	74A890601-2775	MARKER, IDENTIFICATION - ELECTRI-	1	B	MDOZZ
		CAL (76301) (FOR REF DES GND9-J007)			
20	MS21042L3	NUT	3	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 20)	3	D	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 20)	3	D	PAOZZ
21	74A890601-2447	MARKER, IDENTIFICATION - ELECTRI-	1	D	MDOZZ
		CAL (76301) (FOR REF DES GND10J008)			
22	74A890601-2270	MARKER, IDENTIFICATION - ELECTRI-	1	D	MDOZZ
		CAL (76301) (FOR REF DES GND9-J004)			
23	74A890601-2275	MARKER, IDENTIFICATION - ELECTRI-	1	D	MDOZZ
		CAL (76301) (FOR REF DES GND4-J009)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	MS21266-2N	GROMMET	AR		PAOZZ
25	MS21919WDG #	CLAMP	3		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	74A890601-2514	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 17J-J008)	1		MDOZZ
27	MS21919WDG #	CLAMP	1		-
28	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
29	74A890601-2262	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-J017)	1		MDOZZ
30	74A890601-2449	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND5-J001)	1		MDOZZ
31	74A890601-2269	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-J013)	1		MDOZZ
32	74A890601-2260	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-J006)	1		MDOZZ
33	74A890601-2446	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-J004)	1		MDOZZ
34	MS21919WDG #	CLAMP	1	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
35	74A890601-2079	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-J122B)	1	A	MDOZZ
36	MS21919WDG #	CLAMP	1	E	-
	NAS1712D14-24N	CLAMP	1	D	PAOZZ
37	74A890601-2510	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-J033)	1		MDOZZ
38	74A890601-2071	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-J038)	1		MDOZZ
39	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-40	SPACER (AP)	1		PAOZZ
40	74A890601-2017	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES WTJ001)	1		MDOZZ
41	MS21919WDG #	CLAMP	1	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
42	MS21919WDG #	CLAMP	1	G	-
	NAS673V #	BOLT (AP)	1	G	-
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	NAS42DD6-16	SPACER (AP)	1	G	PAOZZ
43	MS21919WDG #	CLAMP	1	H	-
	NAS673V #	BOLT (AP)	1	H	-
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
44	MS21919WDG #	CLAMP	1	C	-
	NAS673V #	BOLT (AP)	1	C	-
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6 #	SPACER (AP)	1	C	-
45	MS21919WDG #	CLAMP	1	E	-
	NAS673V #	BOLT (AP)	1	E	-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
46	MS21919WDG #	CLAMP	1	F	-
47	MS21919WDG #	CLAMP	1	F	-
	NAS673V #	BOLT (AP)	1	F	-
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	F	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27
B	161702 & UP
C	161353 THRU 161528
D	161716 & UP
E	161353 THRU 161715
F	161702 THRU 161715
G	161925 & UP
H	161716 THRU 161761


LEGEND

- 1 161520 AND UP; ALSO 161353 THRU 161519
AFTER F18 AFC 27
- 2 161353 THRU 161519 BEFORE F18 AFC 27
- 3 161702 AND UP; ALSO 161353 THRU
161528 AFTER F18 AFC 49
- 4 161925 AND UP; ALSO 161353 THRU 161761 AFTER F18 AFC 57
- 5 161353 THRU 161761 BEFORE F18 AFC 57

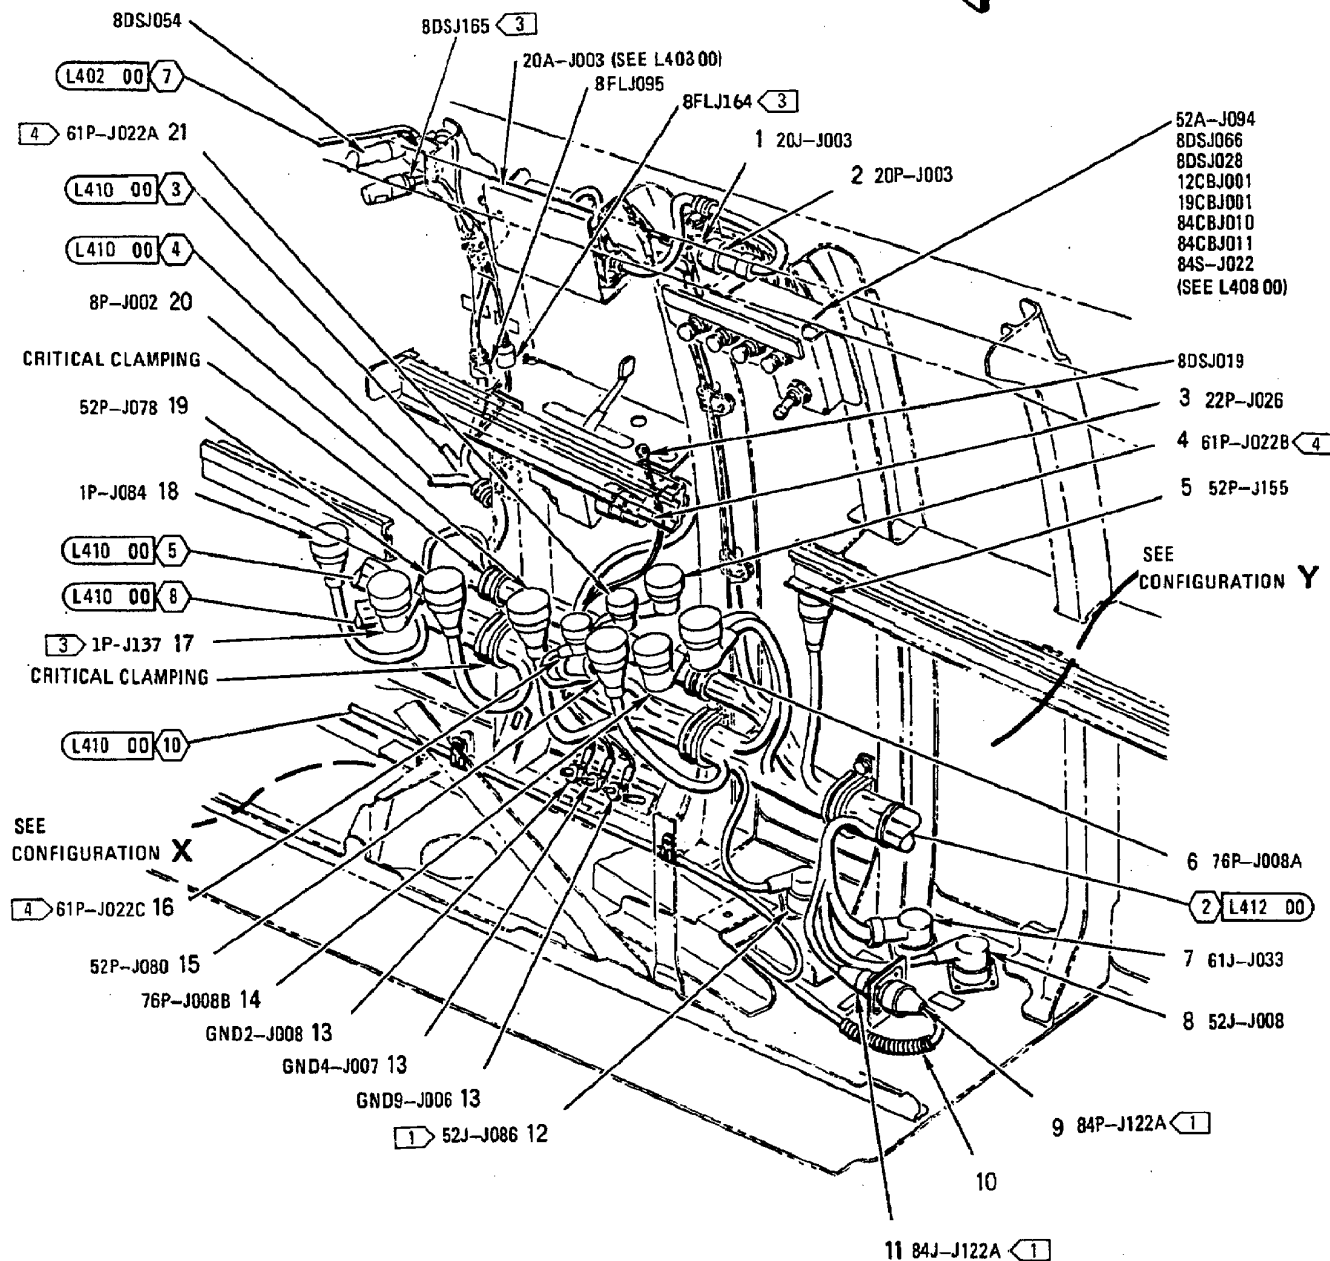


COCKPIT
RIGHT CENTER

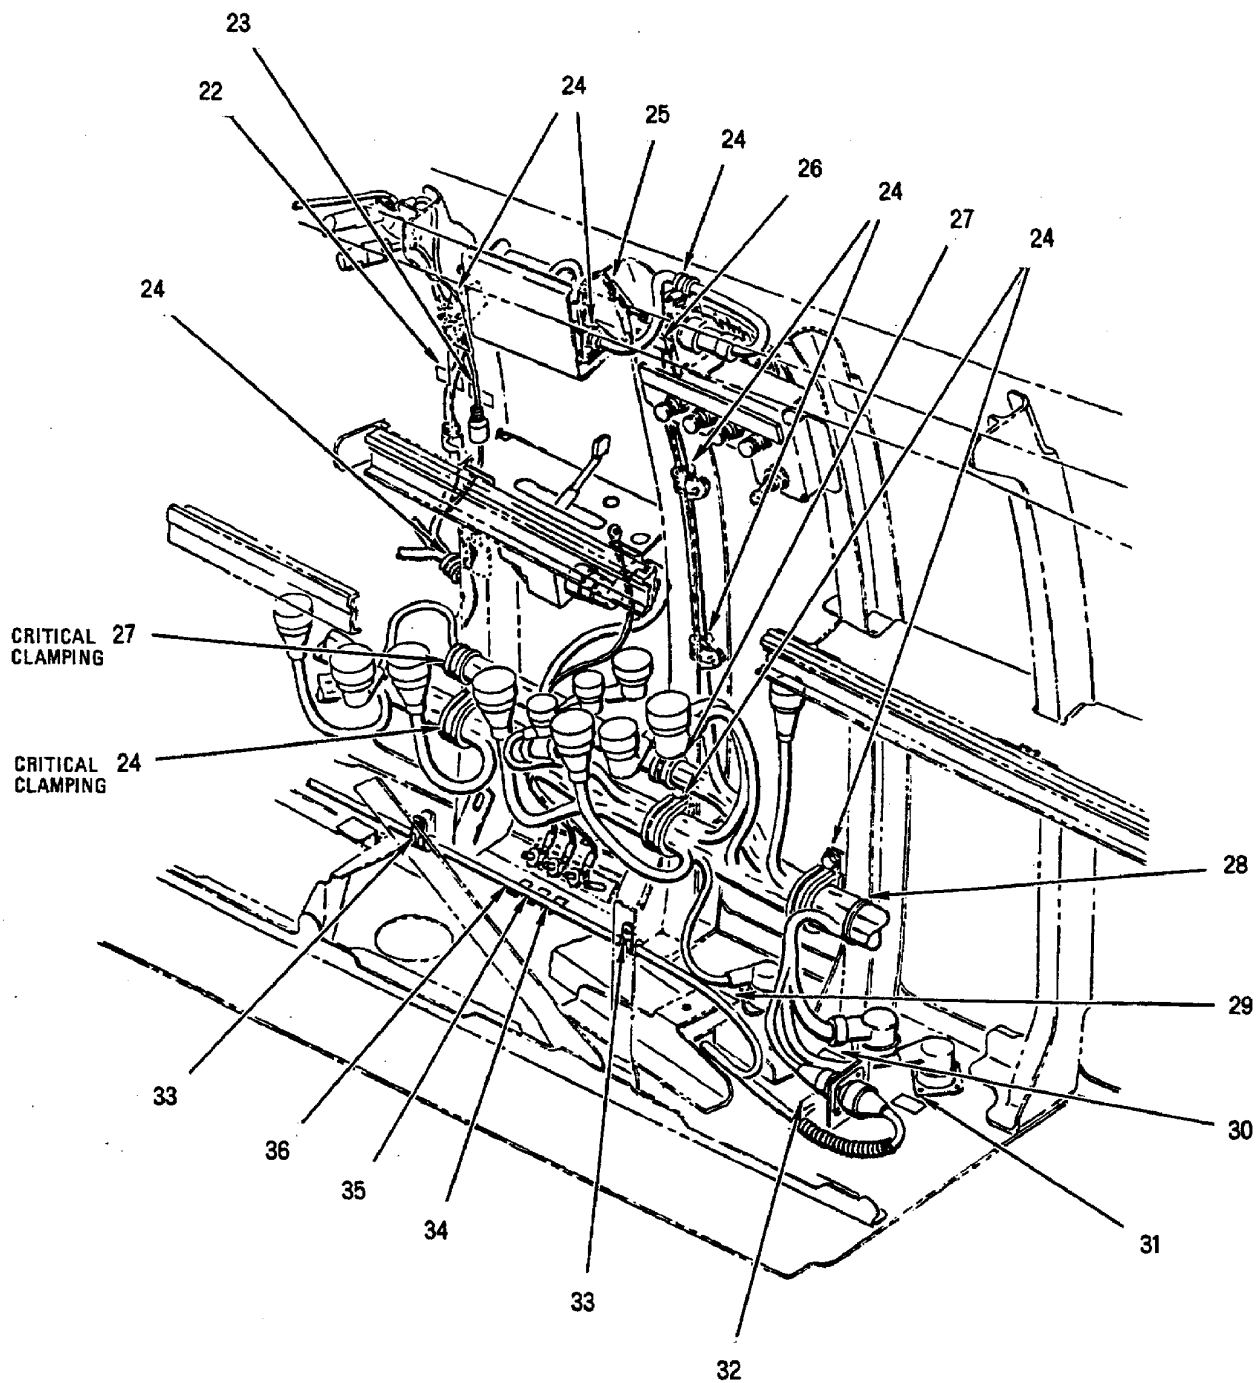

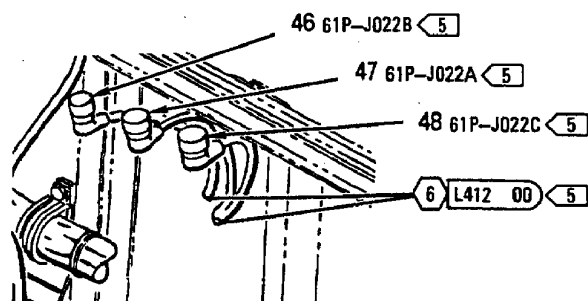

CONFIGURATION Y

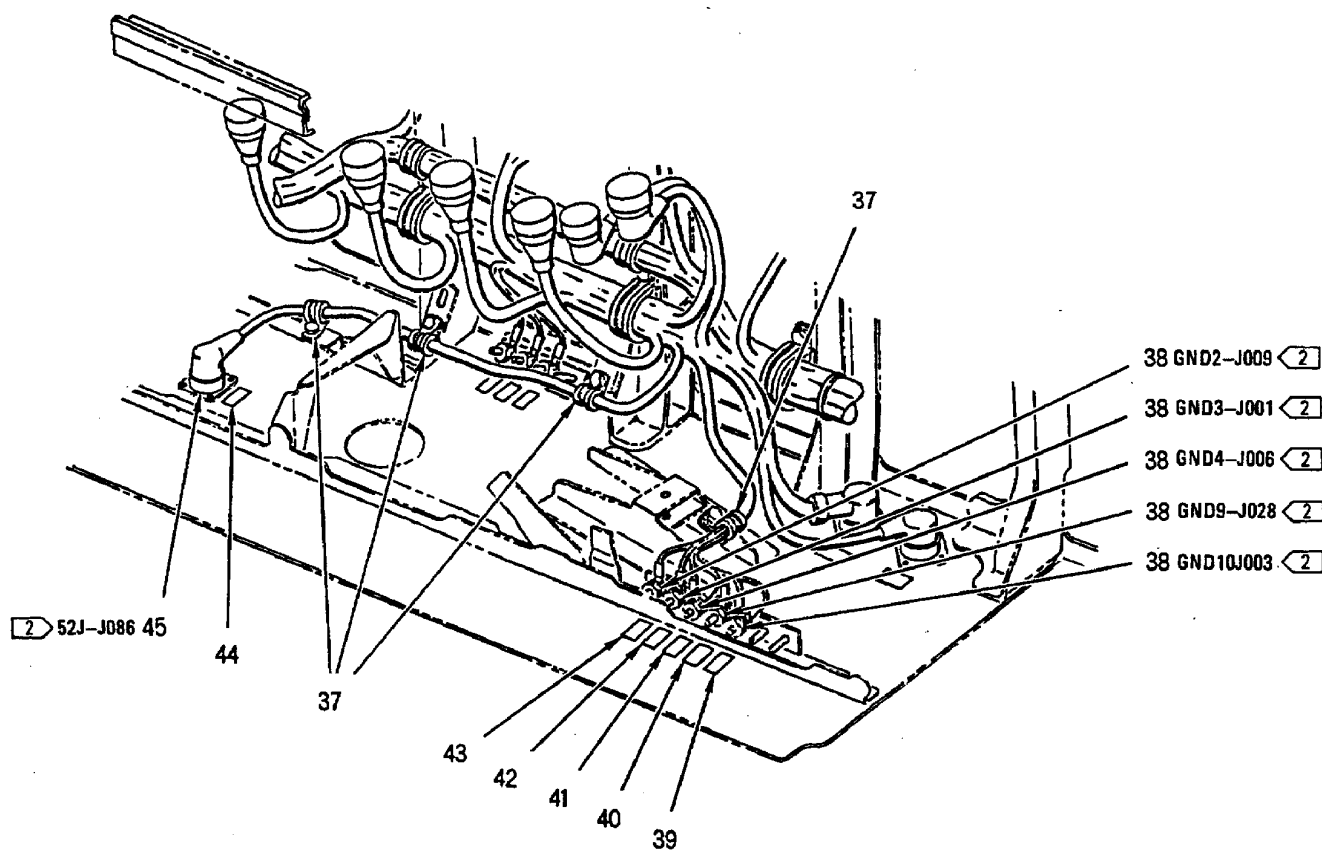

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T11B35S	CONNECTOR, RECEPTACLE (20J-J003)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
2	MS27467T11B35P	CONNECTOR, PLUG (20P-J003)	1		PAOZZ
3	MS27467T11B35S	CONNECTOR, PLUG (22P-J026)	1		PAOZZ
4	MS27467T15B35P	CONNECTOR, PLUG (61P-J022B)	1	D	PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (52P-J155)	1		PAOZZ
6	MS3476W16-26S	CONNECTOR, PLUG (76P-J008A)	1		PAOZZ
7	MS27656T15B35S	CONNECTOR, RECEPTACLE (61J-J033)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0016	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-6) (USE WITH INDEX 7)			
	1214-0506	SEE ABOVE (64098)	1	*	PAOZZ
8	MS27656T15B97PA	CONNECTOR, RECEPTACLE (52J-J008)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0016	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-6) (USE WITH INDEX 8)			
	1214-0506	SEE ABOVE (64098)	1	*	PAOZZ
9	MS27467T13B35PA	CONNECTOR, PLUG (84P-J122A)	1	A	PAOZZ
10	95340	TUBING, PLASTIC, SPIRAL (78570)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TB6)			
	500024-2	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TB6)			
11	MS27656T13B35SA	CONNECTOR, RECEPTACLE (84J-J122A)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
12	MS27656T13B4P	CONNECTOR, RECEPTACLE (52J-J086)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
	07-0501-0014	SHIELDING GASKET, ELECTRICAL (57003)	1	A*	PAOZZ
		(MCDONNELL SPEC 5M988-5) (USE WITH INDEX 12)			
	1214-0505	SEE ABOVE (64098)	1	A*	PAOZZ
13	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	3		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 13)	3		PAOZZ
14	MS3476W14-19S	CONNECTOR, PLUG (76P-J008B)	1		PAOZZ
15	MS27467T15B35S	CONNECTOR, PLUG (52P-J080)	1		PAOZZ
16	MS27467T11B35S	CONNECTOR, PLUG (61P-J022C)	1	D	PAOZZ
17	MS27467T9B35S	CONNECTOR, PLUG (1P-J137)	1	C	-
18	MS27467T13B35S	CONNECTOR, PLUG (1P-J084)	1		PAOZZ
19	MS27467T17B35S	CONNECTOR, PLUG (52P-J078)	1		PAOZZ
20	MS27467T15B35SA	CONNECTOR, PLUG (8P-J002)	1		PAOZZ
21	MS27467T13B98S	CONNECTOR, PLUG (61P-J022A)	1	D	PAOZZ
22	74A890601-2608	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 8FLJ095)			
23	74A890601-2621	MARKER, IDENTIFICATION - ELECTRICAL	1	C	MDOZZ
		(76301) (FOR REF DES 8FLJ164)			
24	MS21919WDG #	CLAMP	9		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
25	MS21266-2N	GROMMET	AR		PAOZZ
26	74A890601-2555	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 20J-J003)			
27	MS21919WDG #	CLAMP	2		-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
28	PLT4H-C30	STRAP, TIEDOWN, ELECTRICAL COMPONENTS (06383) (MCDONNELL SPEC ST9M559-3)	1	*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	1	*	PAOZZ
29	74A890601-2087	MARKER, IDENTIFICATION - COMPONENTS (06383) (MCDONNELL SPEC ST9M559-3)	1	A	MDOZZ
30	74A890601-2104	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-J033)	1		MDOZZ
31	74A890601-2050	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J008)	1		MDOZZ
32	74A890601-2040	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-J122A)	1	A	MDOZZ
33	MS21919WDG #	CLAMP	2	A	-
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
34	74A890601-2718	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J006)	1		MDOZZ
35	74A890601-2261	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-J007)	1		MDOZZ
36	74A890601-2268	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-J008)	1		MDOZZ
37	MS21919WDG #	CLAMP	4	F	-
	NAS673V #	BOLT (AP)	1	F	-
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
38	MS21042L3	NUT	5	F	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 38)	5	P	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 38)	5	F	PAOZZ
39	74A890601-2681	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10J003)	1	F	MDOZZ
40	74A890601-2613	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-J028)	1	P	MDOZZ
41	74A890601-2680	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-J006)	1	F	MDOZZ
42	74A890601-2263	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-J001)	1	F	MDOZZ
43	74A890601-2583	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-J009)	1	F	MDOZZ
44	74A890601-2087	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J086)	1	B	MDOZZ
45	MS27656T13B4P	CONNECTOR, RECEPTACLE (52J-J086)	1	B	PAOZZ
	NAS600-8P	SCREW (AP)	4	B	PAOZZ
	AN960JD4L	WASHER (AP)	4	B	PAOZZ
	07-0501-0014	SHIELDING GASKET, ELECTRICAL (57003) (MCDONNELL SPEC 5M988-5) (USE WITH INDEX 45)	1	B*	PAOZZ
	1214-0505	SEE ABOVE (64098)	1	B*	PAOZZ
46	MS27467T15B35P	CONNECTOR, PLUG (61P-J022B)	1	E	PAOZZ
47	MS27467T13B98S	CONNECTOR, PLUG (61P-J022A)	1	E	PAOZZ
48	MS27467T9B35P	CONNECTOR, PLUG (61P-J022C)	1	E	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27
B	161353 THRU 161519 BEFORE F18 AFC 27
C	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 49
D	161925 & UP; ALSO 161353 THRU 161761 AFTER F18 AFC 57
E	161353 THRU 161761 BEFORE F18 AFC 57
F	161353 THRU 161519

LEGEND


- 1 161520 AND UP
- 2 161353 THRU 161761
- 3 161520 AND UP; ALSO
161353 THRU 161519
AFTER F18 AFC 27



COCKPIT
RIGHT AFT

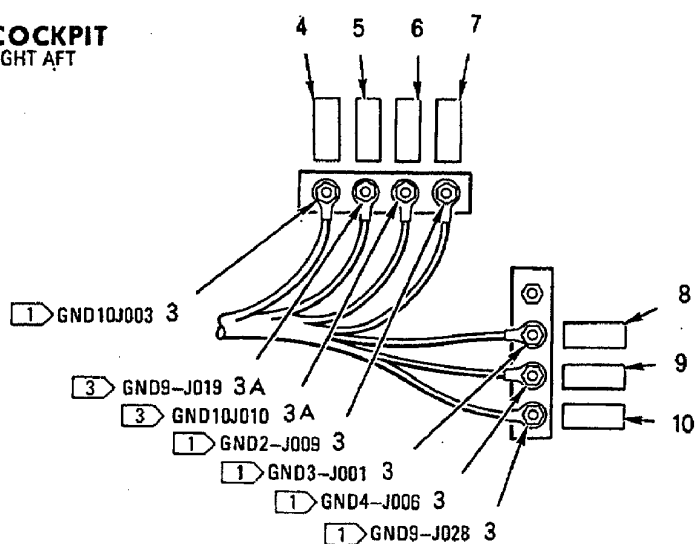

A
VIEW LOOKING AFT

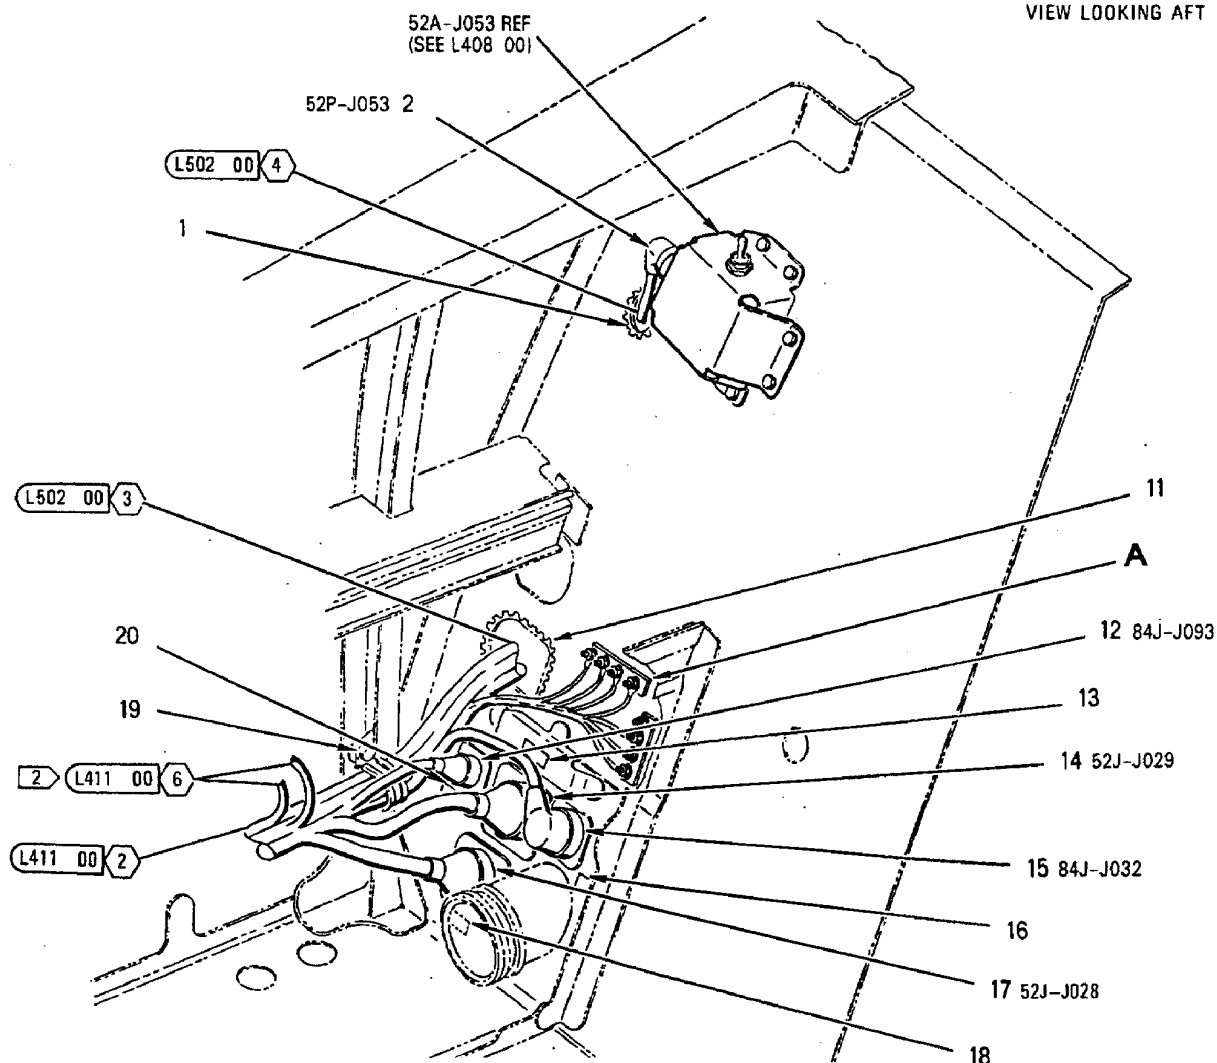



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR		PAOZZ
2	MS27467T11B35S	CONNECTOR, PLUG (52P-J053)	1		PAOZZ
3	MS21042L3	NUT	5	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	5	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	5	A	PAOZZ
3A	MS21042L3	NUT	2	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3A)	2	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3A)	2	B	PAOZZ
4	74A890601-2681	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10J003)	1	A	MDOZZ
5	74A890601-2080	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-J019)	1	B	MDOZZ
6	74A890601-2122	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10J010)	1	B	MDOZZ
7	74A890601-2583	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-J009)	1	A	MDOZZ
8	74A890601-2263	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-J001)	1	A	MDOZZ
9	74A890601-2680	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND4-J006)	1	A	MDOZZ
10	74A890601-2613	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND9-J028)	1	A	MDOZZ
11	MS21266-6N	GROMMET	AR		PAOZZ
12	MS27656T13B4S	CONNECTOR, RECEPTACLE (84J-J093)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0014	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-5) (USE WITH INDEX 12)			
	1214-0505	SEE ABOVE (64098)	1	*	PAOZZ
13	74A890601-2066	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 52J-J029)	1		MDOZZ
14	MS27656T25B35PA	CONNECTOR, RECEPTACLE (52J-J029)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 14)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ
15	MS27656T17B35PA	CONNECTOR, RECEPTACLE (84J-J032)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0018	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-7) (USE WITH INDEX 15)			
	1214-0507	SEE ABOVE (64098)	1	*	PAOZZ
16	74A890601-2141	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 84J-J032)	1		MDOZZ
17	MS27656T25B35P	CONNECTOR, RECEPTACLE (52J-J028)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	AN960JD6L	WASHER (AP)	4		PAOZZ
	07-0501-0059	SHIELDING GASKET, ELECTRICAL	1	*	PAOZZ
		(57003) (MCDONNELL SPEC 5M988-26) (USE WITH INDEX 17)			
	1214-0526	SEE ABOVE (64098)	1	*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	74A890601-2065	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-J028)	1		MDOZZ
19	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
20	74A890601-2296	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 84J-J093)	1		MDOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161520 & UP
B	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27

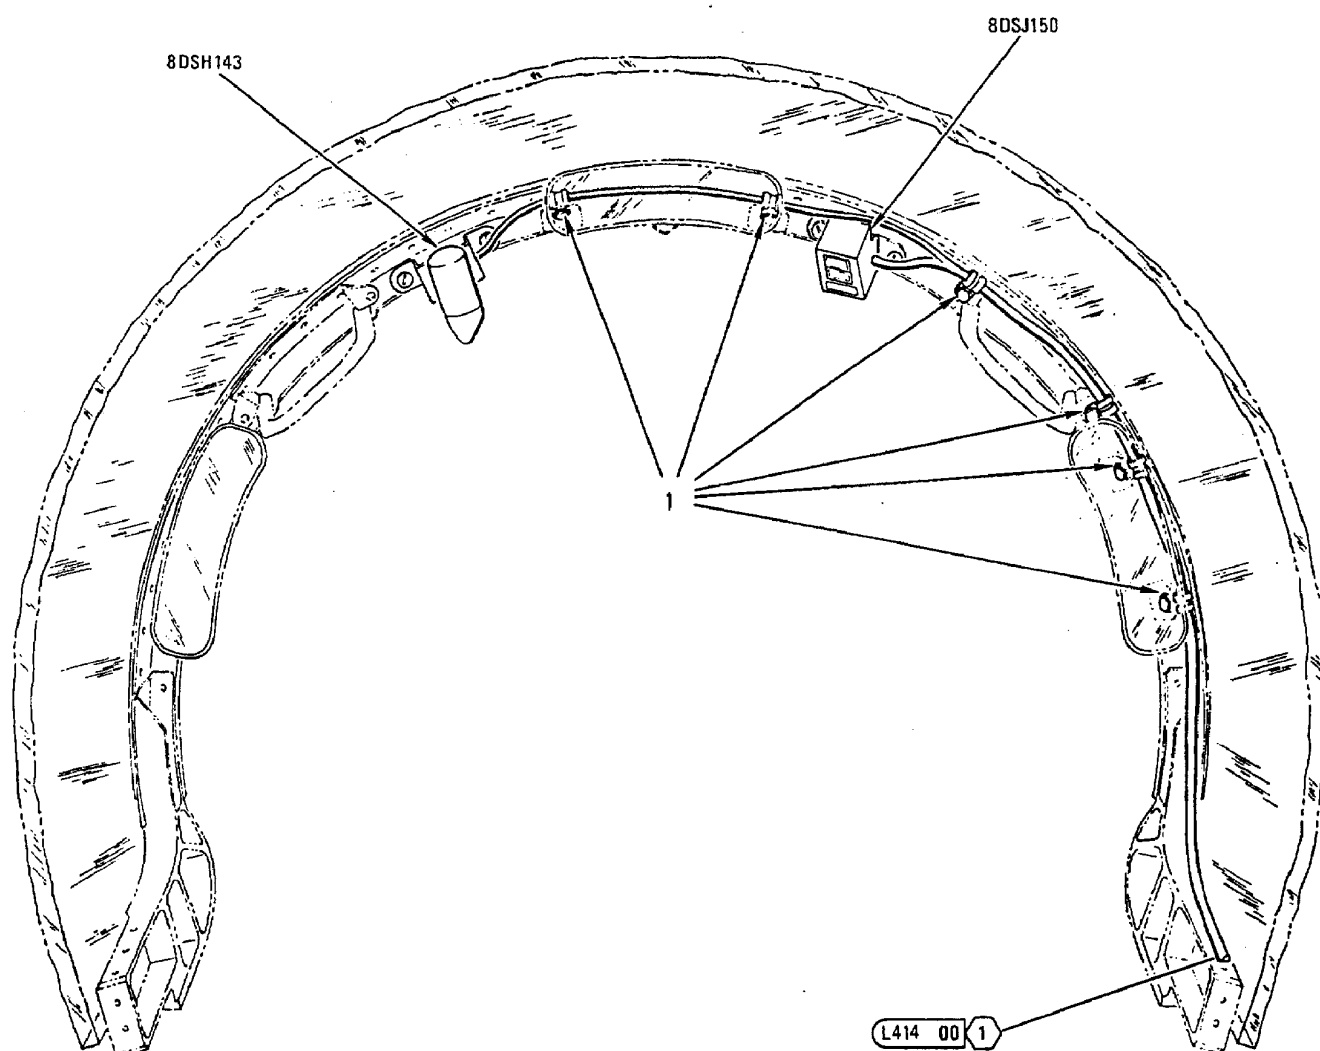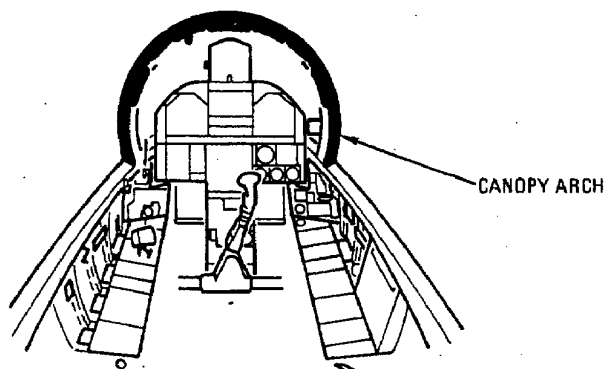


INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			
1	MS21919WDG3	CLAMP	6		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ

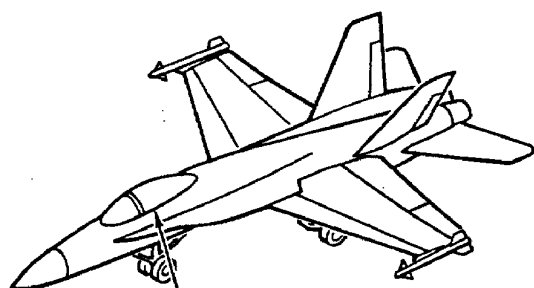

CANOPY

COCKPIT CANOPY-FWD END

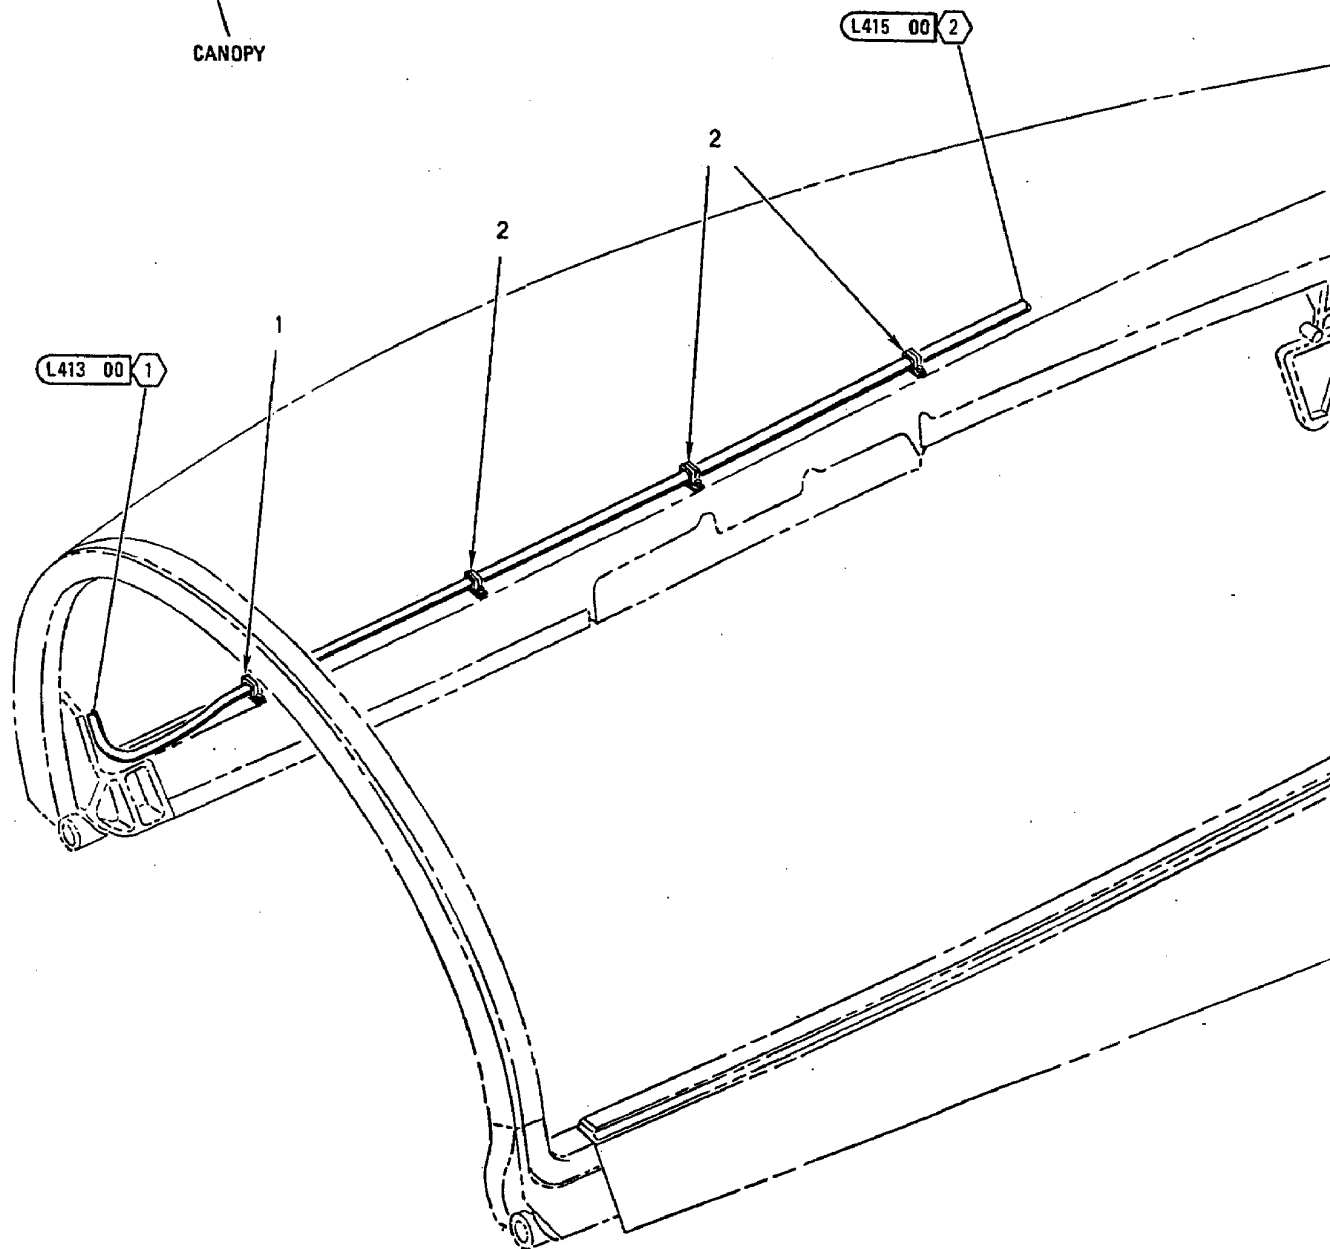

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG7	CLAMP	1		PAOZZ
	NAS1802-3-14	SCREW (AP) (SUPERSEDES NAS1802-3-12) ...	1		PAOZZ
	NAS1802-3-12	SCREW (AP)	1	*	PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
2	MS21919WDG7	CLAMP	3		PAOZZ
	NAS1802-08-12	SCREW (AP)	1		PAOZZ
	AN960JD8	WASHER (AP)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(WP002 00)

15 April 1992

Sheet 1



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG7	CLAMP	2		PAOZZ
	NAS1802-08-12	SCREW (AP)	1		PAOZZ
	AN960JD8	WASHER (AP)	1		PAOZZ
2	MS21919WDG3	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21919WDG #	CLAMP	2		-
4	MS21919WDG3	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-8	SPACER (AP)	1		PAOZZ
5	AN123027	SEAL	1	D	PAOZZ
	AN960JD1016L	WASHER (AP)	1	D	PAOZZ
	AN3066-4	NUT (AP)	1	D	PAOZZ
6	MS21919WDG #	CLAMP	2		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	74A890601-2549	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTL002)	1		MDOZZ
8	MS27656T11B35P	CONNECTOR, RECEPTACLE (52J-L050)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
9	74A890601-2077	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-L050)	1		MDOZZ
10	MS27467T11B35S	CONNECTOR, PLUG (8P-L080B)	1	B	PAOZZ
11	74A890068-2021	PLATE, IDENTIFICATION - UPPER EQUIP BAY, ZONE 12 (76301) (FOR REF DES 8A-L080)	1		MDOZZ
12	NMCS45A-13	SEAL - SPLIT, ELECTRICAL WIRE HARNESS (03296) (MCDONNELL SPEC ST5M1572-003)	2	C	PAOZZ
	NAS673V5	BOLT (AP)	2	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
	MS21042L3	NUT (AP)	2	C	PAOZZ
13	MS27467T11B35S	CONNECTOR, PLUG (8P-L080)	1	A	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

CODE	USABLE ON
A	161353 THRU 161359 BEFORE F18 AFC 19
B	161361 & UP; ALSO 161353 THRU 161359 AFTER F18 AFC 19
C	161353 THRU 162477
D	162826 & UP


UPPER EQUIPMENT BAY RIGHT SIDE AFT EQUIPMENT REMOVED


LEGEND

1 161702 AND UP;
ALSO 161353
THRU 161528
AFTER F18 AFC 54

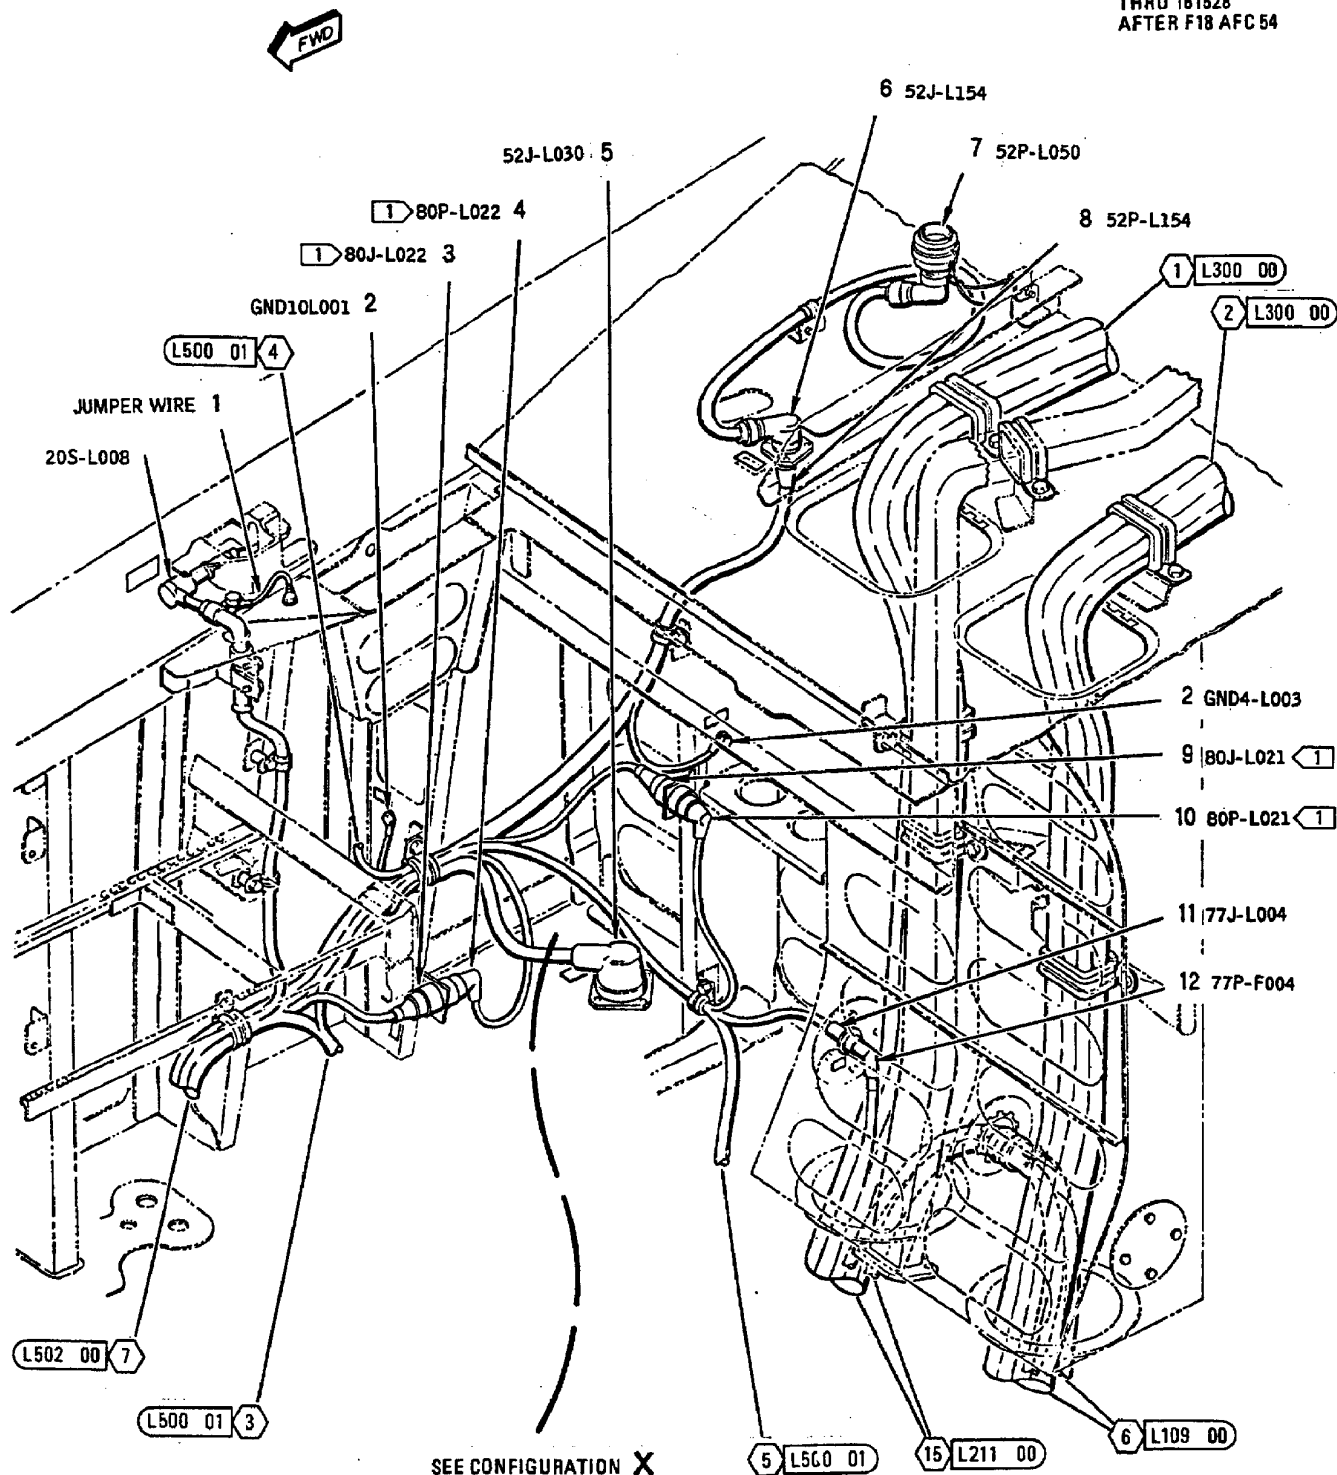

UPPER EQUIPMENT BAY
RIGHT SIDE AFT
EQUIPMENT REMOVED

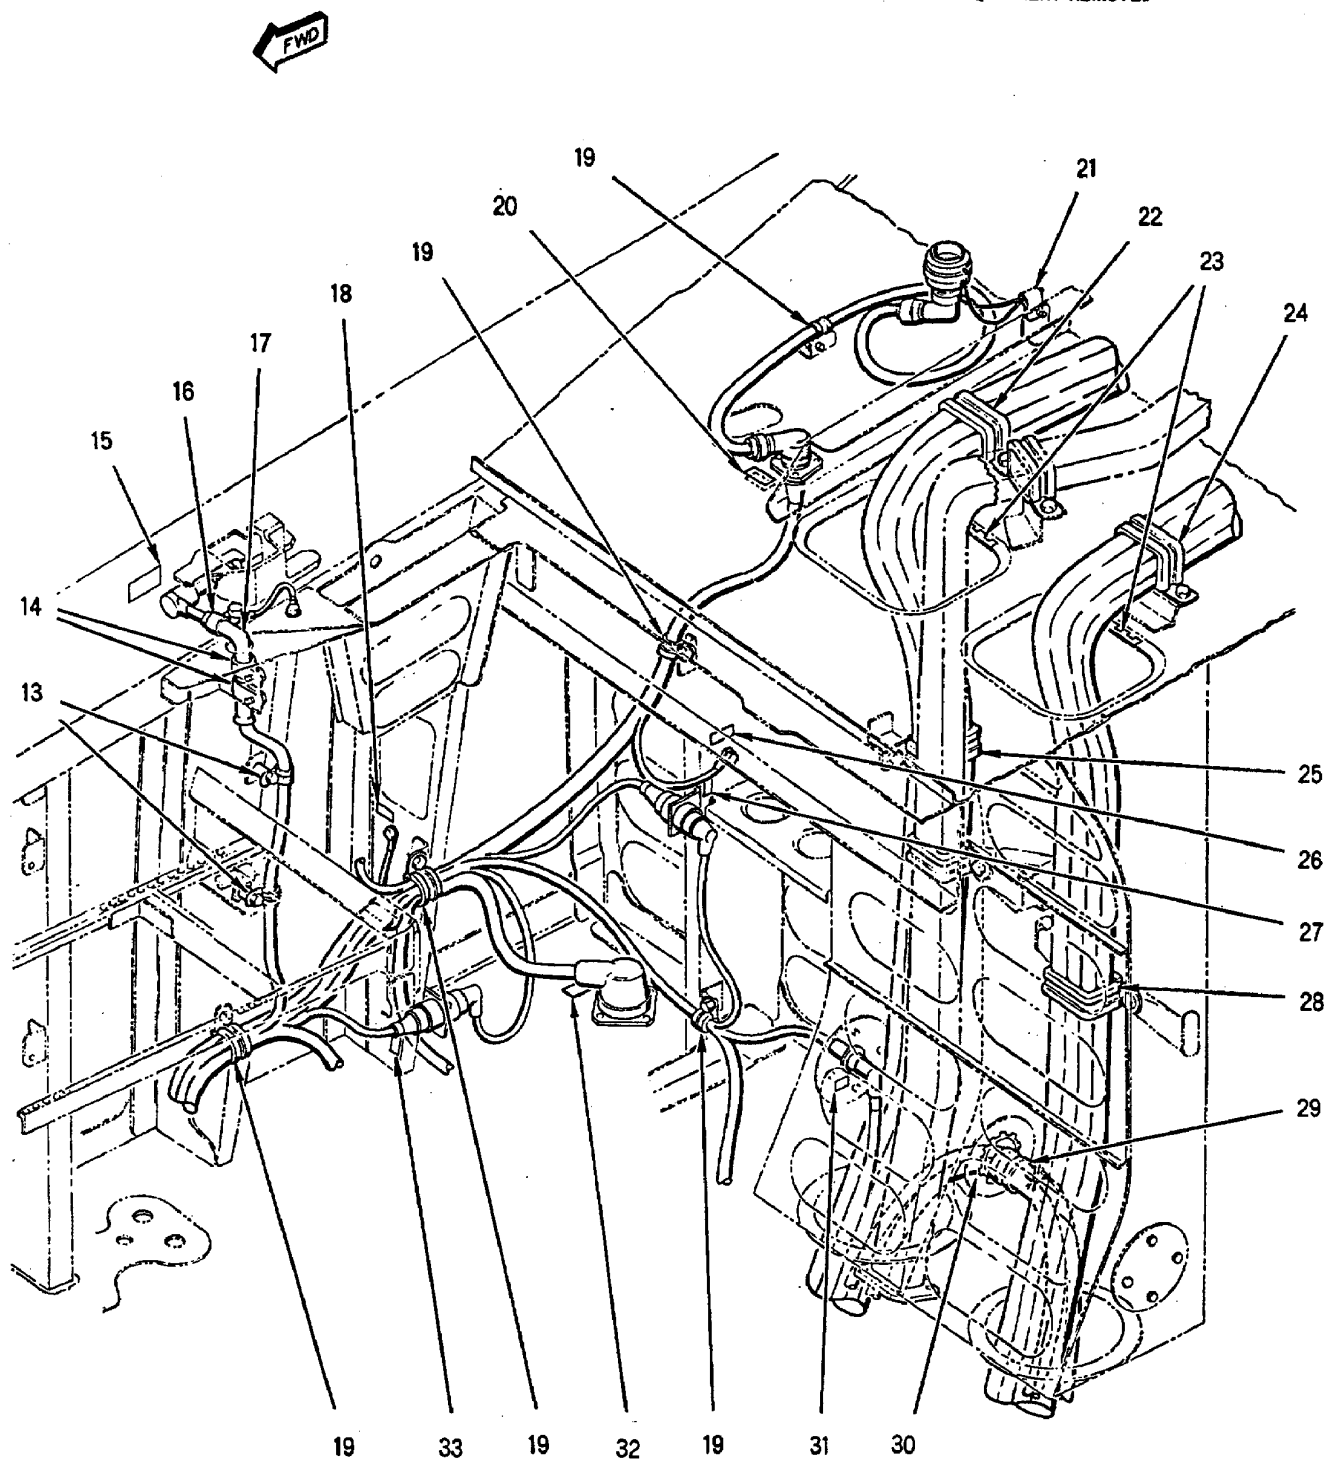

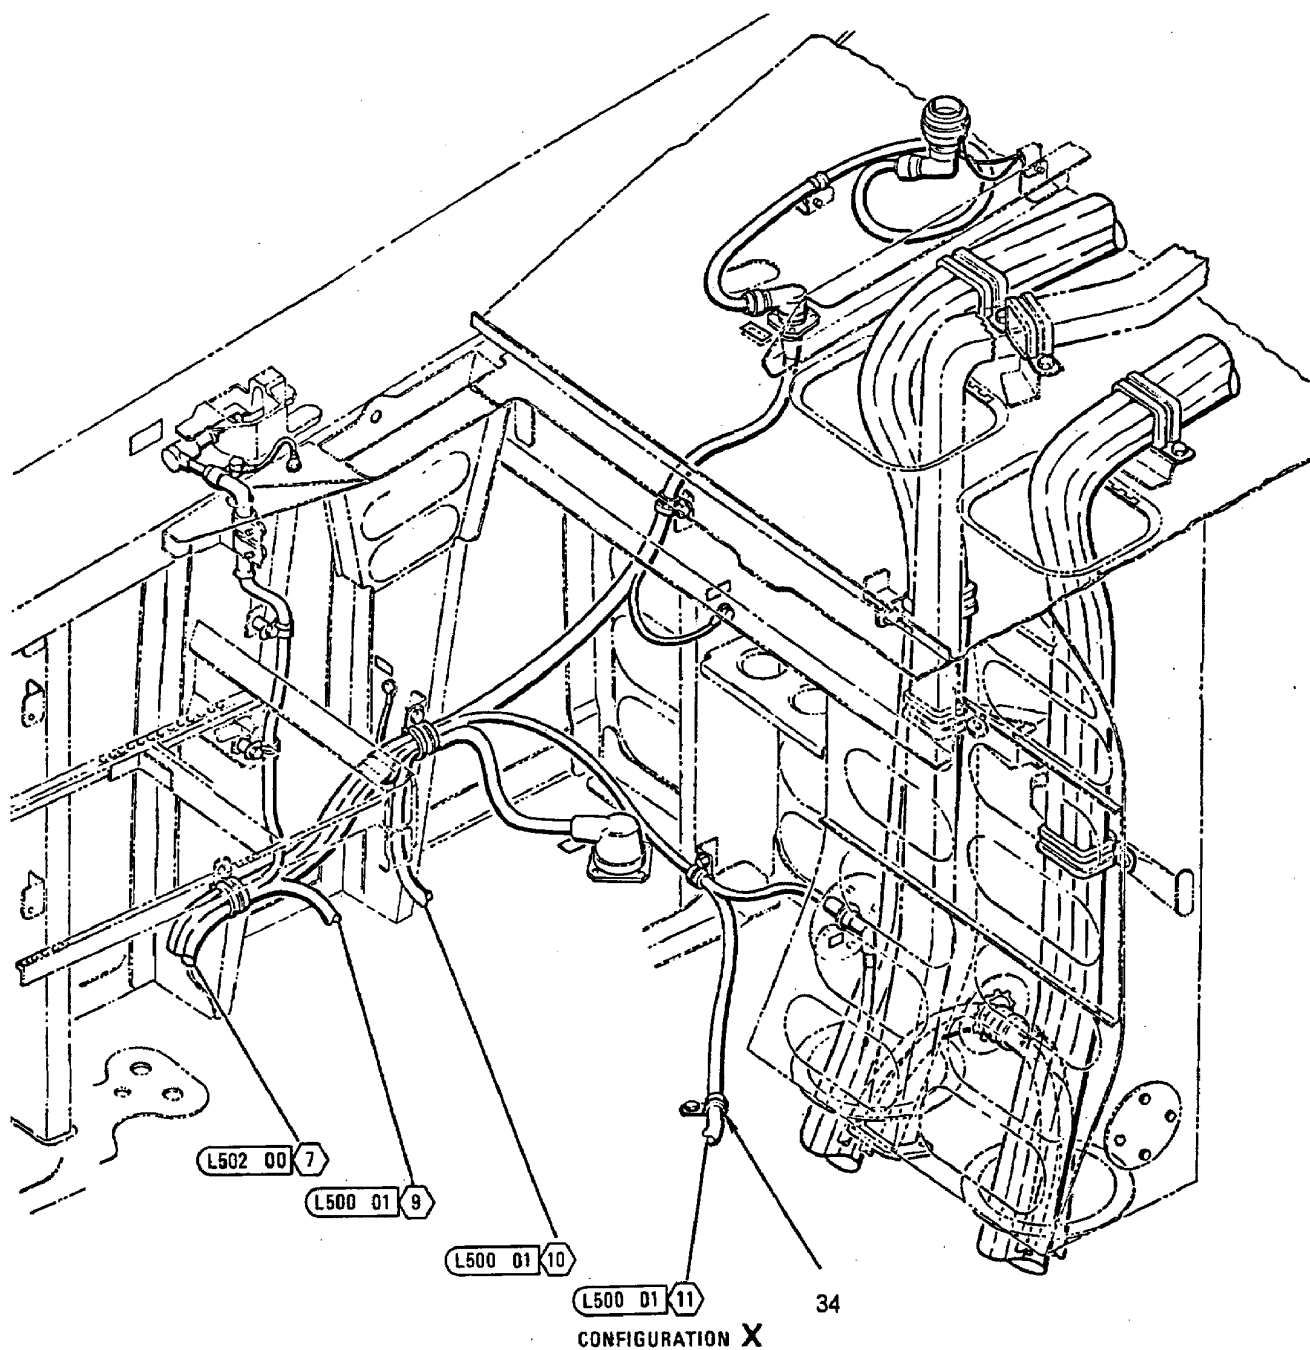

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25083-2BB4	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	NAS1801-3-8	SCREW	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	4		PAOZZ
3	31-34181-2	CONNECTOR, RECEPTACLE, ELECTRICAL	1	A*	PAOZZ
		(74868) (MCDONNELL SPEC 5M1999S1) (80J-L022)			
4	31-34179-2	CONNECTOR, PLUG, ELECTRICAL (74868)	1	C*	PAOZZ
		(MCDONNELL SPEC 5M1953RP2) (80P-L022)			
	31-34179-1	CONNECTOR, PLUG, ELECTRICAL (74868)	1	D*	PAOZZ
		(MCDONNELL SPEC 5M1953RP1) (80P-L022)			
5	MS27656T21B35P	CONNECTOR, RECEPTACLE (52J-L030)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0022	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-9) (USE WITH INDEX 5)			
	1214-0509	SEE ABOVE (64098)	1	*	PAOZZ
6	MS27656T11B35P	CONNECTOR, RECEPTACLE (52J-L154)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	07-0501-0012	SHIELDING GASKET, ELECTRICAL (57003)	1	*	PAOZZ
		(MCDONNELL SPEC 5M988-4) (USE WITH INDEX 6)			
	1214-0504	SEE ABOVE (64098)	1	*	PAOZZ
7	88-488706-93S	CONNECTOR, PLUG, ELECTRICAL (77820)	1		PAOZZ
		(MCDONNELL SPEC 5T5M1258B3SNB93) (52P-L050)			
8	MS27467T11B35S	CONNECTOR, PLUG (52P-L154)	1		PAOZZ
9	31-34181-2	CONNECTOR, RECEPTACLE, ELECTRICAL	1	A*	PAOZZ
		(74868) (MCDONNELL SPEC 5M1999S1) (80J-L021)			
10	31-34179-2	CONNECTOR, PLUG, ELECTRICAL (74868)	1	C*	PAOZZ
		(MCDONNELL SPEC 5M1953RP2) (80P-L021)			
	31-34179-1	CONNECTOR, PLUG, ELECTRICAL (74868)	1	D*	PAOZZ
		(MCDONNELL SPEC 5M1953RP1) (80P-L021)			
11	M39012/28-0503	CONNECTOR, RECEPTACLE (77J-L004)	1		PAOZZ
12	M39012/30-0503	CONNECTOR, PLUG (77P-F004)	1		PAOZZ
13	MS21919WDG #	CLAMP	2		-
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
14	AN742D8	CLAMP	2		PAOZZ
	NAS1801-3-4	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	74A890601-2499	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 20S-L008)			
16	AN735D9	CLAMP	1		PAOZZ
	NAS1801-3-4	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
17	74A782452-1001	TUBE, BENT, METALLIC - ELECTRICAL	1		MGOZZ
		CONDUIT, Y290. 994 (76301)			
18	74A890601-2545	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND10L001)			
19	MS21919WDG #	CLAMP	5		-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
20	74A890601-2490	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 52J-L154)			
21	AN742-2	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-8	SPACER (AP)	1		PAOZZ
22	NAS1677D20W30N	STRAP	1		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
23	MS21266-2N	GROMMET	AR		PAOZZ
24	NAS1677D10W30N	STRAP	1		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
25	MS21919WDG #	CLAMP	1		-
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	74A890601-2593	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND4-L003)			
27	74A890601-2198	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES 80J-L021)			
28	NAS1677D10W30N	STRAP	1		PAOZZ
	NAS673V4	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
29	MS21919WDG #	CLAMP	1		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
30	MS21266-3N	GROMMET	AR		PAOZZ
31	74A890601-2134	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 77J-L004)			
32	74A890601-2544	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 52J-L030)			
33	74A890601-2200	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES 80J-L022)			
34	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 54
B	161353 THRU 161528 BEFORE F18 AFC 54

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

C 161702 THRU 161761;
 ALSO 161353 THRU
 161528 AFTER F18 AFC
 54

D 161925 & UP

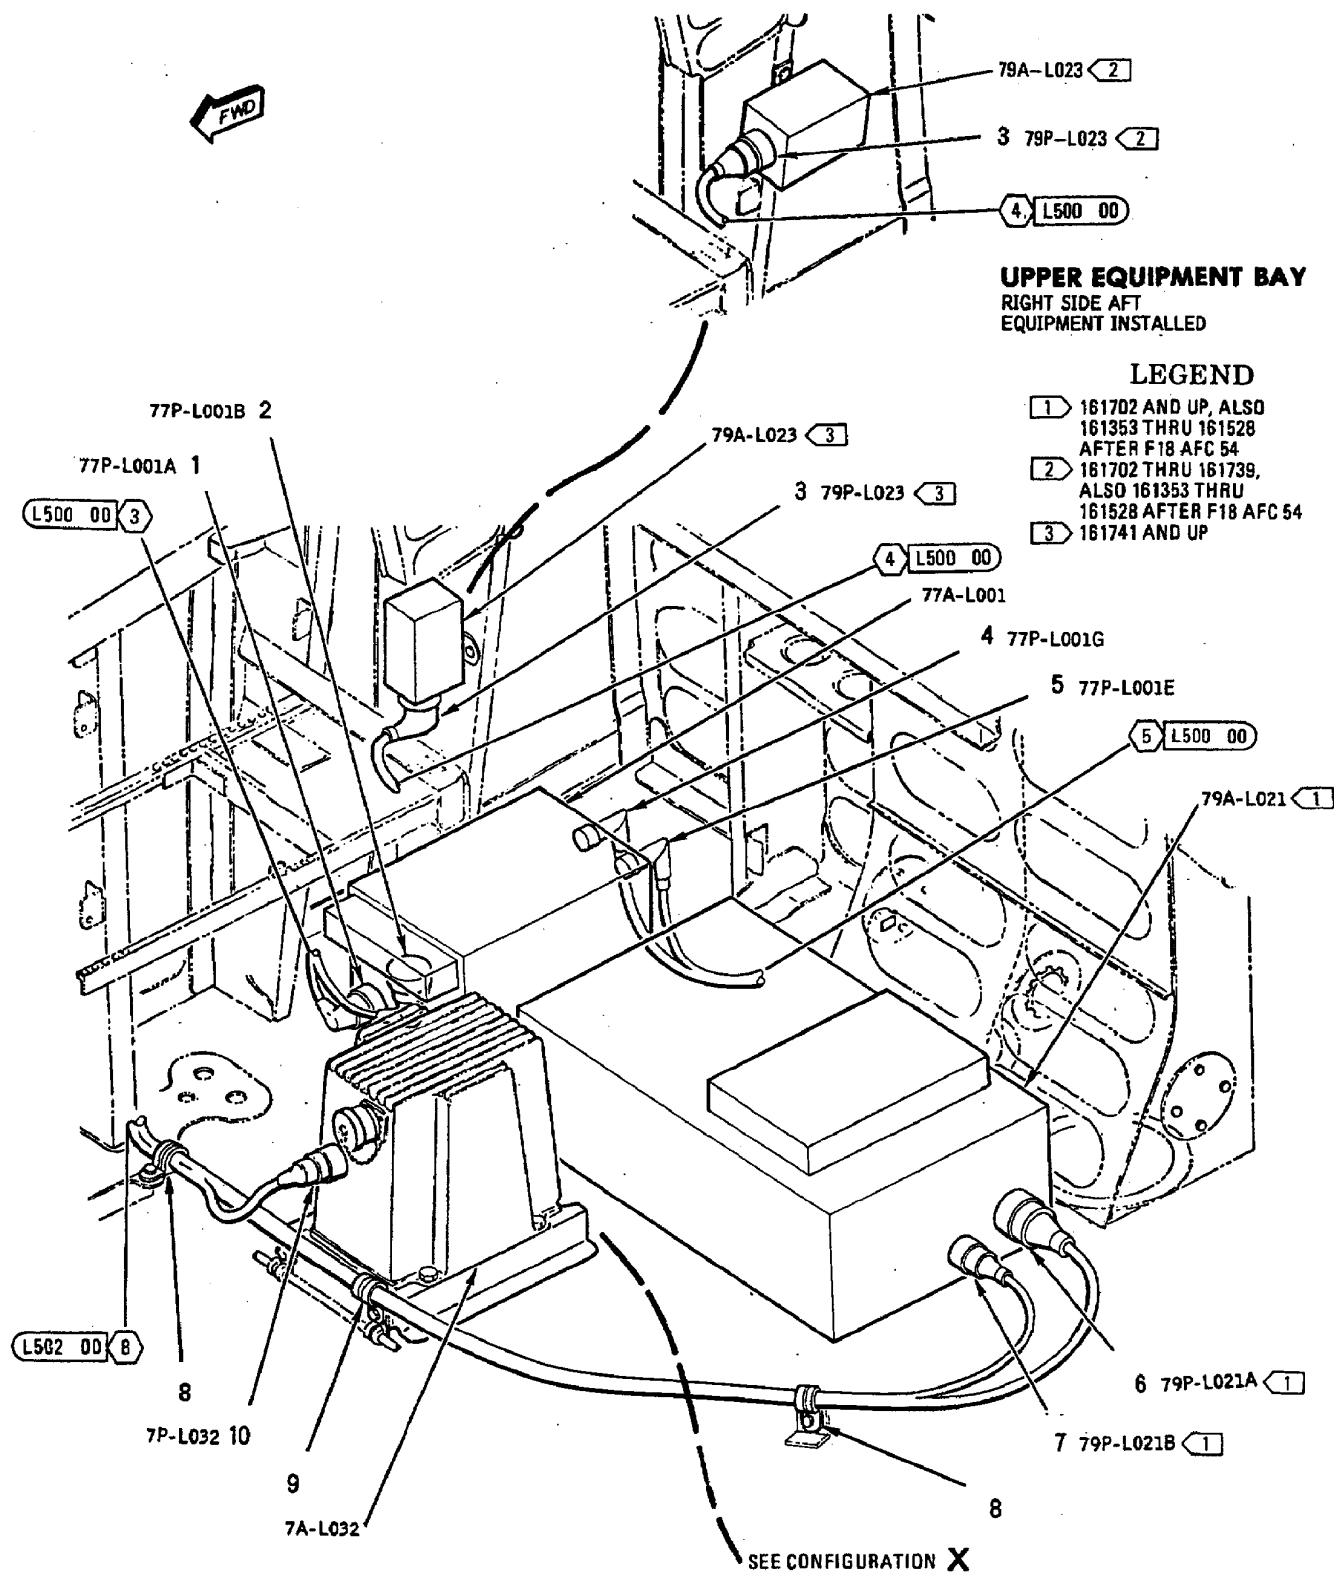

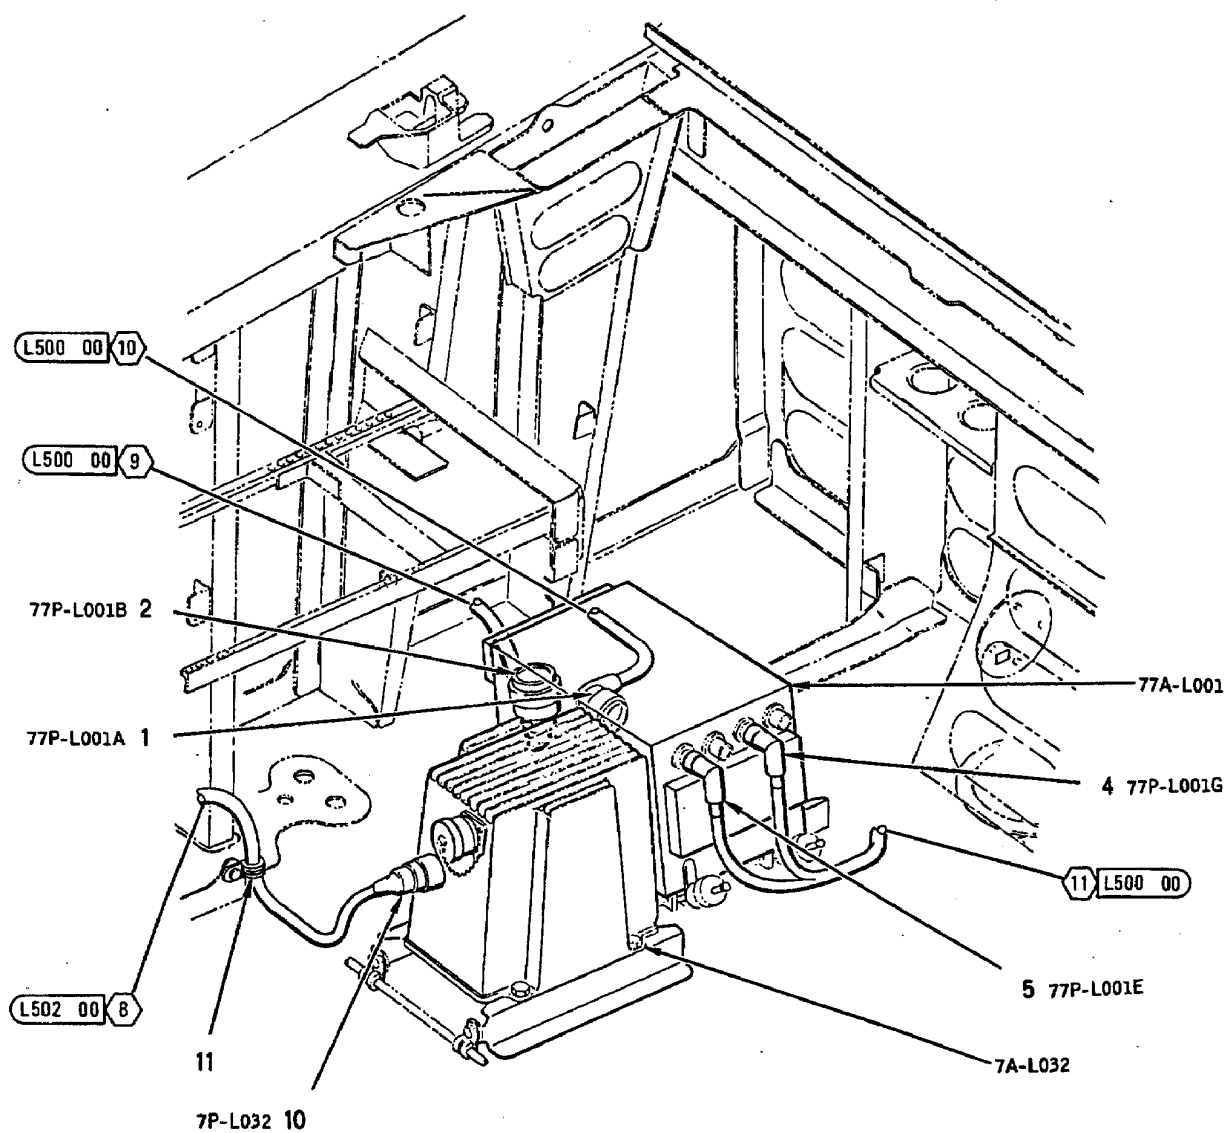

CONFIGURATION X
 161353 THRU 161528
 BEFORE F18 AFC 54


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M39012/30-0503	CONNECTOR, PLUG (77P-L001A)	1		PAOZZ
2	D38999/26WE35SC	CONNECTOR, PLUG (77P-L001B)	1		PAOZZ
3	MS27467T13B35S	CONNECTOR, PLUG (79P-L023)	1	A	PAOZZ
4	31-34179-1	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC 5M1953RP1)			
		(77P-L001G)			
5	31-34179-1	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC 5M1953RP1)			
		(77P-L001E)			
6	MS3475W22-21S	CONNECTOR, PLUG (79P-L021A)	1	A	PAOZZ
7	MS27473T8B35S	CONNECTOR, PLUG (79P-L021B)	1	A	PAOZZ
8	MS21919WDG #	CLAMP	2	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
9	MS21919WDG #	CLAMP	1	A	-
	NAS673V #	BOLT (AP)	1	A	-
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	A	PAOZZ
10	MS27467T15B35S	CONNECTOR, PLUG (7P-L032)	1		PAOZZ
11	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 54
B	161353 THRU 161528 BEFORE F18 AFC 54

UPPER EQUIPMENT BAY LEFT SIDE FWD

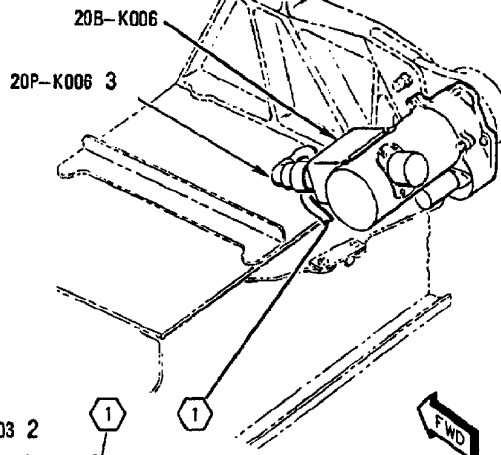



LEGEND

1 163092 AND UP

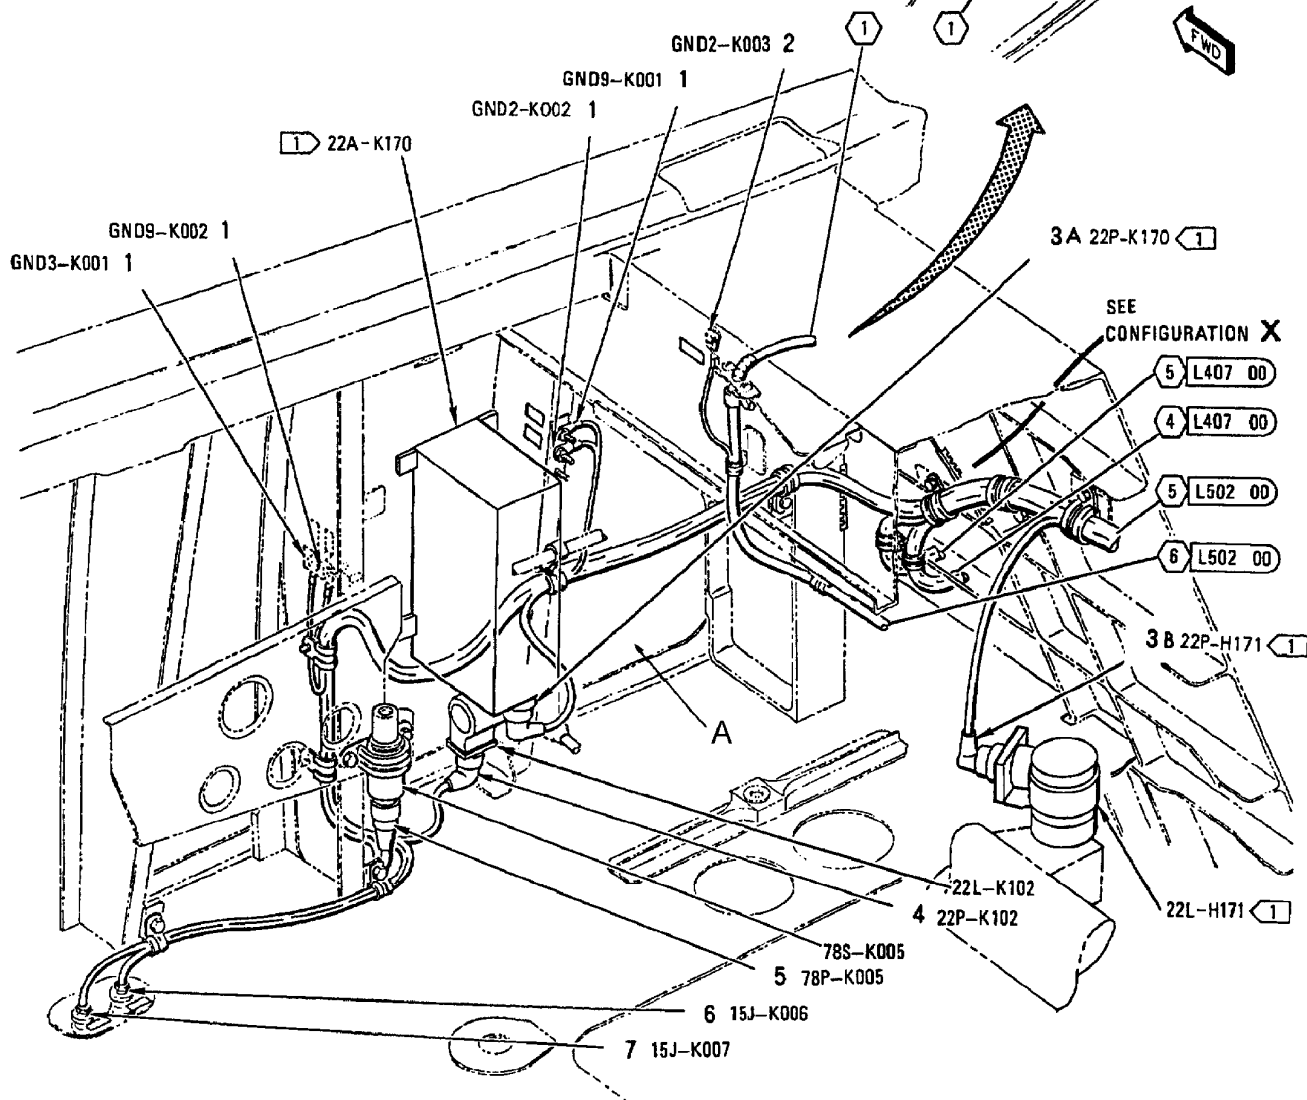


UPPER EQUIPMENT BAY LEFT SIDE FWD

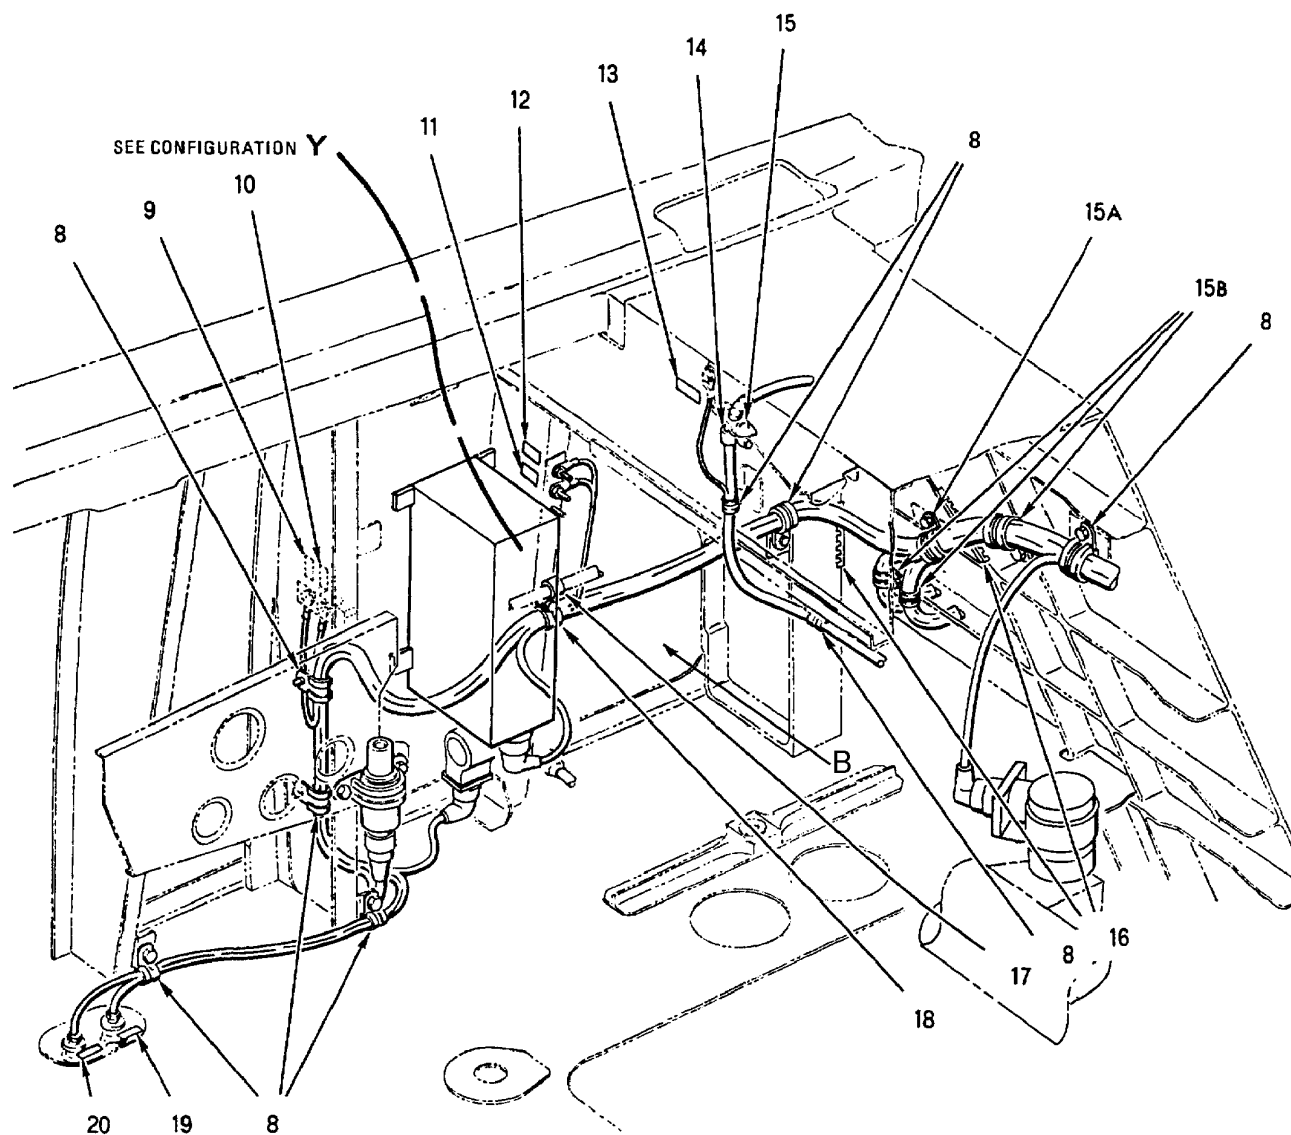


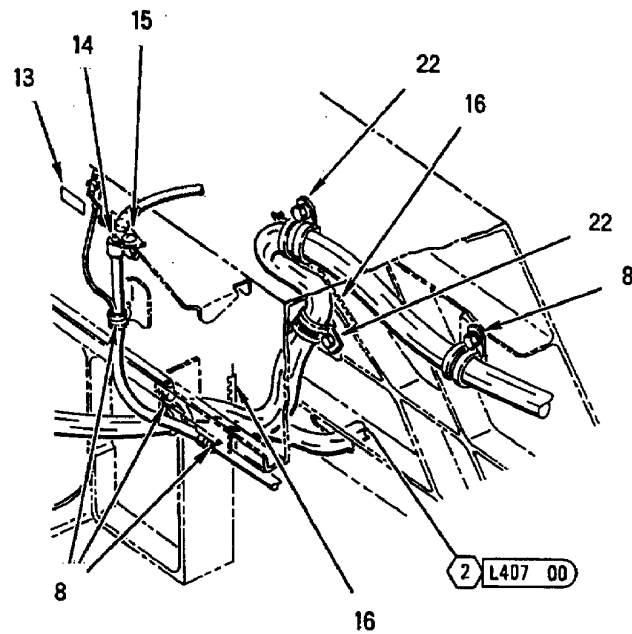


CONFIGURATION X
161353 THRU 161987



CONFIGURATION Y

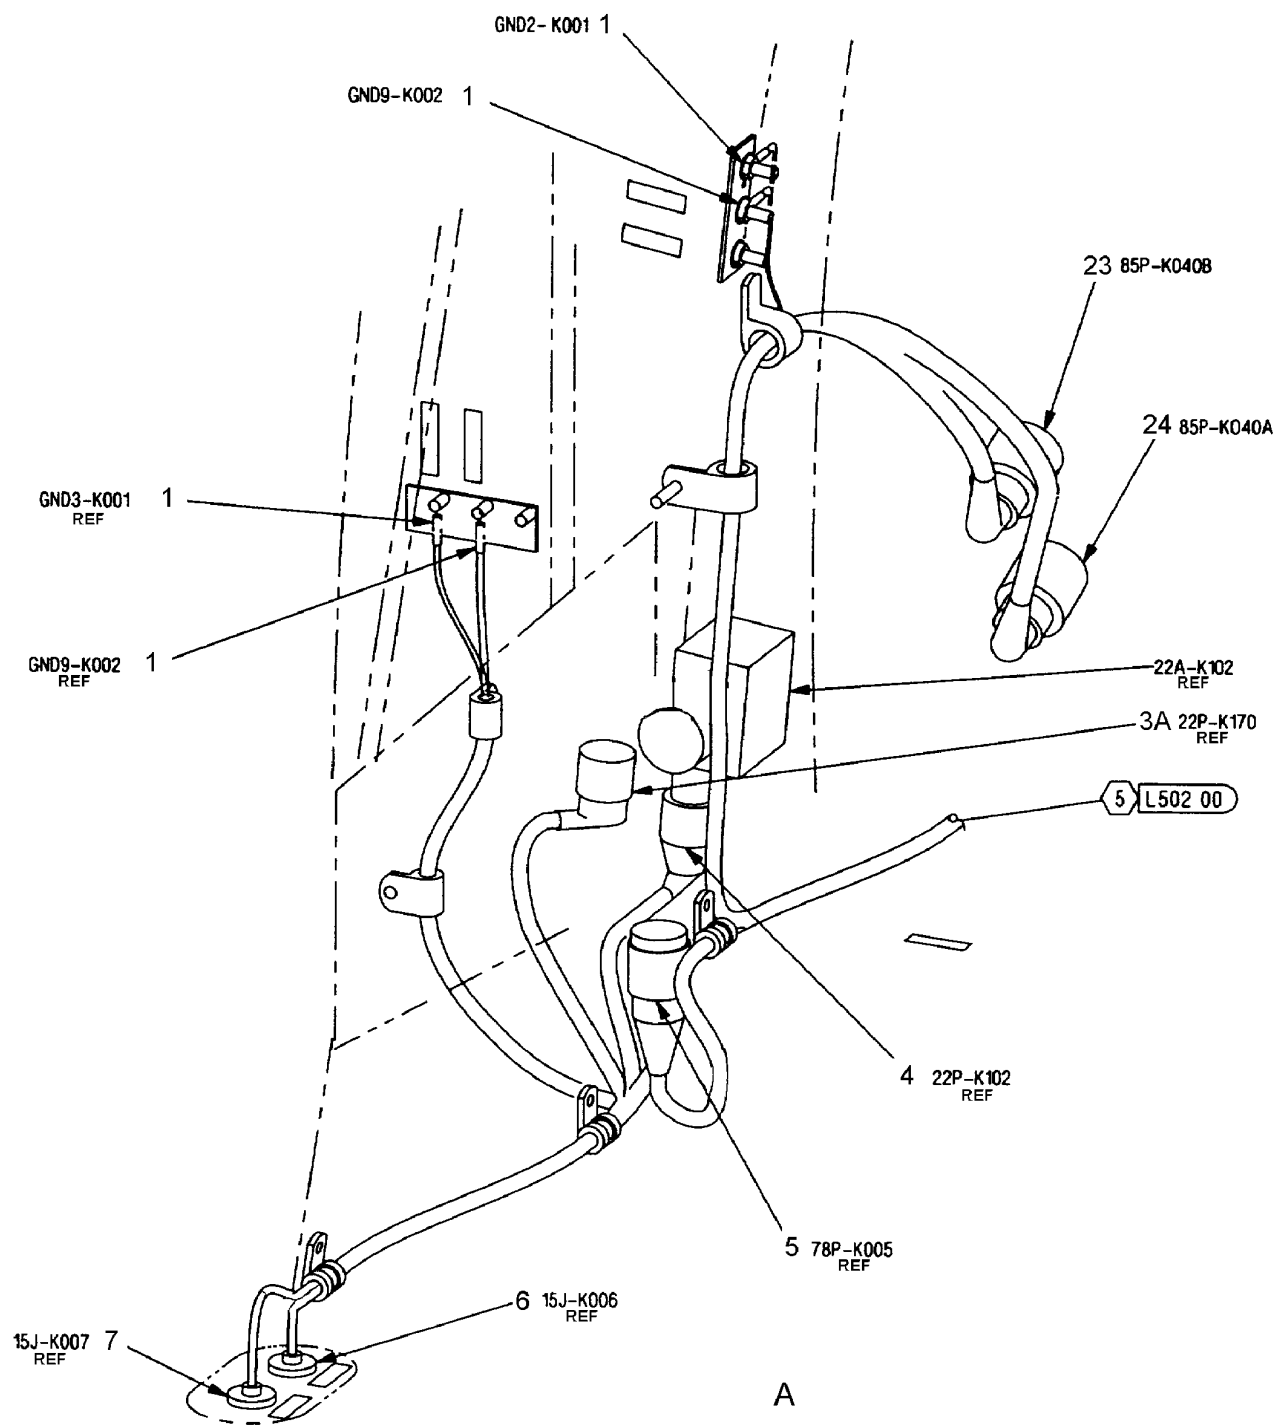

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

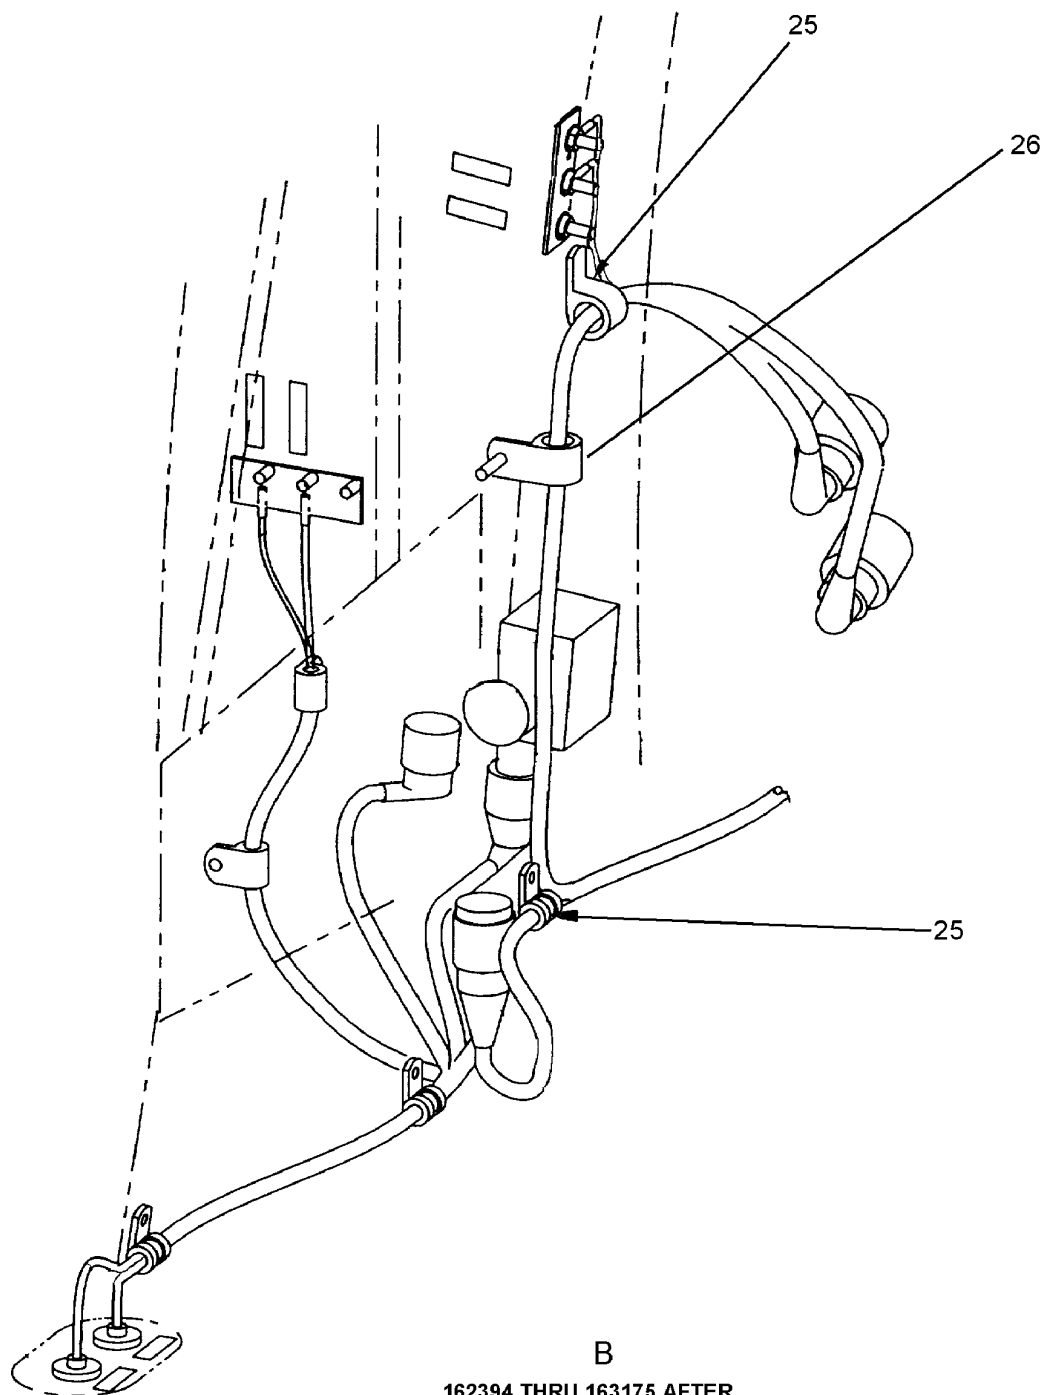

B

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	NAS1801-3-8	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	2		PAOZZ
3	MS27467T15B5S	CONNECTOR, PLUG (20P-K006)	1		PAOZZ
3A	MS27467T13B35S	CONNECTOR, PLUG (22P-K170)	1	F	PAOZZ
3B	MS27467T11B35S	CONNECTOR, PLUG (22P-H171)	1	F	PAOZZ
4	MS27467T9B35S	CONNECTOR, PLUG (22P-K102)	1		PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (78P-K005)	1		PAOZZ
6	M25516/19-10-04	CONNECTOR, RECEPTACLE (15J-K006)	1	C	PAOZZ
	M25516/19-02-04	CONNECTOR, RECEPTACLE (15J-K006)	1	D	PAOZZ
7	M25516/19-03-04	CONNECTOR, RECEPTACLE (15J-K007)	1		PAOZZ
8	MS21919WDG #	CLAMP	8		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	74A890601-2743	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-K001)	1		MGOZZ
10	74A890601-2742	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-K002)	1		MGOZZ
11	74A890601-2311	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-K002)	1		MGOZZ
12	74A890601-2310	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-K001)	1		MGOZZ
13	74A890601-2313	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-K003)	1		MGOZZ
14	AN735D8	CLAMP	1	E	PAOZZ
	NAS673V3	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS1291C3M	NUT (AP)	1	E	PAOZZ
15	74A782453-1001	TUBE ASSY - CONDUIT ELECTRICAL Y281 (76301)	1	E	XBOZZ
	NAS603-6P	SCREW (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	4		PAOZZ
	NAS1291C3M	NUT (AP)	2		PAOZZ
15A	MS21919WDG #	CLAMP	1	D	-
	NAS673V10	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS42DD6-48	SPACER (AP)	1	D	PAOZZ
15B	MS21919WDG #	CLAMP	3	D	-
	NAS673V #	BOLT (AP)	1	D	-
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
16	MS21266-3N	GROMMET	AR		PAOZZ
17	MS21919WDG3	CLAMP	1		PAOZZ
	NAS673V12	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-36	SPACER (AP)	1		PAOZZ
18	MS21919WDG #	CLAMP	1	A	-
19	74A890601-2154	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 15J-K006)	1		MGOZZ
20	74A890601-2155	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 15J-K007)	1		MGOZZ
21	MS21919WDG #	CLAMP	1	B	-
	NAS673V #	BOLT (AP)	1	B	-
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
22	MS21919WDG #	CLAMP	2	C	-
	NAS673V #	BOLT (AP)	1	C	-


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
23	D38999/46WB35SN	CONNECTOR, PLUG (85P-K040A)	1	G	PAOZZ
24	D38999/46WC35SN	CONNECTOR, PLUG (85P-K040B)	1	G	PAOZZ
25	MS21919WDG8	CLAMP	2	G	PAOZZ
	NAS673V3	BOLT (AP)	2	G	PAOZZ
	NAS1149D0316J	WASHER (AP)	2	*G	PAOZZ
	AN960JD10LL	WASHER (AP)	2	*G	PAOZZ
26	MS21919WDG8	CLAMP	1	G	PAOZZ
	NAS673V9	BOLT	1	G	PAOZZ
	NAS42DD6-64FC	SPACER	1	G	PAOZZ
	NAS1149D0316J	WASHER	1	*G	PAOZZ
	AN960JD10LL	WASHER	1	*G	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.

CODE	USABLE ON
A	161367 & UP
B	161353 THRU 161366
C	161353 THRU 161987
D	162394 & UP
E	161353 THRU 162909
F	163092 & UP
G	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

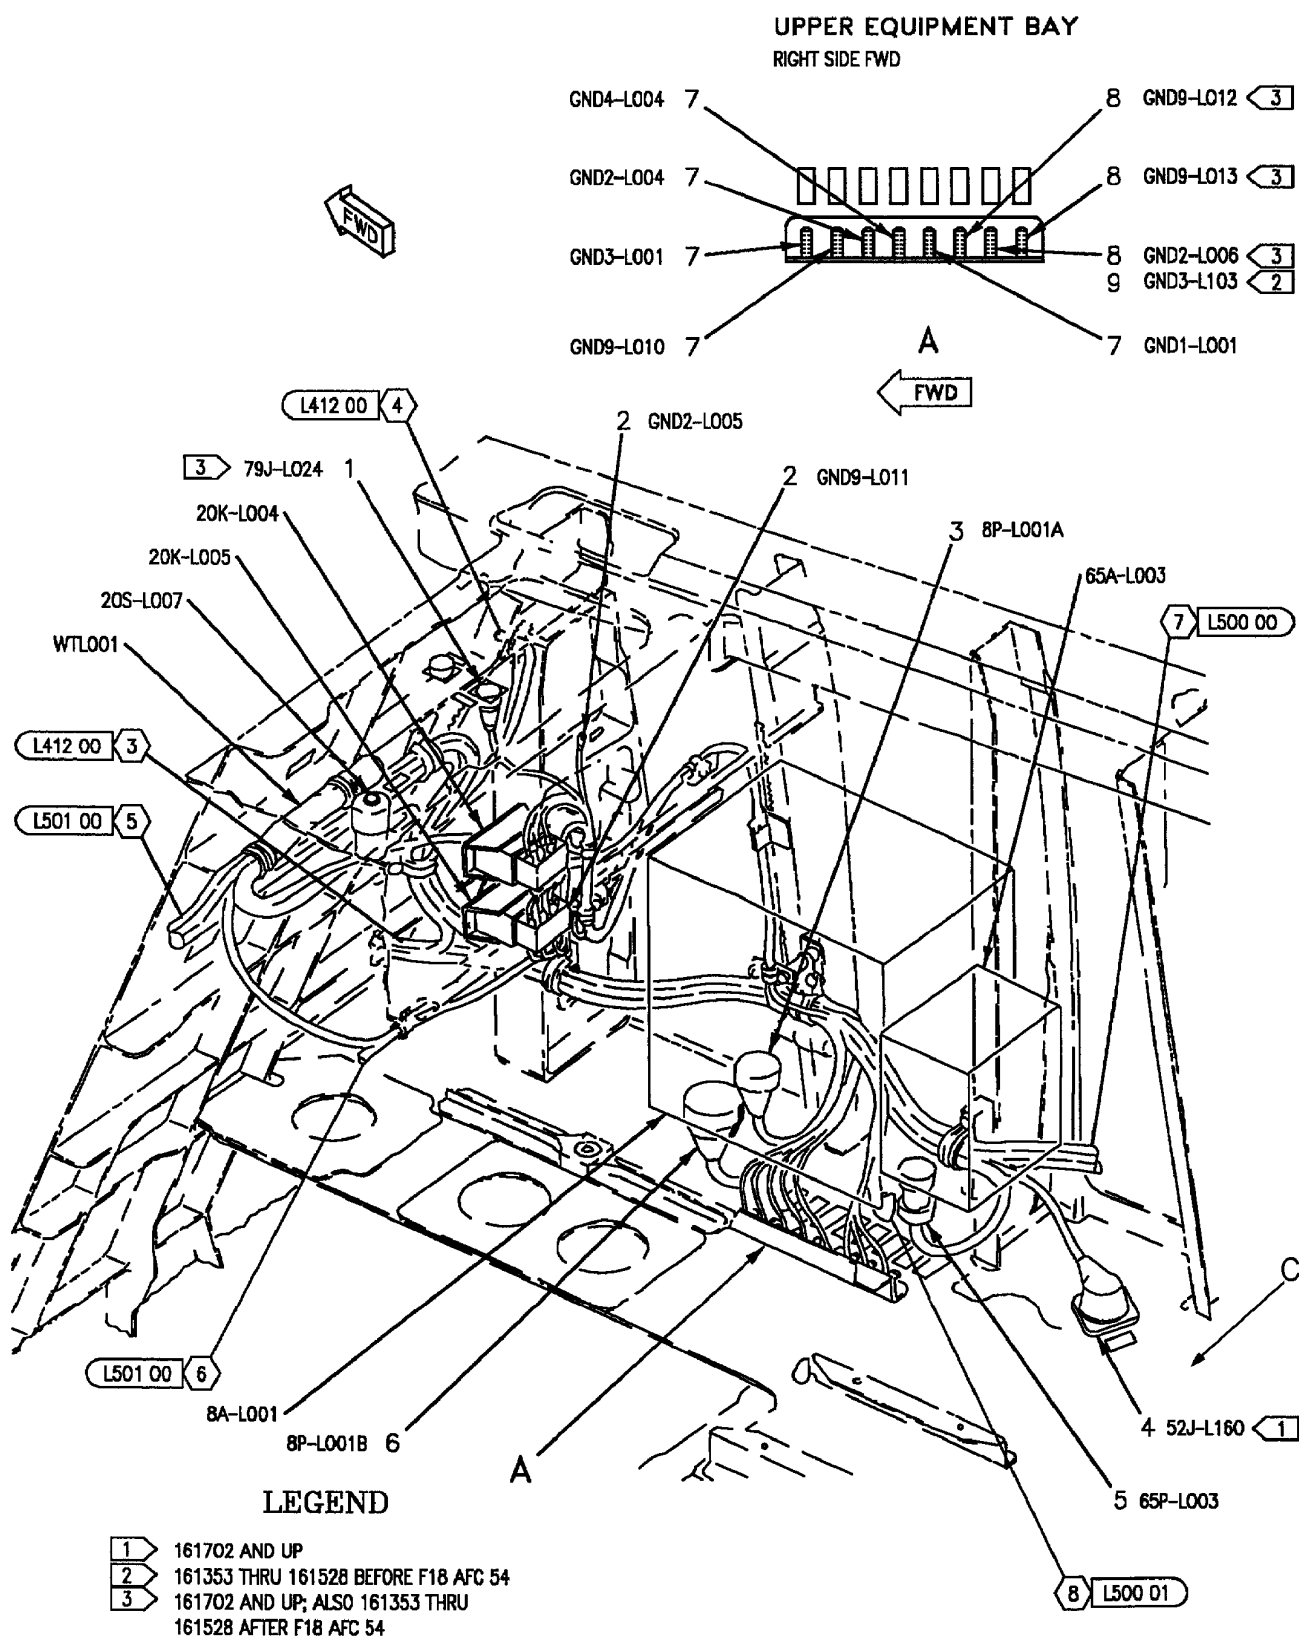

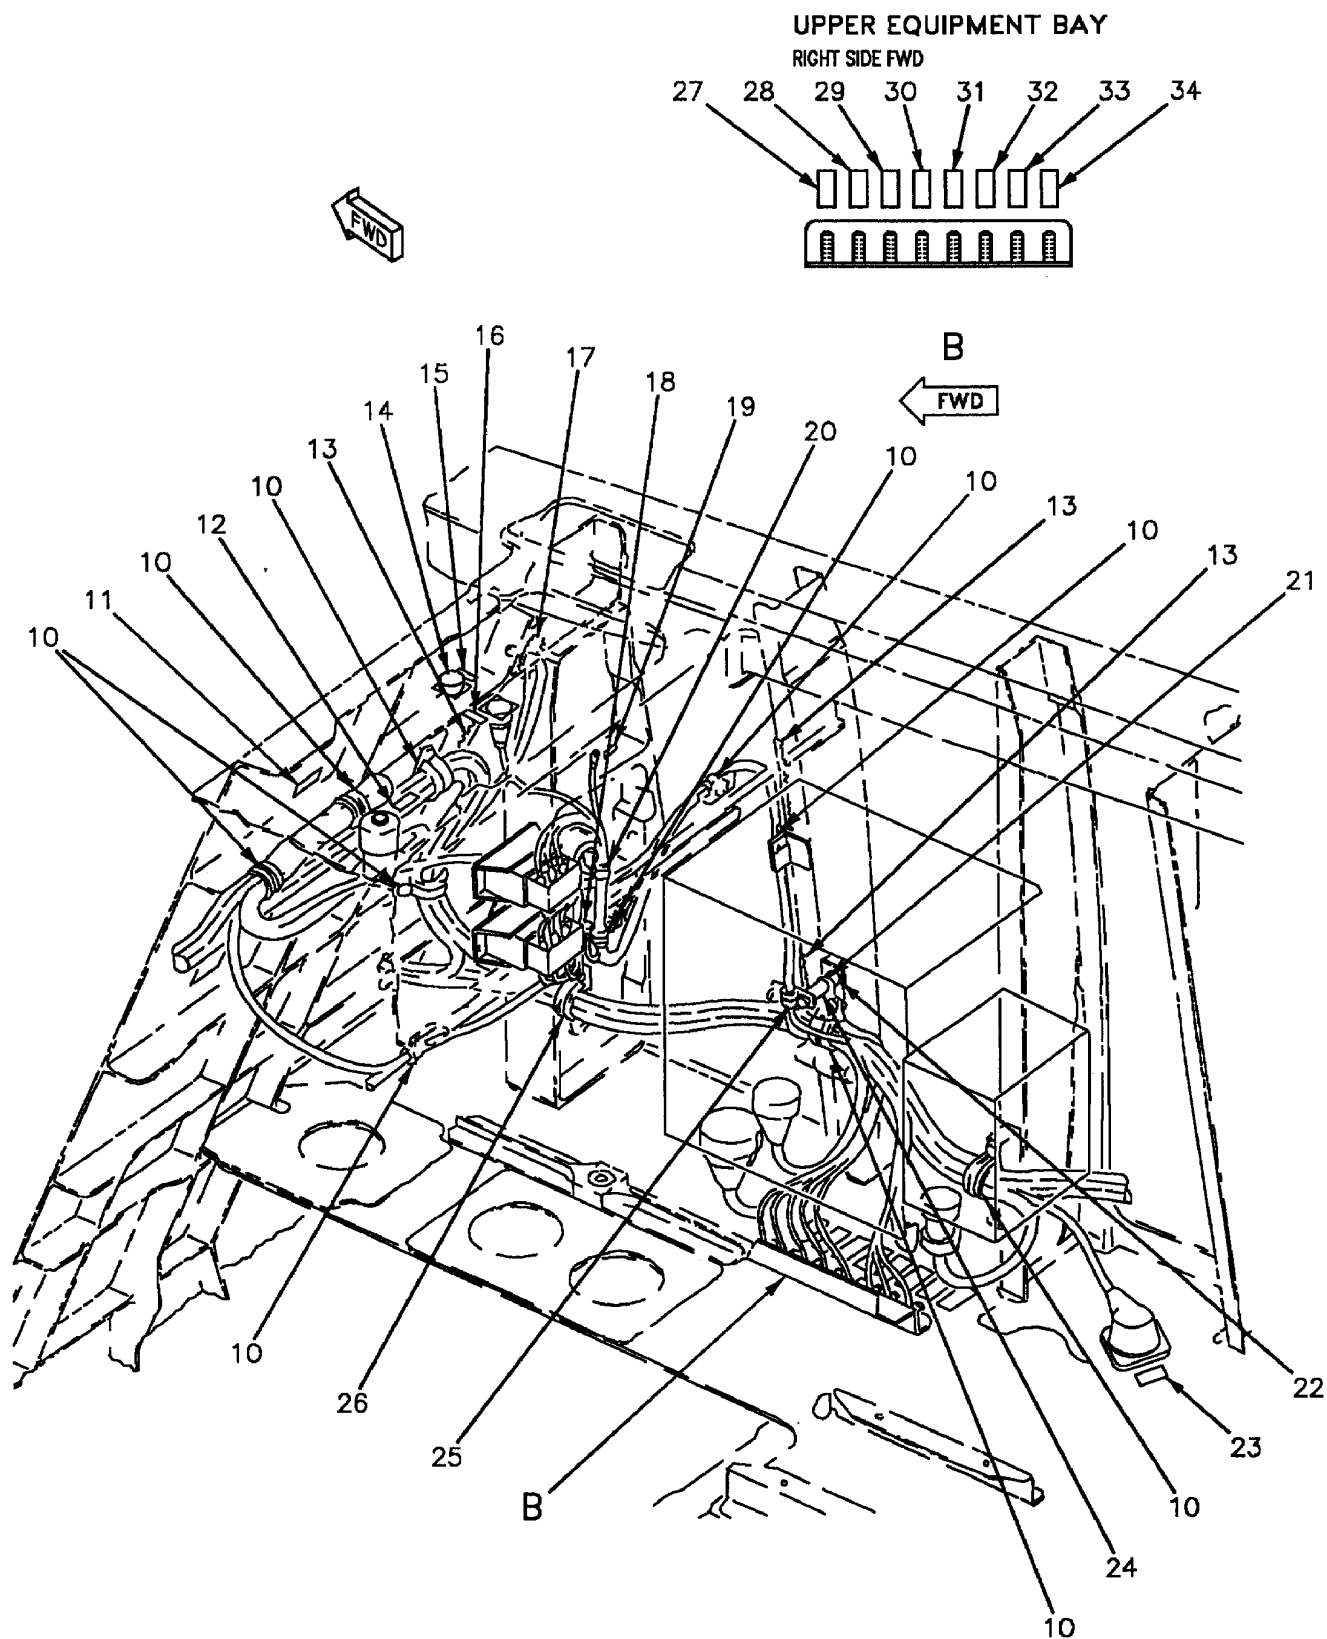

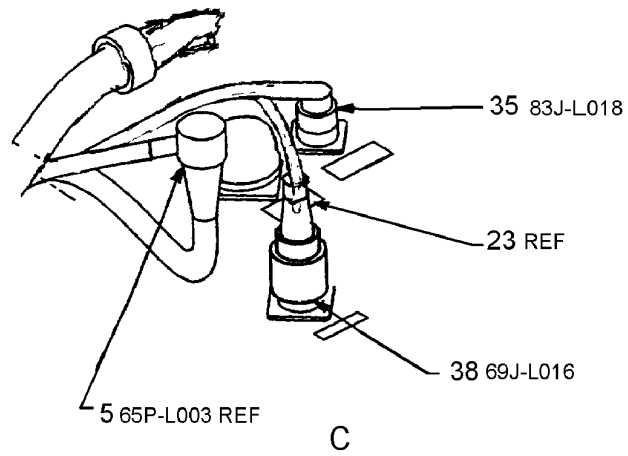

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T11B35S	CONNECTOR, RECEPTACLE (79J-L024)	1	A	PAOZZ
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
	07-0501-0063	SHIELDING GASKET, ELECTRICAL (57003)	1	A*	PAOZZ
		(MCDONNELL SPEC 5M988-30) (USE WITH INDEX 1)			
2	1214-0529	SEE ABOVE (64098)	1	A*	PAOZZ
	NAS1801-3-8	SCREW	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	4		PAOZZ
3	MS27467T17B35S	CONNECTOR, PLUG (8P-L001A)	1		PAOZZ
4	MS27656T17B35P	CONNECTOR, RECEPTACLE (52J-L160)	1	C	PAOZZ
	NAS600-8P	SCREW (AP)	4	C	PAOZZ
	AN960JD10L	WASHER (AP)	4	C	PAOZZ
	ST5M1427-18	GASKET (76301) (USE WITH INDEX 4)	1	C	PAOZZ
5	MS3476W14-19SX	CONNECTOR, PLUG (65P-L003)	1		PAOZZ
6	MS27467T25B35P	CONNECTOR, PLUG (8P-L001B)	1		PAOZZ
7	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 7)	5		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 7)	5		PAOZZ
8	MS21042L3	NUT	3	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 8)	3	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 8)	3	A	PAOZZ
9	MS21042L3	NUT	1	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 9)	1	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 9)	1	B	PAOZZ
10	MS21919WDG #	CLAMP	10		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	74A890601-2502	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES WTL001)			
12	74A890601-2557	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES 20S-L007)			
13	MS21266-2N	GROMMET	AR		PAOZZ
14	10-427405-119	DUMMY CONNECTOR, RECEPTACLE	1	A*	PAOZZ
		(77820) (MCDONNELL SPEC ST5M1402-11)			
	650FS001NF11	DUMMY CONNECTOR, RECEPTACLE	1	A*	PAOZZ
		(06324) (MCDONNELL SPEC ST5M1402-11)			
	1107-001-11	DUMMY CONNECTOR, RECEPTACLE	1	A*	PAOZZ
		(59976) (MCDONNELL SPEC ST5M1402-11)			
	NAS600-8P	SCREW (AP)	4	A	PAOZZ
	AN960JD4L	WASHER (AP)	4	A	PAOZZ
	1009-12	PLATE, RETAINING, ELECTRICAL CONNECTOR	1	A	PAOZZ
		(AP) (04967) (MCDONNELL SPEC ST3M546B3)			
	MS27502B11C	COVER (USE WITH INDEX 14)	1	A	PAOZZ
15	74A890601-2501	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (STOWAGE RECP)			
16	74A890601-2196	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES 79J-L024)			
17	MS21266-2N	GROMMET	AR		PAOZZ
18	74A890601-2445	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-L011)			
19	74A890601-2314	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND2-L005)			
20	MS21919WDG #	CLAMP	1		-

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
21	MS25281-R6	CLAMP (SUPERSEDES MS25281-6)	1		PAOZZ
22	NAS42DD6-16	SPACER	1		PAOZZ
23	74A890601-2304	MARKER, IDENTIFICATION - ELECTRICAL	1	C	MGOZZ
		(76301) (FOR REF DES 52J-L160)			
24	NAS42DD6-32	SPACER	1		PAOZZ
25	MS21919WDG #	CLAMP	1		-
	NAS673V12	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
26	MS21919WDG #	CLAMP	1		-
	NAS673V16	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
27	74A890601-2308	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND3-L001)			
28	74A890601-2307	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-L010)			
29	74A890601-2306	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND2-L004)			
30	74A890601-2305	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND4-L004)			
31	74A890601-2843	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND1-L001)			
32	74A890601-2202	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES GND9-L012)			
33	74A890601-2757	MARKER, IDENTIFICATION - ELECTRICAL	1	B	MGOZZ
		(76301) (FOR REF DES GND3-L103)			
	74A890601-2201	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES GND2-L006)			
34	74A890601-2204	MARKER, IDENTIFICATION - ELECTRICAL	1	A	MGOZZ
		(76301) (FOR REF DES GND9-L013)			
35	MS27656T13B35P	CONNECTOR, RECEPTACLE (83J-L018)	1	D	PAOZZ
	NAS600-8P	SCREW (AP)	4	D	PAOZZ
	NAS1149DN416J	WASHER (AP)	4	D	PAOZZ
	74A890601-2962	MARKER, IDENTIFICATION, ELECTRICAL	1	D	MGOZZ
36	D38999/20WC35PA	CONNECTOR, RECEPTACLE (69J-L016)	1	D	PAOZZ
	NAS600-8P	SCREW (AP)	4	D	PAOZZ
	NAS1149DN416J	WASHER (AP)	4	D	PAOZZ
	74A890601-3279	MARKER, IDENTIFICATION, ELECTRICAL	1	D	MGOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 54
B	161353 THRU 161528 BEFORE F18 AFC 54
C	161702 & UP
D	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292


CENTER FUSELAGE

DOOR 29L AND DOOR 32L
LEFT LEX

LEGEND

- 1 161353
- 2 161358 AND UP
- 3 161353 THRU 161519
- 4 161520 AND UP
- 5 161353 THRU 161519
BEFORE F18 AFC 27

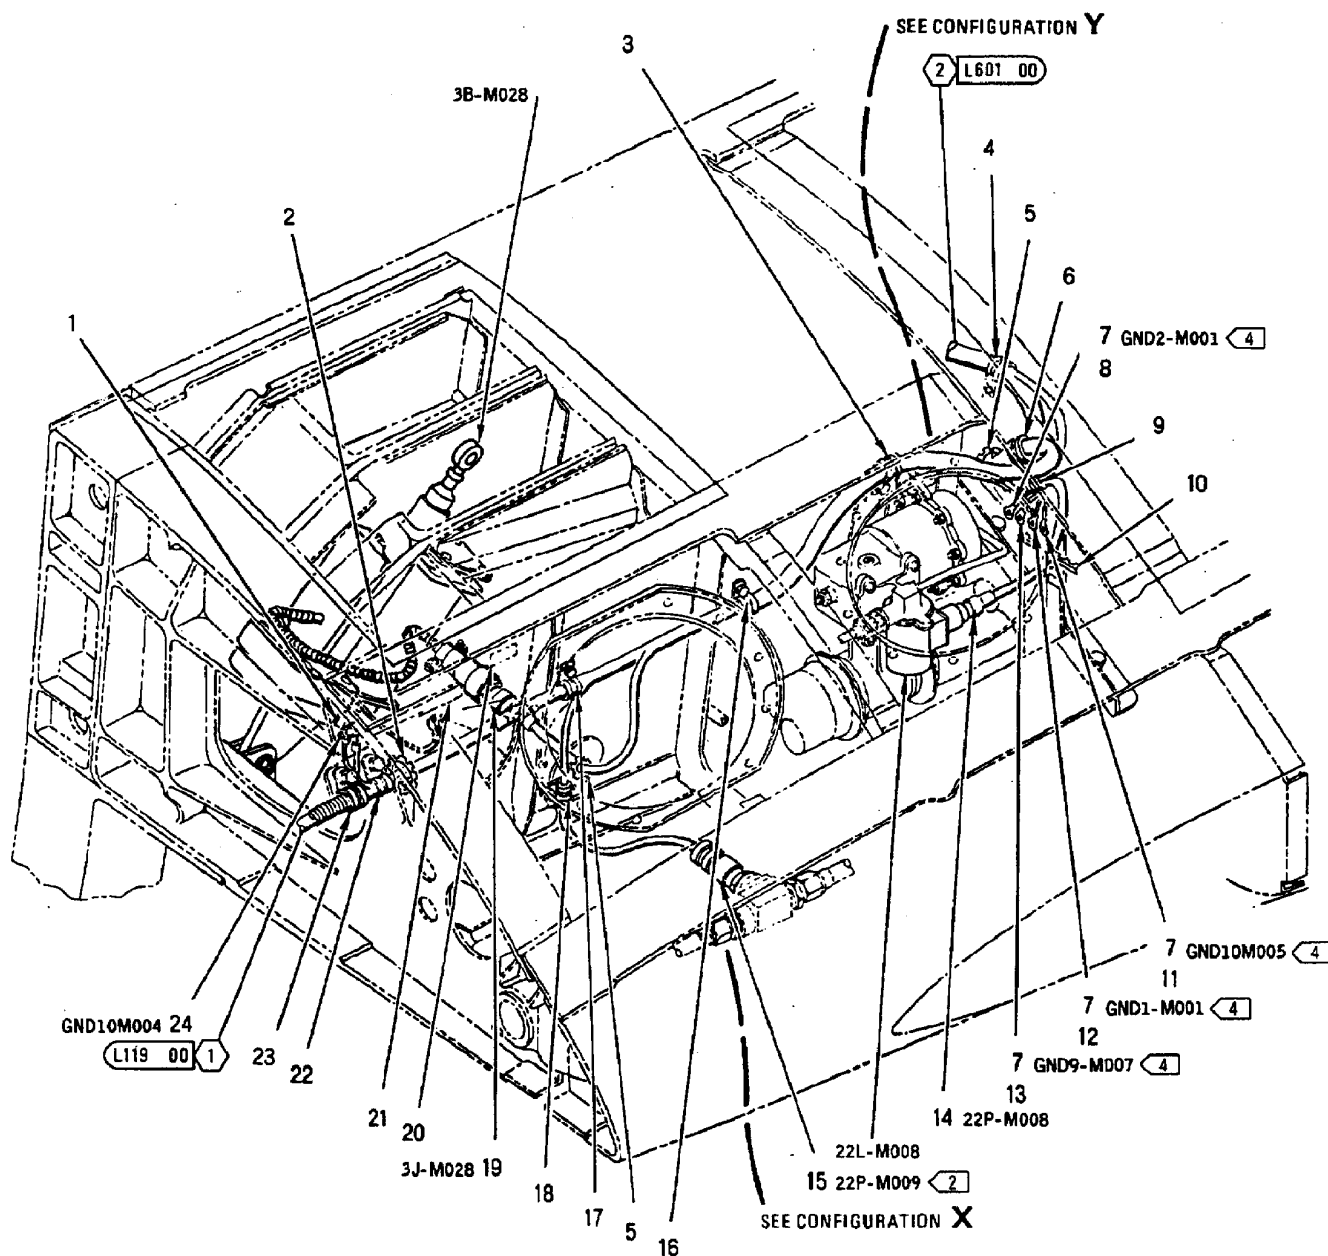

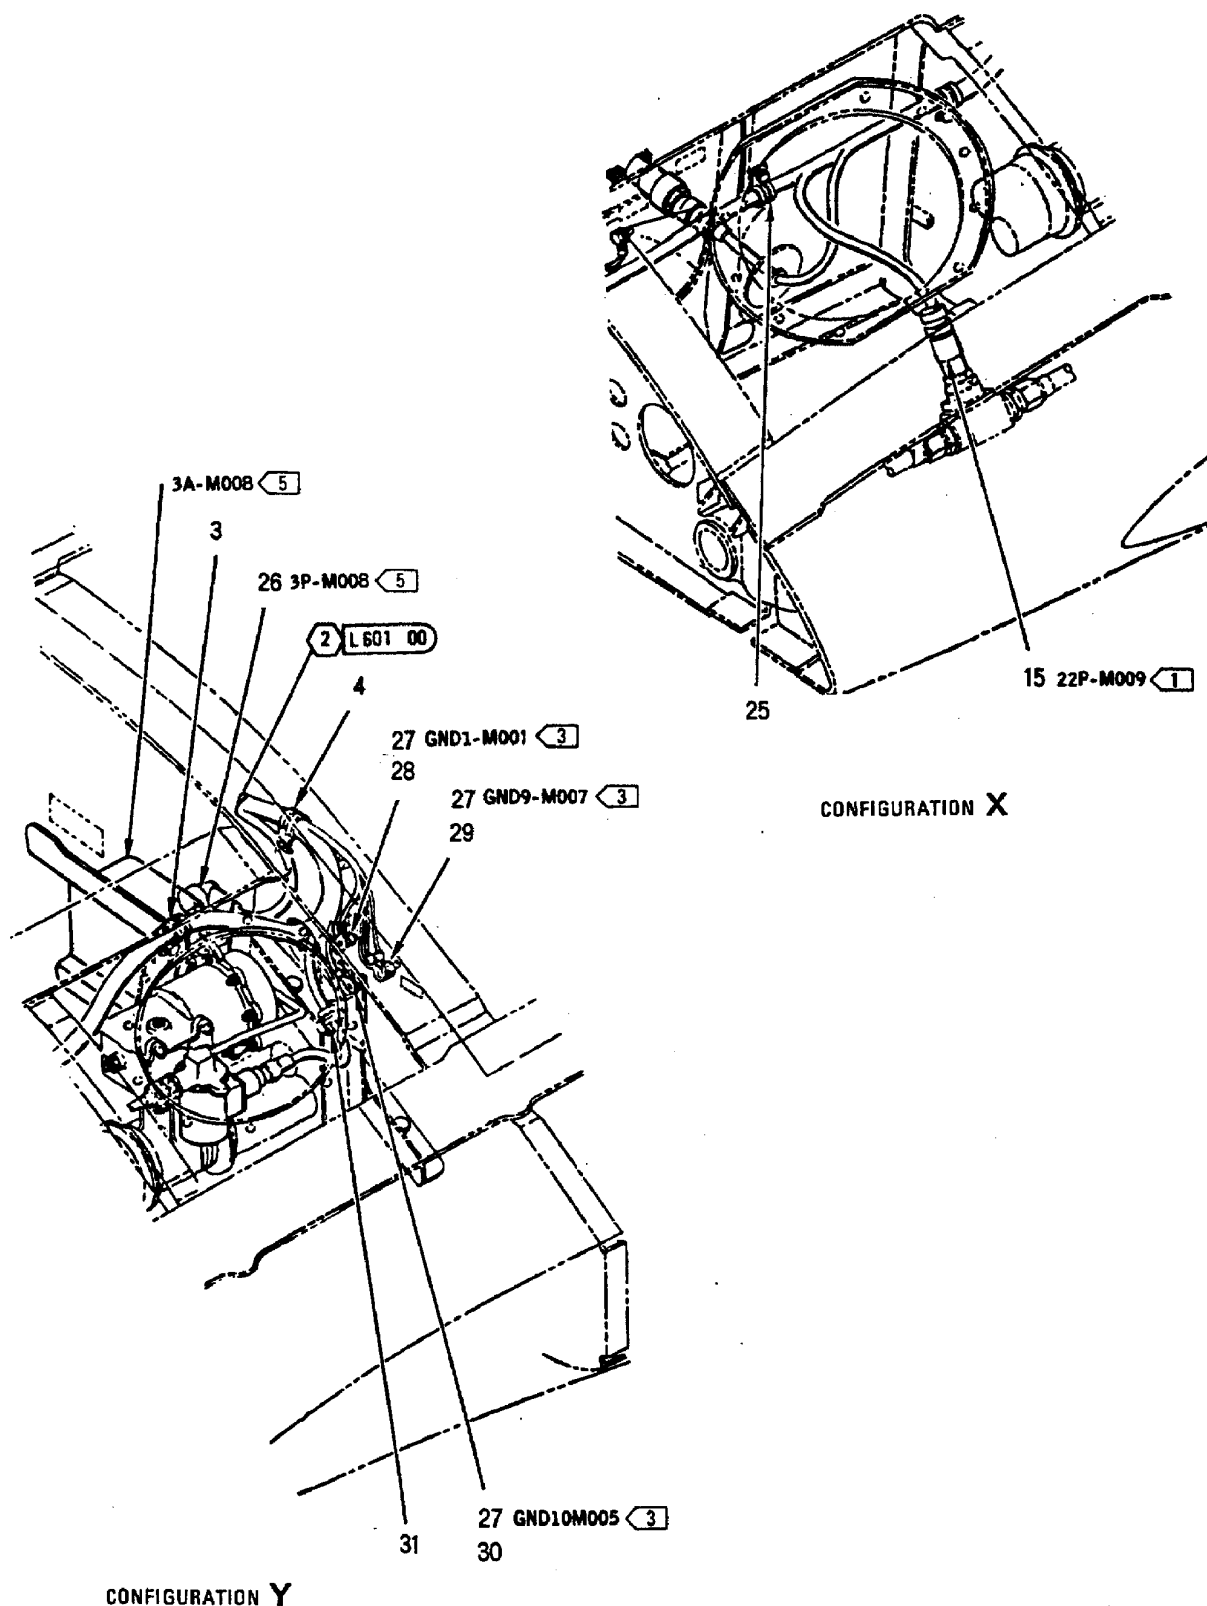


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885621-2346	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10M004)	1		MDOZZ
2	MS21266-3N	GROMMET	AR	C	PAOZZ
	NAS557-12C	GROMMET	1	D	PAOZZ
3	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	C*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	C*	PAOZZ
	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	NAS673V6	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
5	MS21266-3N	GROMMET	AR		PAOZZ
6	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
7	MS21042L3	NUT	4	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 7)	4	D	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 7)	4	D	PAOZZ
8	74A885621-2022	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-M001)	1	D	MDOZZ
9	MS21919WDG4	CLAMP	1	D	PAOZZ
10	MS21266-2N	GROMMET	AR	D	PAOZZ
11	74A885621-2347	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10M005)	1	D	MDOZZ
12	74A885621-2002	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-M001)	1	D	MDOZZ
13	74A885621-2429	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M007)	1	D	MDOZZ
14	MS27467T9B35S	CONNECTOR, PLUG (22P-M008)	1		PAOZZ
15	MS27467T9B35S	CONNECTOR, PLUG (22P-M009)	1		PAOZZ
16	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
18	MS21919WDG4	CLAMP	1	G	PAOZZ
	MS21919WDG7	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
19	MS27468T11B35S	CONNECTOR, RECEPTACLE (3J-M028)	1		PAOZZ
20	74A885621-2338	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 3B-M028)	1		MDOZZ
21	74A885621-2215	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 3J-M028)	2		MDOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
22	M85052/1-6	CLAMP	1	E	PAOZZ
	M85052/1-10	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
23	MS21919WDG #	CLAMP	1		-
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
24	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 24)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 24)	1		PAOZZ
25	M85052/1-6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
26	MS27467T11B35S	CONNECTOR, PLUG (3P-M008)	1	H	PAOZZ
27	MS21042L3	NUT	3	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 27)	3	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 27)	3	C	PAOZZ
28	74A885621-2002	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-M001)	1	C	MDOZZ
29	74A885621-2429	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M007)	1	C	MDOZZ
30	74A885621-2347	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10M005)	1	C	MDOZZ
31	M85052/1-4	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353
B	161358 & UP
C	161353 THRU 161519
D	161520 & UP
E	161353 THRU 161761
F	161925 & UP
G	161358 THRU 161519
H	161353 THRU 161519 BEFORE F18 AFC 27

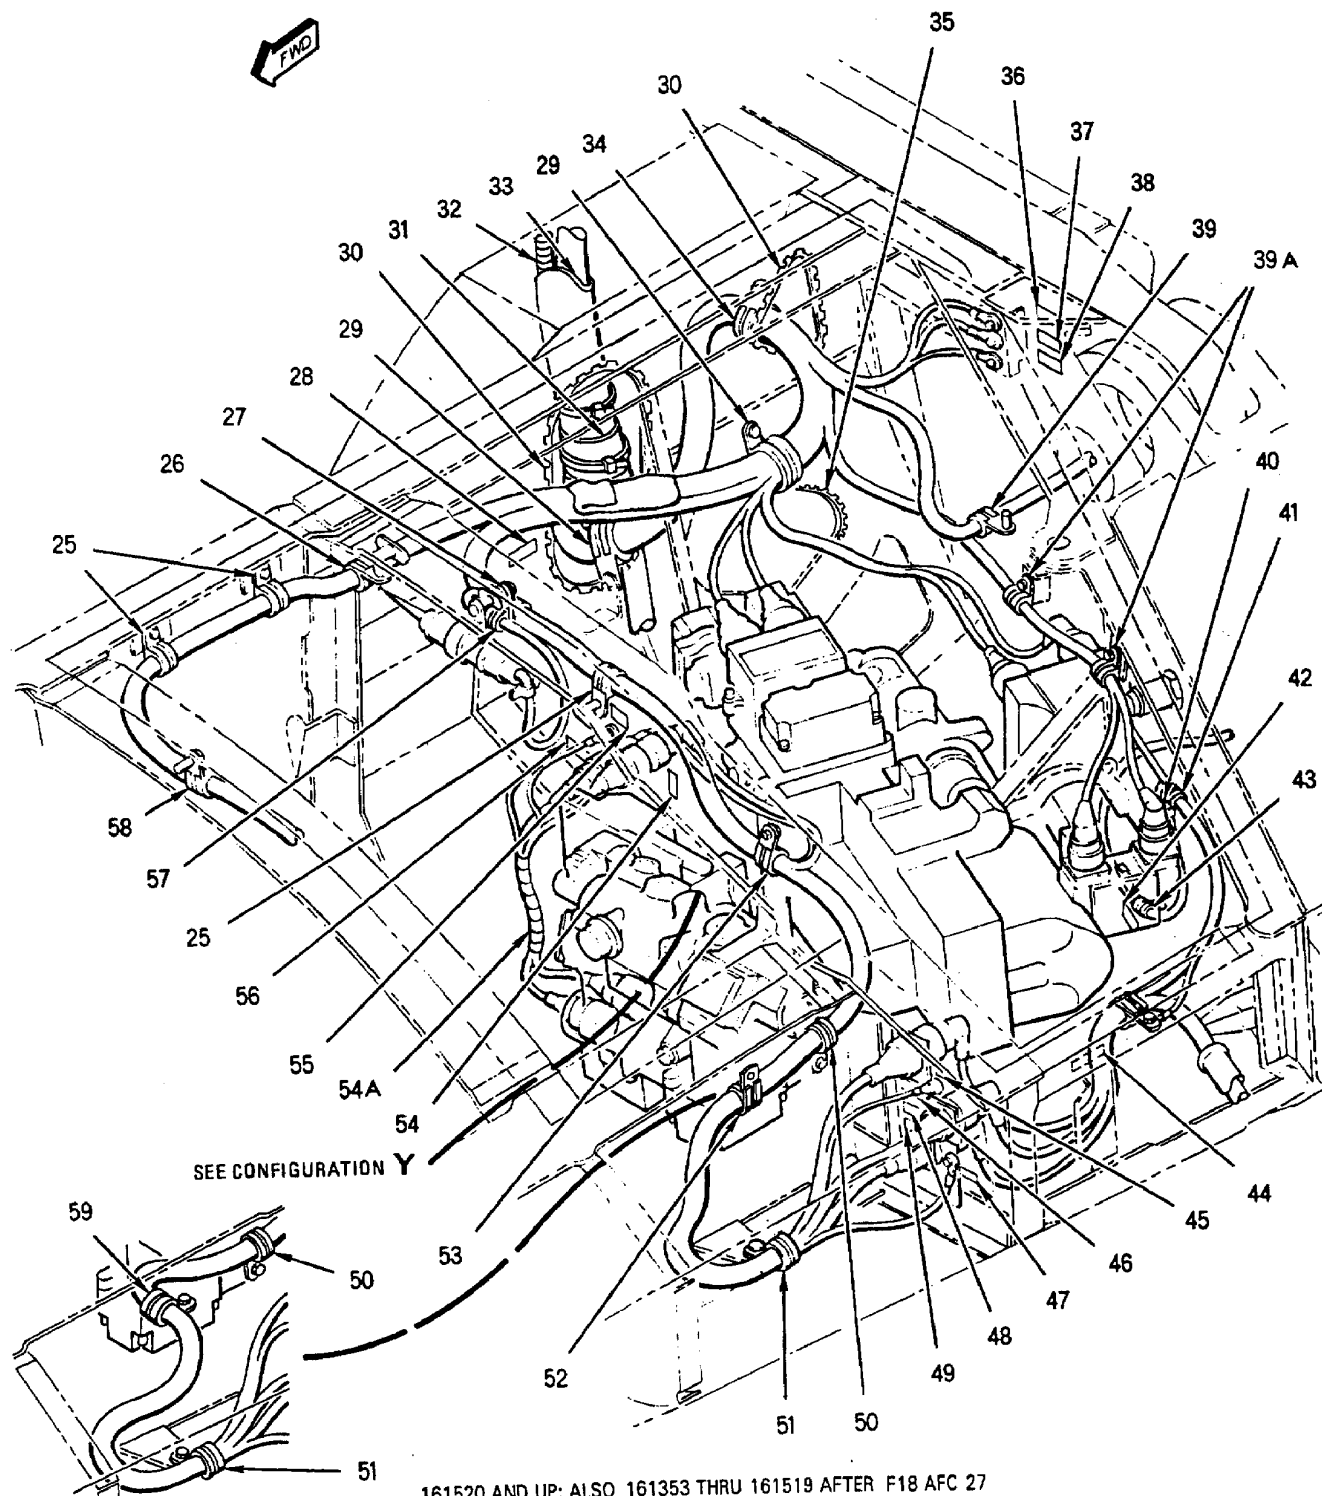CENTER FUSELAGE
DOOR 32L AND DOOR 34L
LEFT LEX

161520 AND UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27

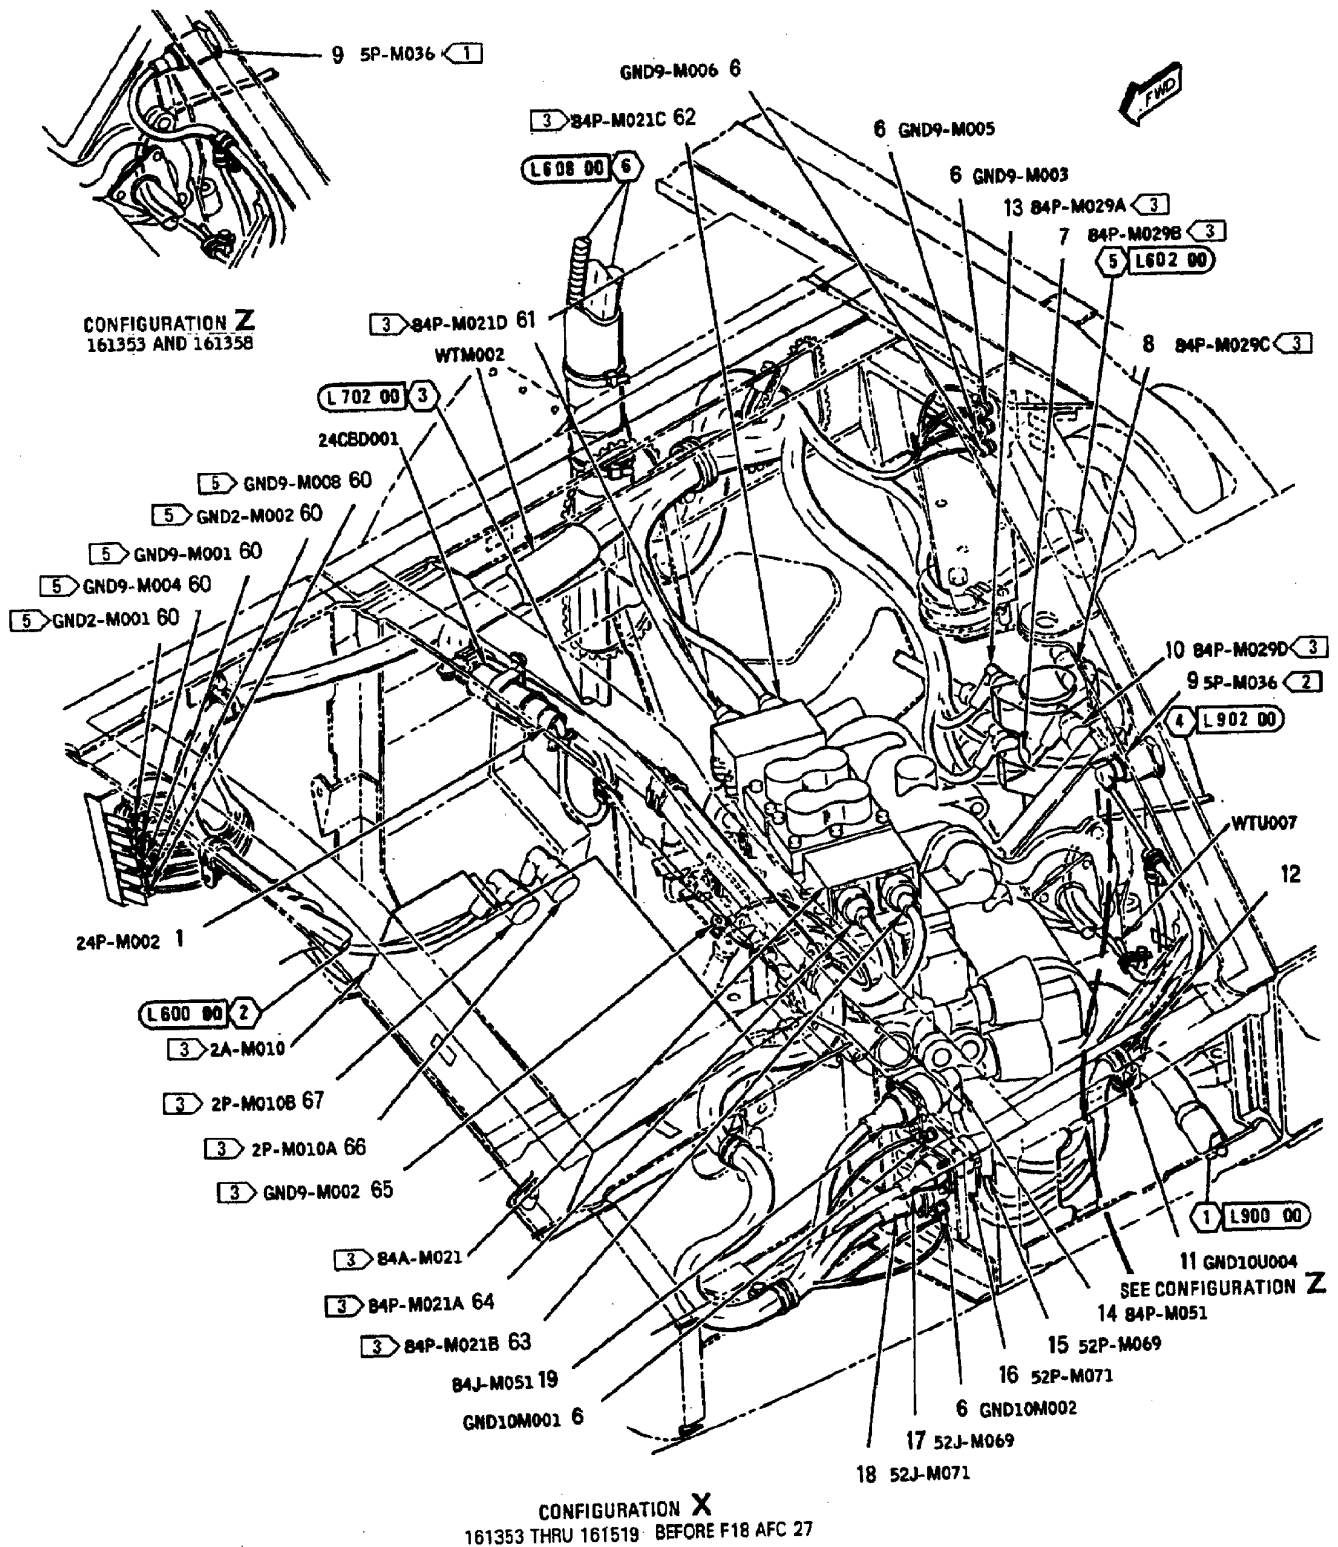

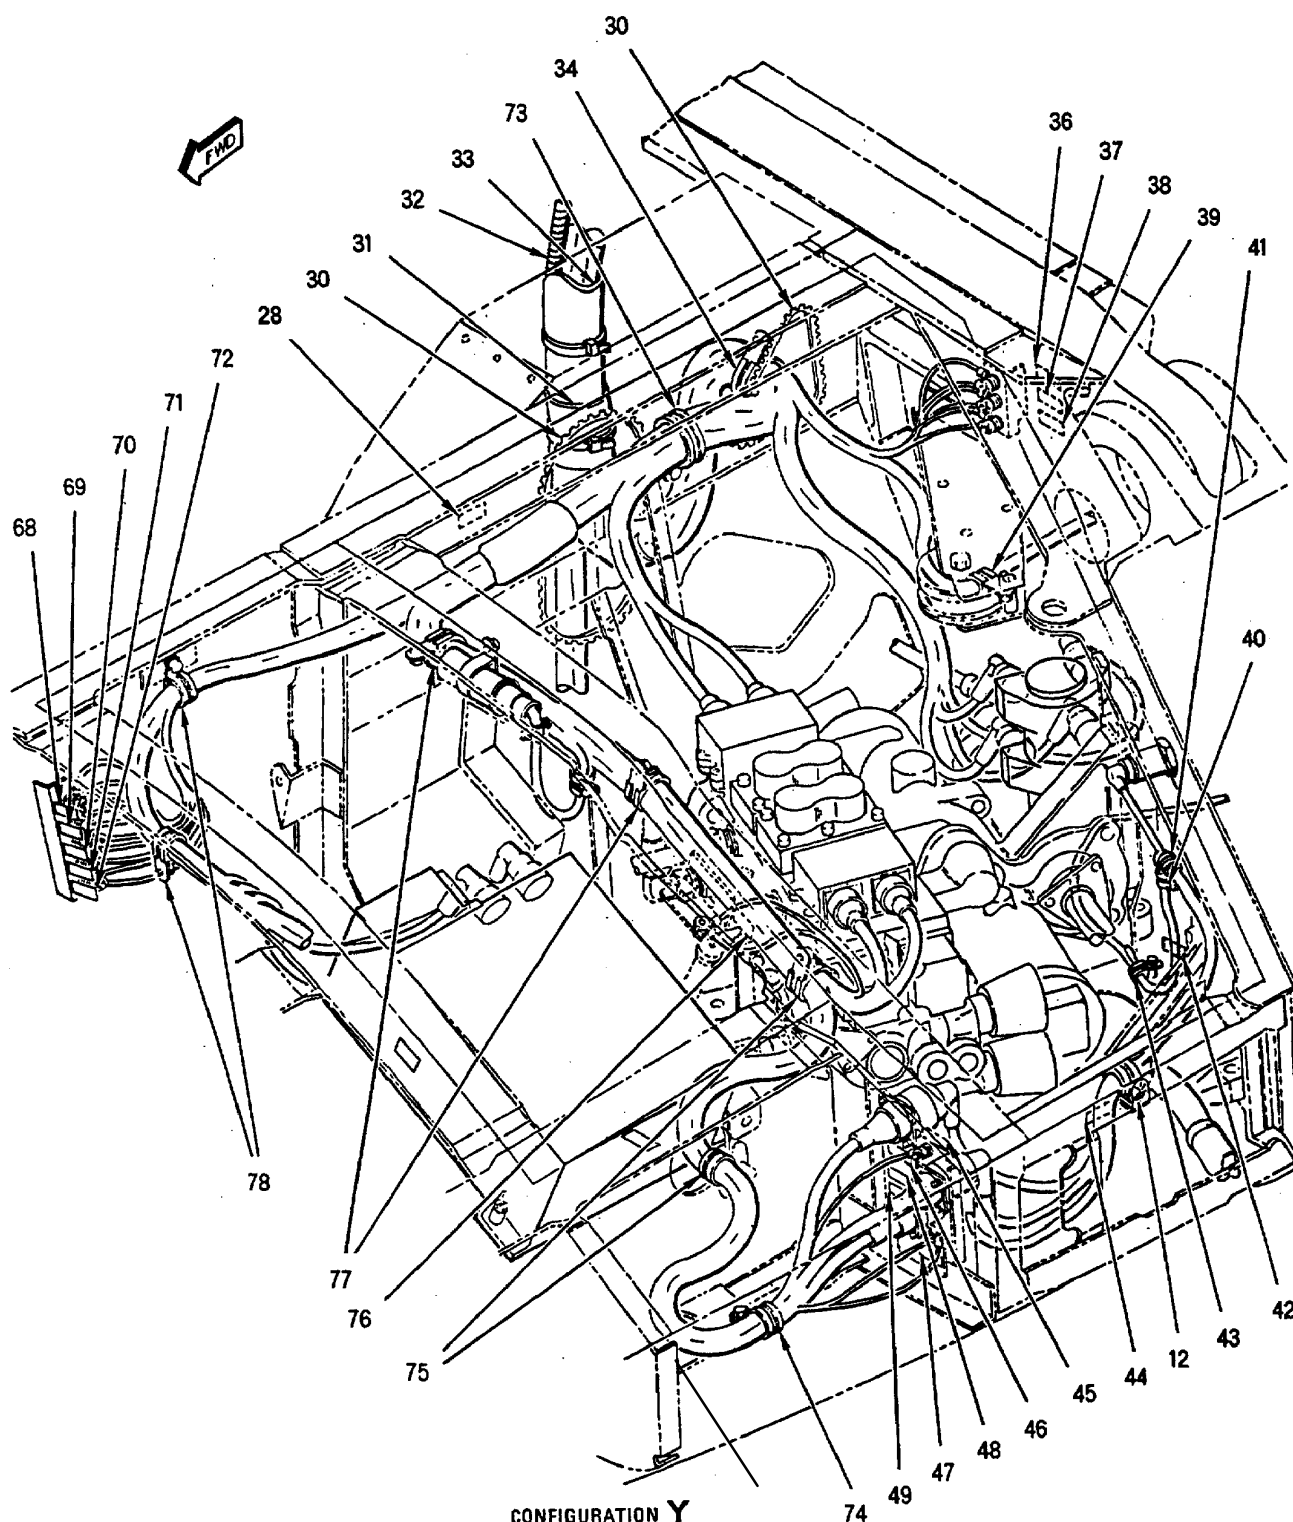

CONFIGURATION Y
161353 THRU 161519 BEFORE F18 AFC 27

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SA) (24P-M002)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-M002)	1	E	PAOZZ
2	MS21042L3	NUT	1	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	1	D	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 2)	2	D	PAOZZ
3	MS27467T13B35SC	CONNECTOR, PLUG (84P-M133)	1	D	PAOZZ
4	MS27467T13B35SA	CONNECTOR, PLUG (84P-M021A)	1	D	PAOZZ
5	MS27467T13B35SB	CONNECTOR, PLUG (84P-M021B)	1	D	PAOZZ
6	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	5		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	5		PAOZZ
7	MS27467T11B35SD	CONNECTOR, PLUG (84P-M029B)	1		PAOZZ
8	MS27467T11B35SA	CONNECTOR, PLUG (84P-M029C)	1		PAOZZ
9	MS27467T11B35S	CONNECTOR, PLUG (5P-M036)	1		PAOZZ
10	MS27467T11B35SB	CONNECTOR, PLUG (84P-M029D)	1		PAOZZ
11	NAS673V4	BOLT	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 11)	1		PAOZZ
12	MS21919WDG10	CLAMP	1		PAOZZ
13	MS27467T11B35S	CONNECTOR, PLUG (84P-M029A)	1		PAOZZ
14	MS27467T17B35P	CONNECTOR, PLUG (84P-M051)	1		PAOZZ
15	MS27467T15B35P	CONNECTOR, PLUG (52P-M069)	1		PAOZZ
16	MS27467T13B98P	CONNECTOR, PLUG (52P-M071)	1		PAOZZ
17	MS27656T15B35S	CONNECTOR, RECEPTACLE (52J-M069)	1		PAOZZ
	NAS1801-04-6	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	8		PAOZZ
	NAS1291C04M	NUT (AP)	4		PAOZZ
18	MS27656T13B98S	CONNECTOR, RECEPTACLE (52J-M071)	1		PAOZZ
	NAS1801-04-6	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	8		PAOZZ
	NAS1291C04M	NUT (AP)	4		PAOZZ
19	MS27656T17B35S	CONNECTOR, RECEPTACLE (84J-M051)	1		PAOZZ
	NAS1801-04-6	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	8		PAOZZ
	NAS1291C04M	NUT (AP)	4	D	PAOZZ
20	MS27467T13B35SC	CONNECTOR, PLUG (84P-M110B)	1	D	PAOZZ
21	MS27467T13B35S	CONNECTOR, PLUG (84P-M110A)	1	D	PAOZZ
22	MS27467T13B35S	CONNECTOR, PLUG (84P-M132)	1	D	PAOZZ
23	MS27468T13B35P	CONNECTOR, PLUG (84J-M132)	1	D	PAOZZ
24	MS27468T13B35PC	CONNECTOR, PLUG (84J-M133)	1	D	PAOZZ
25	MS21919WDG6	CLAMP	3	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
26	MS21919WDG6	CLAMP	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
27	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	D*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
28	74A885621-2147	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTM002)	1		MDOZZ
29	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	2	K*	PAOZZ
	830WD18G	SEE ABOVE (83930)	2	K*	PAOZZ
	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	2	D*	PAOZZ
	830WD16G	SEE ABOVE (83930)	2	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
30	MS21266-3N	GROMMET	AR		PAOZZ
31	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	1		PAOZZ
32	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
33	74A885639-2003	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	1		PAOZZ
34	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	C*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	D*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
35	MS21266-3N	GROMMET	AR		PAOZZ
36	74A885621-2074	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-M003)			
37	74A885621-2427	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-M005)			
38	74A885621-2428	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-M006)			
39	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V13	BOLT (AP)	1	H	PAOZZ
	NAS673V15	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-40	SPACER (AP)	2		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
39A	MS21919WDG4	CLAMP	2	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	SEE ABOVE (76530)	1	D*	PAOZZ
40	MS21919WDG3	CLAMP (AP)	1		PAOZZ
	NAS673V3	BOLT (AP)	1	R	PAOZZ
	NAS673V19	BOLT (AP)	1	P	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-64	SPACER (AP)	1	D	PAOZZ
41	MS21919WDG5	CLAMP	1		PAOZZ
42	74A890601-2242	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES WTU007)			
43	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
44	74A890601-2579	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND10U004)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
45	74A885621-2106	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10M001)	1		MDOZZ
46	74A885621-2141	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-M051)	1		MDOZZ
47	74A885621-2276	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10M002)	1		MDOZZ
48	74A885621-2143	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-M069)	2		MDOZZ
49	74A885621-2144	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-M071)	2		MDOZZ
50	MS21919WDG7	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
51	MS21919WDG6	CLAMP	1	D*	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
52	MS21919WDG6	CLAMP	1	G*	PAOZZ
	NAS673V3	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	G*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	G*	PAOZZ
53	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
54	74A885621-2603	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-M132)	2	D	MDOZZ
54A	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	M*	PAOZZ
	SC-606-1/4	SEE ABOVE (48227)	AR	M*	PAOZZ
	T0004	SEE ABOVE (66794)	AR	N*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	N*	PAOZZ
	500024-3	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TB8)	AR	N*	PAOZZ
	95349	SEE ABOVE (78570)	AR	N*	PAOZZ
	T0008	SEE ABOVE (66794)	AR	N*	PAOZZ
55	74A885621-2602	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M011)	1	D	MDOZZ
56	74A885621-2604	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-M133)	2	D	MDOZZ
57	MS21919WDG5	CLAMP	1	D	PAOZZ
58	MS21919WDG6	CLAMP	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
59	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	F*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
60	MS25082-3	NUT	5	L	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	MS35338-43	WASHER (USE WITH INDEX 60)	5	L	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 60)	5	L	PAOZZ
61	MS27467T13B35SC	CONNECTOR, PLUG (84P-M021D)	1	C	PAOZZ
62	MS27467T13B35SB	CONNECTOR, PLUG (84P-M021C)	1	C	PAOZZ
63	MS27467T13B35SA	CONNECTOR, PLUG (84P-M021B)	1	C	PAOZZ
64	MS27467T13B35S	CONNECTOR, PLUG (84P-M021A)	1	C	PAOZZ
65	MS25082-3	NUT	1	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 65)	1	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 65)	1	C	PAOZZ
66	MS27467T15B35S	CONNECTOR, PLUG (2P-M010A)	1	C	PAOZZ
67	MS27467T15B35P	CONNECTOR, PLUG (2P-M010B)	1	C	PAOZZ
68	74A885621-2022	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-M001)	1	L	MDOZZ
69	74A885621-2075	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M004)	1	L	MDDZZ
70	74A885621-2072	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M001)	1	L	MDDZZ
71	74A885621-2431	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-M002)	1	L	MDDZZ
72	74A885621-2430	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M008)	1	L	MDDZZ
73	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	A*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
74	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	C*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
75	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	2	C*	PAOZZ
	830WD12G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
76	74A885621-2073	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-M002)	2	C	MDDZZ
77	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	2	C*	PAOZZ
	830WD16G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
78	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	2	C*	PAOZZ
	830WD9G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE	USABLE ON
A	161353 THRU 161359 BEFORE F18 AFC 27
B	161361 & UP
C	161353 THRU 161519 BEFORE F18 AFC 27
D	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27
E	161353 THRU 161761
F	161520 THRU 161741
G	161742 & UP
H	161353 THRU 161705
J	161706 & UP
K	161361 THRU 161519 BEFORE F18 AFC 27
L	161353 THRU 161519
M	161520 THRU 161761
N	161925 & UP
P	161520 & UP
R	161353 THRU 161519

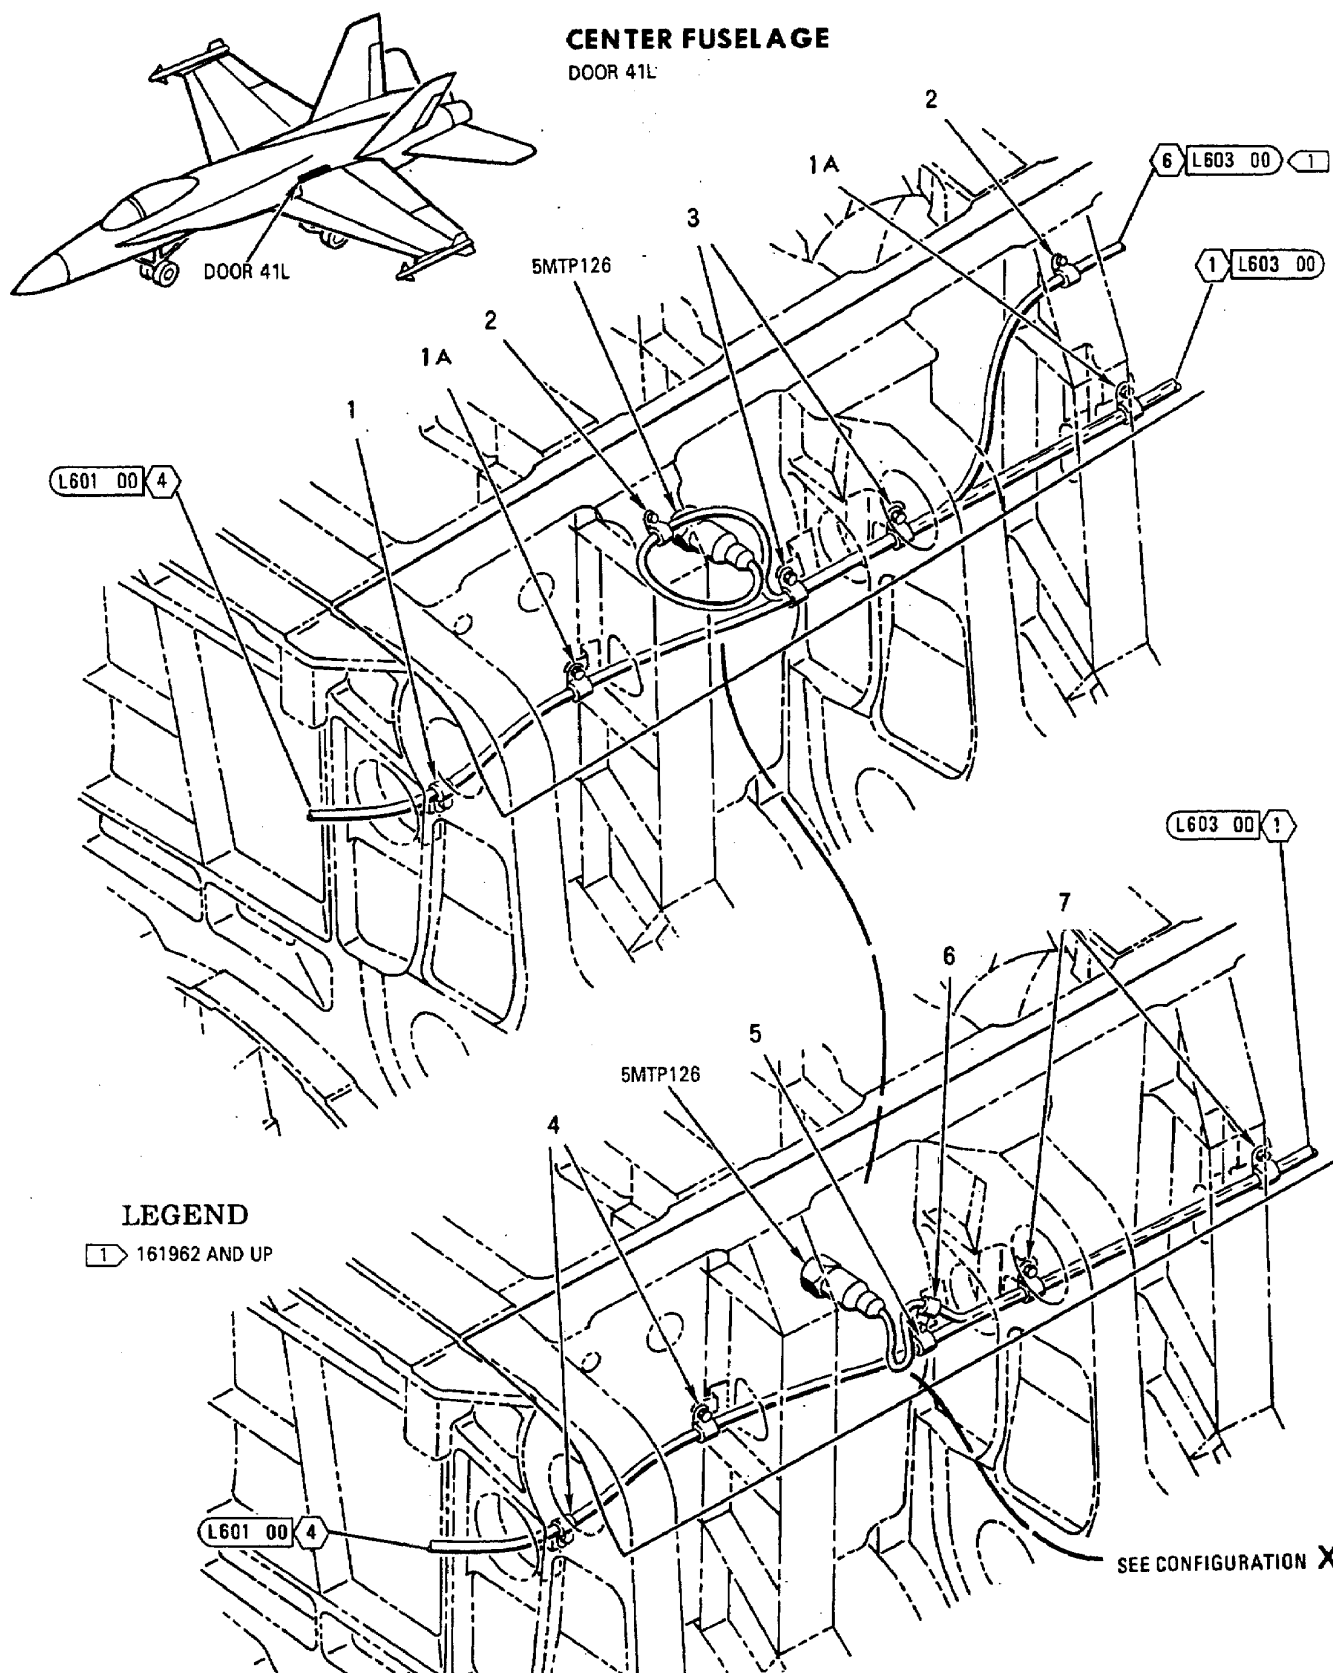

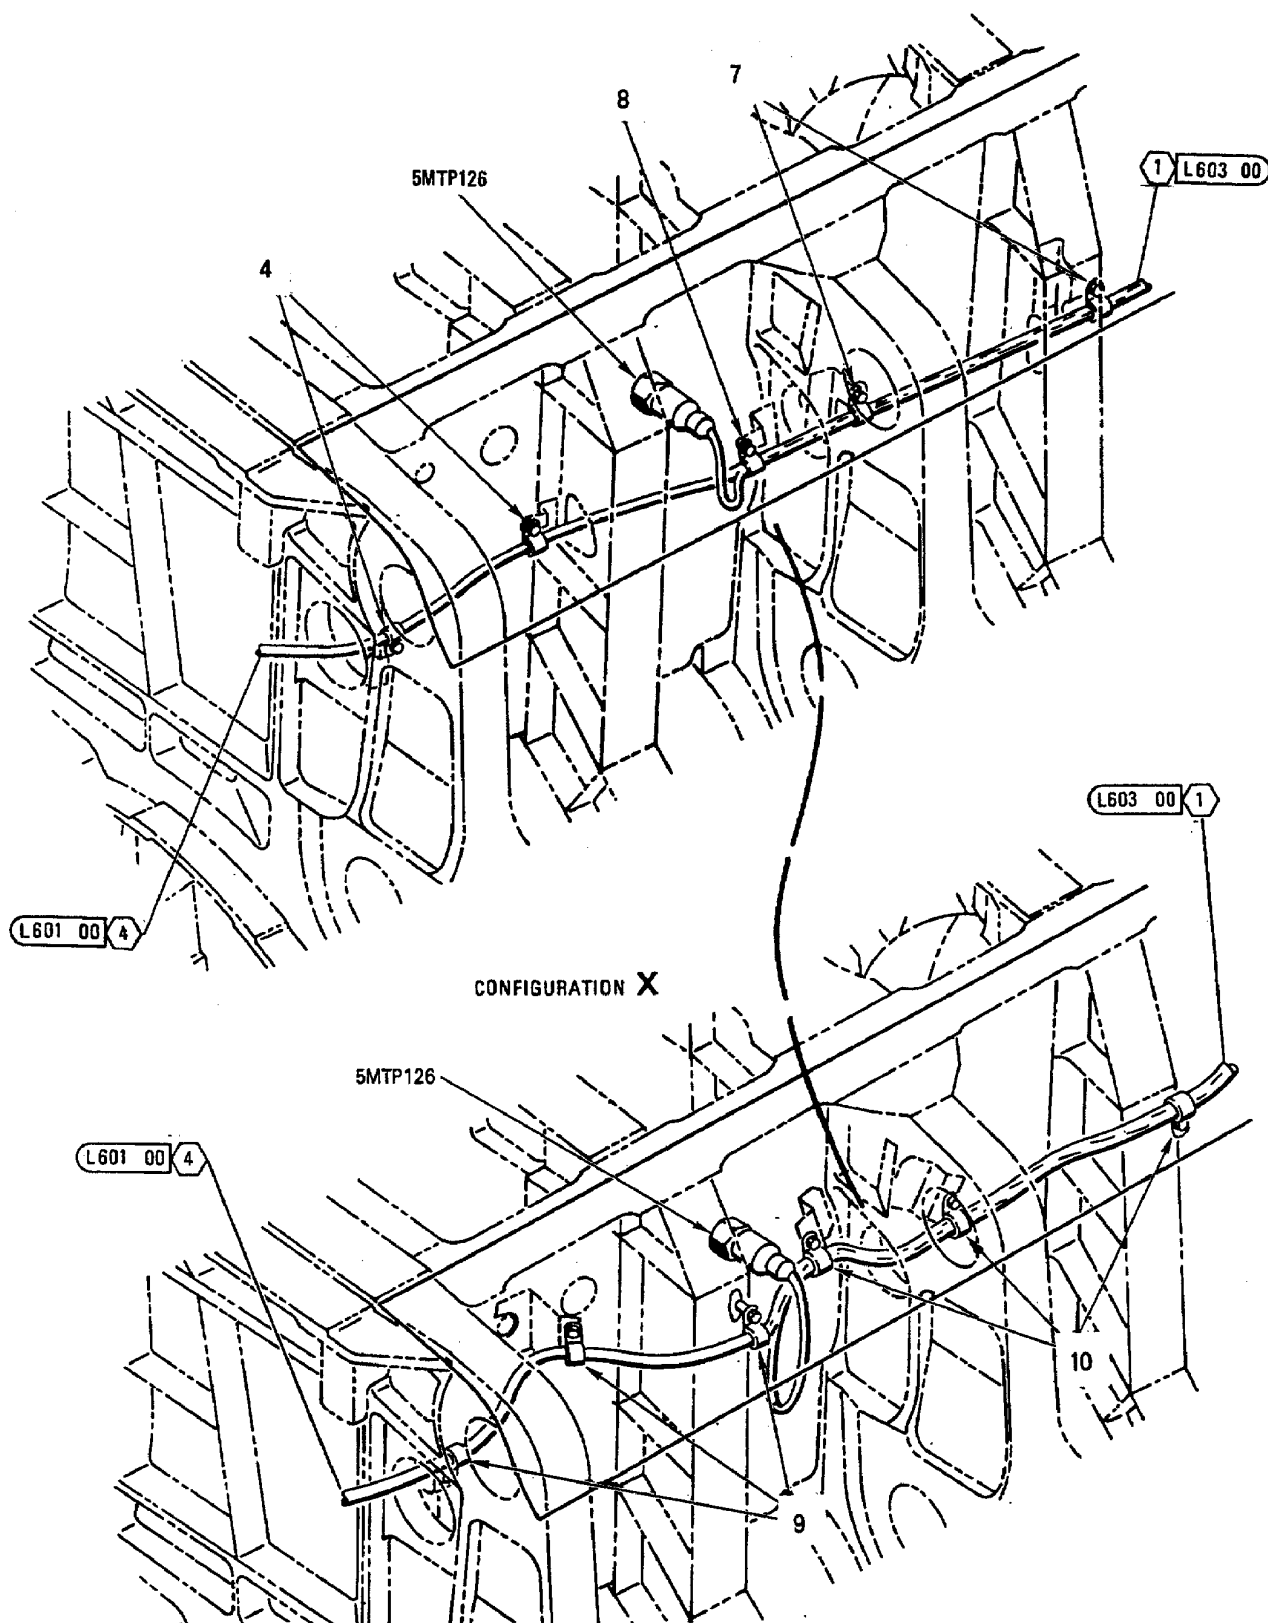


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG6	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	NAS673V5	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
1A	MS21919WDG6	CLAMP	2	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
2	MS21919WDG2	CLAMP	2	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
3	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	2	E*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	2	E*	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
4	MS21919WDG6	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
5	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	D*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	2	D	PAOZZ
6	M85052/1-2	CLAMP	1	D	PAOZZ
7	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	2	B*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	2	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
8	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	C*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
9	MS21919WDG6	CLAMP	3	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
10	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	3	A*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	3	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161741
B	161742 THRU 161961
C	161742 THRU 161957
D	161958 THRU 161961
E	161962 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		F						161354 THRU 162427			
		G						162836 & UP			

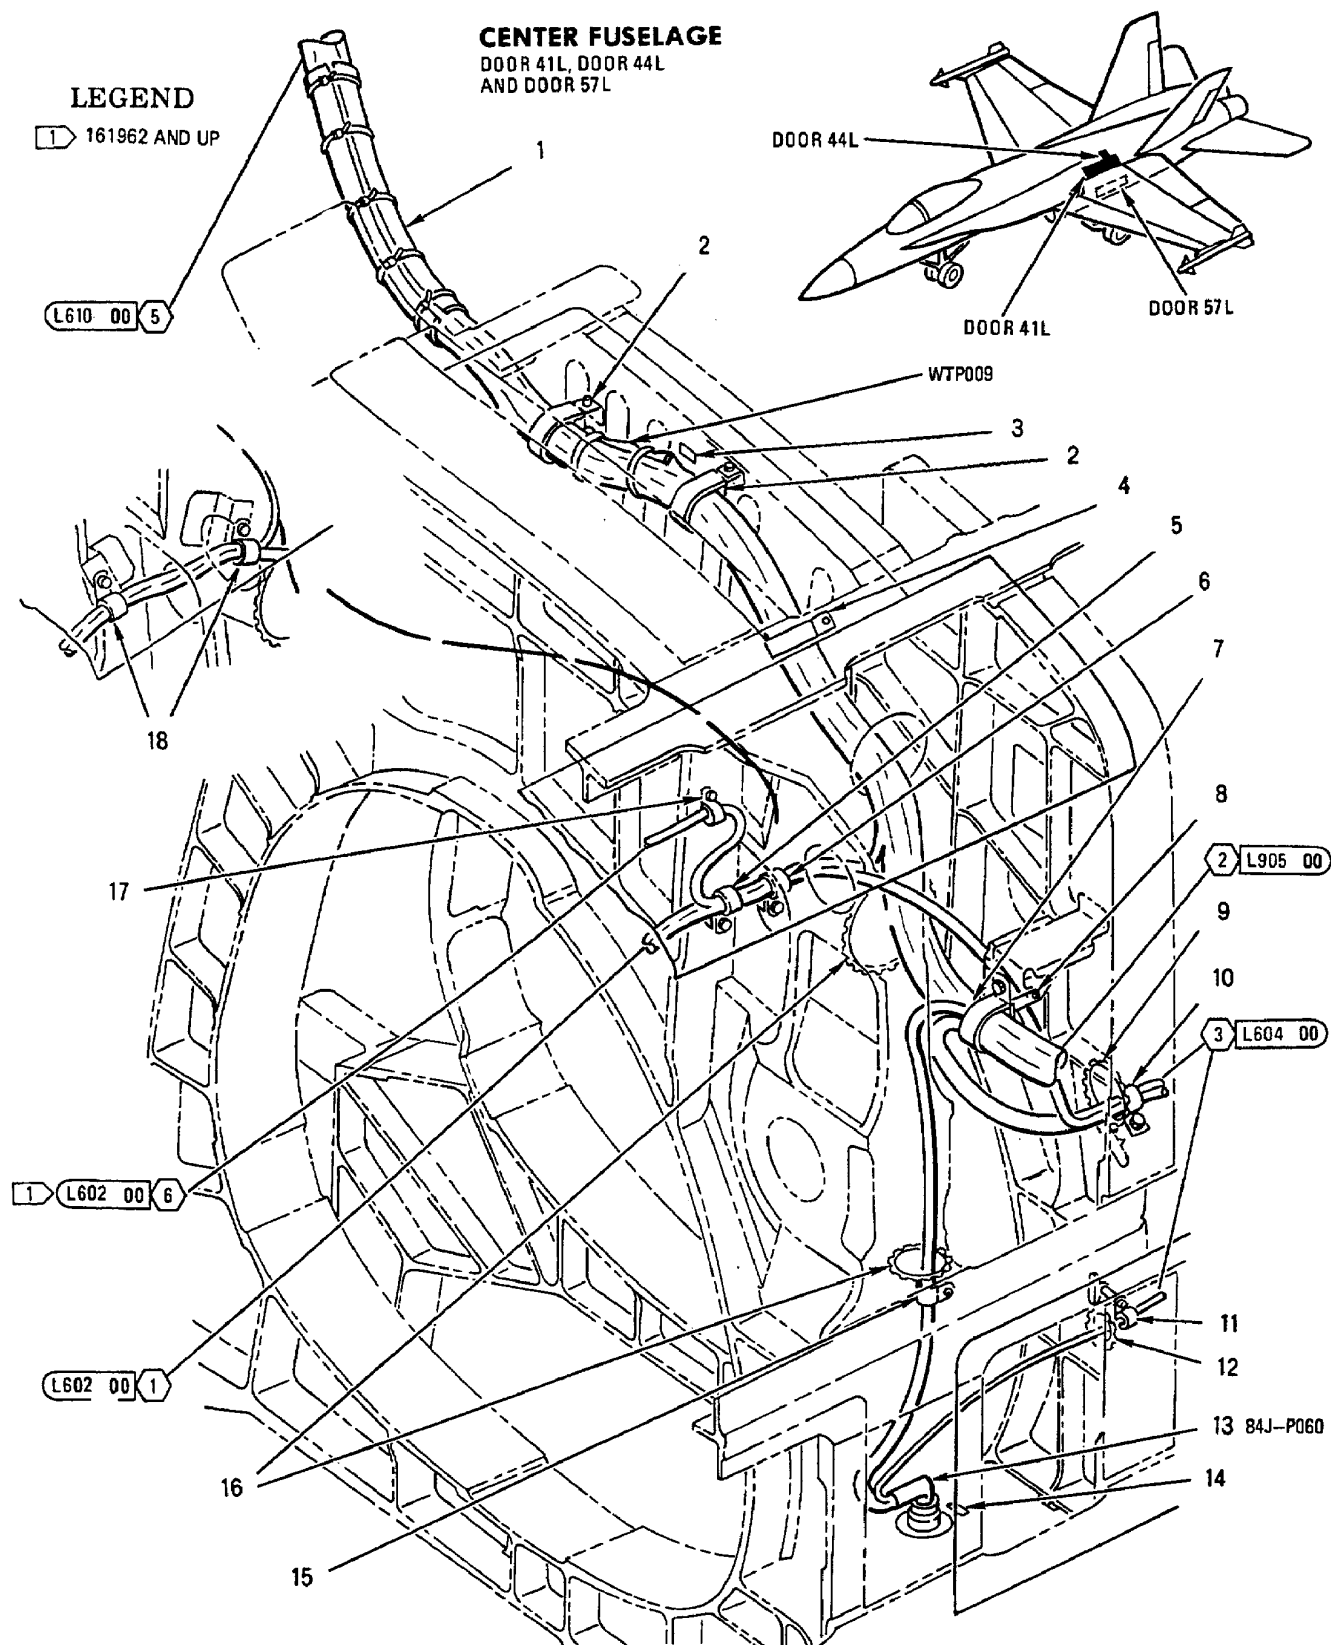


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885639-2003	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	5	B	PAOZZ
	PLT4HC30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)	5	C*	PAOZZ
2	08403	SEE ABOVE (16956)	5	C*	PAOZZ
	M85052/1-16	CLAMP	2		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
3	74A885621-2161	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTP009)	1		MDOZZ
4	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V6	BOLT (AP)	1	H	PAOZZ
	NAS673V12	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-24	SPACER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
5	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
6	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	NAS673V5	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
7	JM44LC33WD20	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D20)	1	*	PAOZZ
	830WD20G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS21266-3N	GROMMET	AR		PAOZZ
10	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
11	AN960JD10L	WASHER (AP)	1		PAOZZ
	M85052/1-2	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
12	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	MS21266-5N	GROMMET	AR		PAOZZ
13	MS27468T15B35P	CONNECTOR, RECEPTACLE (84J-P060)	1		PAOZZ
14	74A885621-2206	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P060)	1		MDOZZ
15	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS21266-()N #	GROMMET	AR		-
17	MS21919WDG2	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	2	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161358 & UP
B	161353 THRU 161741
C	161742 & UP
D	161966 & UP
E	161962 & UP
F	161742 THRU 162473
G	162474 & UP
H	161353 THRU 162477
J	162826 & UP

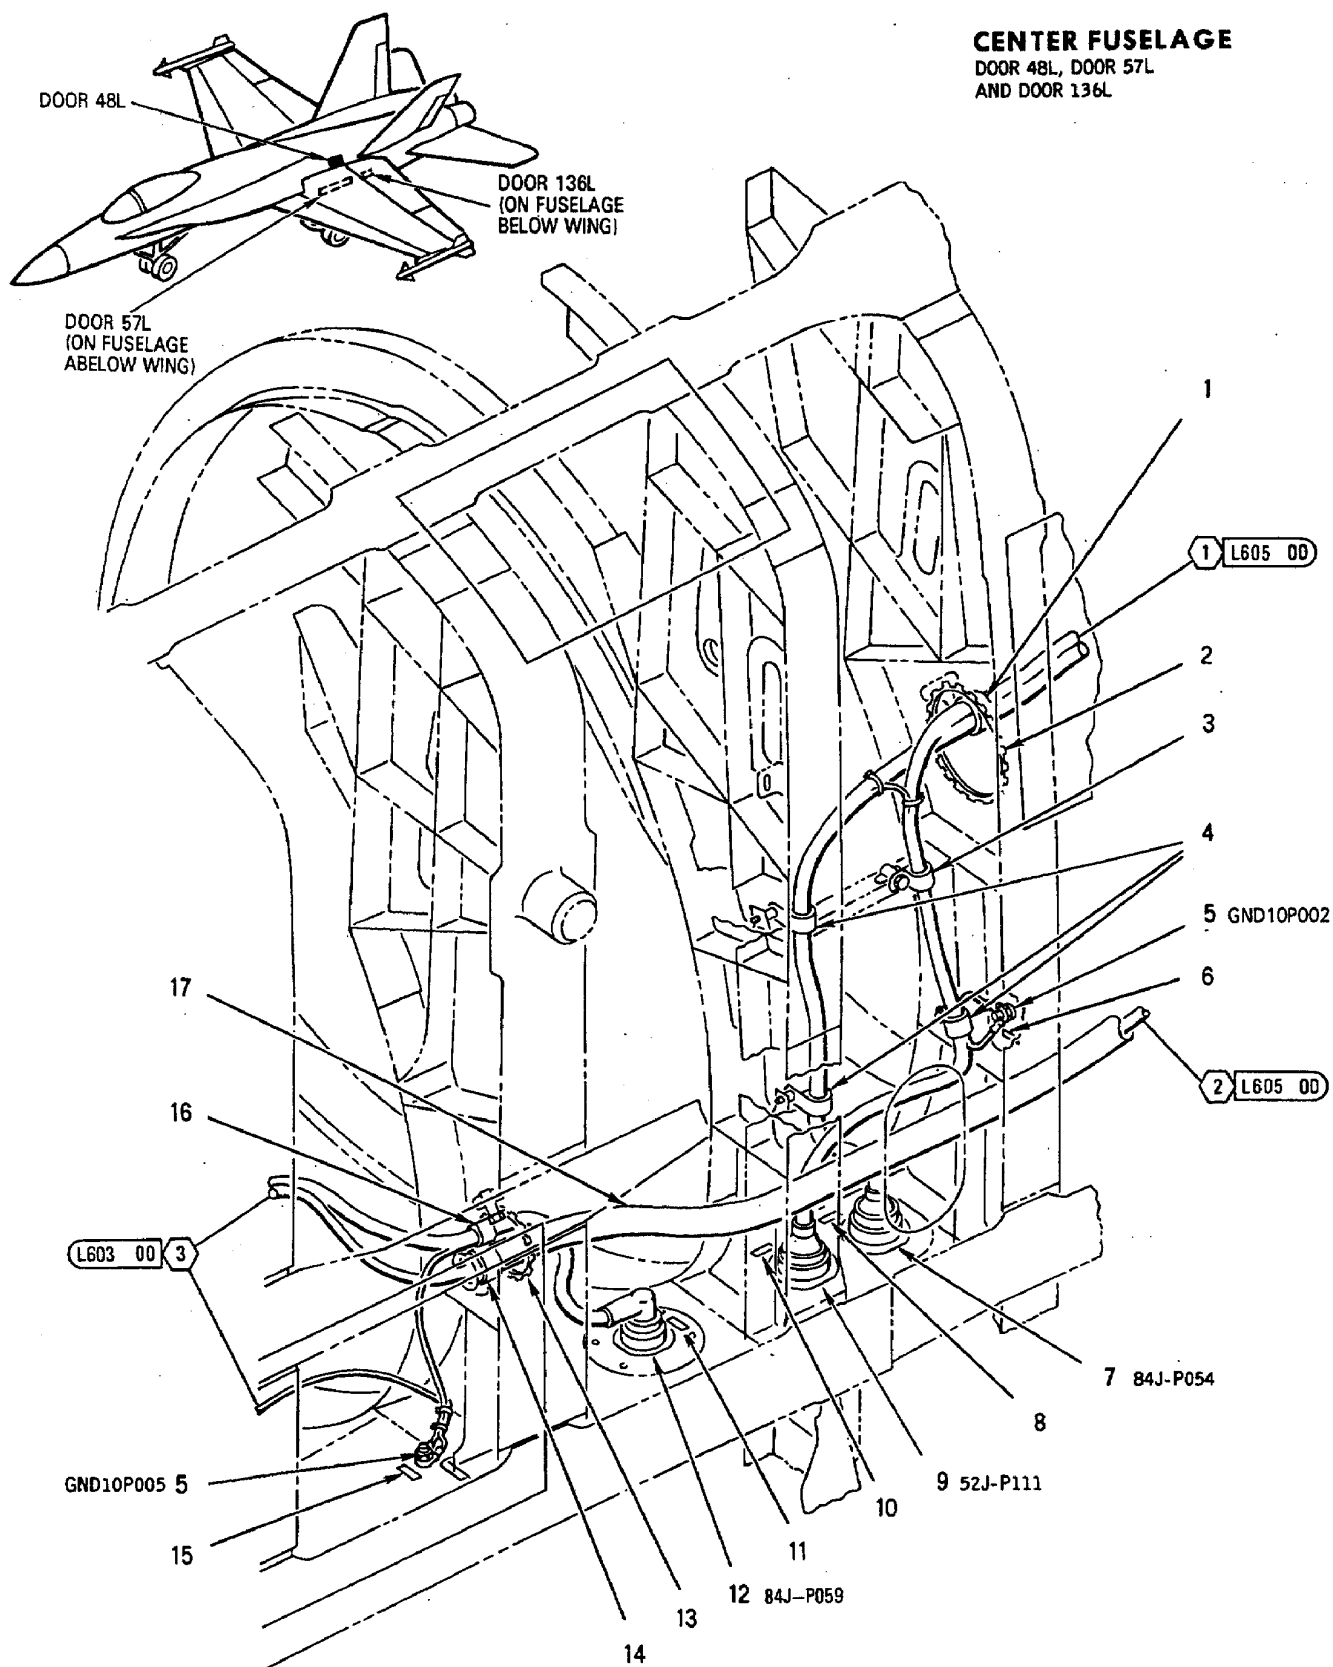


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ... ST9M630D14)	1	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-()N #	GROMMET	AR		-
3	M85052/1-6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
4	MS25281-6	CLAMP	3		PAOZZ
	NAS1801-3-15	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC .. ST3M523C3M1)	1		PAOZZ
5	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 5)	2		PAOZZ
6	74A885621-2110	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10P002)			
7	MS27468T23B35P	CONNECTOR, RECEPTACLE (84J-P054)	1		PAOZZ
8	74A885621-2203	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-P054)			
9	MS27468T23B35PA	CONNECTOR, RECEPTACLE (52J-P111)	1		PAOZZ
10	74A885621-2204	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52J-P111)			
11	74A885621-2205	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-P059)			
12	MS27468T17B35P	CONNECTOR, RECEPTACLE (84J-P059)	1		PAOZZ
13	MS21266-5N	GROMMET	AR		PAOZZ
14	M85052/1-16	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	74A885621-2112	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10P005)			
16	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ... ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	74A885630-1015	CONDUIT - ELECTRICAL (76301)	1		A0000
	74A885630-1029	SEE ABOVE (76301)	1	*	A0000

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 THRU 161741

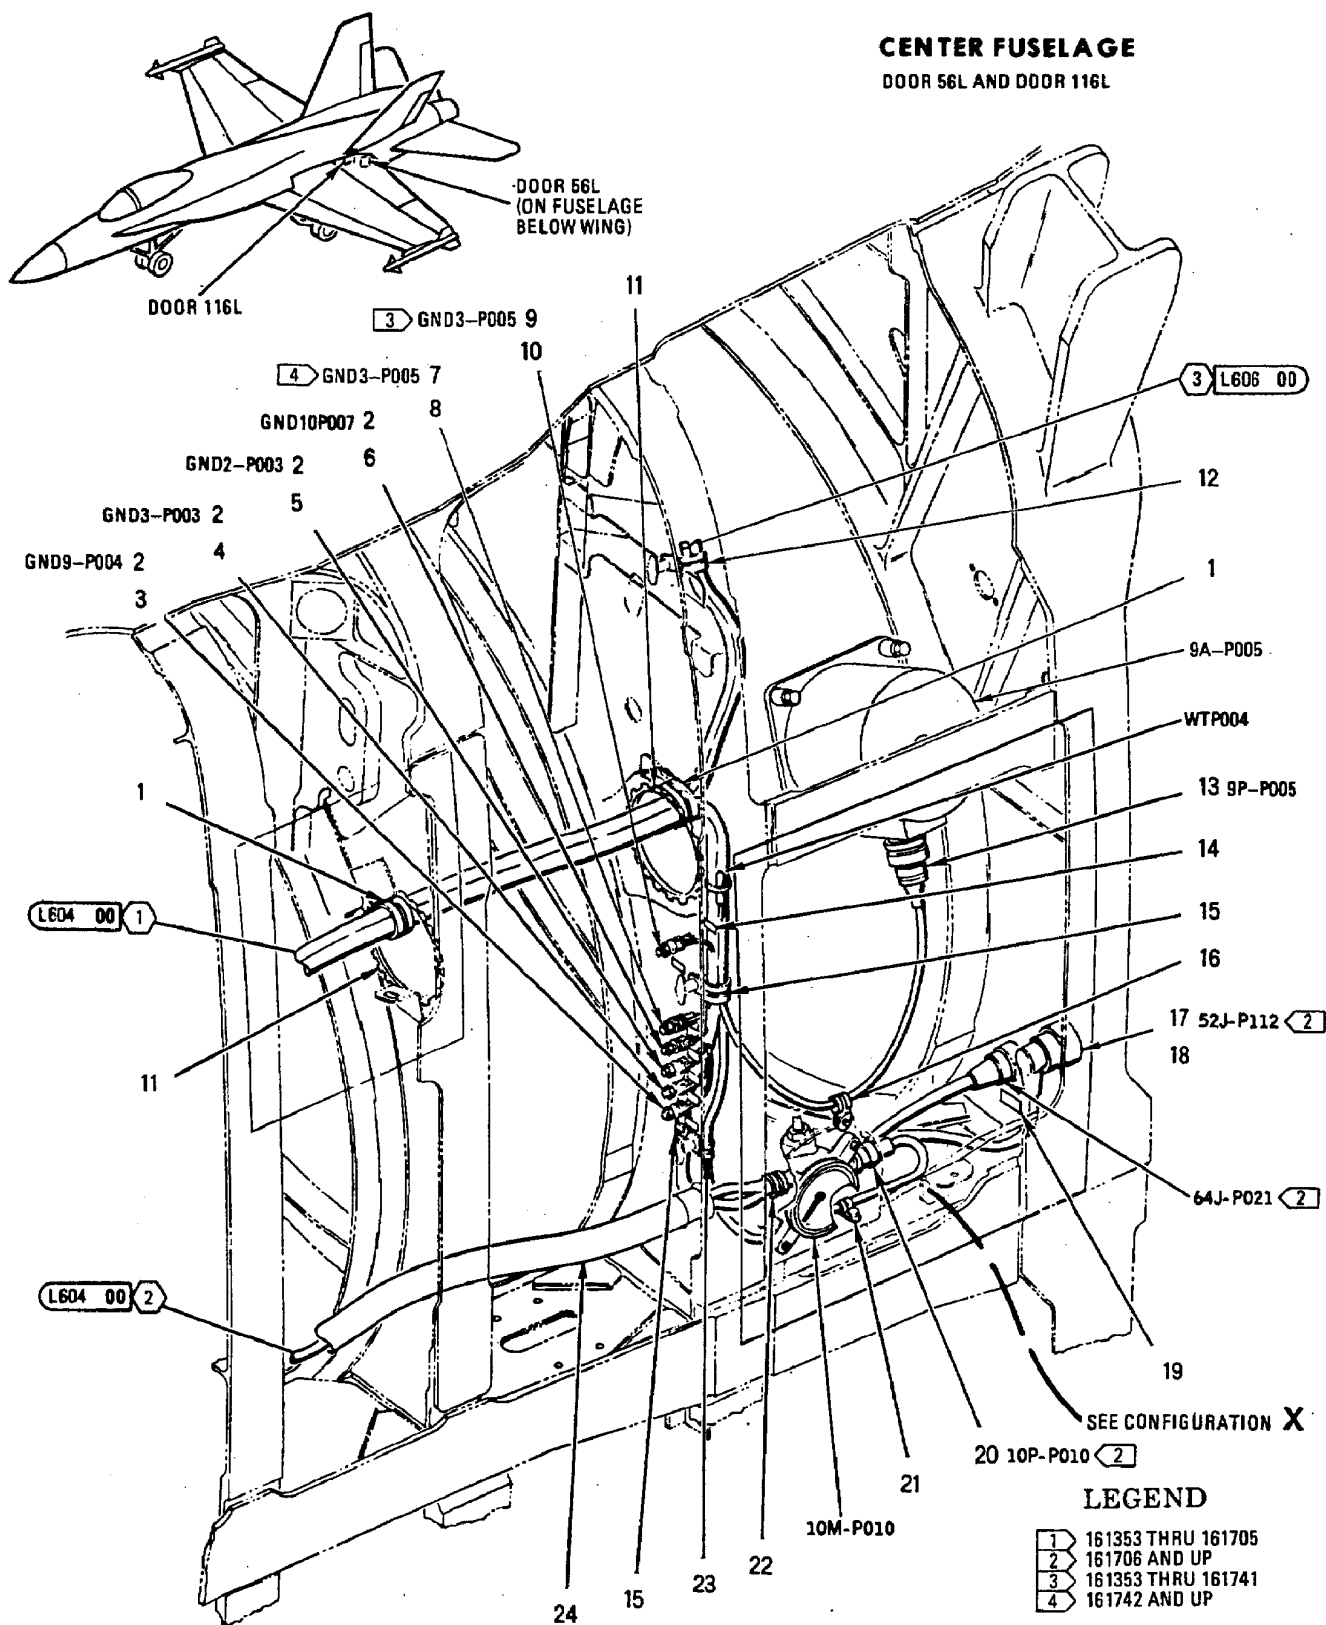

CENTER FUSELAGE

DOOR 56L AND DOOR 116L

-DOOR 56L
(ON FUSELAGE
BELOW WING)

DOOR 116L

3 GND3-P005 9

4 GND3-P005 7

GND10P007 2

GND2-P003 2

GND3-P003 2

GND9-P004 2

3 L606 00

- 9A-P005

- WTP004

13 9P-P005

17 52J-P112 ☐64J-P021 2


SEE CONFIGURATION X

20 10P-P010 < 2

10M-P010

LEGEND

- | | |
|---|--------------------|
| 1 | 161353 THRU 161705 |
| 2 | 161706 AND UP |
| 3 | 161353 THRU 161741 |
| 4 | 161742 AND UP |

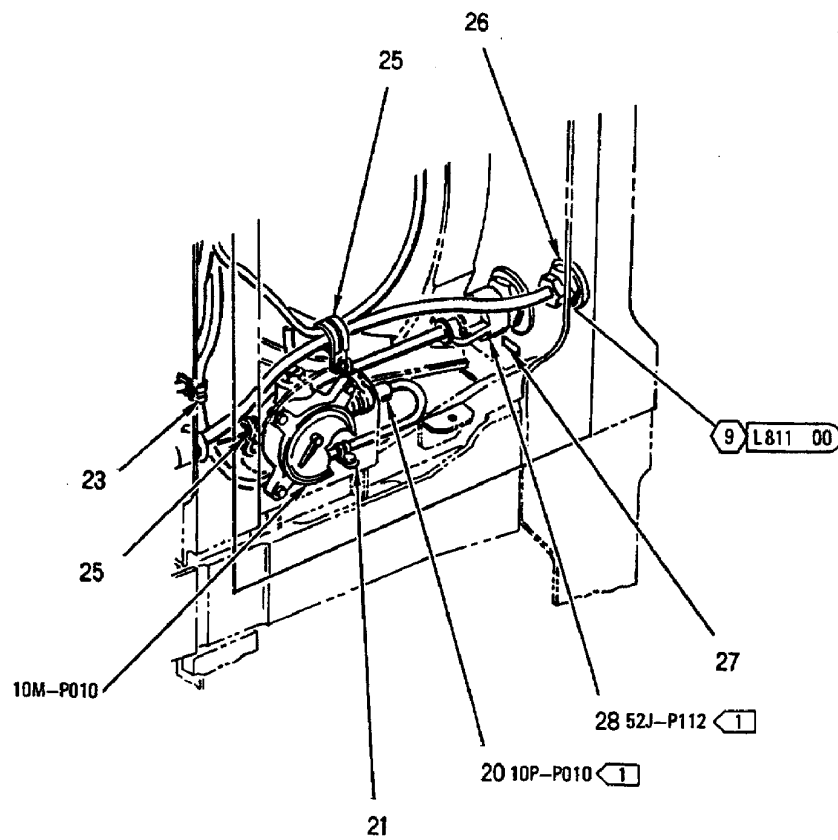

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9N630D14)	2	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
2	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	4		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 2)	4		PAOZZ
3	74A885621-2080	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P004)	1		MDOZZ
4	74A885621-2060	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P003)	1		MDOZZ
5	74A885621-2032	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P003)	1		MDOZZ
6	74A885621-2253	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P007)	1		MDOZZ
7	MS21042L3	NUT	1	G	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 7)	1	G	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 7)	1	G	PAOZZ
8	74A885621-2252	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P005)	1	G	MDOZZ
9	MS21042L3	NUT	1	F	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 9)	1	F	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 9)	1	F	PAOZZ
10	74A885621-2252	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P005)	1	F	MDOZZ
11	MS21266-()N #	GROMMET	AR		-
12	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
13	MS27467T15B35S	CONNECTOR, PLUG (9P-P005)	1		PAOZZ
14	74A885621-2156	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTP004)	1		MDOZZ
15	MS21919WDG6	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
16	MS21919WDG2	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	H	PAOZZ
	HT4024L3-3	SCREW, CLOSE TOLERANCE (AP) (73197) (MCDONNELL SPEC ST3M455-3L3-1)	1	G	PAOZZ
	AN960JD10	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	H*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	H*	PAOZZ
	NAS1291C3M	NUT (AP)	1	G	PAOZZ
17	D38999/24KG35SN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-21-35SN) (52J-P112)	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	TVS07RK-21-35SN	CONNECTOR, RECEPTACLE ELECTRICAL ... (77820) (MCDONNELL SPEC ST5M1614K35SN) (USE UNTIL EXHAUSTED) (52J-P112)	1	B	PAOZZ
18	74A885621-2591	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P112)	2	C	MDOZZ
19	74A885621-2587	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 64J-P021)	1	C	MDOZZ
20	MS27467T11B98S	CONNECTOR, PLUG (10P-P010)	1		PAOZZ
21	MS21919WDG2	CLAMP	1		PAOZZ
	NAS1297-3-5	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
22	MS21919WDG11	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
23	MS21919WDG2	CLAMP	1		PAOZZ
24	74A885630-1015	CONDUIT - ELECTRICAL (76301)	1		A0000
	74A885630-1029	SEE ABOVE (76301)	1	*	A0000
25	MS21919WDG6	CLAMP	2	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
26	74B878001-165	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
27	74A885621-2238	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-S112)	1	D	MDOZZ
	74A885621-2591	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P112)	1	E	MDOZZ
28	D38999/24KG35SN	CONNECTOR, RECEPTACLE (REPLACES ... TVS07RK-21-35SN) (52J-P112)	1	A	PAOZZ
	TVS07RK-21-35SN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KG35SN) (USE UNTIL EXHAUSTED) (52J-P112)	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON


A 161353 THRU 161705

B 161706 THRU 161761


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161706 & UP			
		D						161353 THRU 161528			
		E						161702 THRU 161705			
		F						161353 THRU 161741			
		G						161742 & UP			
		H						161706 THRU 161741			

CENTER FUSELAGE

DOOR 55L

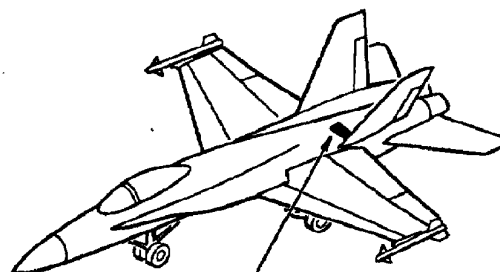


DOOR 55L

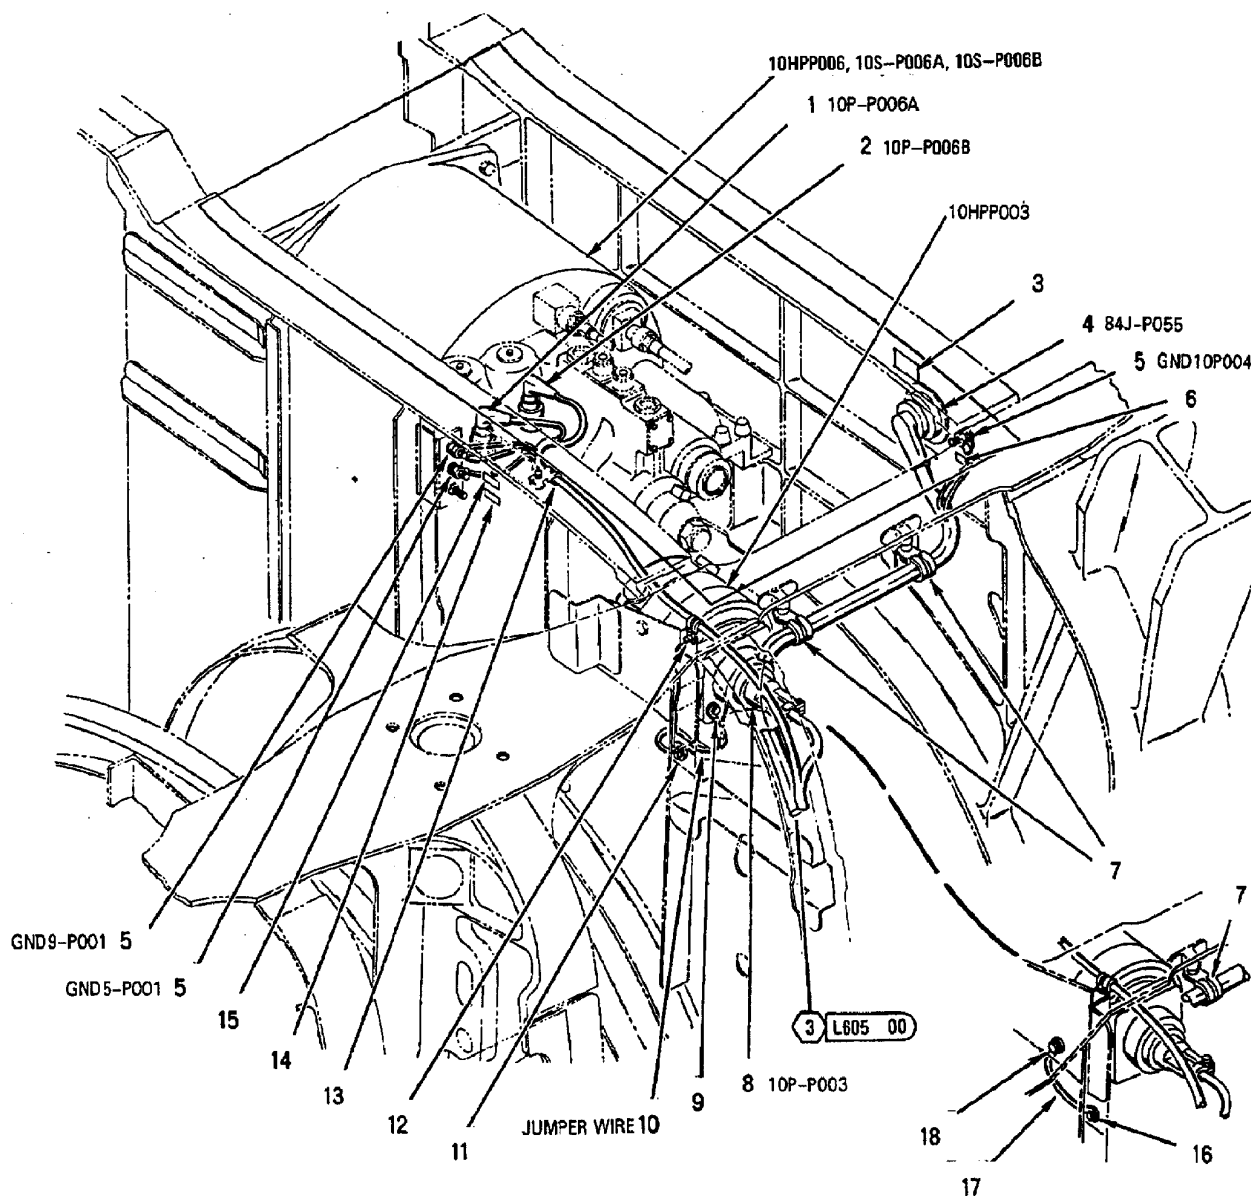

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B98S	CONNECTOR, PLUG (10P-P006A)	1		PAOZZ
2	MS27467T11B98SA	CONNECTOR, PLUG (10P-P006B)	1		PAOZZ
3	74A885621-2278	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P055)	1		MDOZZ
4	MS27468T21B35S	CONNECTOR, RECEPTACLE (84J-P055)	1		PAGZZ
5	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	3		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 5)	3		PAOZZ
6	74A885621-2111	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P004)	1		MDOZZ
7	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
8	MS3459W14S2S	CONNECTOR, PLUG (10P-P003)	1		PAOZZ
9	NAS1801-06-6	SCREW	1	B	PAOZZ
	AN960JD6	WASHER (USE WITH INDEX 9)	1	B	PAOZZ
10	MS25083-2CA5	LEAD, ELECTRICAL (JUMPER WIRE)	1	B	PAOZZ
11	NAS673V3	BOLT	1	B	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 11)	1	B	PAOZZ
12	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
13	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
14	74A885621-2070	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND5-P001)	1		MDOZZ
15	74A885621-2078	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P001)	1		MDOZZ
16	NAS673V3	BOLT	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 16)	1	A	PAOZZ
17	MS25083-2BC5	LEAD, ELECTRICAL (JUMPER WIRE)	1	A	PAOZZ
18	NAS674V3	BOLT	1	A	PAOZZ
	AN960JD416L	WASHER (USE WITH INDEX 18)	1	A	PAOZZ
	NAS1291C4M	NUT (USE WITH INDEX 18)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162477
B	162826 & UP

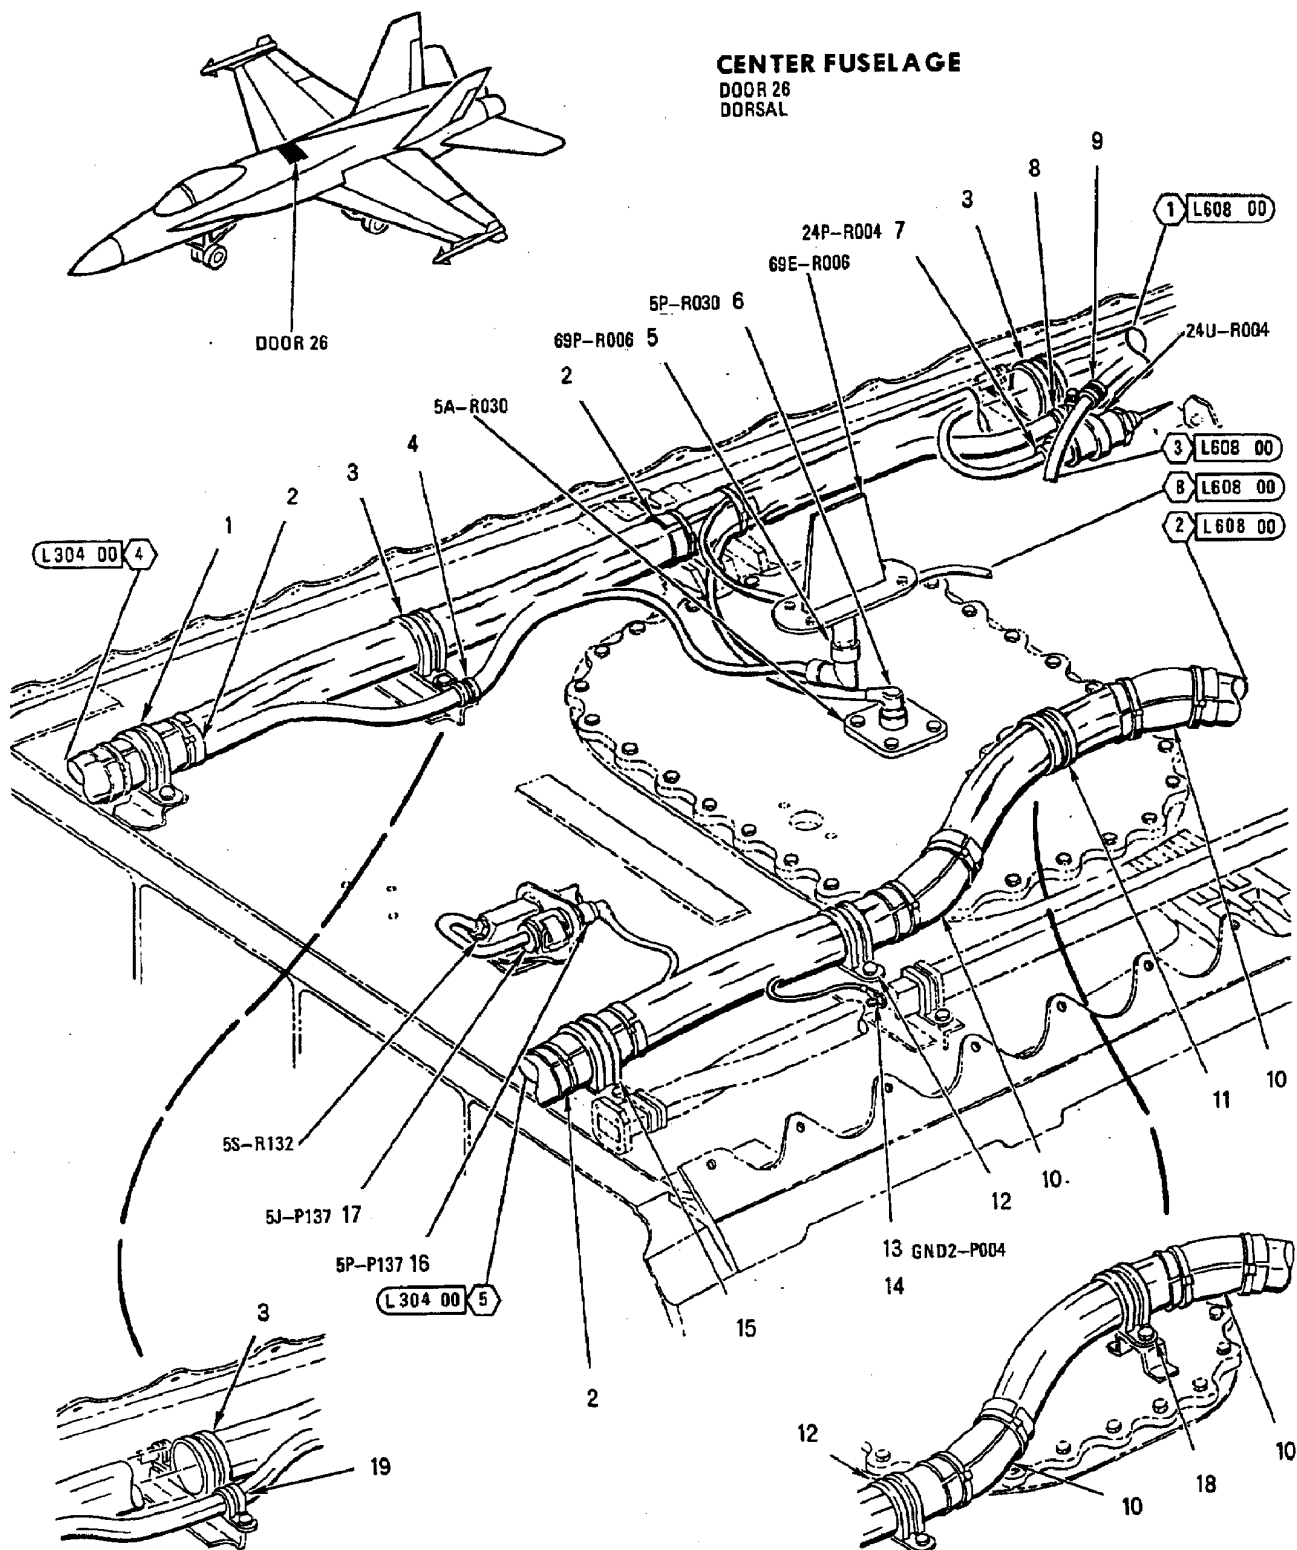


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-24	CLAMP	1	B	PAOZZ
	JM44LC33WH26	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630H26) .	1	C*	PAOZZ
	830WSS26G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	3		MGOZZ
	MS3367-7-0	STRAP (AP)	2	K	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)	2	L*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	2	L*	PAOZZ
3	M85052/3-22	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	M85052/3-13	CLAMP	1	H	PAOZZ
5	M39012/39-0501	CONNECTOR, PLUG (69P-R006)	1		PAOZZ
6	MS27467T11B35S	CONNECTOR, PLUG (5P-R030)	1		PAOZZ
7	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SA) (24P-R004)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-R004)	1	D	PAOZZ
8	M85052/3-11	CLAMP	1	B	PAOZZ
	M85052/3-13	CLAMP	1	C	PAOZZ
	NAS673V20	BOLT (AP)	1	B	PAOZZ
	NAS673V22	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-72	SPACER (AP)	1		PAOZZ
9	JM44LC33WD24	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D24)	1	*	PAOZZ
	830WD24G	SEE ABOVE (83930)	1	*	PAOZZ
10	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	2	A	MGOZZ
	MS3367-7-0	STRAP (AP)	2	M	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)	2	L*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	2	L*	PAOZZ
11	M85052/3-22	CLAMP	1	F	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D23)	1	N	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	M85052/3-20	CLAMP	1	B	PAOZZ
	M85052/3-22	CLAMP	1	C	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D23)	1	N	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	NAS673V3	BOLT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	1		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 13)	2		PAOZZ
14	74A885621-2259	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P004)	1		MDOZZ
15	M85052/3-20	CLAMP	1	B	PAOZZ
	M85052/3-22	CLAMP	1	C	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D23)	1	N	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS27467T11B35S	CONNECTOR, PLUG (5P-P137)	1		PAOZZ
17	KJL7YC103451-3	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC 5M1701-11D35PN) (5J-P137)	1	*	PAOZZ
	92344-01	SEE ABOVE (14283)	1	*	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	M85052/3-20	CLAMP	1	B	PAOZZ
	M85052/3-22	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	M85052/3-11	CLAMP	1	B	PAOZZ
	M85052/3-13	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161358 & UP
B	161353 THRU 161528
C	161702 & UP
D	161353 THRU 161761
E	161702 THRU 161718
F	161720 & UP
G	161353 THRU 161705
H	161706 & UP
J	161702 THRU 161705
K	161353 THRU 161741
L	161742 & UP
M	161358 THRU 161741
N	161925 THRU 163175 AFTER F/A-18 AFC 231

DOOR 31
DORSAL

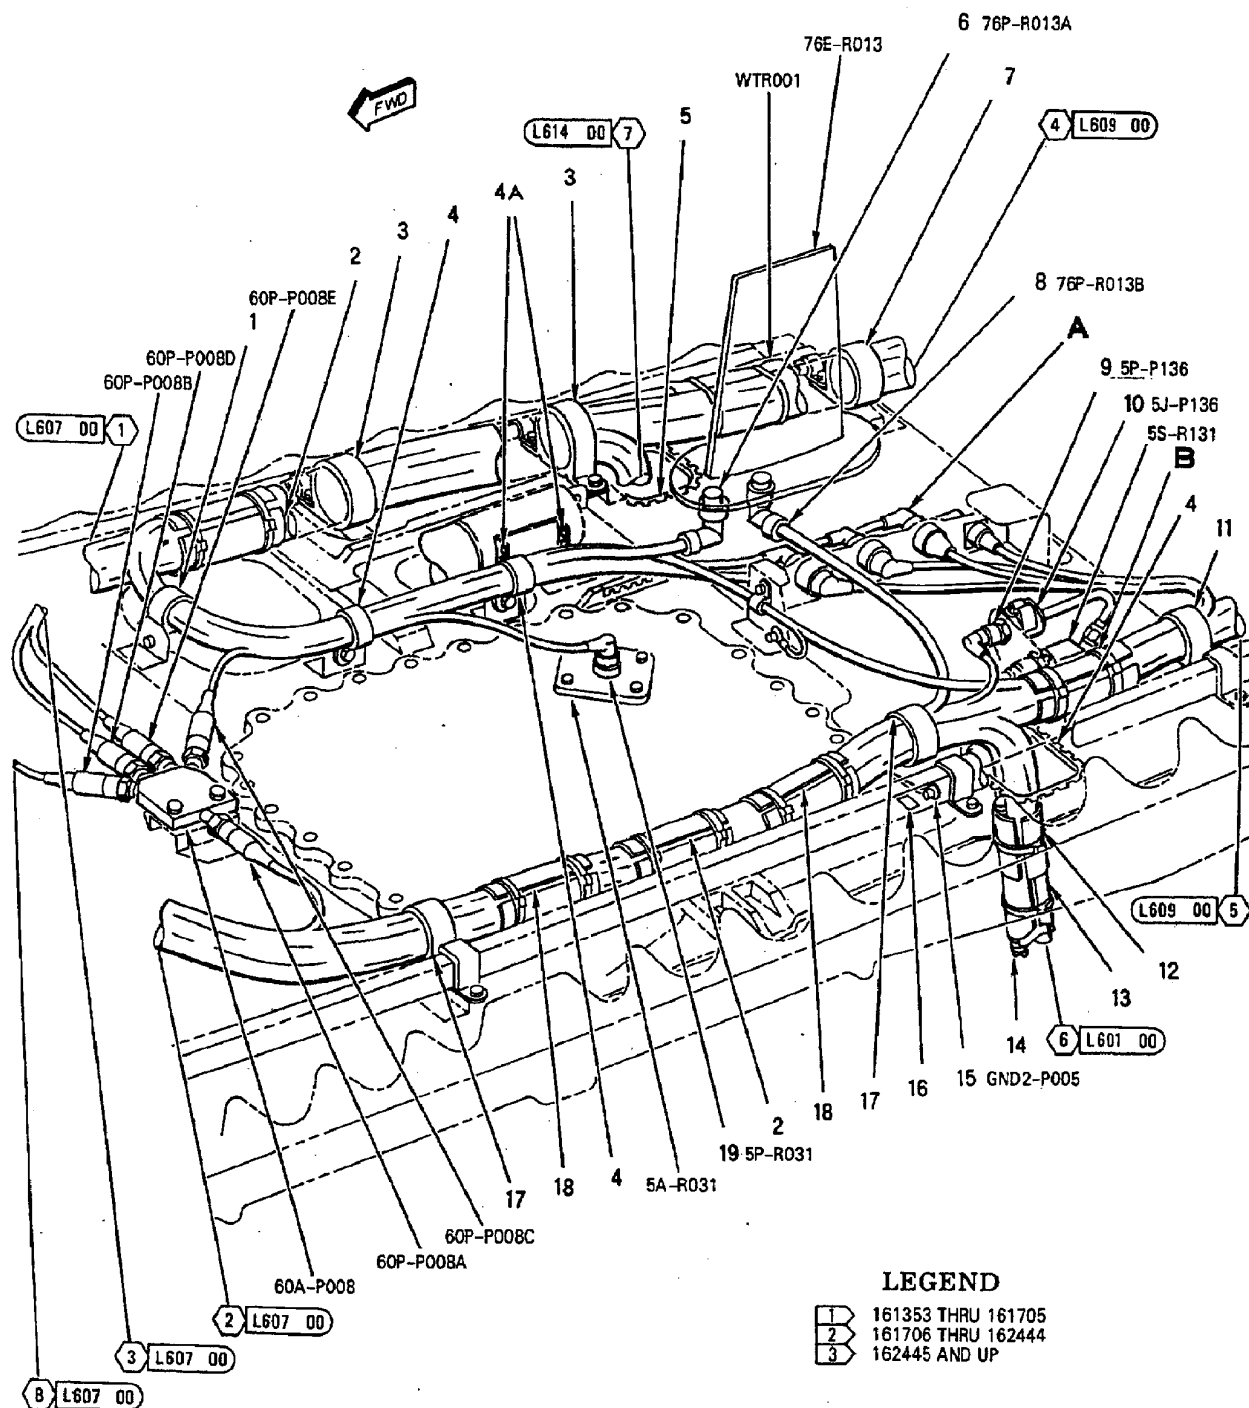

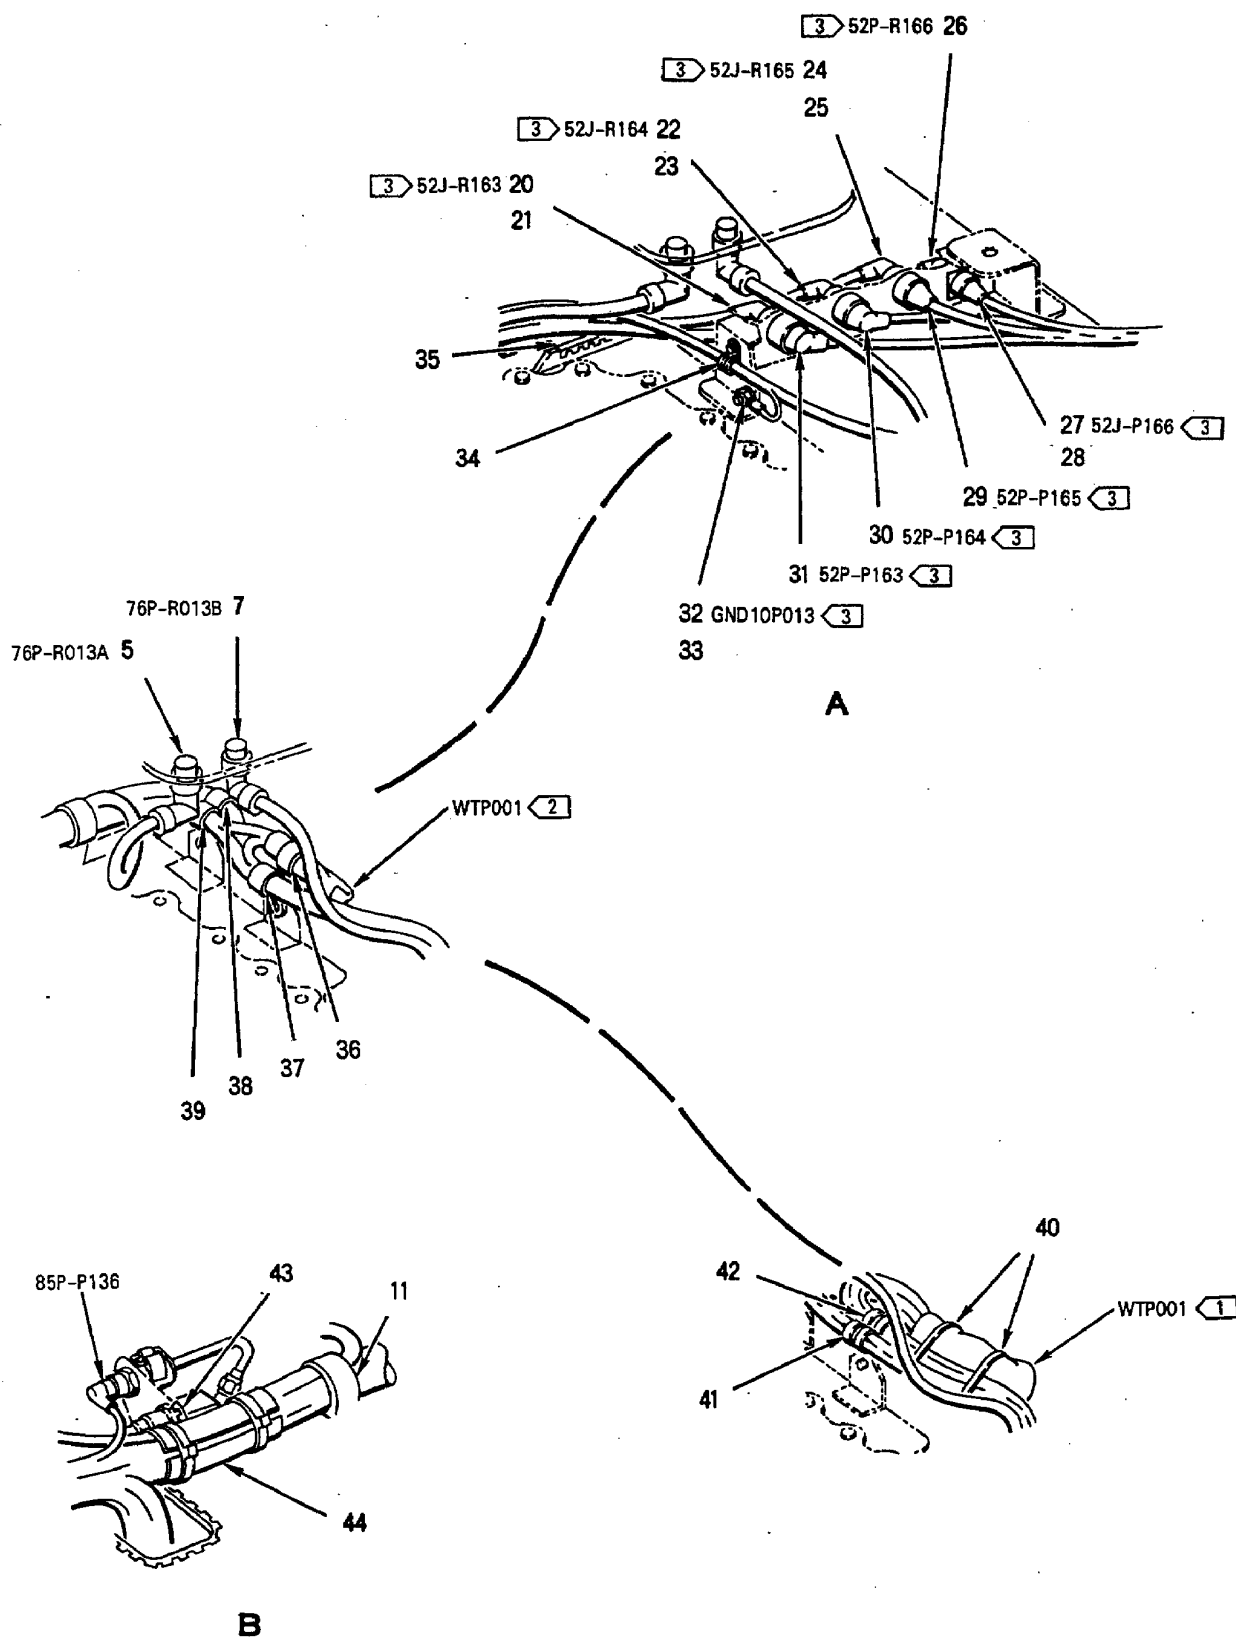

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC33WD20	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D20)	1	P*	PAOZZ
	830WD20G	SEE ABOVE (83930)	1	P*	PAOZZ
	JM44LC33WD19	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D19)	1	Q*	PAOZZ
	830WD19G	SEE ABOVE (83930)	1	Q*	PAOZZ
	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	M*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	M*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
2	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	2		MGOZZ
	MS3367-7-0	STRAP (AP)	2	F	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) MCDONNELL SPEC ST9M559-3)	2	G*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	2	G*	PAOZZ
3	JM44LC33WD28	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D28)	2	S*	PAOZZ
	830WD28G	SEE ABOVE (83930)	2	S*	PAOZZ
	JM44LC33WD31	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D31)	2	Q*	PAOZZ
	830WD31G	SEE ABOVE (83930)	2	Q*	PAOZZ
	JM44LC33WD30	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D30)	2	C*	PAOZZ
	830WD30G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V2	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
4	JM44LC33WD20	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D20)	2	R*	PAOZZ
	830WD20G	SEE ABOVE (83930)	2	R*	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D23)	2	Q*	PAOZZ
	830WD23G	SEE ABOVE (83930)	2	Q*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4A	MS21266-1N	GROMMET	1	N	PAOZZ
5	MS21266-5N	GROMMET	AR		PAOZZ
6	1207-079-A00E	CONNECTOR, PLUG, ELECTRICAL (00795) (MCDONNELL SPEC ST5M1332-001) (76P-R013A)	1	*	PAOZZ
	31-4371-3009	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1332-001) (76P-R013A)	1	*	PAOZZ
	126-6	CONNECTOR, PLUG, ELECTRICAL (91836) (MCDONNELL SPEC ST5M1332-001) (76P-R013A)	1	*	PAOZZ
7	M85052/3-22	CLAMP	1	B	PAOZZ
	M85052/3-23	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	M39012/39-0501	CONNECTOR, PLUG (76P-R013B)	1		PAOZZ
9	MS27467T11B35S	CONNECTOR, PLUG (5P-P136)	1		PAOZZ
10	KJL7YC103451-3	CONNECTOR, RECEPTACLE, ELECTRICAL (71468) (MCDONNELL SPEC 5M1701-11D35PN) (5J-P136)	1	*	PAOZZ
	92344-01	SEE ABOVE (14283)	1	*	PAOZZ
11	M85052/3-18	CLAMP	1	B	PAOZZ
	M85052/3-23	CLAMP	1	C	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D23)	1	T	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
12	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	1		PAOZZ
13	74A885639-2003	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	AR		PAOZZ
14	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
15	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
	NAS673V3	BOLT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 15)	1		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 15)	1		PAOZZ
16	74A885621-2256	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND2-P005)			
17	M85052/3-20	CLAMP	2	B	PAOZZ
	M85052/3-22	CLAMP	2	C	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175) (MCDONNELL SPEC	2	T	PAOZZ
		ST9M630D23)			
18	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	2	A	XBOZZ
	MS3367-7-0	STRAP (AP)	2	H	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS	2	G*	PAOZZ
		(AP) (06383) (MCDONNELL SPEC ST9M559-3)			
19	WIT-120R-HS	SEE ABOVE (06915)	2	G*	PAOZZ
	MS27467T11B35S	CONNECTOR, PLUG (5P-R031)	1		PAOZZ
20	MS27656T19B11P	CONNECTOR, RECEPTACLE (52J-R163)	1	K	PAOZZ
	NAS1801-04-7	SCREW (AP)	4	K	PAOZZ
	AN960JD4L	WASHER (AP)	4	K	PAOZZ
21	74A885621-2675	MARKER, IDENTIFICATION - AVIONICS (76301)	1	K	MDOZZ
		(FOR REF DES 52J-R163)			
22	MS27656T25B35S	CONNECTOR, RECEPTACLE (52J-R164)	1	K	PAOZZ
	NAS1801-06-7	SCREW (AP)	4	K	PAOZZ
	AN960JD6L	WASHER (AP)	4	K	PAOZZ
23	74A885621-2676	MARKER, IDENTIFICATION - AVIONICS (76301)	1	K	MDOZZ
		(FOR REF DES 52J-R164)			
24	MS27656T23B35P	CONNECTOR, RECEPTACLE (52J-R165)	1	K	PAOZZ
	NAS1801-06-7	SCREW (AP)	4	K	PAOZZ
	AN960JD6L	WASHER (AP)	4	K	PAOZZ
25	74A885621-2677	MARKER, IDENTIFICATION - AVIONICS (76301)	1	K	MDOZZ
		(FOR REF DES 52J-R165)			
26	MS27467T13B35P	CONNECTOR, PLUG (52P-R166)	1	K	PAOZZ
27	MS27656T13B35S	CONNECTOR, RECEPTACLE (52J-P166)	1	K	-
	NAS1801-04-7	SCREW (AP)	4	K	PAOZZ
	AN960JD4L	WASHER (AP)	4	K	PAOZZ
	74A885621-2678	MARKER, IDENTIFICATION - AVIONICS (76301)	1	K	MDOZZ
		(FOR REF DES 52J-P166)			
29	MS27467T23B35S	CONNECTOR, PLUG (52P-P165)	1	K	-
30	MS27467T25B35P	CONNECTOR, PLUG (52P-P164)	1	K	-
31	MS27467T19B11S	CONNECTOR, PLUG (52P-P163)	1	K	-
32	MS21042L3	NUT	1	K	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 32)	1	K	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 32)	1	K	PAOZZ
33	74A885621-2679	MARKER, IDENTIFICATION - AVIONICS (76301)	1	K	MDOZZ
		(FOR REF DES GND10P013)			
34	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	K*	PAOZZ
		ST9M630D11)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	830WD11G	SEE ABOVE (83930)	1	K*	PAOZZ
	NAS673V3	BOLT (AP)	1	K	PAOZZ
	AN960JD10L	WASHER (AP)	1	K	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	K*	PAOZZ
	130091	SEE ABOVE (76530)	1	K*	PAOZZ
35	MS21266-6N	GROMMET	AR	K	PAOZZ
36	JM44LC33WD21	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D21)	1	E*	PAOZZ
	830WD21G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ
37	JM44LC33WD21	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D21)	1	E*	PAOZZ
	830WD21G	SEE ABOVE (83930)	1	E*	PAOZZ
38	JM44LC44WD #	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D)	1	J*	-
	830WD()G #	SEE ABOVE (83930)	1	J*	-
	NAS673V3	BOLT (AP)	1	J	PAOZZ
	AN960JD10	WASHER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J	PAOZZ
39	JM44LC44WD #	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D)	1	J*	-
	830WD()G #	SEE ABOVE (83930)	1	J*	-
40	PLT4H-C30	STRAP, TIEDOWN, ELECTRICAL COMPONENTS (06383) (MCDONNELL SPEC ST9M559-3)	2	D*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	2	D*	PAOZZ
41	JM44LC44WD #	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D)	1	D*	-
	830WD()G #	SEE ABOVE (83930)	1	D*	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
42	JM44LC44WD #	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D)	1	D*	-
	830WD()G #	SEE ABOVE (83930)	1	D*	-
43	MS21266-2N	GROMMET	AR	L	PAOZZ
44	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	1	L	MGOZZ
	MS3367-7-0	STRAP (AP)	2	L	PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161358 & UP
B	161353 THRU 161528
C	161702 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		D							161353 THRU 161705		
		E							161706 THRU 162444		
		F							161353 THRU 161741		
		G							161742 & UP		
		H							161358 THRU 161741		
		J							161353 THRU 162444		
		K							162445 & UP		
		L							162460 & UP		
		M							161706 & UP		
		N							163116 & UP		
		P							161353 THRU 161519 BEFORE F18 AFC 27 AND 161520 THRU 161705		
		Q							161353 THRU 161519 AFTER F18 AFC 27		
		R							161353 THRU 161519 BEFORE F18 AFC 27 AND 161520 & UP		
		S							161353 THRU 161519 BEFORE F18 AFC 27 AND 161520 THRU 161528		
		T							161925 & UP AFTER F/A-18 AFC 231		

CENTER FUSELAGE DOOR 40 DORSAL

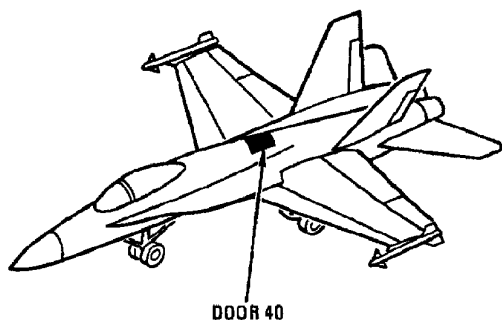


DOOR 40

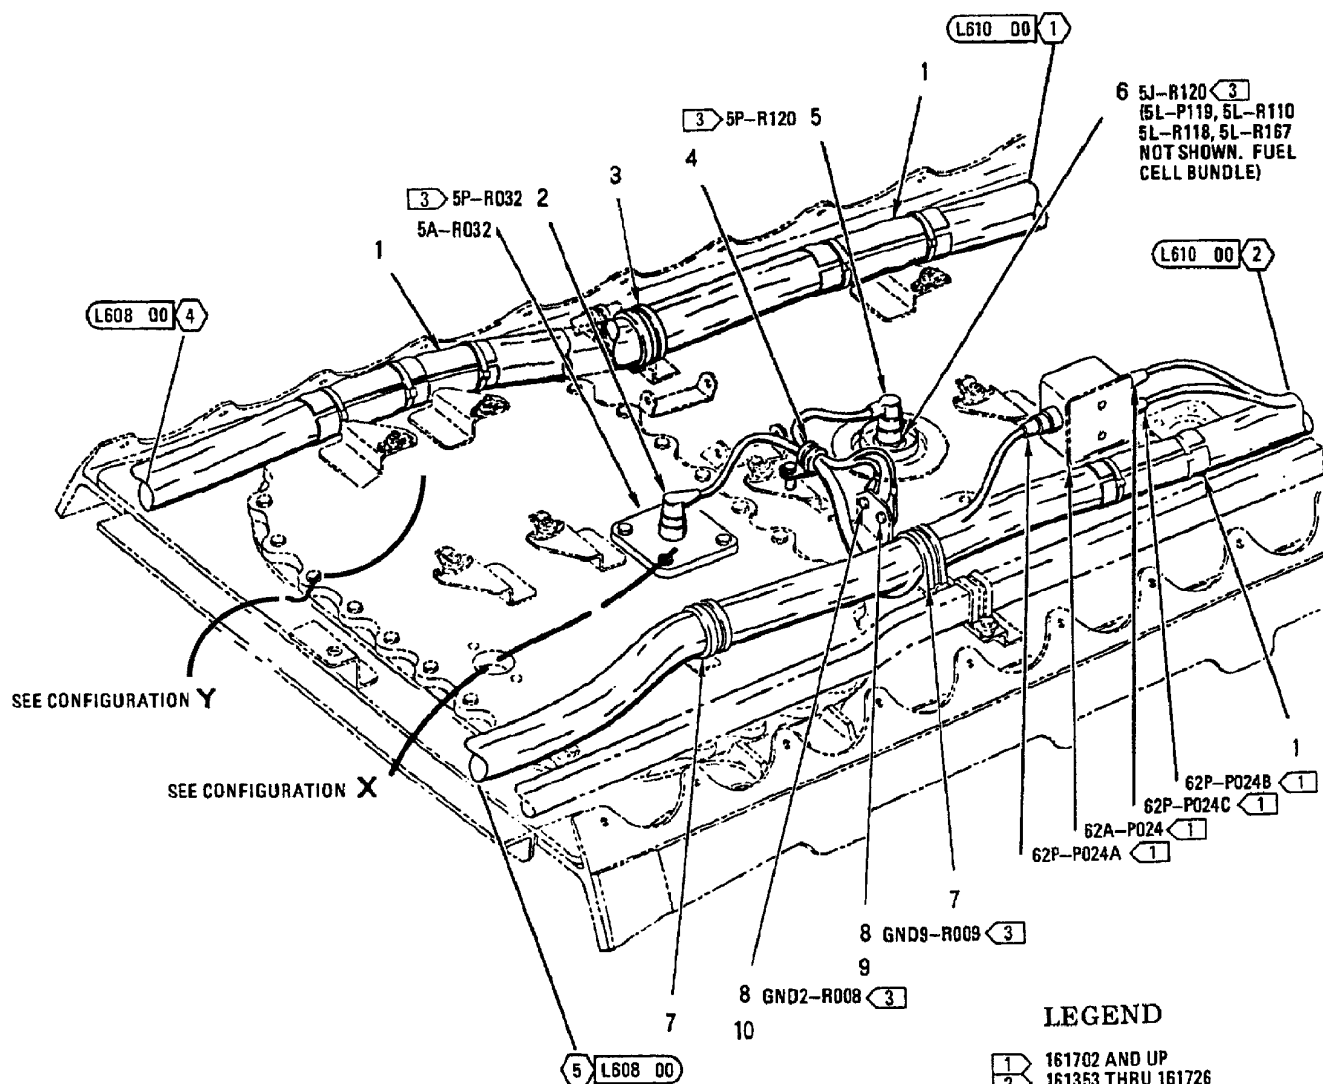


LEGEND

- | | |
|---|----------------------|
| 1 | 161702 AND UP |
| 2 | 161353 THRU 161726 |
| 3 | 161728 AND UP |
| 4 | 161925 AND UP |
| | AFTER F/A-18 AFC 231 |

CENTER FUSELAGE DOOR 40 DORSAL

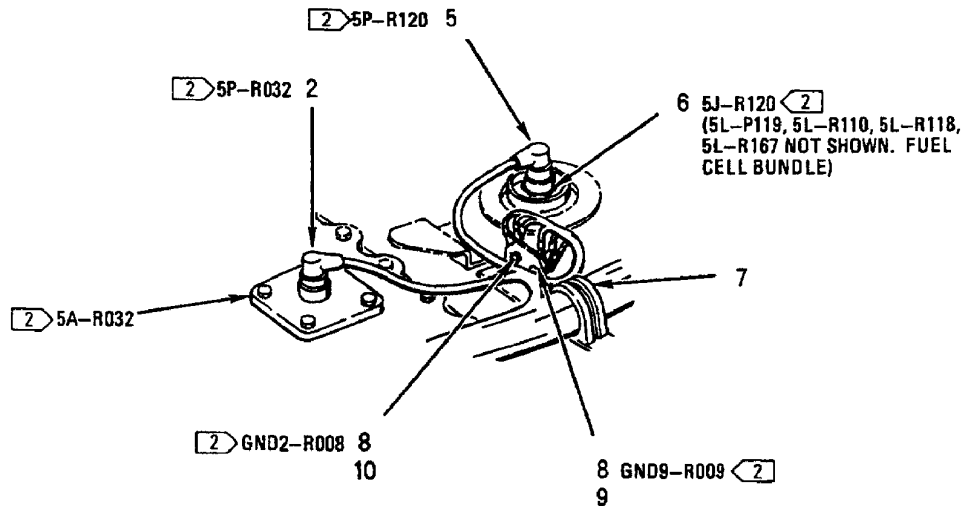

CONFIGURATION X

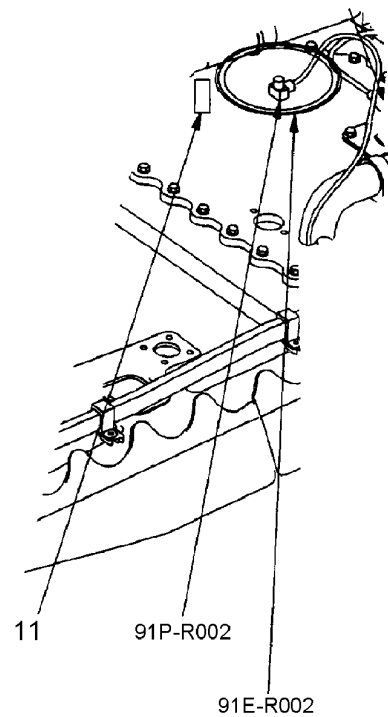


4 CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301) ...	3		MGOZZ
	MS3367-7-0	STRAP (AP)	2	D	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL	2	E*	PAOZZ
		COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)			
	WIT-120R-HS	SEE ABOVE (06915)	2	E*	PAOZZ
2	MS27467T9B35S	CONNECTOR, PLUG (5P-R032)	1		PAOZZ
3	M85052/3-22	CLAMP	1	A	PAOZZ
	M85052/3-23	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	M85052/1-6	CLAMP	1	C	PAOZZ
	NAS1801-3-8	SCREW (AP)	1	C	PAOZZ
	AN960JD10	WASHER (AP)	1	C	PAOZZ
5	MS27467T11B35S	CONNECTOR, PLUG (5P-R120)	1		PAOZZ
6	KJL7YC103451-3	CONNECTOR, RECEPTACLE,	1	*	PAOZZ
		ELECTRICAL (71468) (MCDONNELL SPEC 5M1701-11D35PN) (5J-R120)			
	92344-01	SEE ABOVE (14283)	1	*	PAOZZ
7	M85052/3-18	CLAMP	2	A	PAOZZ
	M85052/3-23	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 8)	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 8)	2		PAOZZ
9	74A885621-2092	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-R009)			
10	74A885621-2045	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-R008)			
11	74R785002-2006	MARKER, IDENTIFICATION - AVIONICS	1	F	MDOZZ
		(76301) (FOR REF DES 91E-R002)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161728 & UP
D	161353 THRU 161741
E	161742 & UP
F	161925 & UP AFTER F/A-18 AFC 231

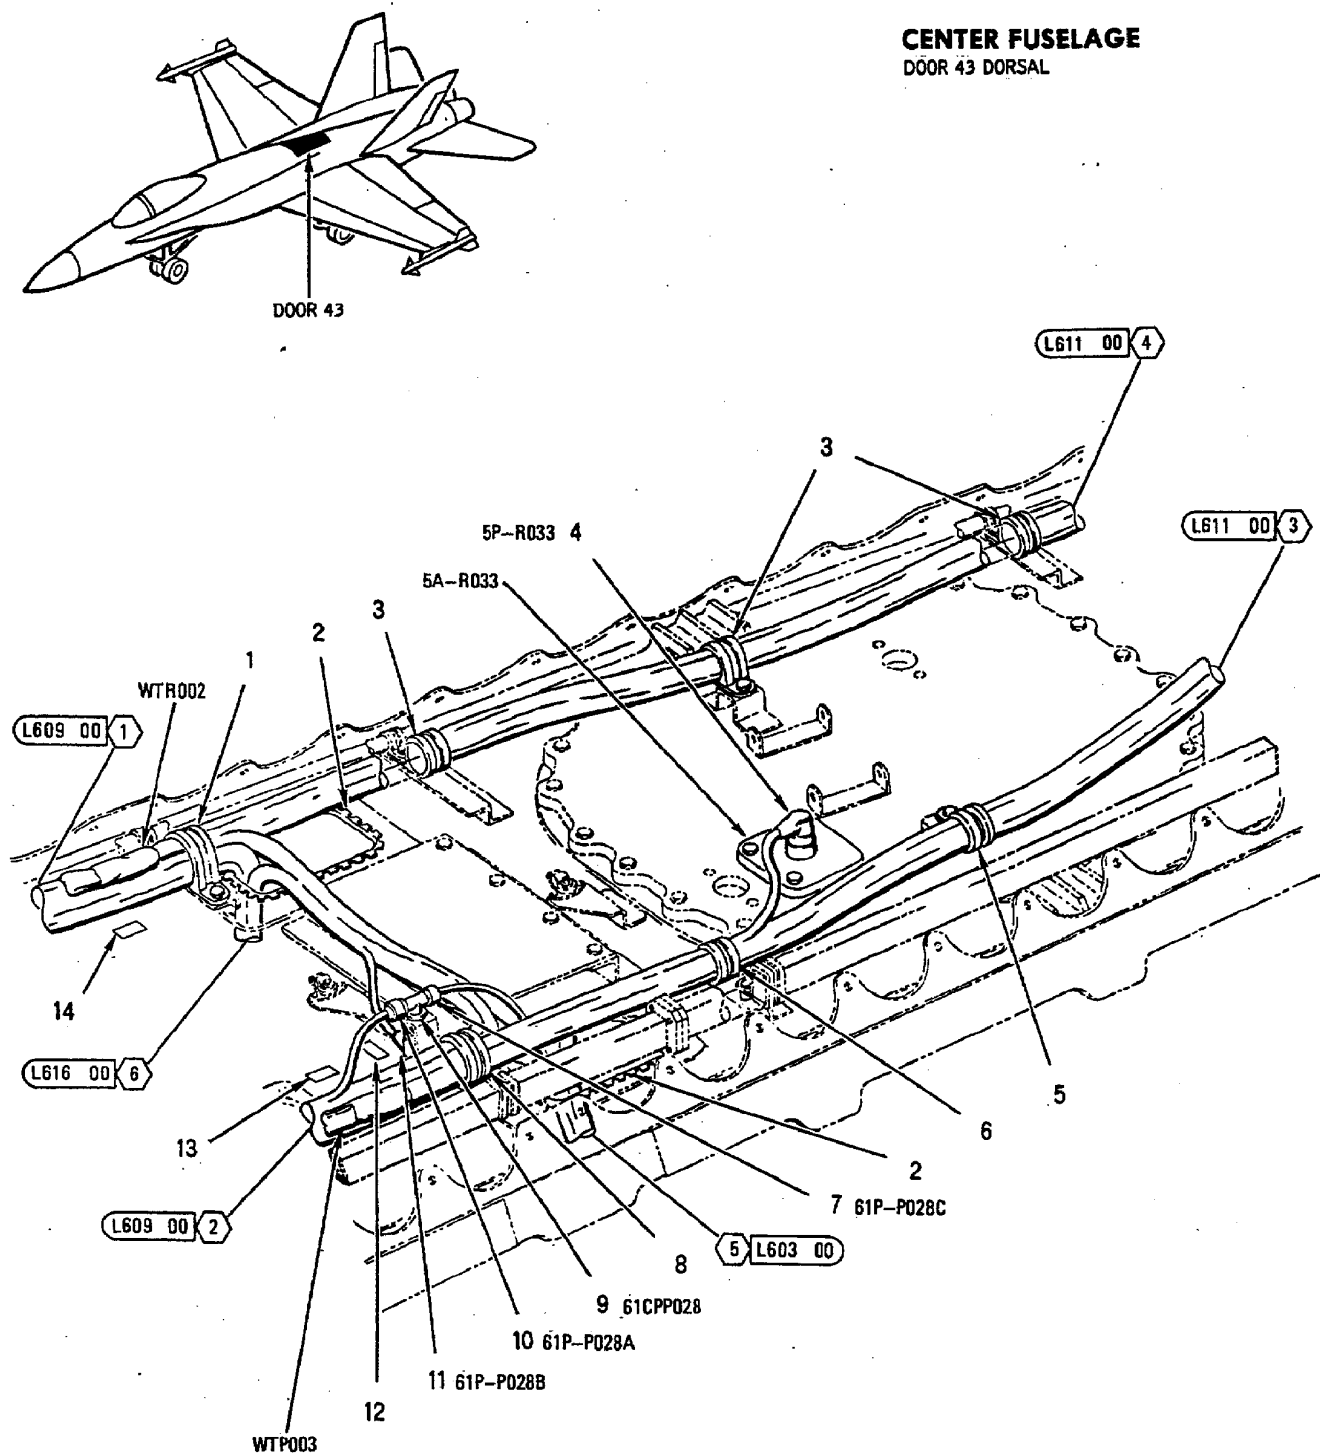


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-22	CLAMP	1	A	PAOZZ
	M85052/3-23	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-5N	GROMMET	AR		PAOZZ
3	M85052/3-16	CLAMP	3	A	PAOZZ
	M85052/3-21	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS27467T9B35S	CONNECTOR, PLUG (5P-R033)	1		PAOZZ
5	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-17	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-17	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	M39012/26-0503	CONNECTOR, PLUG (61P-P028C)	1		PAOZZ
8	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-23	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	NAS673V4	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	M55339-50-00001	ADAPTER (61CPP028)	1		PAOZZ
10	M39012/26-0503	CONNECTOR, PLUG (61P-P028A)	1		PAOZZ
11	M39012/30-0503	CONNECTOR, PLUG (61P-P028B)	1		PAOZZ
12	74A885621-2474	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61PCP028)	1		MDOZZ
13	74A885621-2155	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTP003)	1		MDOZZ
14	74A885621-2164	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTR002)	1		MDOZZ

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161353 THRU 161741
D	161742 & UP

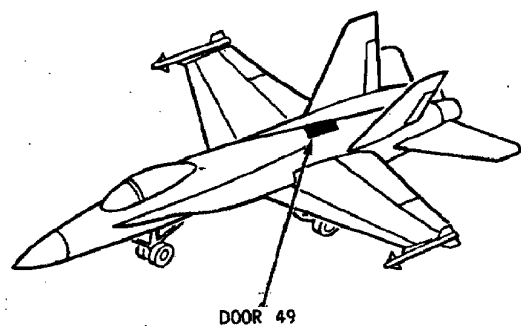

CENTER FUSELAGE

DOOR 49
DORSAL

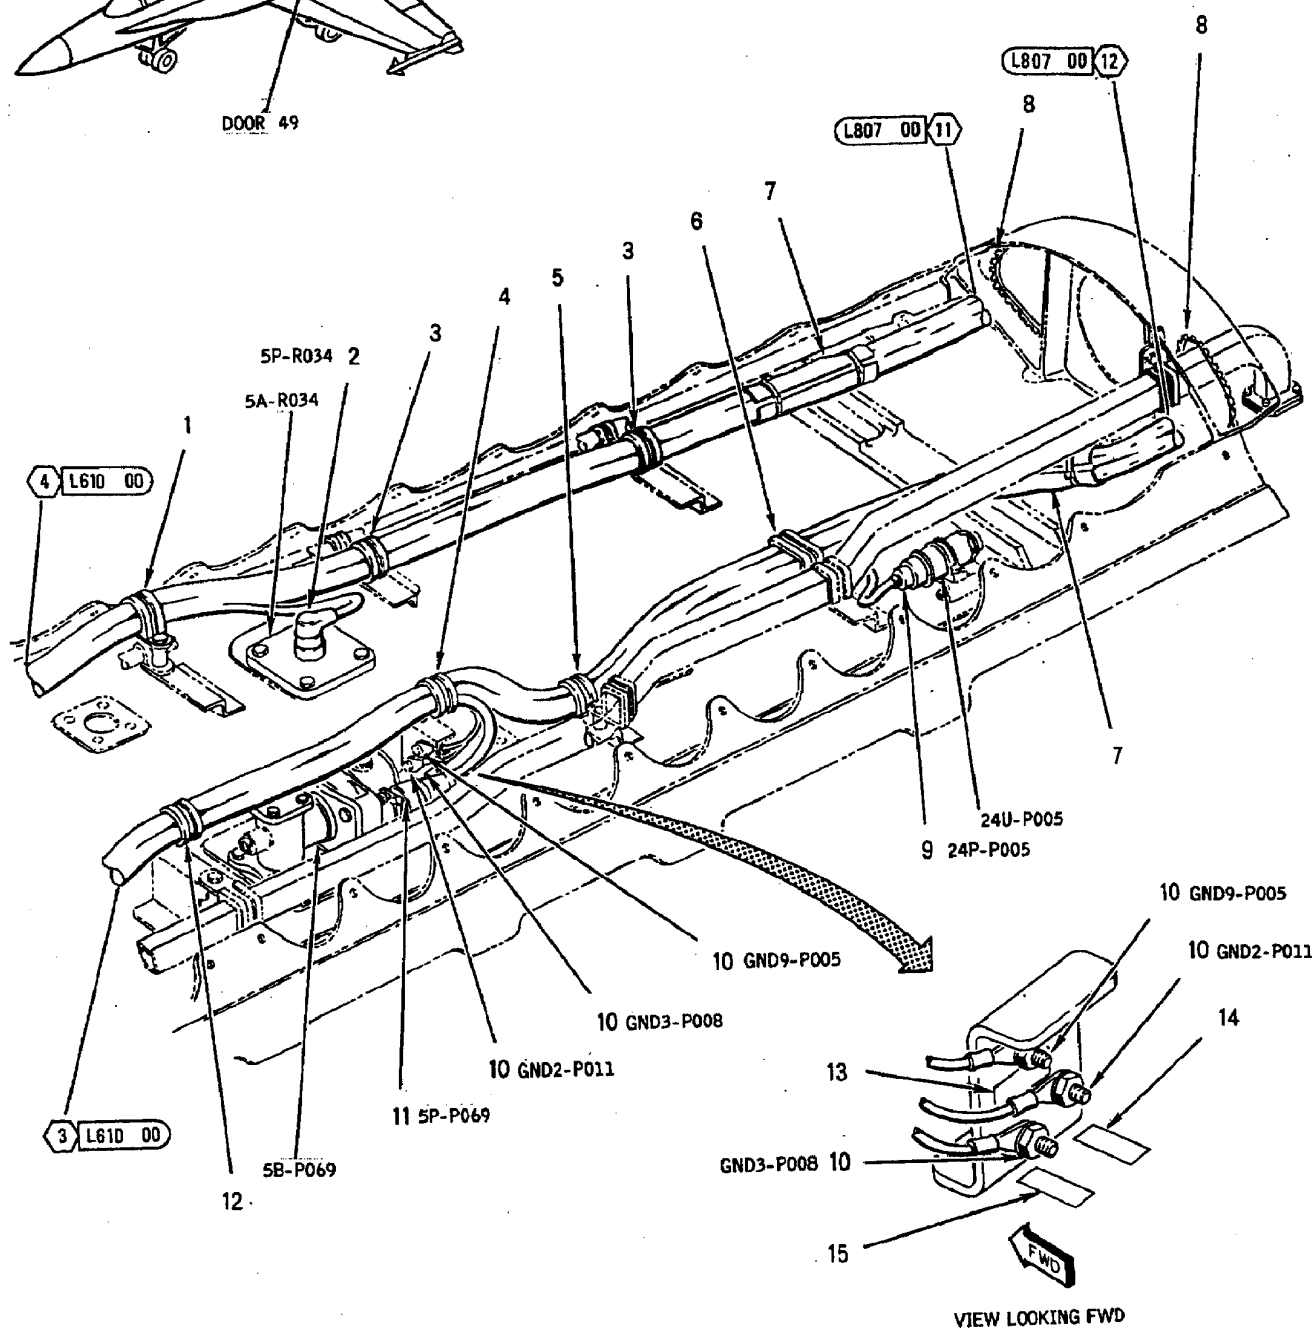


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-14	CLAMP	1	A	PAOZZ
	M85052/3-21	CLAMP	1	B	PAOZZ
	NAS673V9	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-28	SPACER (AP)	1		PAOZZ
2	MS27467T9B35S	CONNECTOR, PLUG (5P-R034)	1		PAOZZ
3	M85052/3-16	CLAMP	2	A	PAOZZ
	M85052/3-21	CLAMP	2	G	PAOZZ
	M85052/3-20	CLAMP	2	H	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-17	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-16	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (72962) (AP) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	SEE ABOVE (76530)	1	D*	PAOZZ
5	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-17	CLAMP	1	B	PAOZZ
	NAS673V9	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-28	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (72962) (AP) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	SEE ABOVE (76530)	1	D*	PAOZZ
6	NAS1712C8-15S	CLAMP	1	A	PAOZZ
	NAS1712C10-20S	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301)	2		MGOZZ
	MS3367-7-0	STRAP (AP)	2	E	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)	2	F*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	2	F*	PAOZZ
8	MS21266-3N	GROMMET	AR		PAOZZ
9	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SA) (24P-P005)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-P005)	1	C	PAOZZ
10	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	3		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 10)	3		PAOZZ
11	MS27467T11B35S	CONNECTOR, PLUG (5P-P069)	1		PAOZZ
12	M85052/3-12	CLAMP	1	A	PAOZZ
	M85052/3-17	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	NAS673V5	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-16	SPACER (AP)	1	H	PAOZZ
13	74A885621-2351	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P005)	1		MDOZZ
14	74A885621-2350	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P011)	1		MDOZZ
15	74A885621-2352	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P008)	1		MDOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161353 THRU 161761
D	161951 & UP
E	161353 THRU 161741
F	161742 & UP
G	161702 THRU 161705
H	161706 & UP
J	161353 THRU 161705

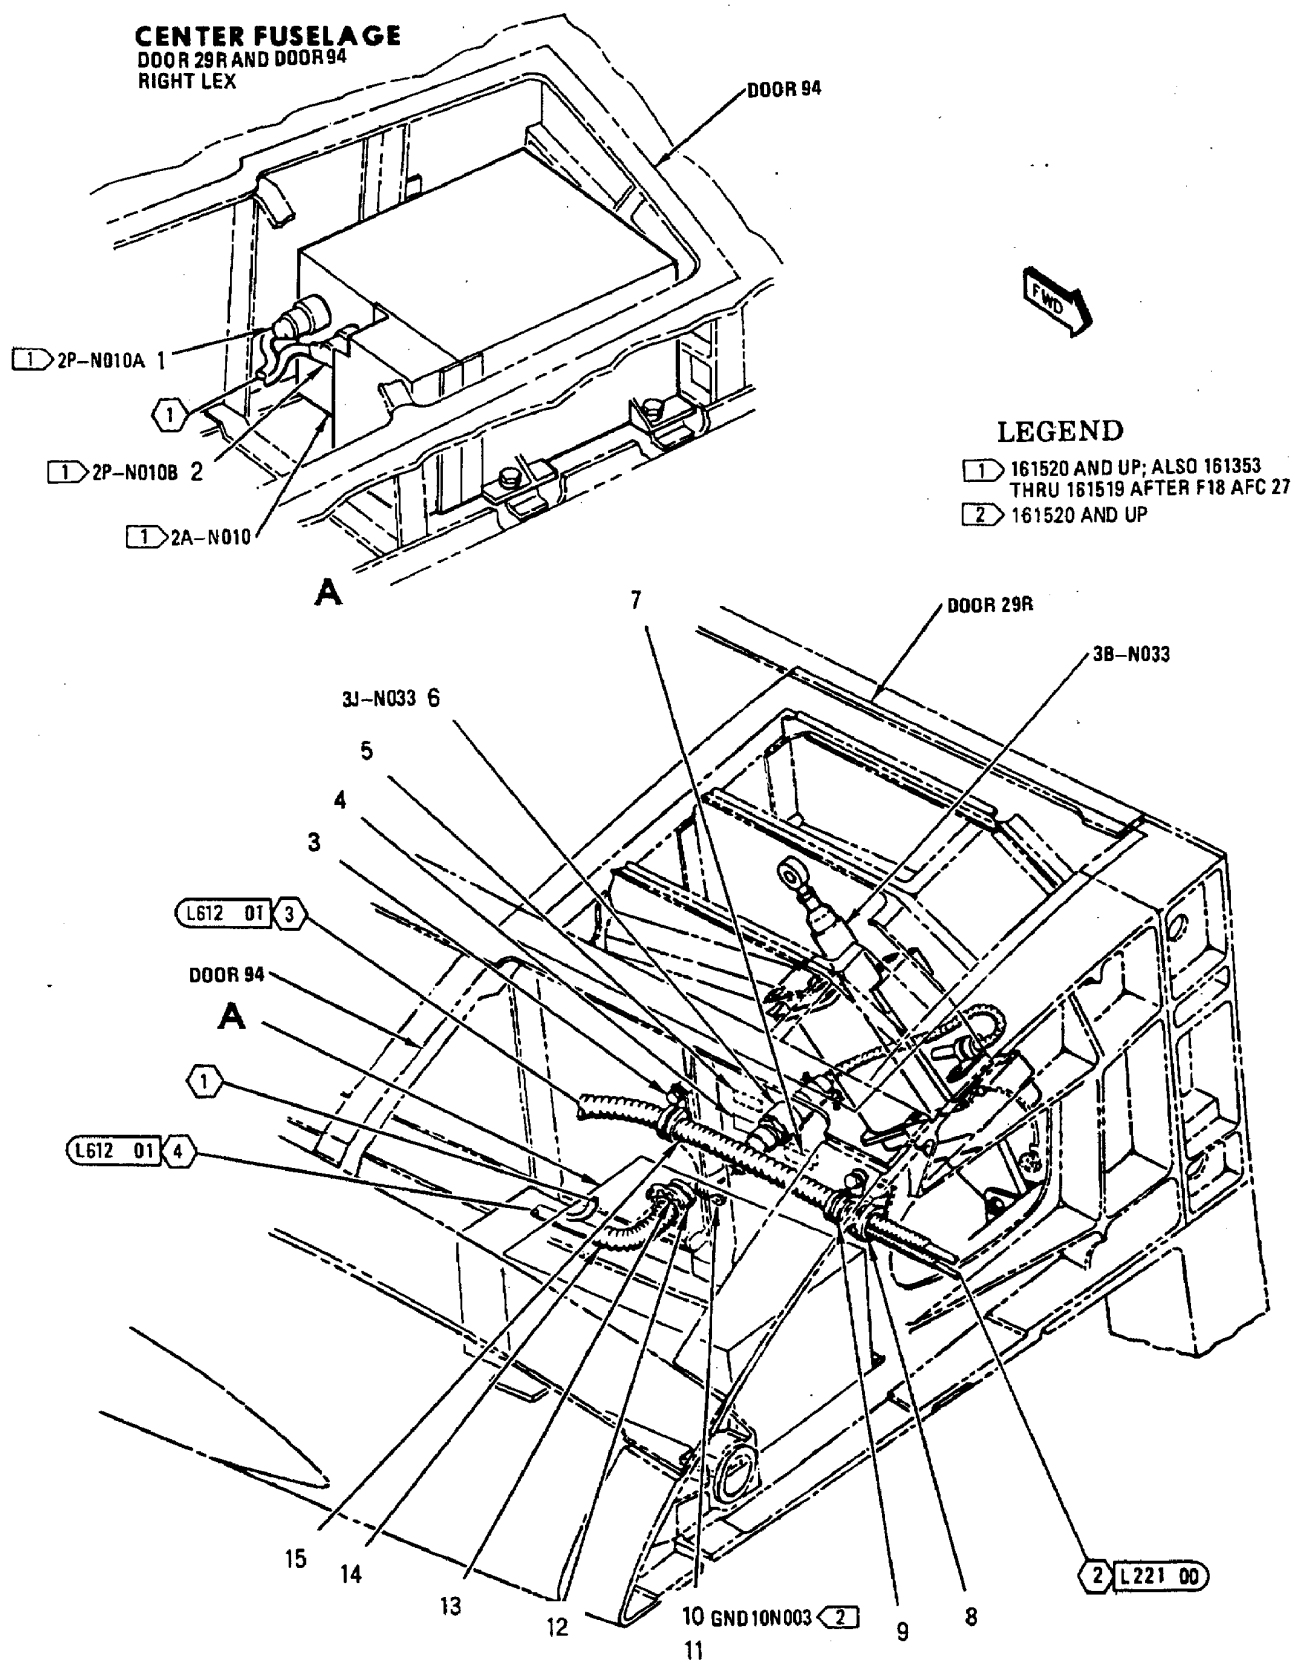

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B35S	CONNECTOR, PLUG (2P-N010A)	1	E	PAOZZ
2	MS27467T15B35P	CONNECTOR, PLUG (2P-N010B)	1	E	PAOZZ
3	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL	1	A*	PAOZZ
		SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	A*	PAOZZ
	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A885621-2592	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES 2A-N010)			
5	74A885621-2337	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 3B-N033)			
6	MS27468T11B35S	CONNECTOR, RECEPTACLE (3J-N033)	1		PAOZZ
7	74A885621-2211	MARKER, IDENTIFICATION - AVIONICS	2		MDOZZ
		(76301) (FOR REF DES 3J-N033)			
8	MS21919WDG #	CLAMP	1		-
	NAS6303U2	BOLT (AP)	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL	1	A*	PAOZZ
		SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1	B	PAOZZ
10	MS25082-3	NUT	1	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	1	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	1	B	PAOZZ
11	74A885621-2601	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES GND10N003)			
12	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL	1	A*	PAOZZ
		SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	MS21919WDG4	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	NAS557-12B	GROMMET	1	B	PAOZZ
14	74A885630-1013	CONDUIT - ELECTRICAL (76301)	1	A	A0000
	74A885630-2015	CONDUIT (76301) (PART OF INDEX 14)	1		MGOZZ
	CRN1137-4	CONVOLUTE REINFORCEMENT (05593)	2	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-004)			
		(PART OF INDEX 14)			
	CTR6612-004	SEE ABOVE (64590)	2	*	PAOZZ
15	74A885630-1003	CONDUIT - ELECTRICAL (76301)	1	A	A0000
	74A885630-2003	CONDUIT (76301) (PART OF INDEX 15)	1		MGOZZ
	CRN1137-4	CONVOLUTE REINFORCEMENT (05593)	2	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-004)			
		(PART OF INDEX 15)			
	CTR6612-004	SEE ABOVE (64590)	2	*	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE

USABLE ON

A 161353 THRU 161519

B 161520 & UP

C 161353 THRU 161987

D 162394 & UP


E 161520 & UP; ALSO
161353 THRU 161519
AFTER F18 AFC 27

F 161520 THRU 163145

CENTER FUSELAGE DOOR 94

LEGEND

- 1 161520 AND UP; ALSO 161353
THRU 161519 AFTER F18 AFC 27
2 161520 AND UP

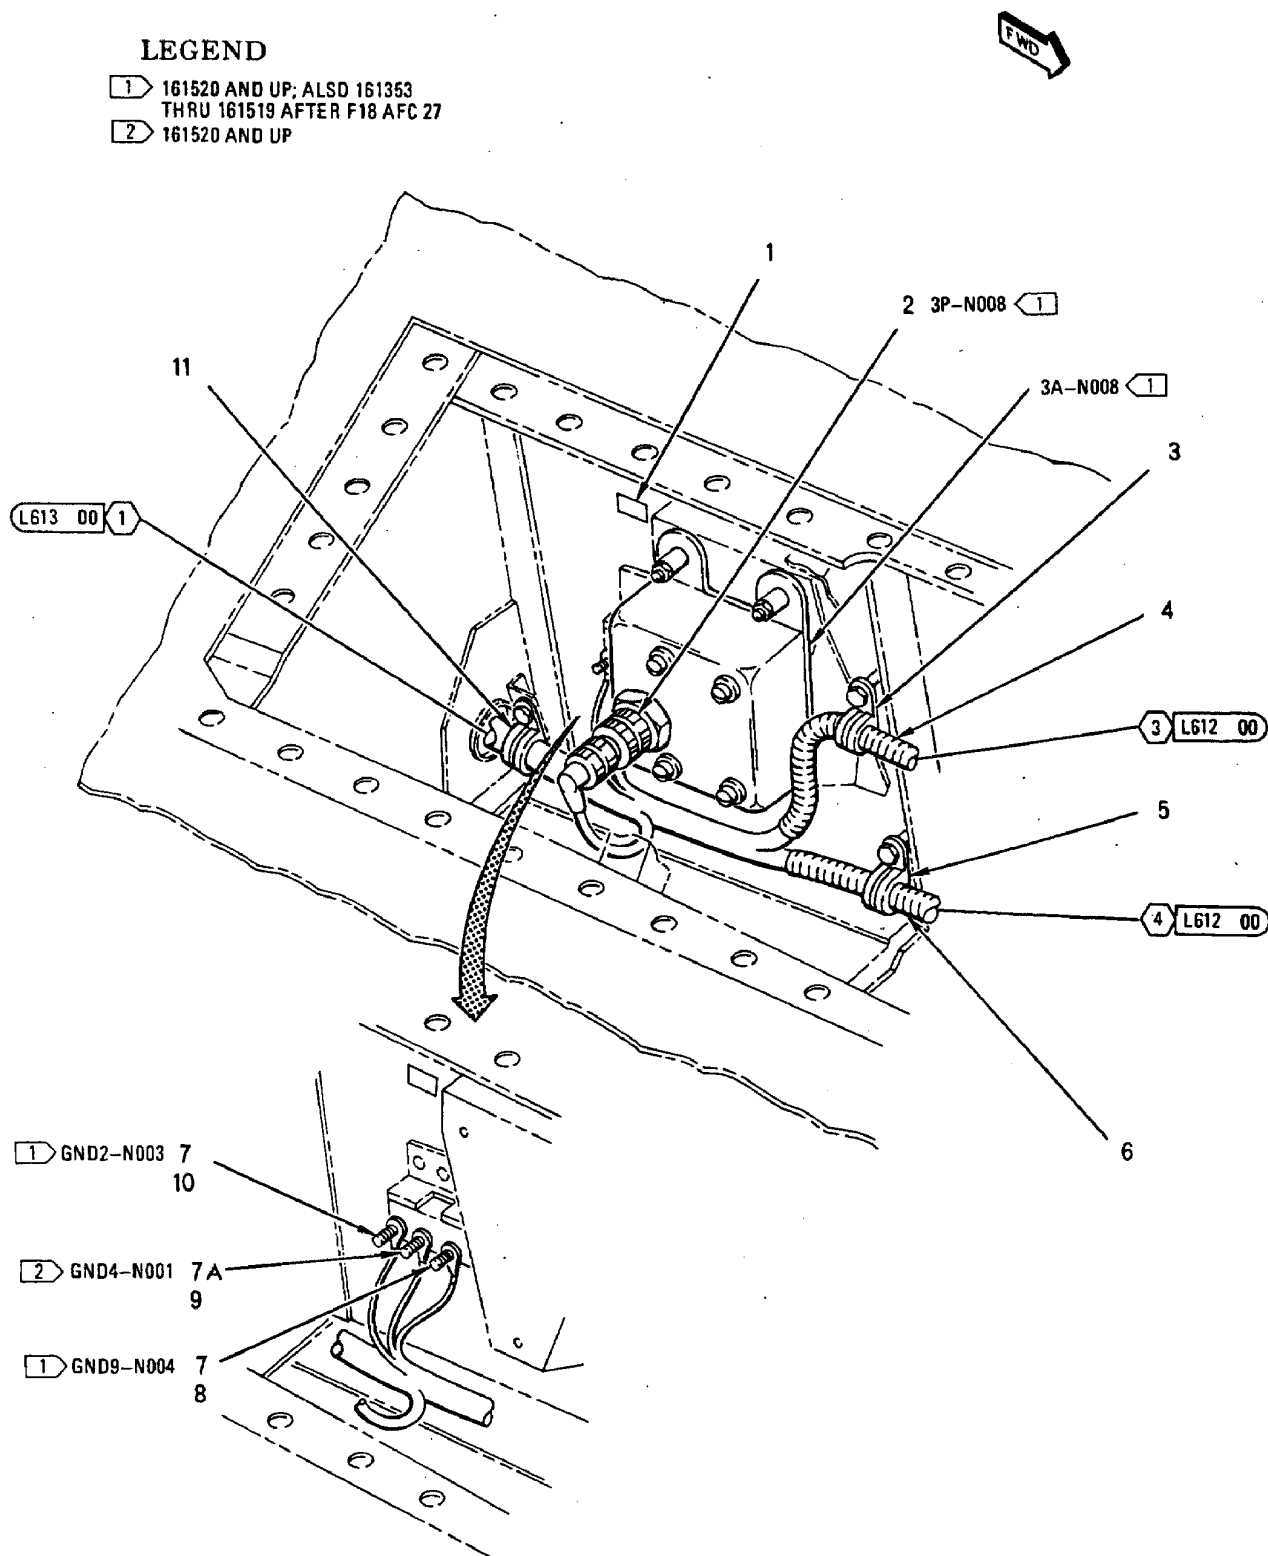

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885621-2600	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 3A-N008)	1	E	MDOZZ
2	MS27467T11B35S	CONNECTOR, PLUG (3P-N008)	1	E	PAOZZ
3	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	A*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	A*	PAOZZ
	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A885630-1003	CONDUIT - ELECTRICAL (76301)	1	A	A0000
	74A885630-2003	CONDUIT (76301) (PART OF INDEX 4)	1	A	MGOZZ
	CRN1137-4	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC STSM1570-004) (PART OF INDEX 4)	2	A*	PAOZZ
	CTR6612-004	SEE ABOVE (64590)	2	A*	PAOZZ
5	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	C*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	D*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	D*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	74A885630-1013	CONDUIT - ELECTRICAL (76301)	1	A	A0000
	74A885630-2015	CONDUIT (76301) (PART OF INDEX 6)	1	A*	MGOZZ
	CRN1137-4	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-004) (PART OF INDEX 6)	2	A*	PAOZZ
	CTR6612-004	SEE ABOVE (64590)	2	A*	PAOZZ
7	MS25082-3	NUT	2	E	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 7)	2	E	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 7)	2	E	PAOZZ
7A	MS25082-3	NUT	1	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 7A)	1	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 7A)	1	B	PAOZZ
8	74A885621-2415	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-N004)	1	B	MDOZZ
	74R785000-2002	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-N004)	1	D	PAOZZ
9	74A885621-2066	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-N001)	1	B	MDOZZ
10	74A885621-2412	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-N003)	1	B	MDOZZ
	74R785000-2001	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-N003)	1	D	PAOZZ
11	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161519
B	161520 & UP
C	161353 THRU 161519 BEFORE F18 AFC 27
D	161353 THRU 161519 AFTER F18 AFC 27
E	161520 & UP; ALSO 161353 THRU 161519 AFTER F18 AFC 27

CENTER FUSELAGE

DOOR 32R
RIGHT LEX


LEGEND


- | | |
|---|--------------------|
| 1 | 161353 THRU 161726 |
| 2 | 161728 AND UP |
| 3 | 161353 THRU 161519 |
| 4 | 161353 THRU 161944 |
| 5 | 161945 AND UP |

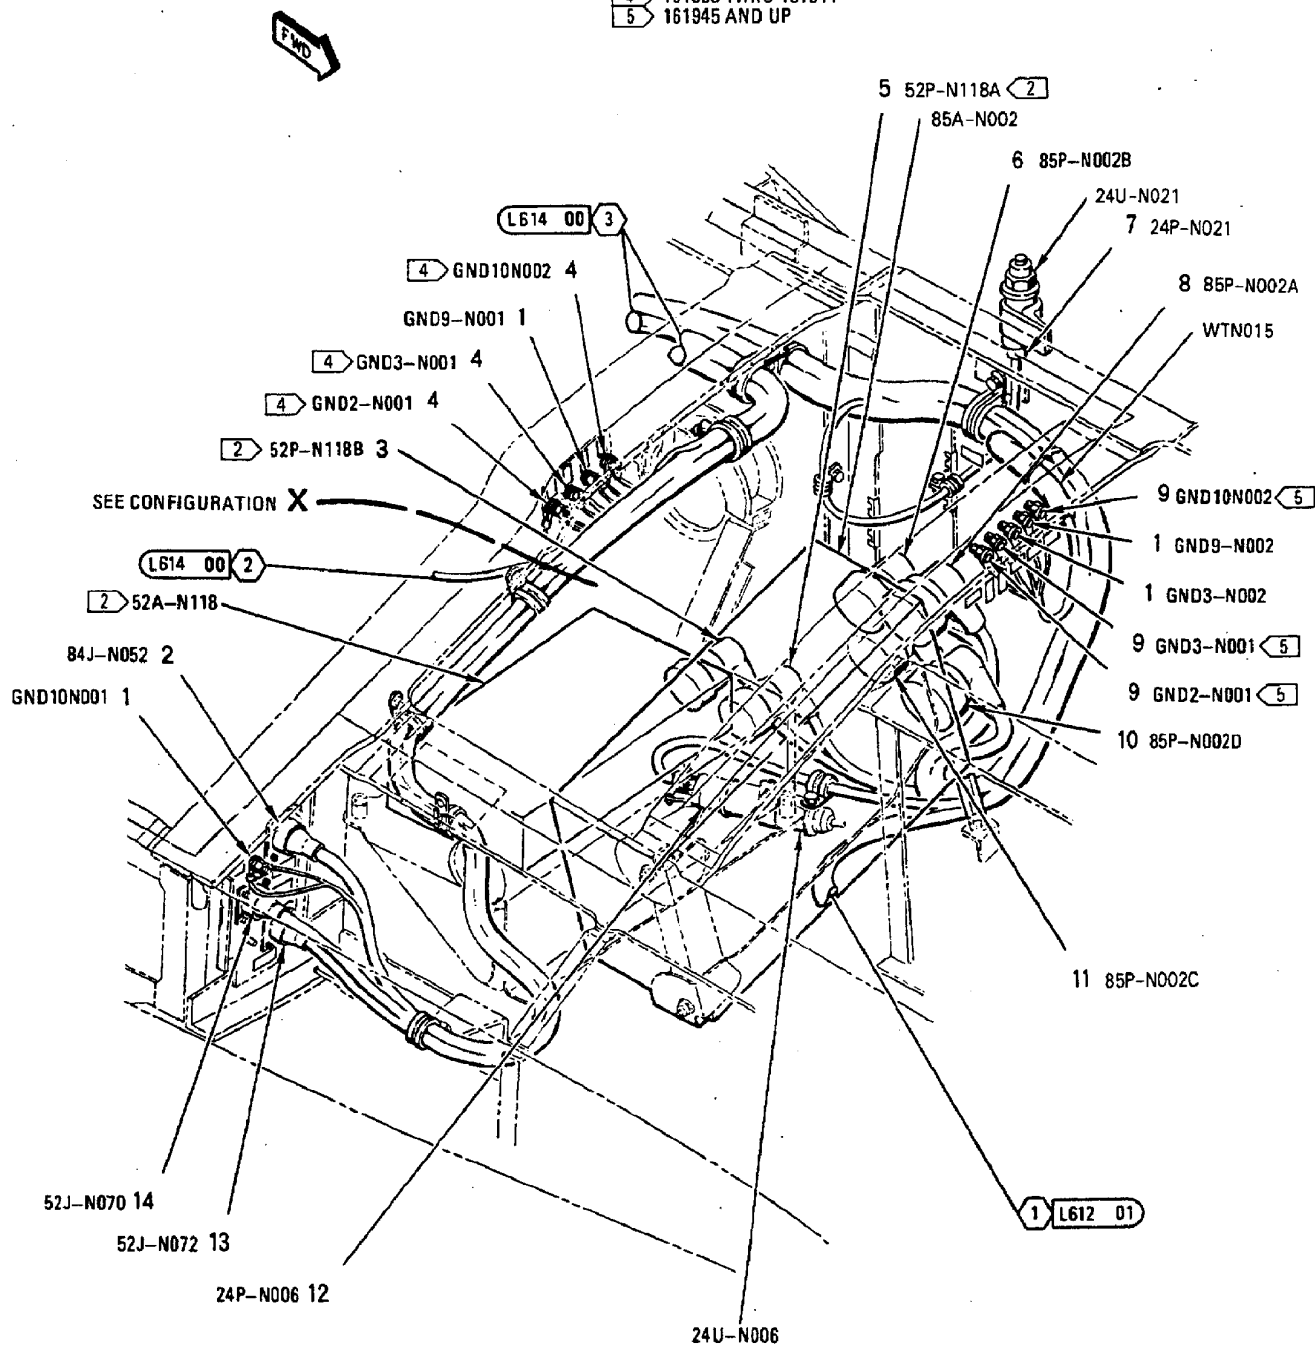

CENTER FUSELAGE

DOOR 32R
RIGHT LEX

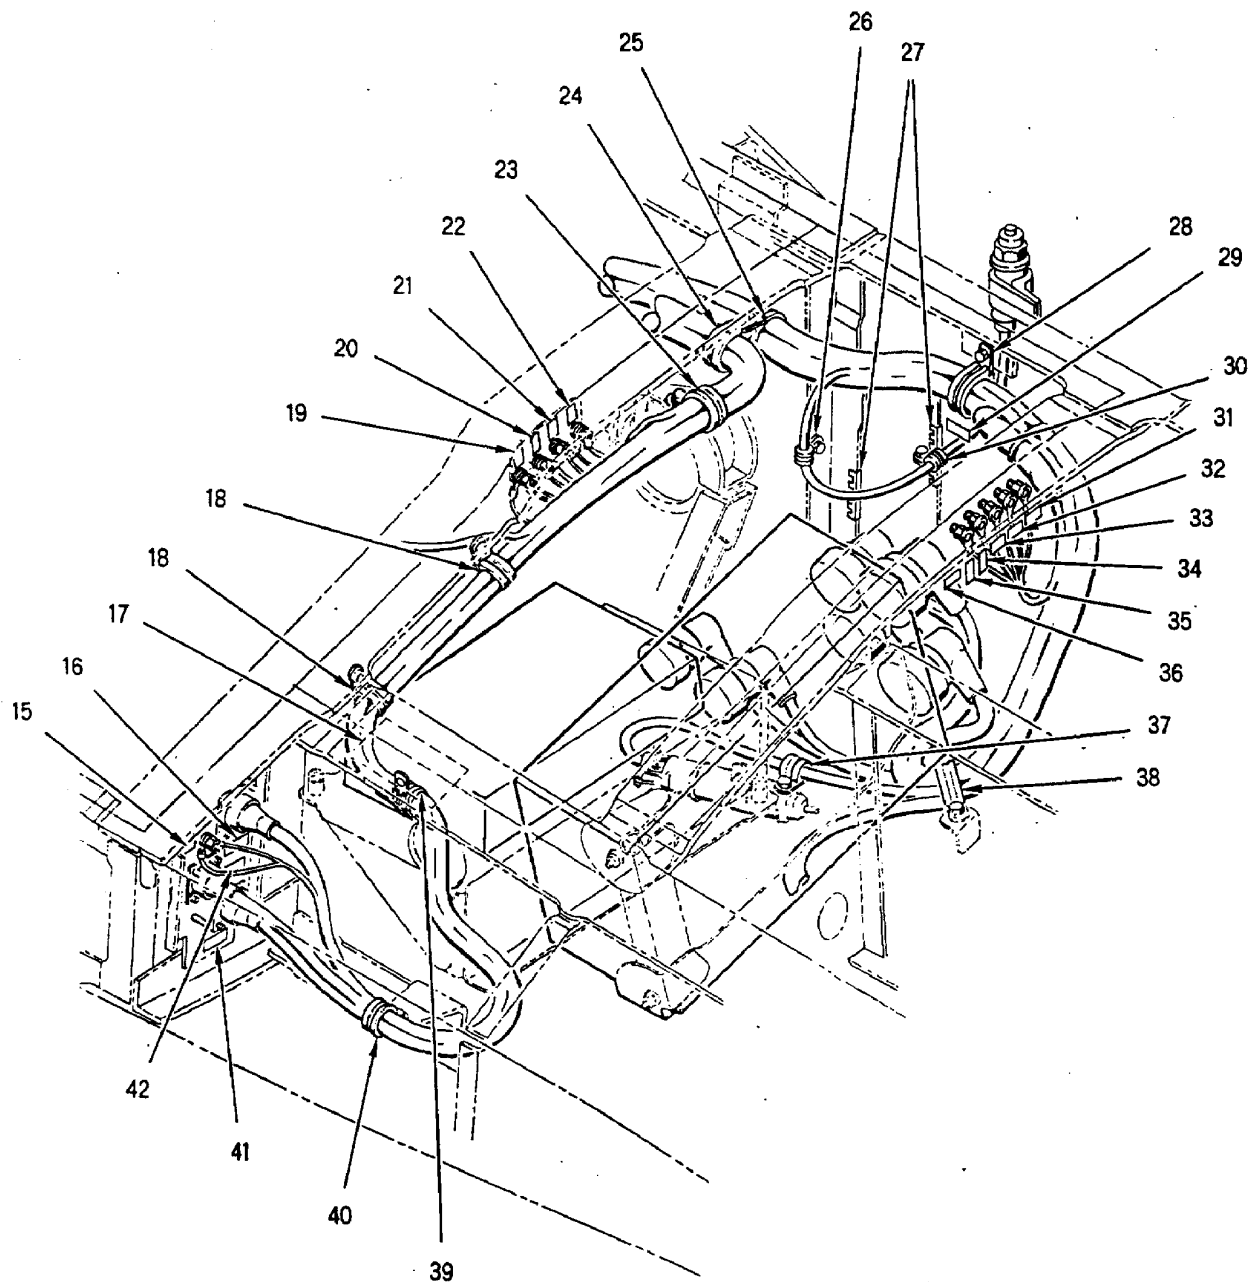

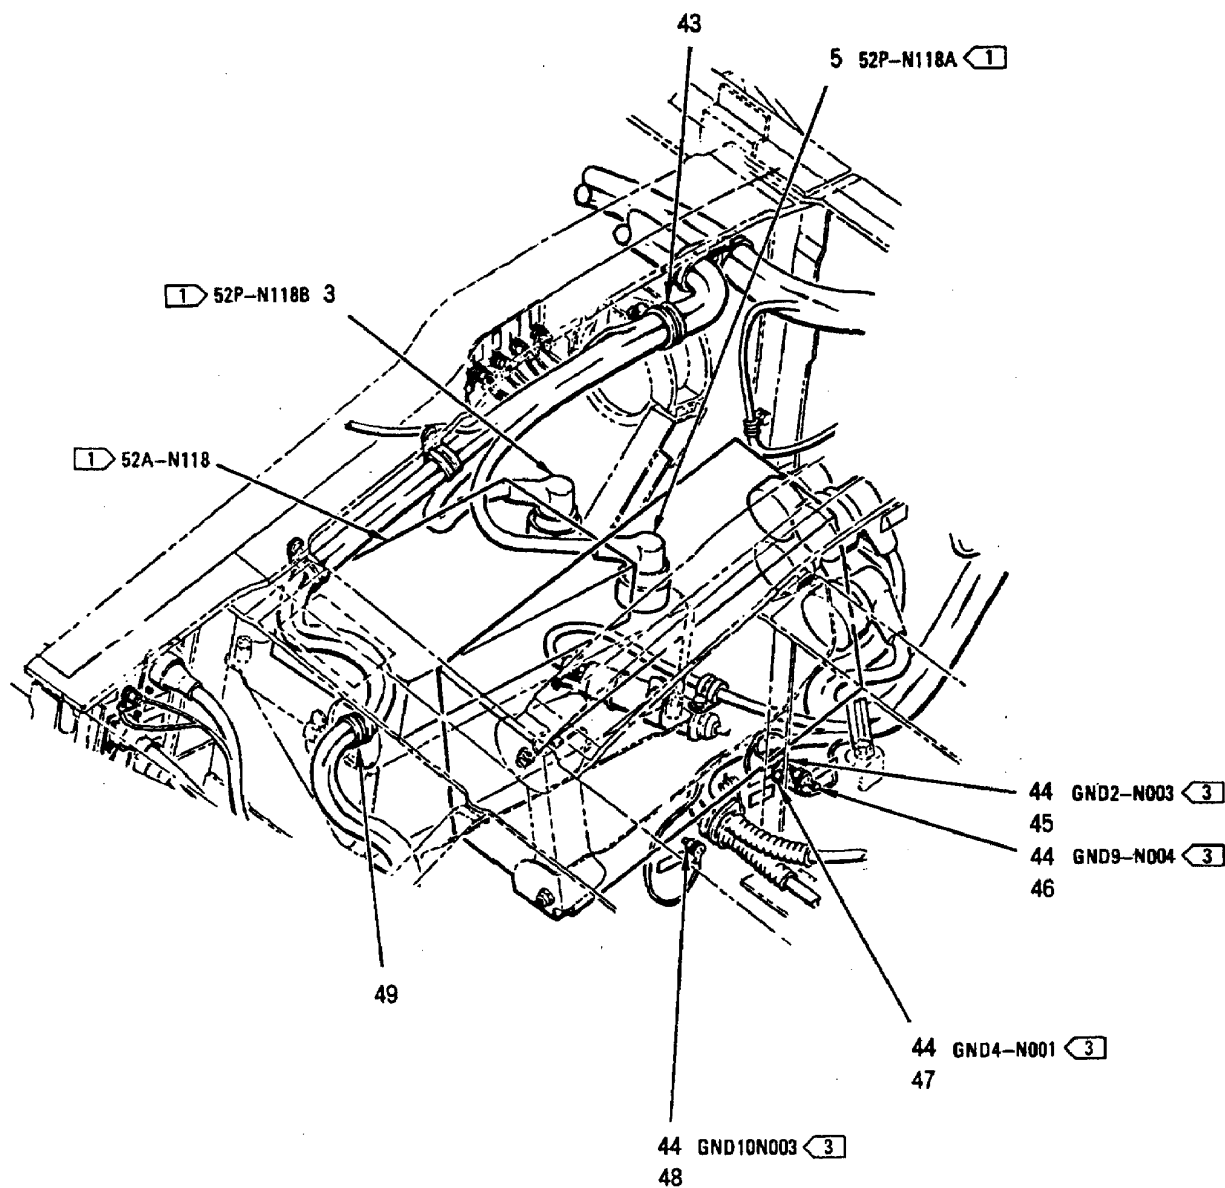

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	MS27656T17B35S	CONNECTOR, RECEPTACLE (84J-N052)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	MS21042L04	NUT (AP)	4		PAOZZ
3	MS27467T19B35SA	CONNECTOR, PLUG (52P-N118B)	1		PAOZZ
4	MS21042L3	NUT	3	J	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	3	J	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	3	J	PAOZZ
5	MS27467T19B35S	CONNECTOR, PLUG (52P-N118A)	1		PAOZZ
6	MS27467T23B35SA	CONNECTOR, PLUG (85P-N002B)	1		PAOZZ
7	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-11-98SA) (24P-N021)			
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) ... (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-N021)	1	A	PAOZZ
8	MS27467T23B35S	CONNECTOR, PLUG (85P-N002A)	1		PAOZZ
9	MS25082-3	NUT	3	J	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 9)	3	J	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 9)	3	J	PAOZZ
10	MS27467T25B35SA	CONNECTOR, PLUG (85P-N002D)	1		PAOZZ
11	MS27467T23B35S	CONNECTOR, PLUG (85P-N002C)	1		PAOZZ
12	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-11-98SA) (24P-N006)			
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) ... (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-N006)	1	A	PAOZZ
13	MS27656T13B98S	CONNECTOR, RECEPTACLE (52J-N072)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
14	MS27656T15B35S	CONNECTOR, RECEPTACLE (52J-N070)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
15	74A885621-2107	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES GND10N001)			
16	74A885621-2142	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES 84J-N052)			
17	74A885621-2566	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES 52A-N118)			
18	JM44LC33WD12	CLAMP, LOOP (22175)	2	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	B*	PAOZZ
	MS21919WDG7	CLAMP	2	C	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	74A885621-2026	MARKER, IDENTIFICATION - AVIONICS	1	H	MDOZZ
		(76301) . (FOR REF DES GND2-N001)			
20	74A885621-2057	MARKER, IDENTIFICATION - AVIONICS	1	H	MDOZZ
		(76301) . (FOR REF DES GND3-N001)			
21	74A885621-2076	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES GND9-N001)			
22	74A885621-2108	MARKER, IDENTIFICATION - AVIONICS	1	H	MDOZZ
		(76301) . (FOR REF DES GND10N002)			
23	MS21919WDG7	CLAMP	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	JM44LC33WD16	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D16)			
25	830WD16G	SEE ABOVE (83930)	1	B*	PAOZZ
	MS21919WDG7	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175)	1	*	PAOZZ
26		(MCDONNELL SPEC ST9M630D23)			
	830WD23G	SEE ABOVE (83930)	1	*	PAOZZ
	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
27	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21266-3N	GROMMET	AR		PAOZZ
28	JM44LC33WD20	CLAMP, LOOP (22175)	1	K*	PAOZZ
		(MCDONNELL SPEC ST9M630D20)			
	830WD20G	SEE ABOVE (83930)	1	K*	PAOZZ
	JM44LC33WD20	CLAMP, LOOP (22175)	1	L*	PAOZZ
		(MCDONNELL SPEC ST9M630D23)			
	830WD23G	SEE ABOVE (83930)	1	L*	PAOZZ
	JM44LC33WD21	CLAMP, LOOP (22175)	1	C*	PAOZZ
		(MCDONNELL SPEC ST9M630D21)			
29	830WD21G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A885621-2152	MARKER, IDENTIFICATION - AVIONICS	1		MDDZZ
		(76301) . (FOR REF DES WTN015)			
30	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
31	74A885621-2108	MARKER, IDENTIFICATION - AVIONICS	1	J	MDOZZ
		(76301) . (FOR REF DES GND10-N002)			
32	74A885621-2077	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES GND9-N002)			
33	74A885621-2413	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES GND3-N002)			
34	74A885621-2057	MARKER, IDENTIFICATION - AVIONICS	1	J	MDOZZ
		(76301) . (FOR REF DES GND3-N001)			
35	74A885621-2026	MARKER, IDENTIFICATION - AVIONICS	1	J	MDOZZ
		(76301) . (FOR REF DES GND2-N001)			
36	74A885621-2578	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES 85A-N002)			
37	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
38	JM44LC33WD12	CLAMP, LOOP (22175)	1	M*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)E			
	830WD12G	SEE ABOVE (83930)	1	M*	PAOZZ
	JM44LC33WD15	CLAMP, LOOP (22175)	1	L*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD15G	SEE ABOVE (83930)	1	L*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
39	MS21919WDG7	CLAMP	1	G	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	G*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	G*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
40	JM44LC33WD12	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	*	PAOZZ
	MS21919WDG7	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
41	74A885621-2146	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES 52J-N072)			
42	74A885621-2145	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) . (FOR REF DES 52J-N070)			
43	JM44LC33WH16R	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630H16R)			
	830WSS16HT	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
44	MS21042L3	NUT	4	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 44)	4	D	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 44)	4	D	PAOZZ
45	74A885621-2412	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) . (FOR REF DES GND2-N003)			
46	74A885621-2415	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) . (FOR REF DES GND9-N004)			
47	74A885621-2066	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) . (FOR REF DES GND4-N001)			
48	74A885621-2334	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) . (FOR REF DES GND10N003)			
49	JM44LC33WD12	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	B*	PAOZZ
	MS21919WDG7	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161761
B	161353 THRU 161726
C	161728 & UP


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		D						161353 THRU 161519			
		E						161353 THRU 161741			
		F						161728 THRU 161741			
		G						161742 & UP			
		H						161353 THRU 161944			
		J						161945 & UP			
		K						161520 THRU 161726; ALSO 161353 THRU 161519 BEFORE F18 AFC			
		L						161353 THRU 161519 AFTER F18 AFC 27			
		M						161520 & UP; ALSO 161353 THRU 161519 BEFORE F18 AFC 27			


CENTER FUSELAGE

DOOR 34R
RIGHT LEX

LEGEND


- | | |
|---|-------------------|
| 1 | 161353 AND 161358 |
| 2 | 161359 AND UP |

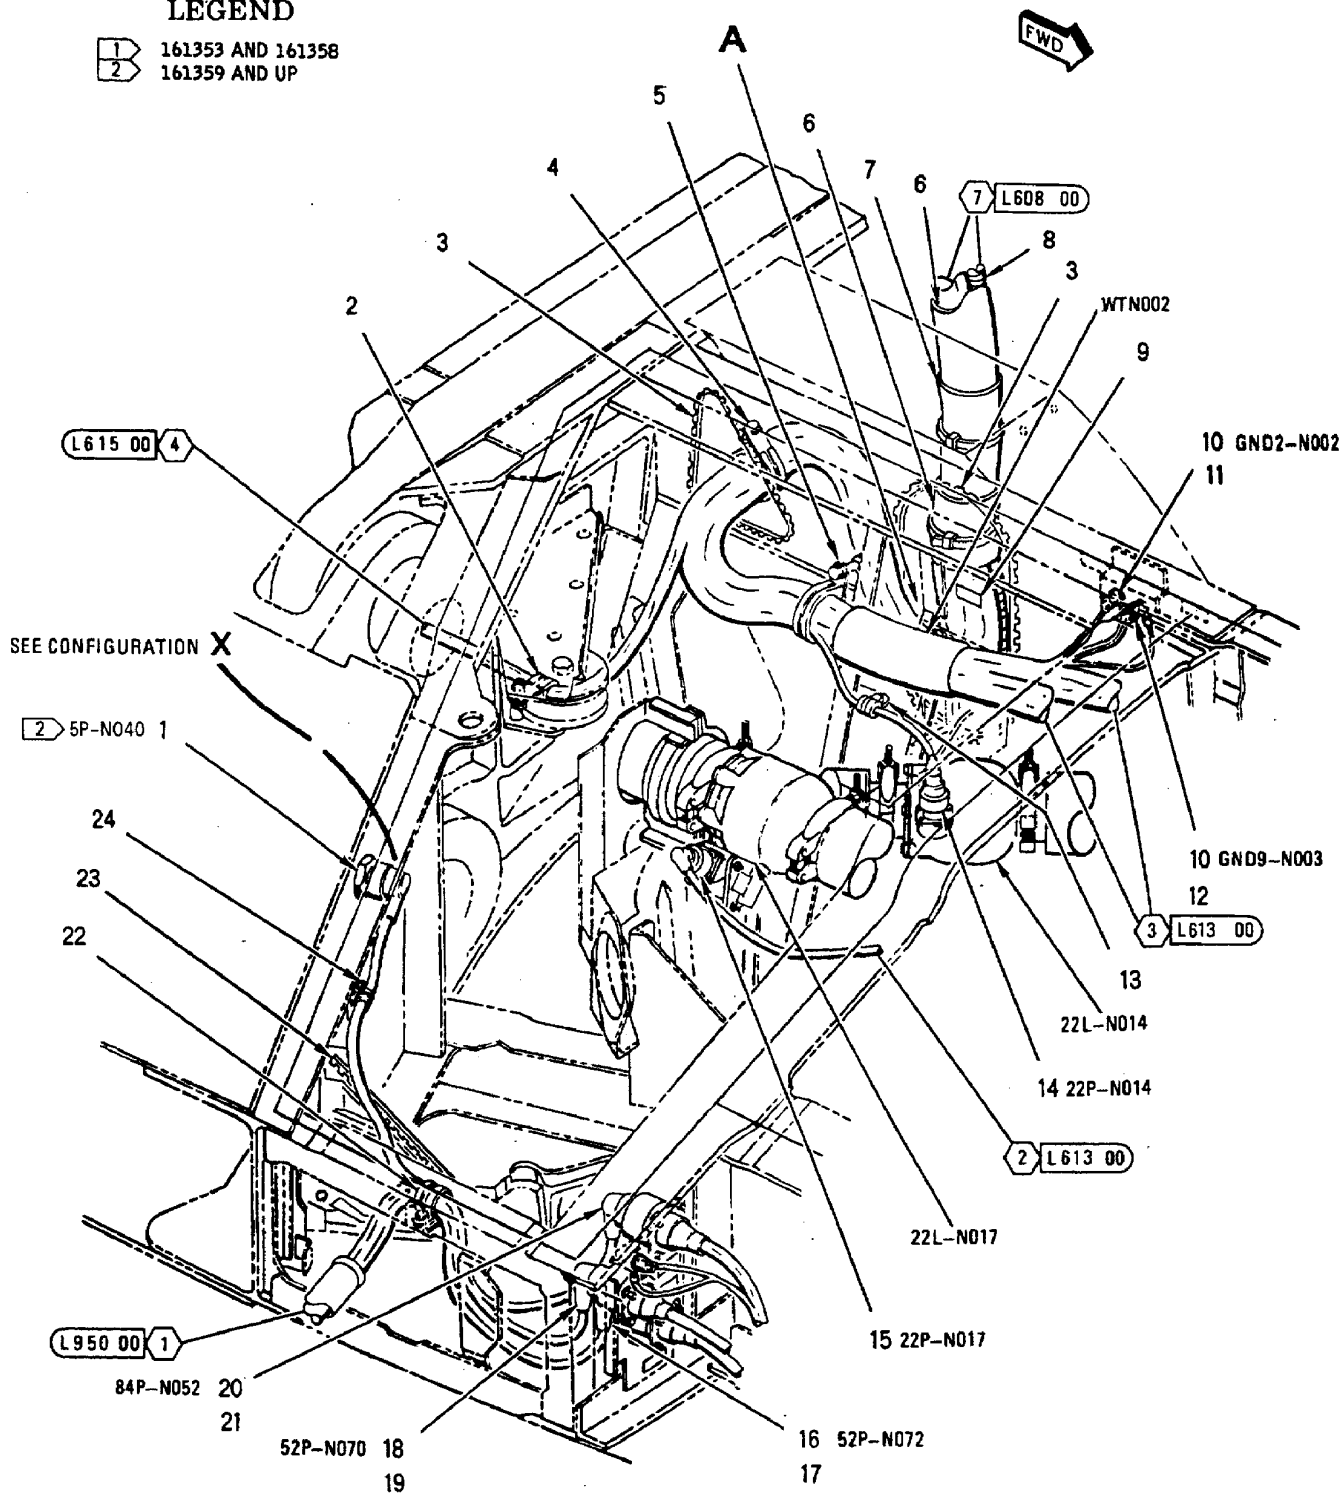

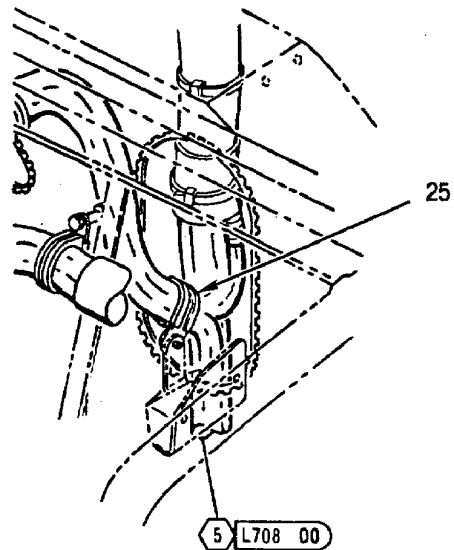

A

1 5P-N040 1

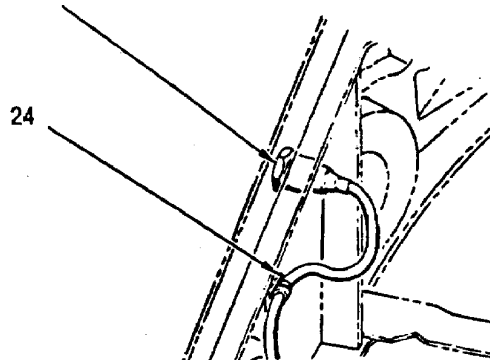

CONFIGURATION X


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B3SS	CONNECTOR, PLUG (5P-N040)	1		PAOZZ
2	MS21919WWDG6	CLAMP	1		PAOZZ
	NAS673V13	BOLT (AP)	1	C	PAOZZ
	NAS673V15	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
3	MS21266-3N	GROMMET	AR		PAOZZ
4	JM44LC33WD20	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D20)			
	830WD20G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D23)			
	830WD23G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
5	JM44LC33WD20	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D20)			
	830WD20G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D23)			
	830WD23G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	74A885639-2001	INSULATION SHEET, ELECTRICAL (76301) ...	2		MGOZZ
	MS3367-7-0	STRAP (AP)	1		PAOZZ
7	74A885639-2003	INSULATION SHEET, ELECTRICAL (76301) ...	1		MGOZZ
	MS3367-7-0	STRAP (AP)	5		PAOZZ
8	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
9	74A885621-2151	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTN002)			
10	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	2		PAOZZ
11	74A885621-2411	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-N002)			
12	74A885621-2414	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-N003)			
13	M85052/1-4	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
14	MS27467T9B35S	CONNECTOR, PLUG (22P-N014)	1		PAOZZ
15	MS27467T9B35S	CONNECTOR, PLUG (22P-N017)	1		PAOZZ
16	MS27467T13B98P	CONNECTOR, PLUG (52P-N072)	1		PAOZZ
17	74A885621-2146	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52J-N072)			
18	MS27467T15B35P	CONNECTOR, PLUG (52P-N070)	1		PAOZZ
19	74A885621-2145	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52J-N070)			
20	MS27467T17B35P	CONNECTOR, PLUG (84P-N052)	1		PAOZZ
21	74A885621-2142	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-N052)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
22	MS21919WDG10	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
23	MS21266-2N	GROMMET	AR		PAOZZ
24	MS21919WDG5	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
25	JM44LC33WD20	CLAMP, LOOP (22175)	1	G*	PAOZZ
		(MCDONNELL SPEC ST9M630D20)			
	830WD20G	SEE ABOVE (83930)	1	G*	PAOZZ
	JM44LC33WD23	CLAMP, LOOP (22175)	1	H*	PAOZZ
		(MCDONNELL SPEC ST9M630D23)			
	830WD23G	SEE ABOVE (83930)	1	H*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161358 & UP
B	161704 & UP
C	161353 THRU 161705
D	161706 & UP
E	161520 & UP; ALSO 161353 THRU 161519 BEFORE F18 AFC 27
F	161353 THRU 161519 AFTER F18 AFC 27
G	161520 & UP; ALSO 161358 THRU 161519 BEFORE F18 AFC 27
H	161358 THRU 161519 AFTER F18 AFC 27


CENTER FUSELAGE DOOR 41R

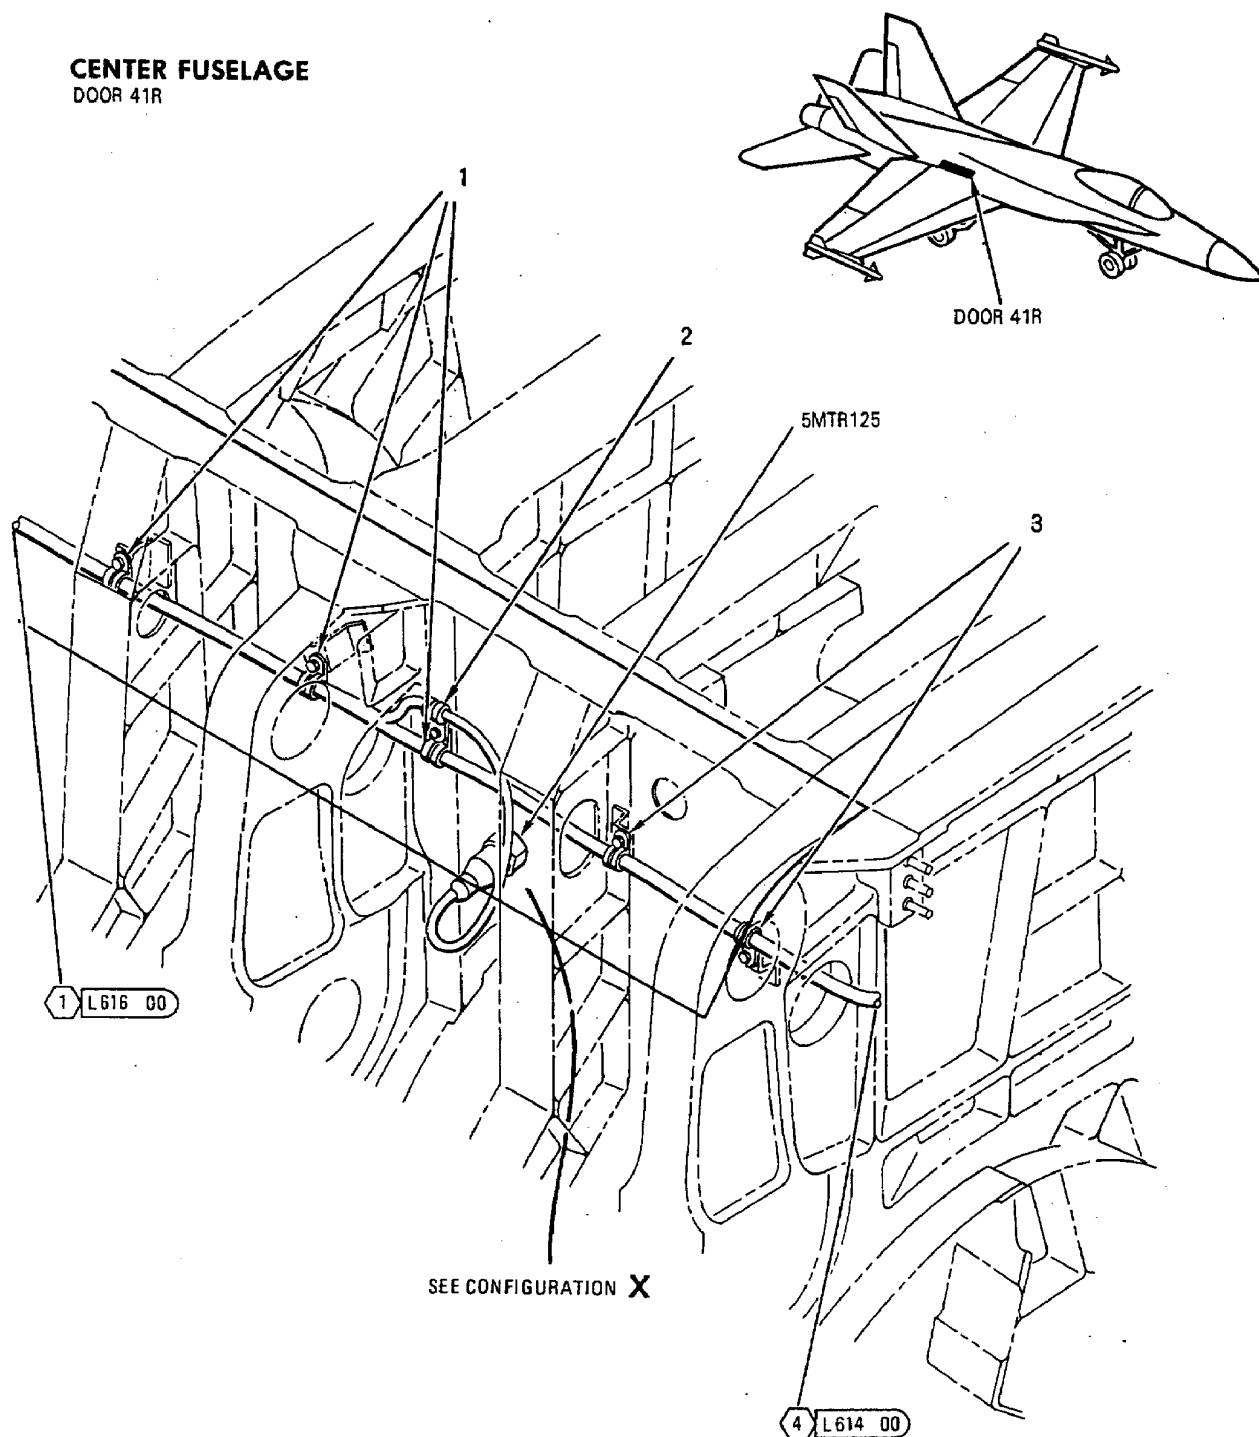

CENTER FUSELAGE DOOR 41R

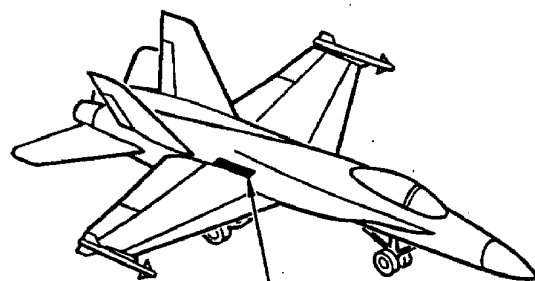

DOOR 41R

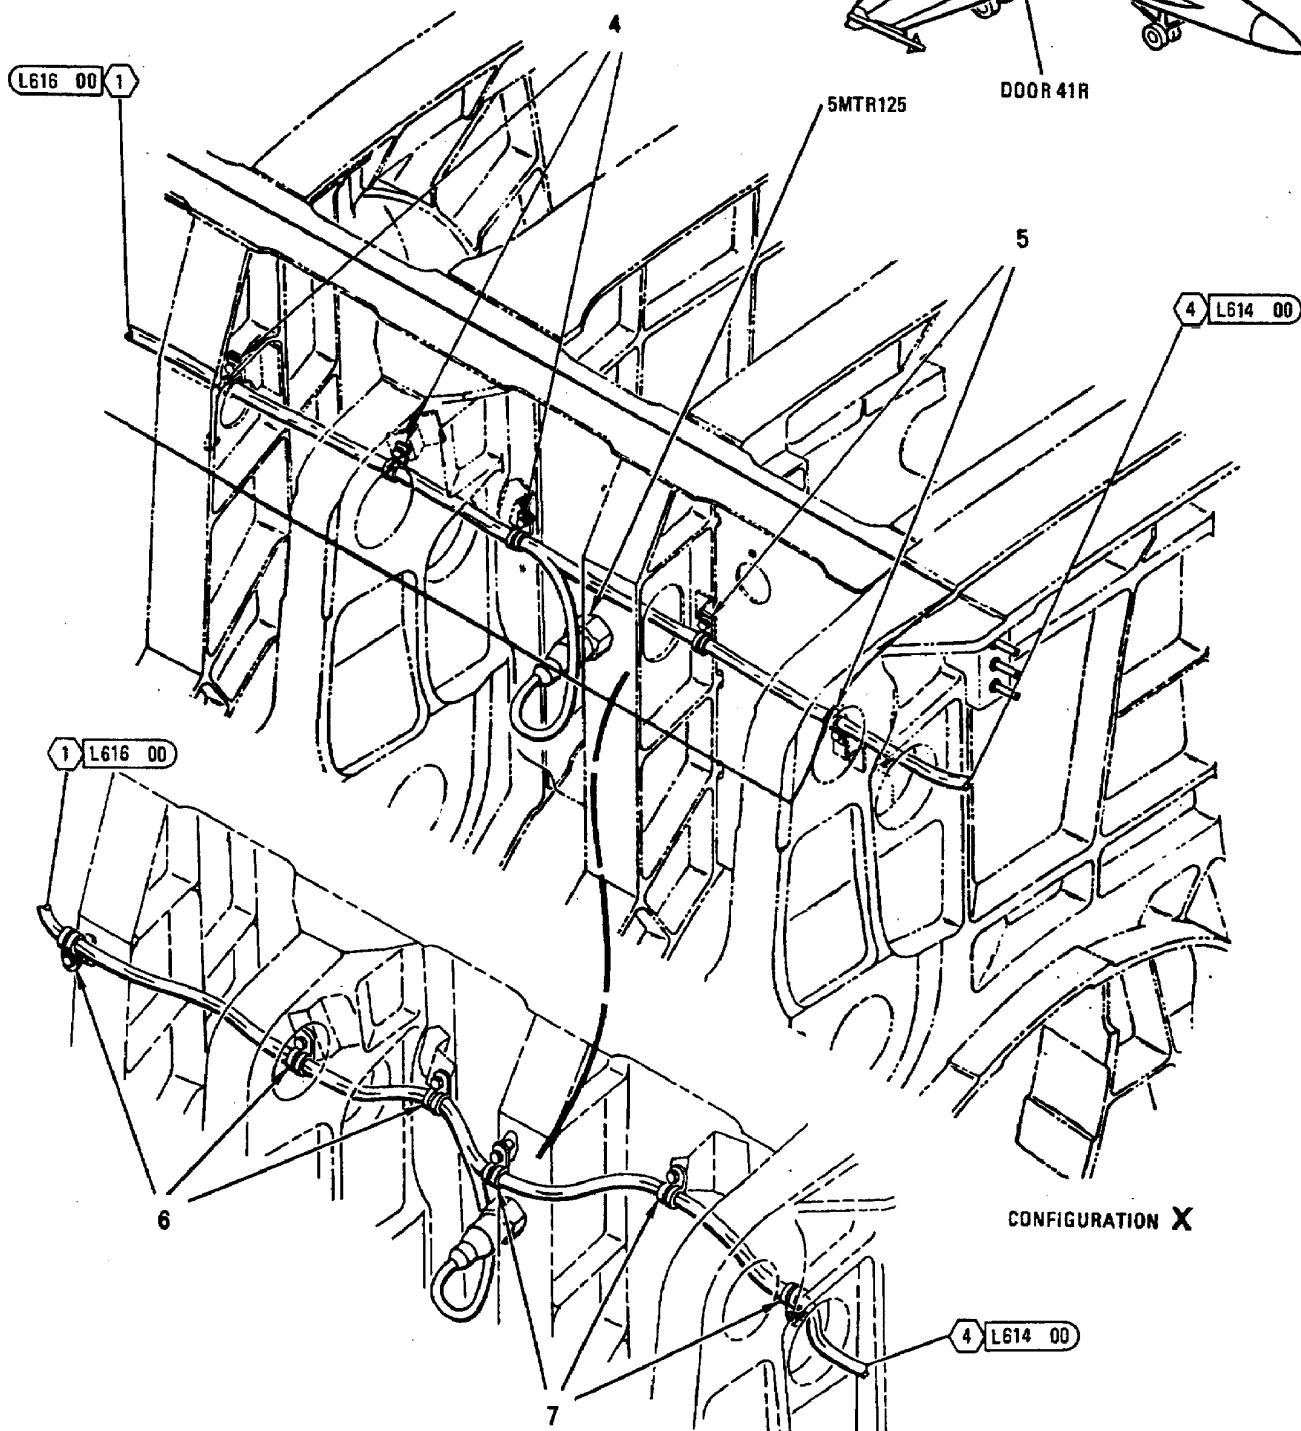


CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	3	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	3	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
2	M85052-1-2	CLAMP	1	C	PAOZZ
3	MS21919WDG6	CLAMP	2	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
4	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	3	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	3	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
5	MS21919WDG6	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
6	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	3	A*	PAOZZ
	830WD8G	SEE ABOVE (83930)	3	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
7	MS21919WDG6	CLAMP	3	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161741
B	161742 THRU 161957
C	161958 & UP

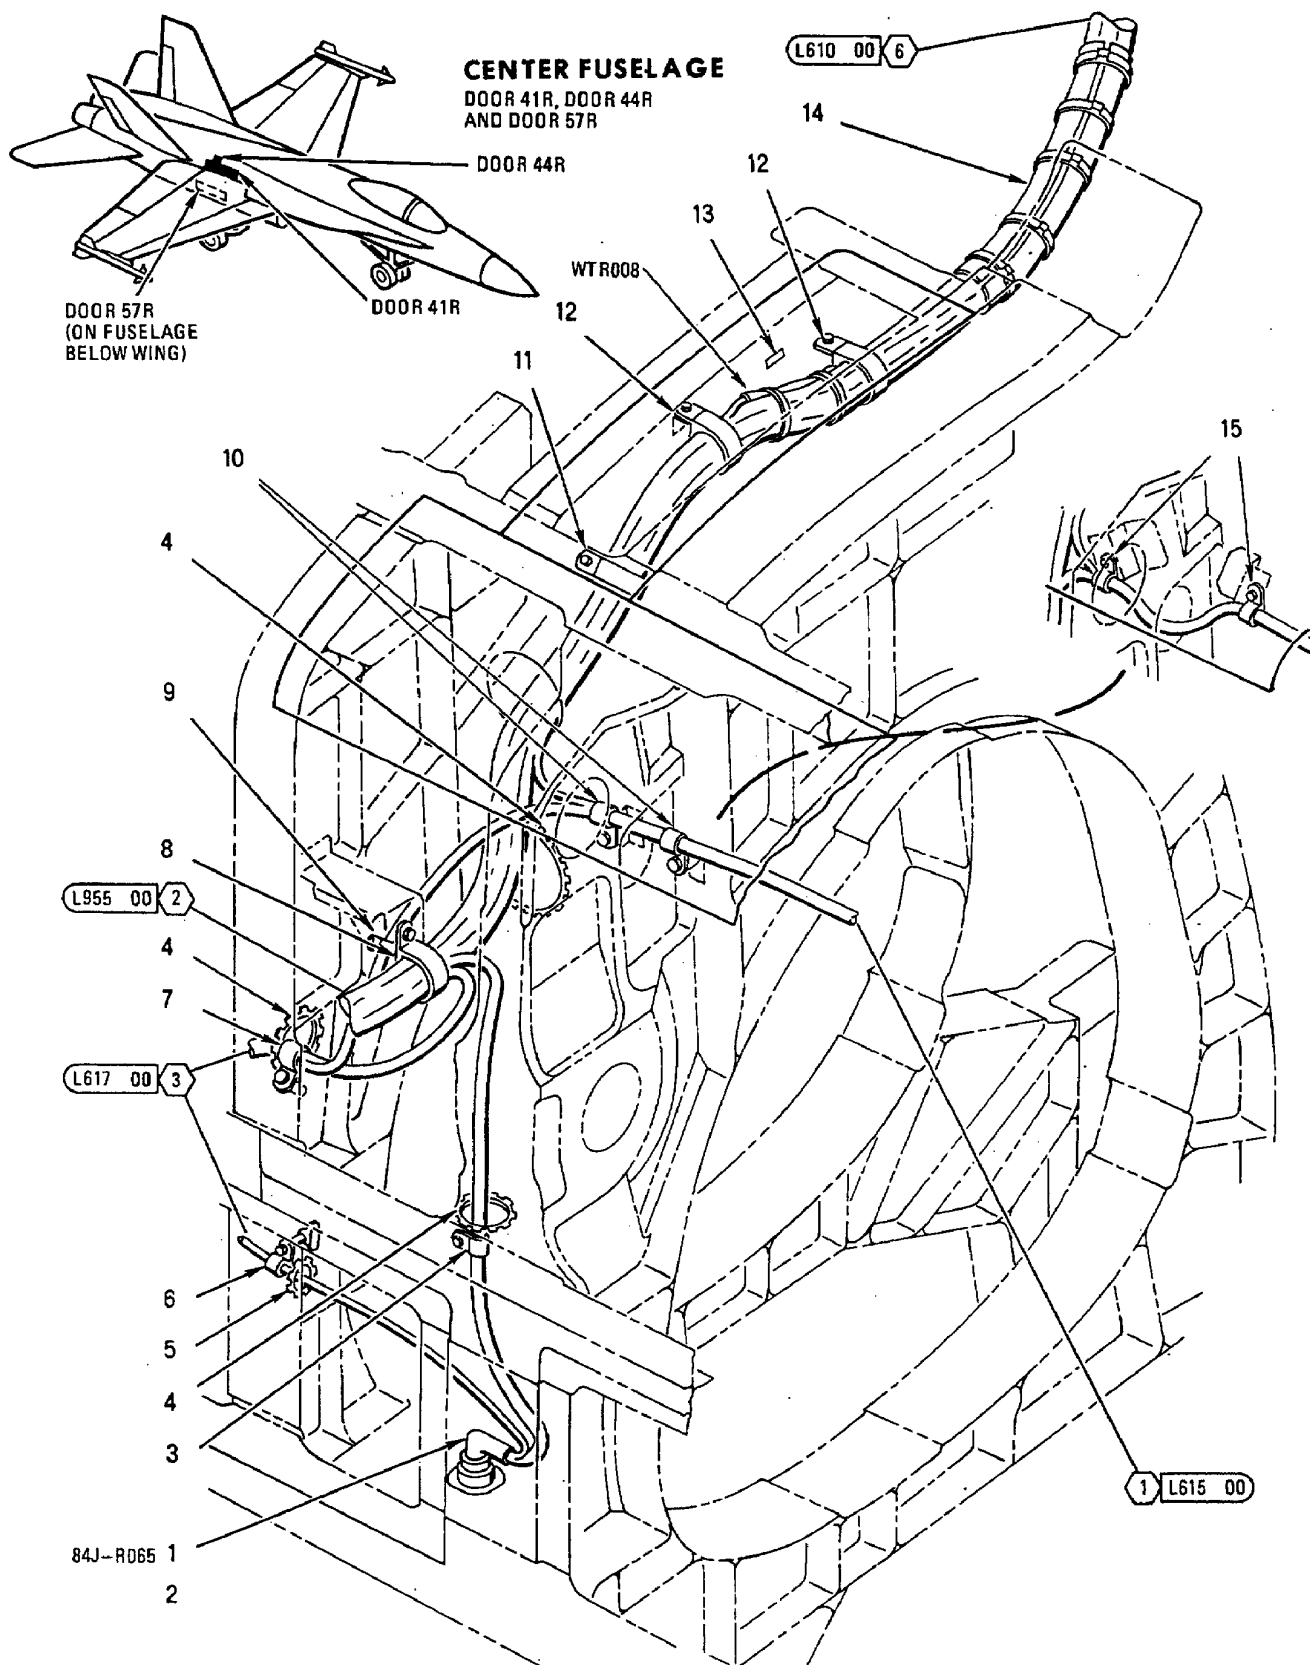

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27468T15B35P	CONNECTOR, RECEPTACLE (84J-R065)	1		PAOZZ
2	74A885621-2196	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R065)	2		MDOZZ
3	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS21266-()N #	GROMMET	AR		-
5	MS21266-5N	GROMMET	AR		PAOZZ
6	M85052/1-2	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
7	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	JM44LC33WD20	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D20)	1	*	PAOZZ
	830WD20G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9N630D8)	2	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
11	M85052/1-16	CLAMP	1		PAOZZ
	NAS673V6	BOLT (AP)	1	E	PAOZZ
	NAS673V12	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-24	SPACER (AP)	1	F	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
12	M85052/1-16	CLAMP	2		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
13	74A885621-2170	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTR008)	1		MDOZZ
14	74A885639-2003	INSULATION SHEET, ELECTRICAL (76301)	1		MGOZZ
	MS3367-7-0	STRAP (AP)	5	B	PAOZZ
	PLT4H-C30	STRAP, TIE-DOWN, ELECTRICAL COMPONENTS (AP) (06383) (MCDONNELL SPEC ST9M559-3)	5	C*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	5	C*	PAOZZ
15	JN44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9N630D8)	2	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE USABLE ON

- A 161358 & UP
- B 161353 THRU 161741
- C 161742 & UP
- D 161966 & UP
- E 161353 THRU 162477
- F 162826 & UP

CENTER FUSELAGE

DOOR 48R, DOOR 57R
AND DOOR 136R

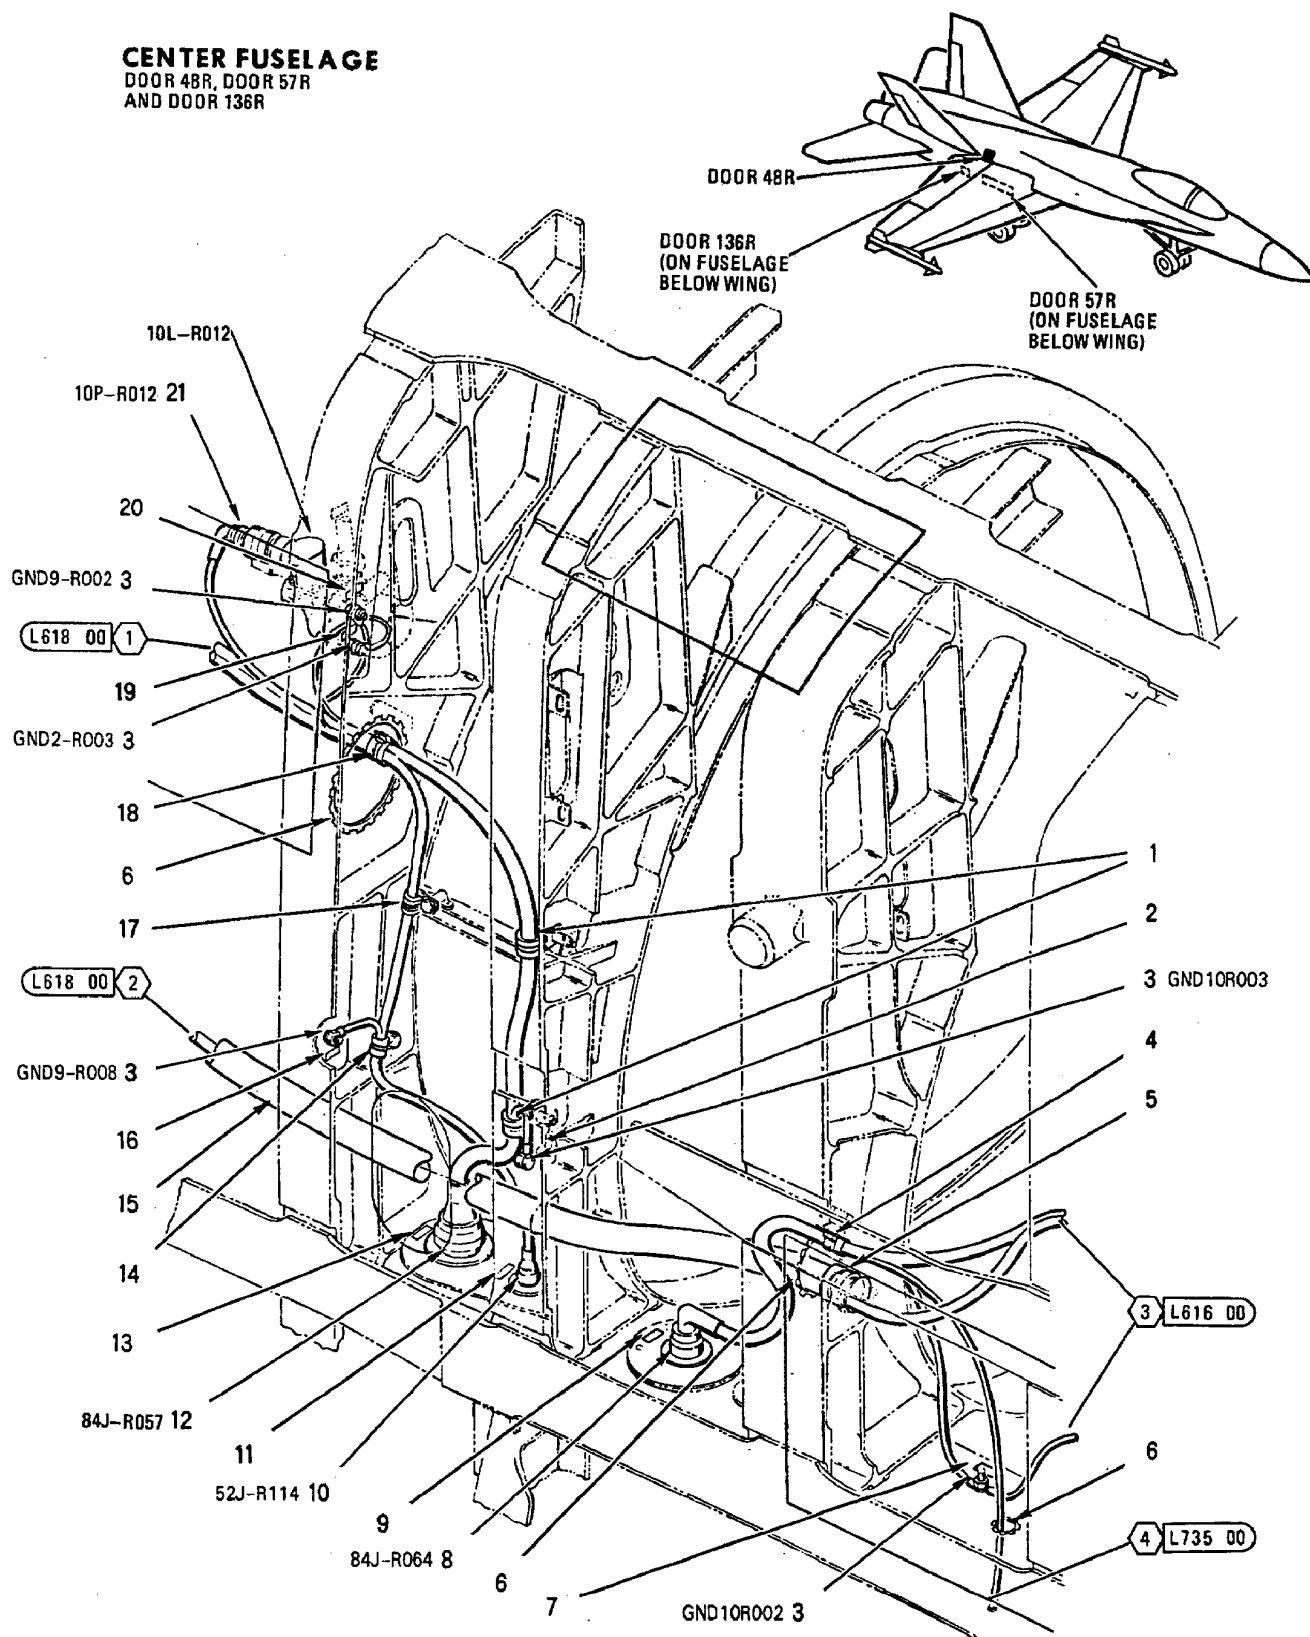

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9N630D8)	2	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS1801-3-15	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
2	74A885621-2116	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R003)	1		MDOZZ
3	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	5		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 3)	5		PAOZZ
4	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	M85052/1-16	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	MS21266-()N #	GROMMET	AR		-
7	74A885621-2115	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R002)	1		MDOZZ
8	MS27468T15B35P	CONNECTOR, RECEPTACLE (84J-R064)	1		PAOZZ
9	74A885621-2197	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R064)	2		MDOZZ
10	MS27468T11B35P	CONNECTOR, RECEPTACLE (52J-R114)	1		PAOZZ
11	74A885621-2198	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R114)	2		MDOZZ
12	MS27468T23B35P	CONNECTOR, RECEPTACLE (84J-R057)	1		PAOZZ
13	74A885621-2199	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R057)	2		MDOZZ
14	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS1801-3-15	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
15	74A885630-1015	CONDUIT, ELECTRICAL (76301)	1		A0000
	74A885630-1029	SEE ABOVE (76301)	1	*	A0000
16	74A885621-2257	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R008)	1		MDOZZ
17	M85052/1-3	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
18	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
19	74A885621-2040	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R003)	1		MDOZZ
20	74A885621-2086	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R002)	1		MDOZZ
21	MS27467T9B98S	CONNECTOR, PLUG (10P-R012)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 THRU 161741

CENTER FUSELAGE DOOR 56R AND DOOR 116R

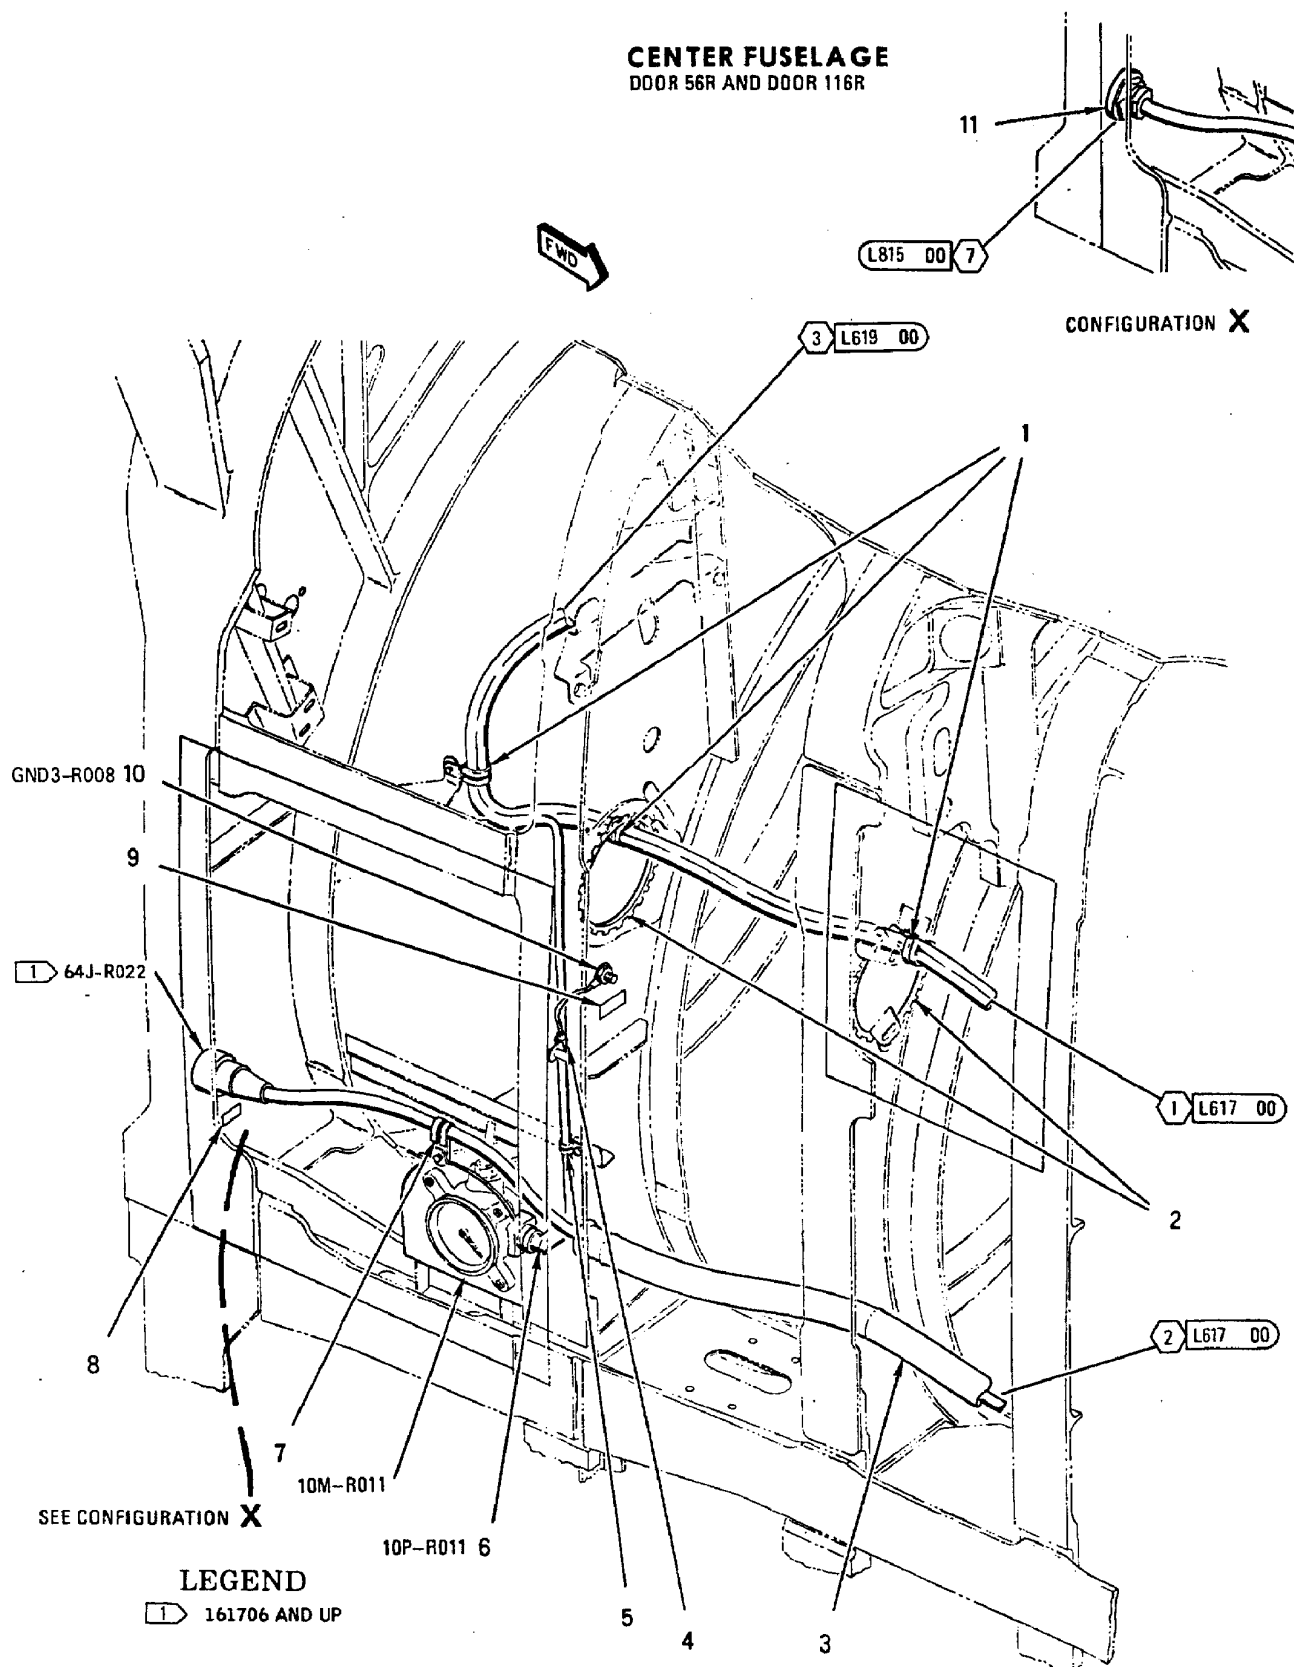



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	3	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	3	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-()N #	GROMMET	AR		-
3	74A885630-1015	CONDUIT, ELECTRICAL (76301)	1		A0000
	74A885630-1029	SEE ABOVE (76301)	1	*	A0000
4	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	HT4024L3-3	SCREW, CLOSE TOLERANCE (AP) (73197) (MCDONNELL SPEC ST3M455-3L3-1)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	C*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	C*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
6	MS27467T11B98S	CONNECTOR, PLUG (10P-R011)	1		PAOZZ
7	MS25281-R6	CLAMP (SUPERSEDES MS25281-6)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
8	74A885621-2586	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 64J-R022)	1	B	MDOZZ
9	74A885621-2506	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R008)	1		MDOZZ
10	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	1		PAOZZ
11	74B878001-165	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161705
B	161706 & UP
C	161353 THRU 162831
D	162832 & UP

CENTER FUSELAGE DOOR 55R

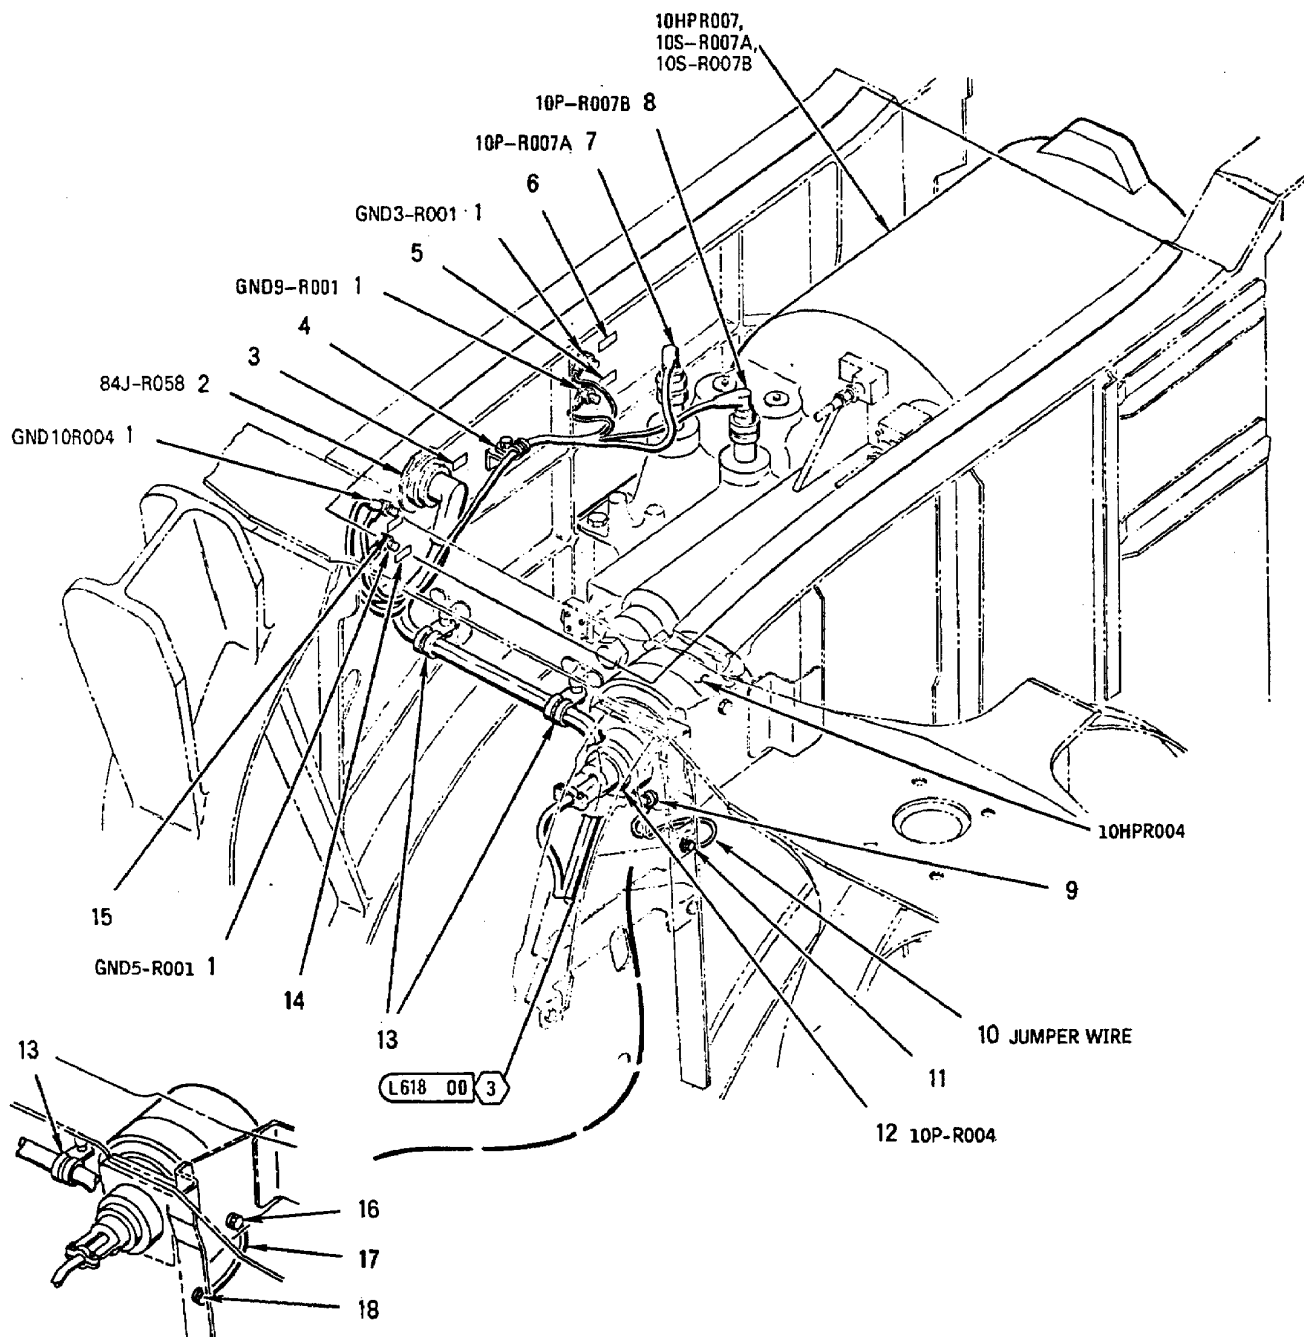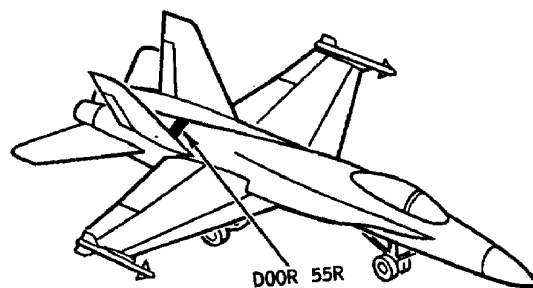

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	MS27468T23B35S	CONNECTOR, RECEPTACLE (84J-R058)	1		PAOZZ
3	74A885621-2279	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-R058)			
4	MS21919WDG2	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
5	74A885621-2085	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-R001)			
6	74A885621-2062	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND3-R001)			
7	MS27467T11B98S	CONNECTOR, PLUG (10P-R007A)	1		PAOZZ
8	MS27467T11B98SA	CONNECTOR, PLUG (10P-R007B)	1		PAOZZ
9	NAS1801-06-6	SCREW	1	B	PAOZZ
	AN960JD6	WASHER (USE WITH INDEX 9)	1	B	PAOZZ
10	MS25083-2CA5	LEAD, ELECTRICAL (JUMPER WIRE)	1	B	PAOZZ
11	NAS673V3	BOLT	1	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	1	B	PAOZZ
12	MS3459W14S2S	CONNECTOR, PLUG (10P-R004)	1		PAGZZ
13	MS25281-8	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74A885621-2071	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND5-R001)			
15	74A885621-2117	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10R004)			
16	NAS674V3	BOLT	1	A	PAOZZ
	AN960C416L	WASHER (USE WITH INDEX 16)	1	A	PAOZZ
	NAS1291C4M	NUT (USE WITH INDEX 16)	1	A	PAOZZ
17	MS25083-2BC5	LEAD, ELECTRICAL (JUMPER WIRE)	1	A	PAOZZ
18	NAS673V3	BOLT	1	A	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 18)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162477
B	162826 & UP






CENTER FUSELAGE

DOOR 12L, DOOR 37L,
DOOR 39L AND DOOR 129L
LEFT NACELLE

LEGEND

- 1 161353 THRU 161521
- 2 161522 AND UP

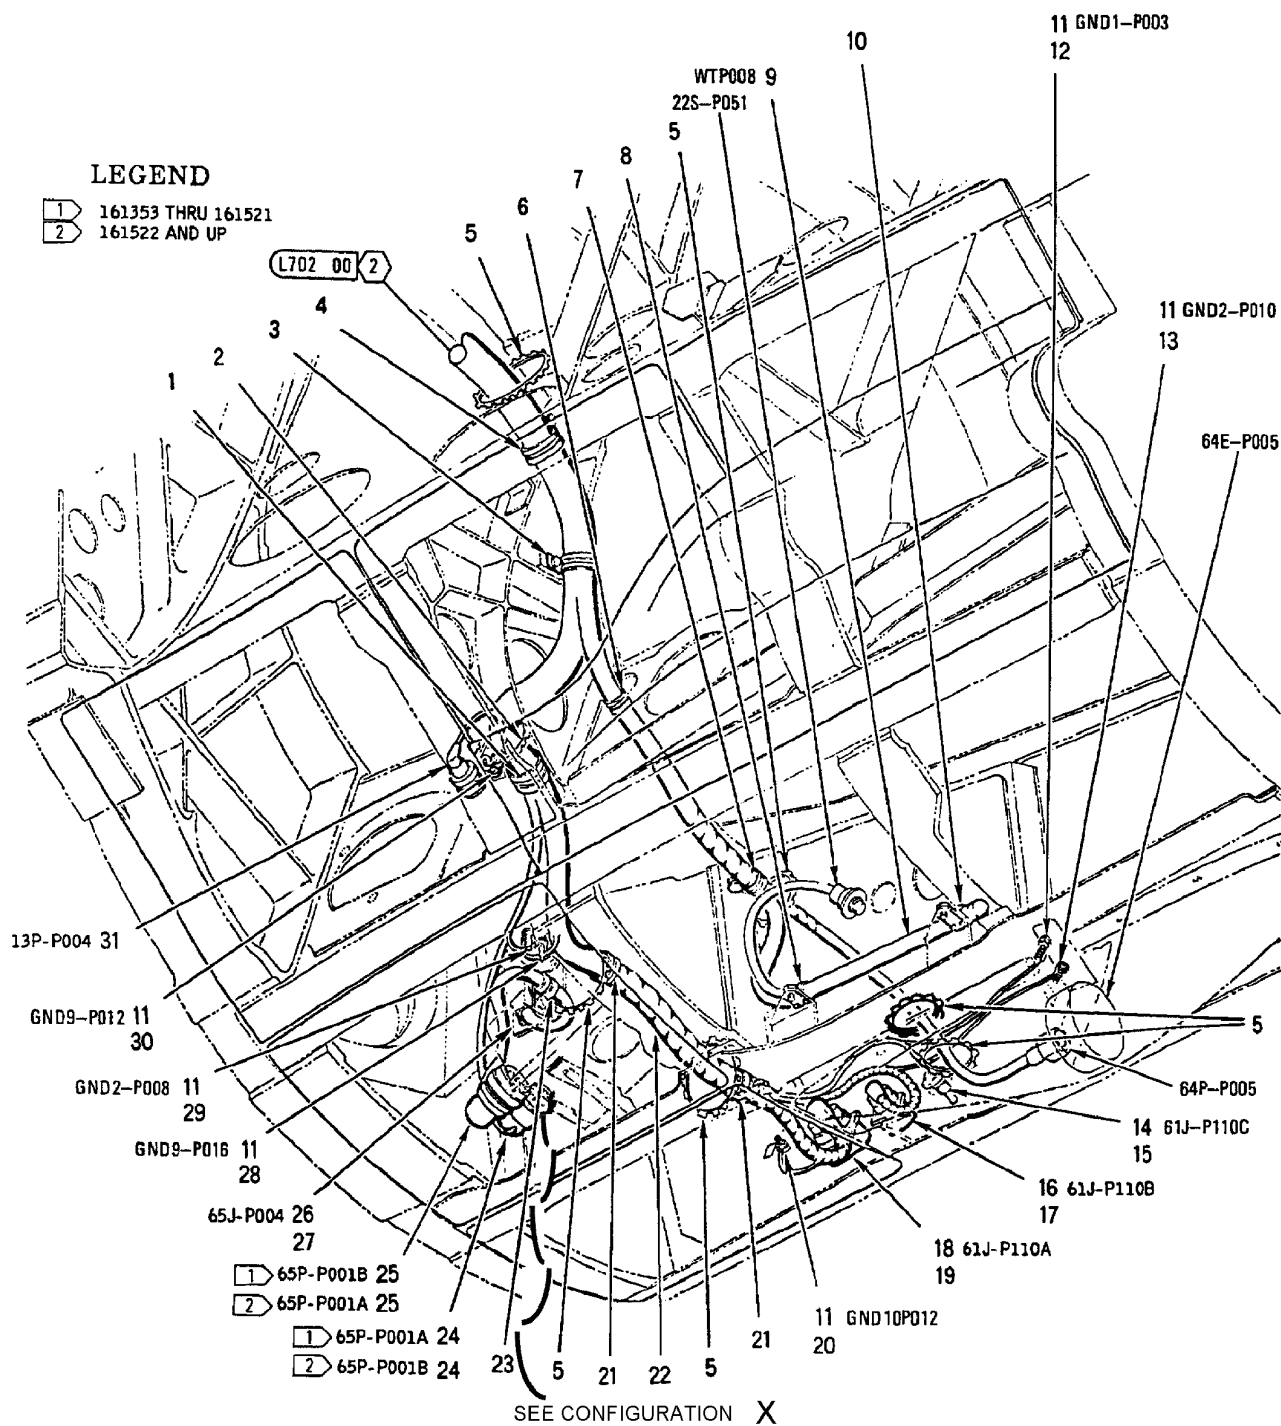

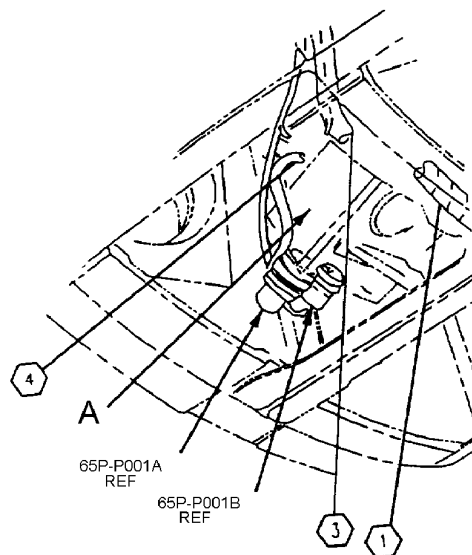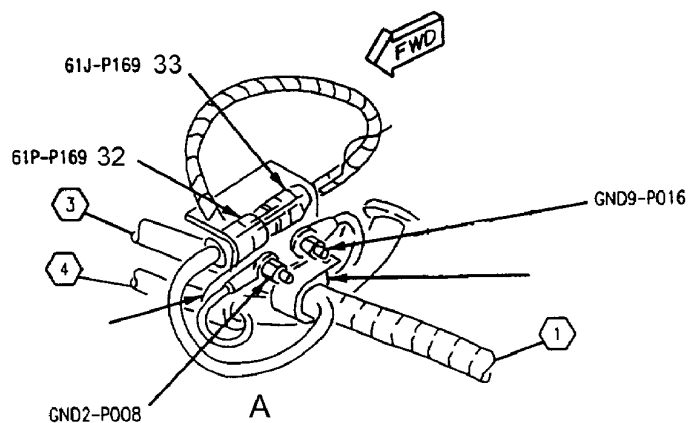

CONFIGURATION X

162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG6	CLAMP	1	G	PAOZZ
	MS21919WDG14	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
2	MS21266-3N	GROMMET	AR		PAOZZ
3	JN44LC44WD10	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
4	JM44LC44WD9	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D9)			
	830WD9G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
5	MS21266-2N	GROMMET	AR	E	PAOZZ
6	JM44LC44WD8	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
7	JM44LC44WD9	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D9)			
	830WD9G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (83930)	1	*	PAOZZ
8	MS21919WDG3	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
9	74A885621-2160	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES WTP008)			
10	MS21919WDG5	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
11	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	6		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 11)	6		PAOZZ
12	74A885621-2409	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND1-P003)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
13	74A885621-2410	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P010)	1		MDOZZ
14	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1426A001) (61J-P110C)	1	*	PAOZZ
	5841-0904	SEE ABOVE (95077)	1	*	PAOZZ
15	74A885621-2362	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-P110C)	2		MDOZZ
16	MS27656T13B35S	CONNECTOR, RECEPTACLE (61J-P110B)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
17	74A885621-2361	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-P110B)	2		MDOZZ
18	MS27656T21B16S	CONNECTOR, RECEPTACLE (61J-P110A)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
19	74A885621-2360	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-P110A)	2		MDOZZ
20	74A885621-2499	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P012)	1		MDOZZ
21	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	2	G	PAOZZ
	830WD12G	SEE ABOVE (83930)	2	G*	PAOZZ
	MS21919WDG15	CLAMP	2	F	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
22	500024-2	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TB6)	AR	B*	PAOZZ
	95340	SEE ABOVE (78570)	AR	B*	PAOZZ
23	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
24	MS3476W12-10SX	CONNECTOR, PLUG (65P-P001A)	1	C	PAOZZ
	MS3476W12-10SX	CONNECTOR, PLUG (65P-P001B)	1	D	PAOZZ
25	MS3476W18-32S	CONNECTOR, PLUG (65P-P001B)	1	C	PAOZZ
	MS3476W18-32S	CONNECTOR, PLUG (65P-P001A)	1	D	PAOZZ
26	MS3472W18-32P	CONNECTOR, RECEPTACLE (65J-P004)	1		PAOZZ
	NAS1801-06-6	SCREW (AP)	4		PAOZZ
	AN960-6L	WASHER (AP)	4		PAOZZ
	MS21042L06	NUT (AP)	4	A	PAOZZ
27	74A885621-2342	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 65J-P004)	2		MDOZZ
28	74A885621-2433	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P016)	1		MDOZZ
29	74A885621-2037	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P008)	1		MDOZZ
30	74A885621-2084	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P012)	1		MDOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
31	MS27467T9B35S	CONNECTOR, PLUG (13P-P004)	1		PAOZZ
32	82-5773	CONNECTOR, PLUG (61P-P169) (74868)	1	F*	PAOZZ
		(76301 SPEC 5M2497S01)			
	4609-0001	CONNECTOR, PLUG (95077) (76301	1	F*	PAOZZ
		SPEC 5M2497S01)			
	74A895602-2959	BAND MARKER (76301)	1	F	MDOZZ
33	82-5780	CONNECTOR, RECEPTACLE (61J-P169)	1	F	PAOZZ
		(74868) (76301 SPEC 5M2496-003)			
	74A895602-2965	BAND MARKER (76301)	1	F	MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161702
B	161358 AND UP
C	161353 THRU 161521
D	161522 AND UP
E	162394 AND UP
F	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292
G	161353 AND UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292

CENTER FUSELAGE

LEFT CHEEK AREA
(ACCESS TO LEFT CHEEK
IS THROUGH DOOR 27
AND DOOR 36)

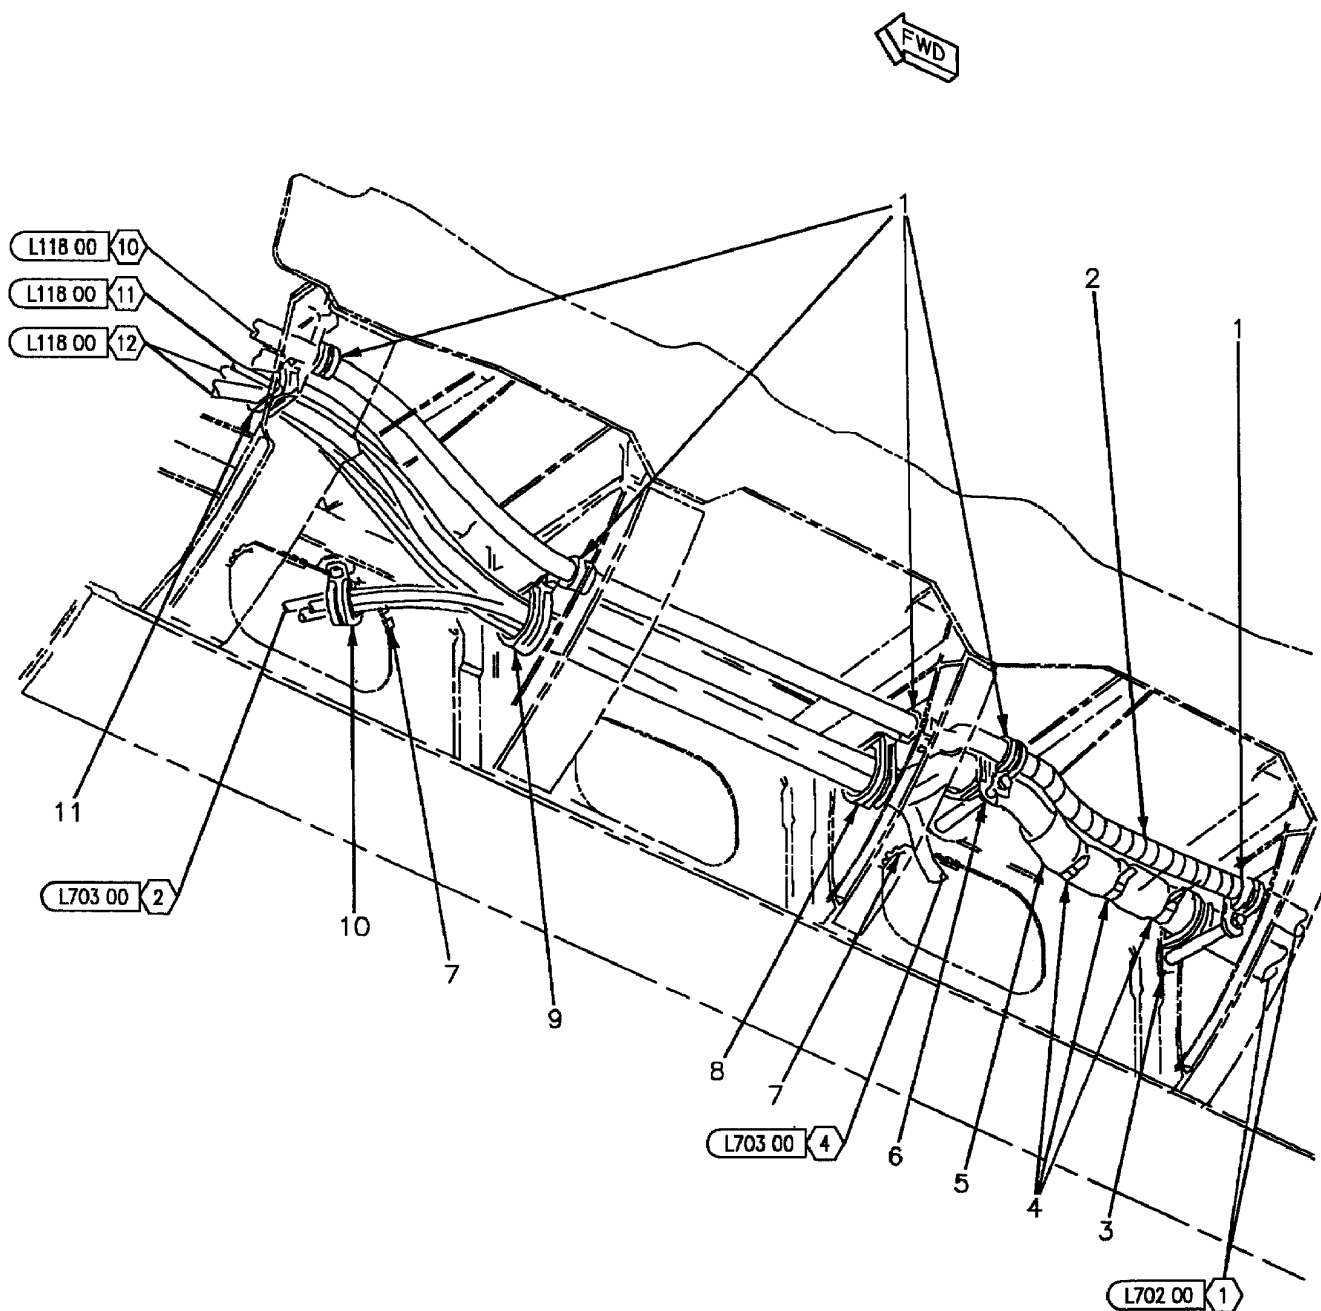


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	5	*	PAOZZ
	830WD9G	SEE ABOVE (83930)	5	*	PAOZZ
2	95340	TUBING, PLASTIC, SPIRAL (78570) (MCDONNELL SPEC 14M912TB6)	AR	*	PAOZZ
	500024-2	SEE ABOVE (6M033)	AR	*	PAOZZ
	T0006	SEE ABOVE (66794)	AR	*	PAOZZ
3	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V21	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS42DD3-68	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
4	PLT4H-C30	STRAP, TIEDOWN, ELECTRICAL (06383) (MCDONNELL SPEC ST9M559-3)	AR	*	PAOZZ
	WIT-120R-HS	SEE ABOVE (06915)	AR	*	PAOZZ
5	74A885639-2005	INSULATION SHEET, ELECTRICAL - CTR AND AFT SECTION (76301)	AR		MGOZZ
6	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V24	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
7	MS21266-2N	GROMMET	AR		PAOZZ
8	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76503) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
9	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
10	NAS1712D6-12N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76503)	1	*	PAOZZ
11	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
--------------	----------------	------------------------------	----------------------	-------------------	--------------

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CENTER FUSELAGE

LEFT CHEEK AREA
(ACCESS TO LEFT CHEEK
IS THROUGH DOOR 27
AND DOOR 36)

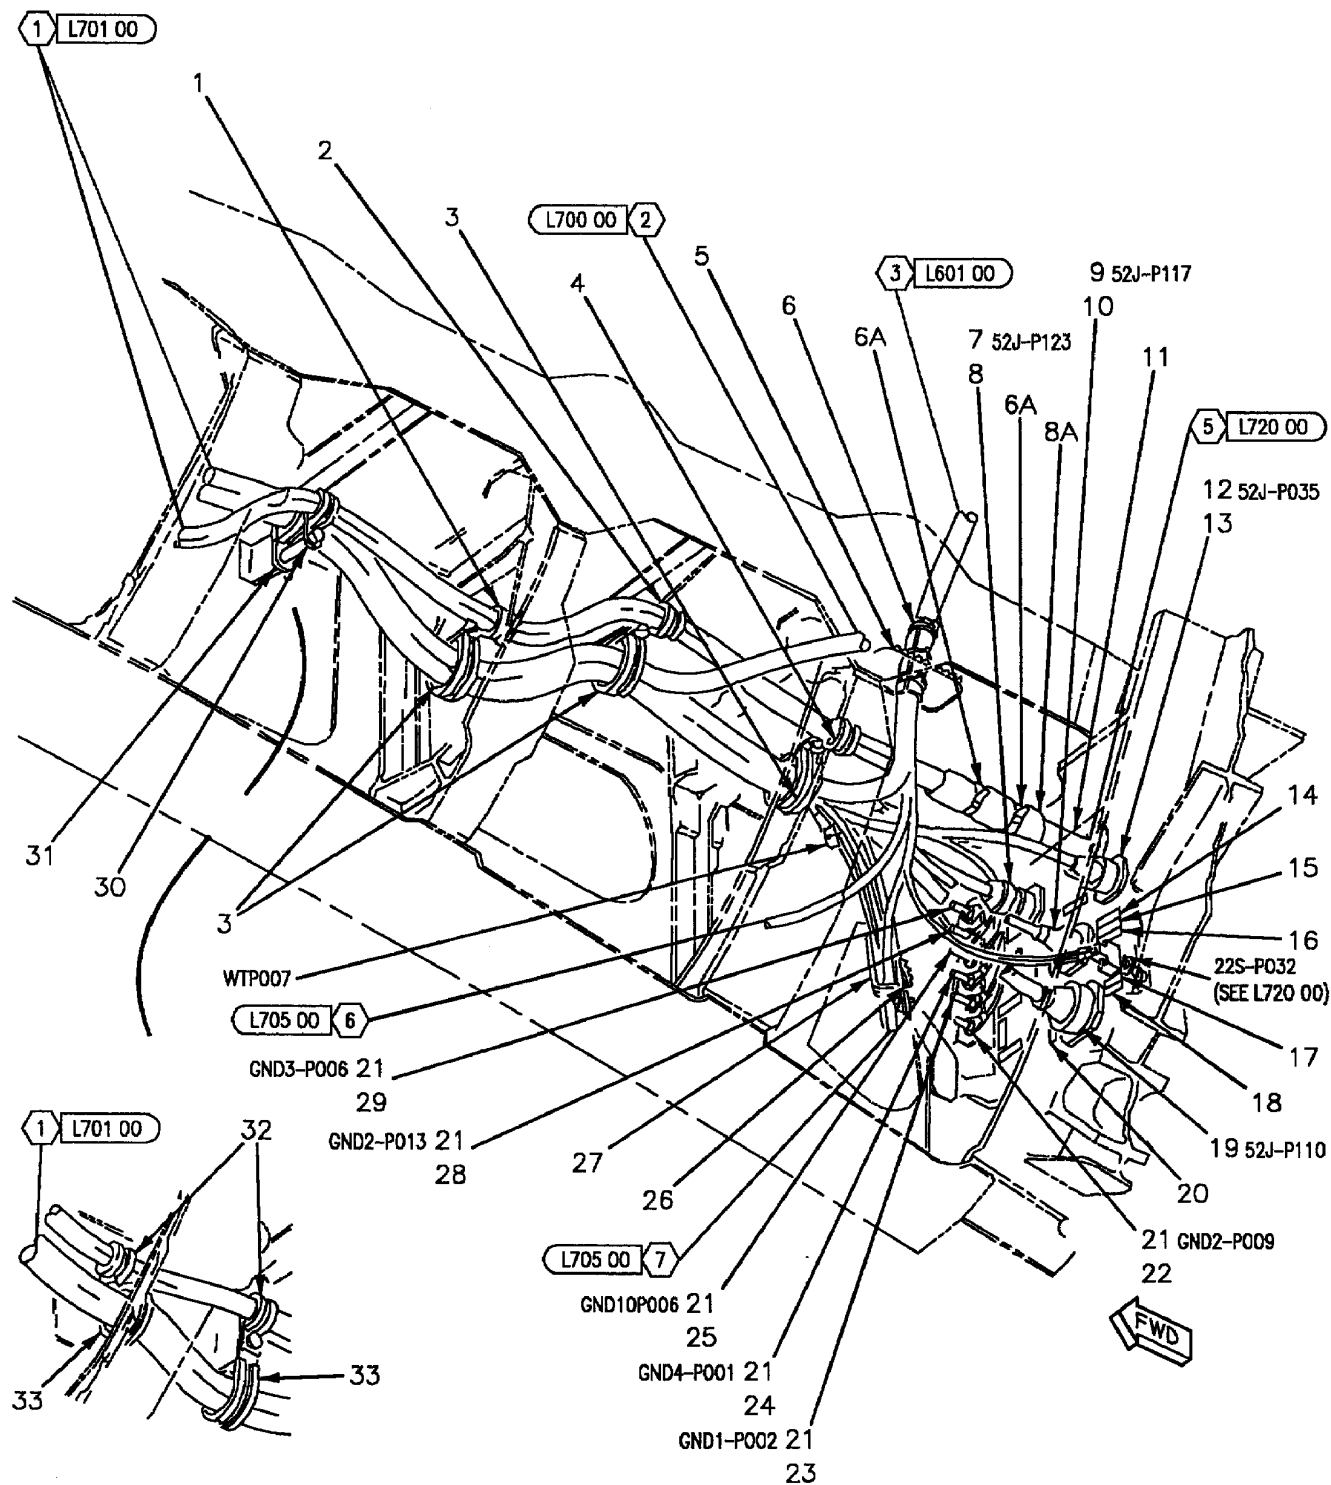

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V12	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-10	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
2	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V12	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-10	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
3	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	3	*	PAOZZ
	830WD18G	SEE ABOVE (83930)	3	*	PAOZZ
4	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	NAS43DD3-12	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	74A885639-2005	INSULATION SHEET, ELECTRICAL (76301) ...	1	C	MGOZZ
	MS3367-5-0	STRAP (AP)	3	C	PAOZZ
6A	MS3367-1-9	STRAP, TIEDOWN, ELECTRICAL	AR		PAOZZ
7	MS27468T15B35S	CONNECTOR, RECEPTACLE (52J-P123)	1		PAOZZ
8	74A885621-2550	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P123)	1		MDOZZ
8A	5M388T35	INSULATION, SLEEVING - ELECTRICAL (76301)	AR		MGOZZ
9	MS27468T17B99S	CONNECTOR, RECEPTACLE (52J-P117)	1		PAOZZ
10	74A885621-2208	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P117)	2		MDOZZ
11	74B878001-129	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
12	MS27468T13B35S	CONNECTOR, RECEPTACLE (52J-P035)	1		PAOZZ
13	74A885621-2190	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P035)	2		MDOZZ
14	74A885621-2463	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
15	74A885621-2464	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
16	74A885621-2465	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
17	74A885621-2466	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
18	74A885621-2467	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 22S-P032)	2		MDOZZ
19	MS27468T25B35S	CONNECTOR, RECEPTACLE (52J-P110)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
20	74A885621-2200	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P110)	1		MDOZZ
21	MS25082-3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 21)	6		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 21)	6		PAOZZ
22	74A885621-2266	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P009)	1		MDOZZ
23	74A885621-2265	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-P002)	1		MDOZZ
24	74A885621-2067	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-P001)	1		MDOZZ
25	74A885621-2113	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P006)	1		MDOZZ
26	MS21266-2N	GROMMET	AR		PAOZZ
27	NAS1712D8-14T	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10LL	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
28	74A885621-2417	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P013)	1		MDOZZ
29	74A885621-2345	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P006)	1		MDOZZ
30	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	B*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V21	BOLT (AP)	1	B	PAOZZ
	AN960JD10LL	WASHER (AP)	1	B	PAOZZ
	NAS43DD3-68	SPACER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
31	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	1	B*	PAOZZ
	830WD18G	SEE ABOVE (83930)	1	B*	PAOZZ
32	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	2	A*	PAOZZ
	830WD9G	SEE ABOVE (83930)	2	A*	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10LL	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	SEE ABOVE (76530)	1	A*	PAOZZ
33	JM44LC33WD18	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D18)	2	A*	PAOZZ
	830WD18G	SEE ABOVE (83930)	2	A*	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 THRU 161752

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
				B				161753 & UP			
				C				161966 & UP			

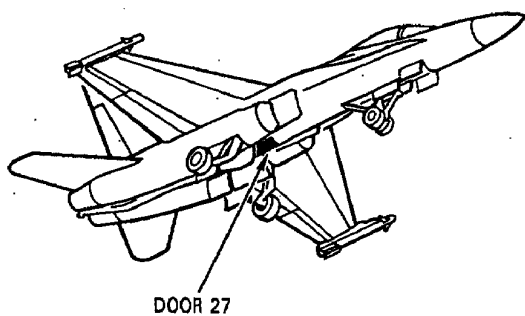


DOOR 27

CENTER FUSELAGE

DOOR 27
CENTER TUNNEL

LEGEND

- 1 161353 THRU 161524
- 2 161525 AND UP

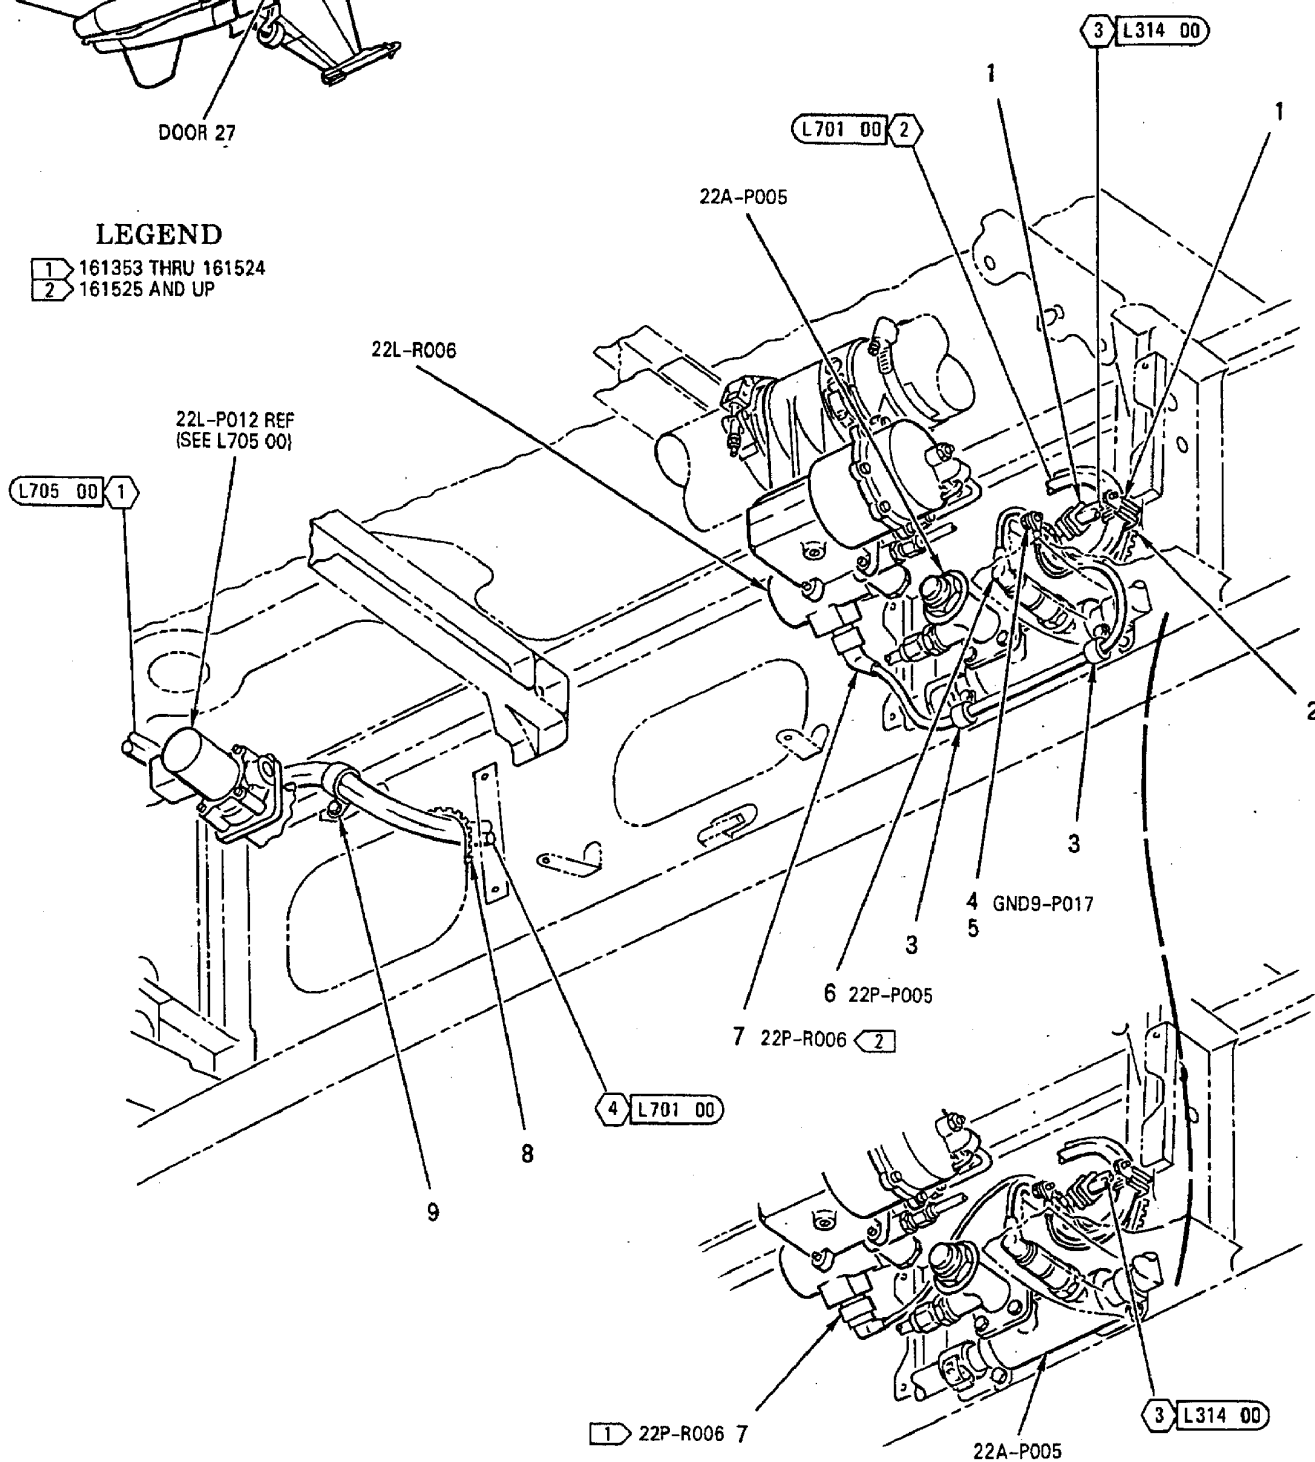


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1712D6-12N	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
2	MS21266-2N	GROMMET	AR	B	PAOZZ
3	MS21919WDG3	CLAMP	2	A	PAOZZ
	NAS673V18	BOLT (AP)	1	C	PAOZZ
	NAS673V17	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-64	SPACER (AP)	1	A	PAOZZ
4	MS25082-3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	1		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 4)	1		PAOZZ
5	74A885621-2432	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-P017)			
6	MS27467T9B35S	CONNECTOR, PLUG (22P-P005)	1		PAOZZ
7	MS27467T9B35S	CONNECTOR, PLUG (22P-R006)	1		PAOZZ
8	MS21266-2N	GROMMET	AR		PAOZZ
9	JM44LC44WD12	CLAMP, LOOP (22175)	1	D*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	D*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161525 & UP
B	162394 & UP
C	161525 THRU 161987
D	161353 THRU 161761
E	161925 & UP

CENTER FUSELAGE

DOOR 27
CENTER TUNNEL

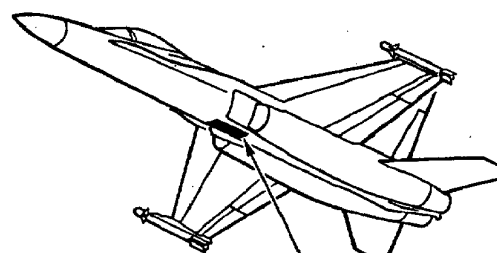



DOOR 27

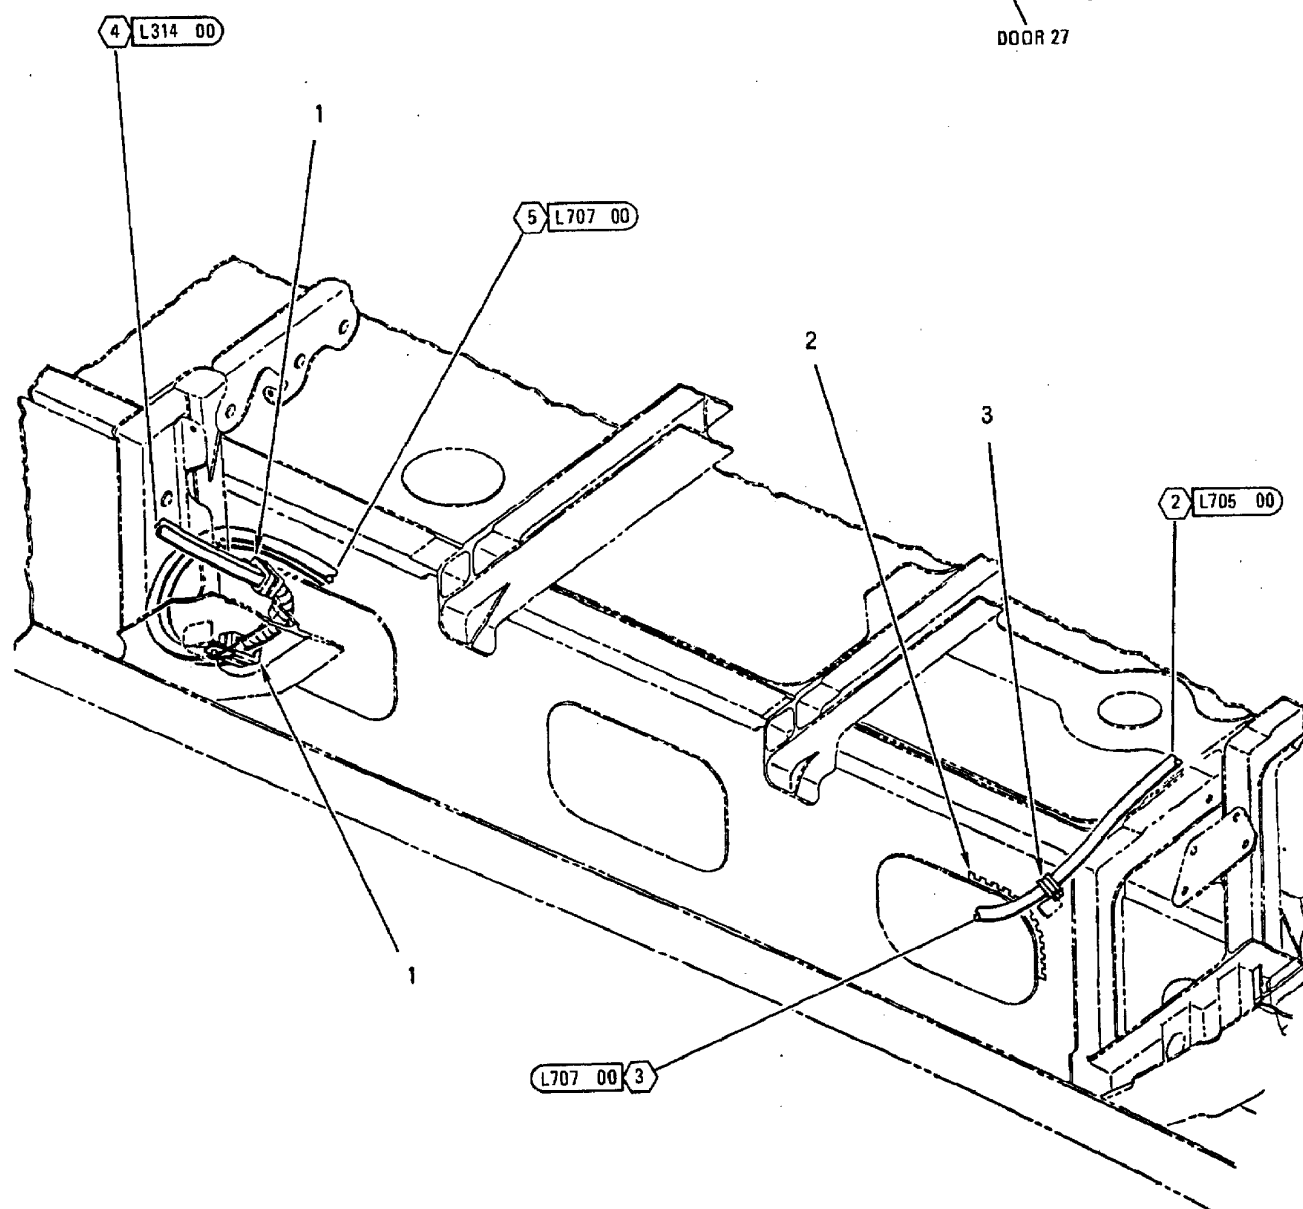

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1712D6-12N	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
2	MS21266-2N	GROMMET	AR		PAOZZ
3	JM44LC44WD8	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

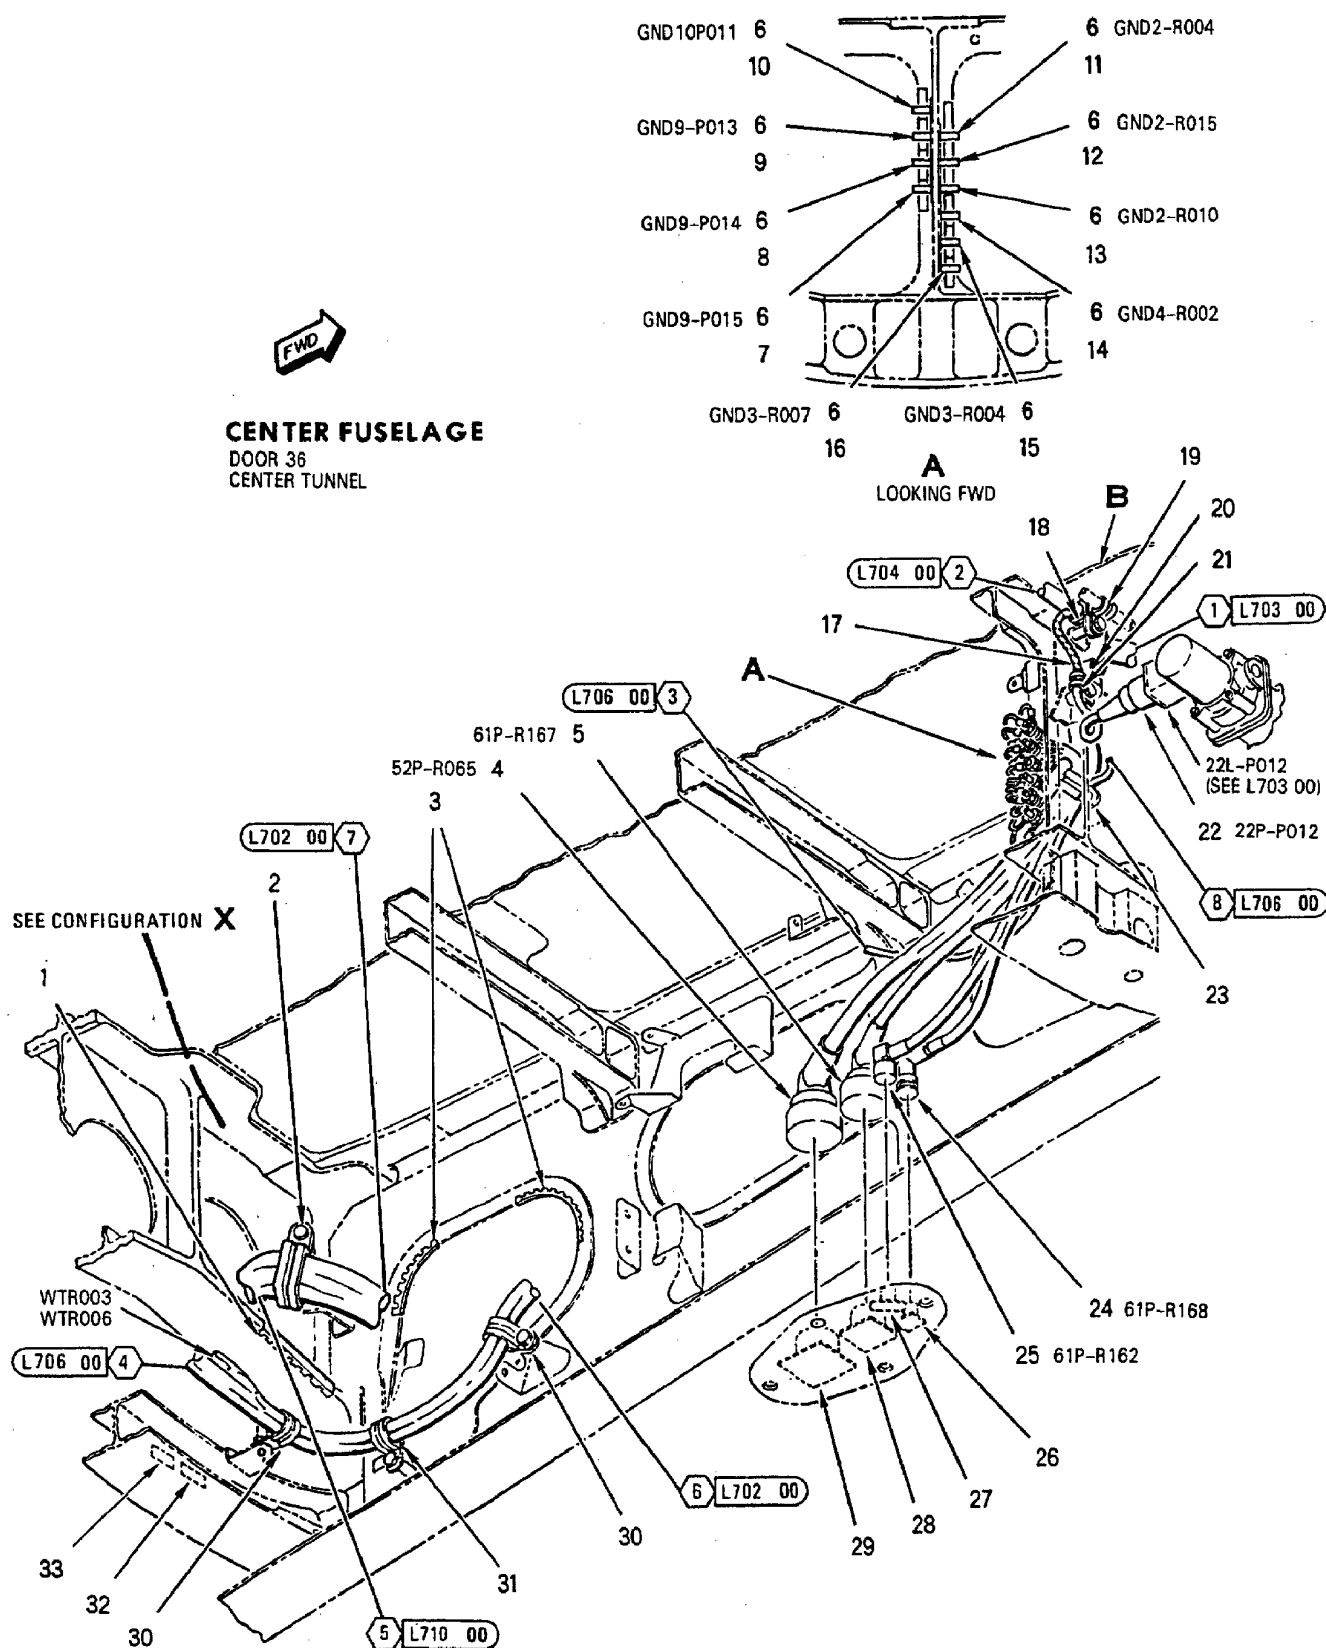

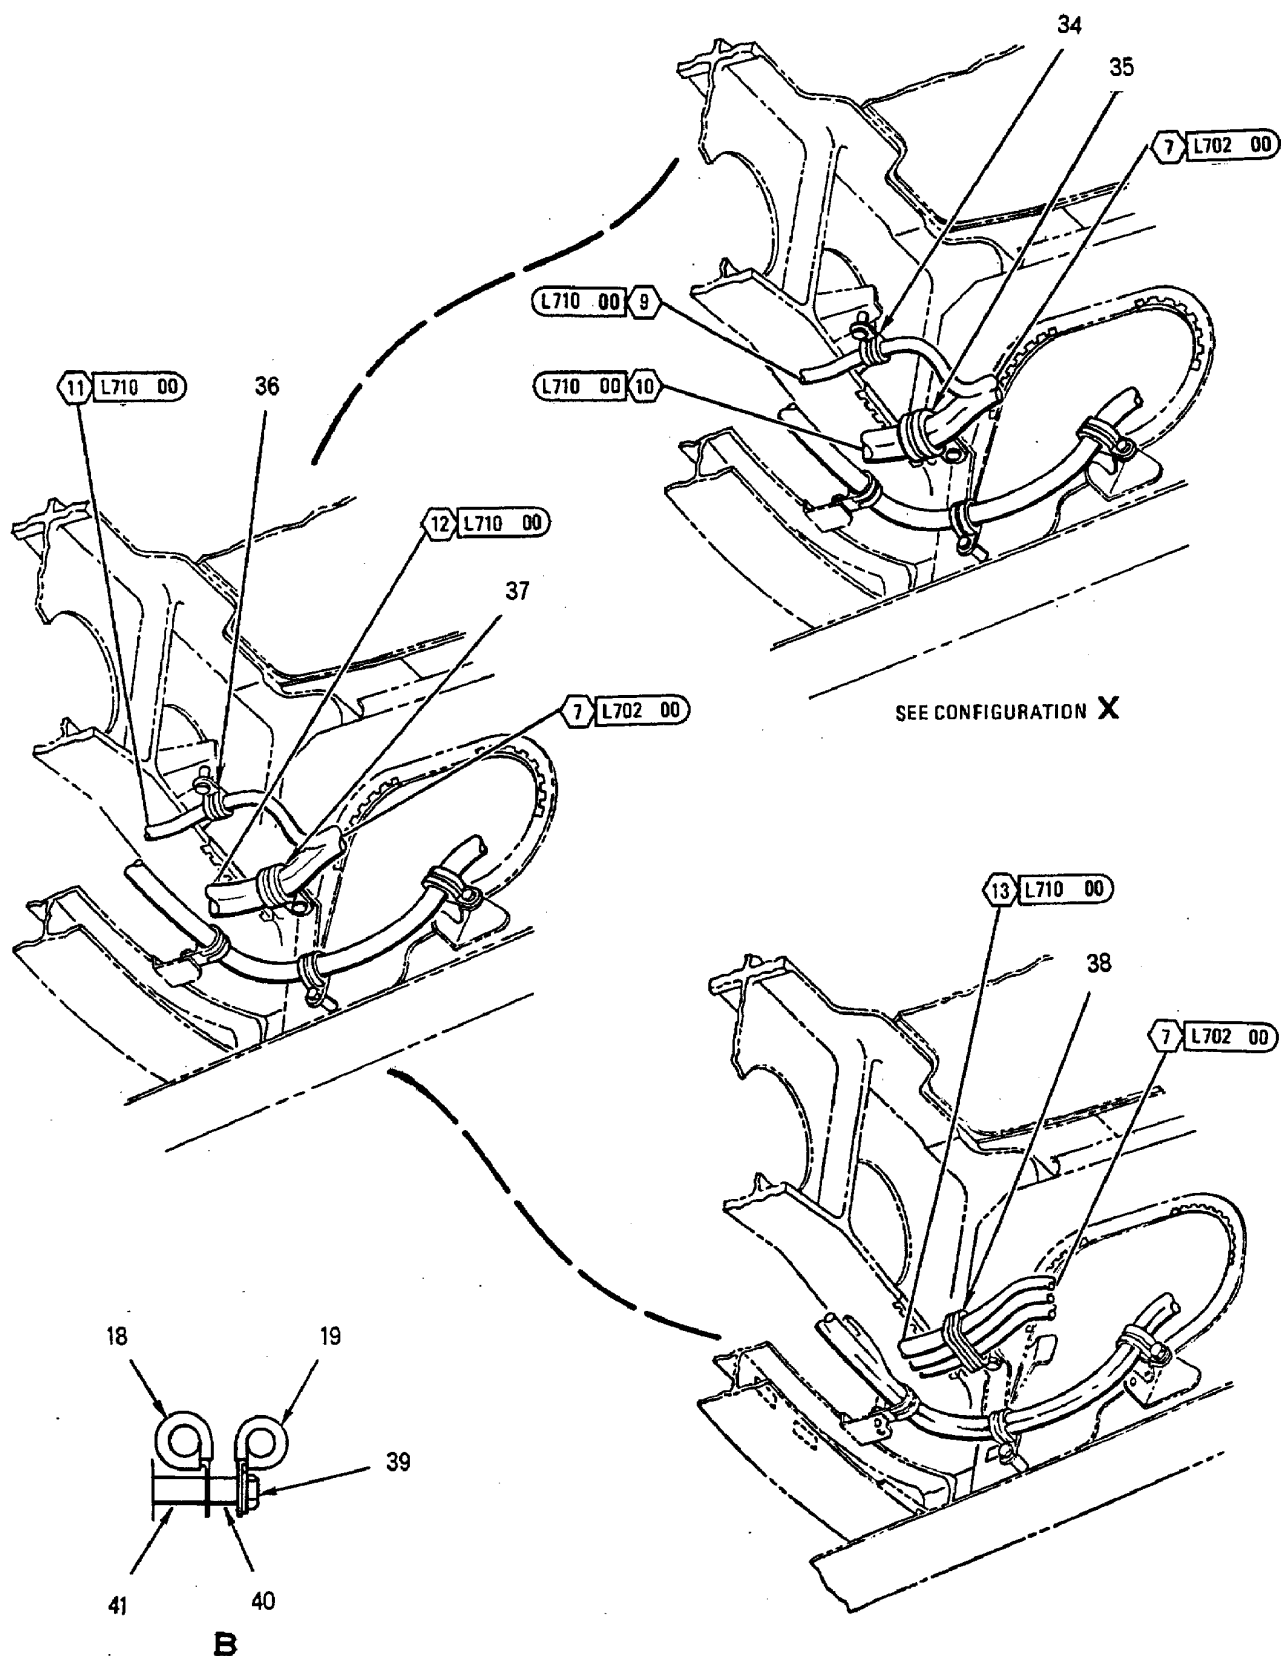

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-7N	GROMMET	AR		PAOZZ
2	NAS1712D8-14T	CLAMP	1	D	PAOZZ
	NAS673V18	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS43DD3-56	SPACER (AP)	1	D	PAOZZ
3	MS21266-2N	GROMMET	AR		PAOZZ
4	MS27467T23B35SD	CONNECTOR, PLUG (52P-R065)	1		PAOZZ
5	MS27467T17B26S	CONNECTOR, PLUG (61P-R167)	1		PAOZZ
6	MS25082-3	NUT	10	G	PAOZZ
	NAS1291C3M	NUT	10	H	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	10		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 6)	10		PAOZZ
7	74A885621-2421	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P015)	1		MDOZZ
8	74A885621-2420	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P014)	1		MDOZZ
9	74A885621-2419	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P013)	1		MDOZZ
10	74A885621-2418	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P011)	1		MDOZZ
11	74A885621-2041	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R004)	1		MDOZZ
12	74A885621-2422	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R015)	1		MDOZZ
13	74A885621-2047	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R010)	1		MDOZZ
14	74A885621-2274	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-R002)	1		MDOZZ
15	74A885621-2273	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R004)	1		MDOZZ
16	74A885621-2423	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R007)	1		MDOZZ
17	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	F*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	F*	PAOZZ
18	MS21919WDG7	CLAMP	1		PAOZZ
19	MS21919WDG6	CLAMP	1		PAOZZ
20	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
21	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V17	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-50	SPACER (AP)	1		PAOZZ
22	MS27467T9B35S	CONNECTOR, PLUG (22P-P012)	1		PAOZZ
23	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	N*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	M*	PAOZZ
	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	N*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	N*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	31-33821-2	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC ST5M1425-01R) (61P-R168)	1	E*	PAOZZ
	5811-0901	SEE ABOVE (95077)	1	E*	PAOZZ
	31-33821-11	CONNECTOR, PLUG, ELECTRICAL (74868) . (MCDONNELL SPEC ST5M1425A01R) (61P-R168)	1	F*	PAOZZ
	5813-0901	SEE ABOVE (95077)	1	F*	PAOZZ
25	M39012/20-0503	CONNECTOR, PLUG (61P-R162)	1		PAOZZ
26	31-33523-1	DUMMY CONNECTOR, RECEPTACLE (74868) (MCDONNELL SPEC ST5M1646-001) (STOWAGE RECP FOR 61P-R168)	1	*	PAOZZ
27	KC89-235-MC7	DUMMY CONNECTOR, RECEPTACLE (91836) (MCDONNELL SPEC ST5M1626-00001) (STOWAGE RECP FOR 61P-R162)	1	*	PAOZZ
	150192-0000	DUMMY CONNECTOR, RECEPTACLE (71468) (MCDONNELL SPEC ST5M1626-00001) (STOWAGE RECP FOR 61P-R162)	1	*	PAOZZ
	1063000A99N	DUMMY CONNECTOR, RECEPTACLE (00795) (MCDONNELL SPEC ST5M1626-00001) (STOWAGE RECP FOR 61P-R162)	1	*	PAOZZ
28	10-427405-179	DUMMY CONNECTOR, RECEPTACLE (77820) (MCDONNELL SPEC ST5M1402-17) (STOWAGE RECP FOR 61P-R167)	1	*	PAOZZ
	650FS001NF17	DUMMY CONNECTOR, RECEPTACLE (06324) (MCDONNELL SPEC ST5M1402-17) (STOWAGE RECP FOR 61P-R167)	1	*	PAOZZ
	1107-001-17	DUMMY CONNECTOR, RECEPTACLE (59976) (MCDONNELL SPEC ST5M1402-17) (STOWAGE RECP FOR 61P-R167)	1	*	PAOZZ
29	10-427405-239	DUMMY CONNECTOR, RECEPTACLE (77820) (MCDONNELL SPEC ST5M1402-23) (STOWAGE RECP FOR 52P-R065)	1	*	PAOZZ
	650FS001NF23	DUMMY CONNECTOR, RECEPTACLE (06324) (MCDONNELL SPEC ST5M1402-23) (STOWAGE RECP FOR 52P-R065)	1	*	PAOZZ
	1107-001-23	DUMMY CONNECTOR, RECEPTACLE (59976) (MCDONNELL SPEC ST5M1402-23) (STOWAGE RECP FOR 52P-R065)	1	*	PAOZZ
30	M85052/3-6	CLAMP	2	A	PAOZZ
	MS21919WDG6	CLAMP	2	P	PAOZZ
	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	2	N*	PAOZZ
	830WD9G	SEE ABOVE (83930)	2	N*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
31	M85052/3-6	CLAMP	1	J	PAOZZ
	MS21919WDG6	CLAMP	1	P	PAOZZ
	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	N*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	N*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-48	SPACER (AP)	1		PAOZZ
32	74A885621-2165	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTR003)	1		MDOZZ
33	74A885621-2168	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTR006)	1		MDOZZ
34	M85052/1-6	CLAMP	1	C	PAOZZ
	NAS673V32	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-96	SPACER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
35	M85052/1-10	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
36	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS43DD3-48	SPACER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
37	M85052/3-6	CLAMP	1	K	PAOZZ
	NAS673V2	BOLT (AP)	1	K	PAOZZ
	AN960JD10L	WASHER (AP)	1	K	PAOZZ
	NAS1291C3M	NUT (AP)	1	K	PAOZZ
38	NAS1712D10-22T	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
39	NAS673V14	BOLT	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
40	NAS43DD3-10	SPACER (AP)	1		PAOZZ
41	NAS43DD3-32	SPACER (AP)	1		PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353
B	161358 THRU 161519
C	161520 THRU 161524
D	161525 & UP
E	161353 THRU 161741
F	161742 & UP
G	161353 THRU 161358
H	161359 & UP


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		J						161353 THRU 161519			
		K						161520 & UP			
		L						DELETED			
		M						161353 THRU 161761			
		N						161925 & UP			
		P						161520 THRU 161761			

CENTER FUSELAGE

DOOR 36
CENTER TUNNEL

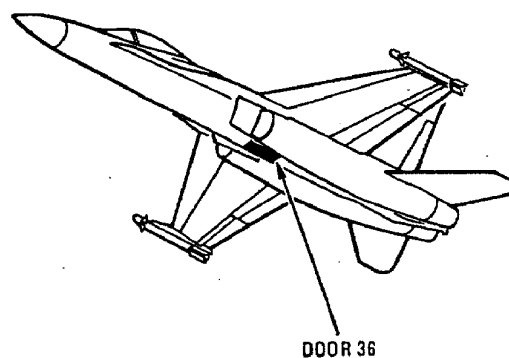


DOOR 36

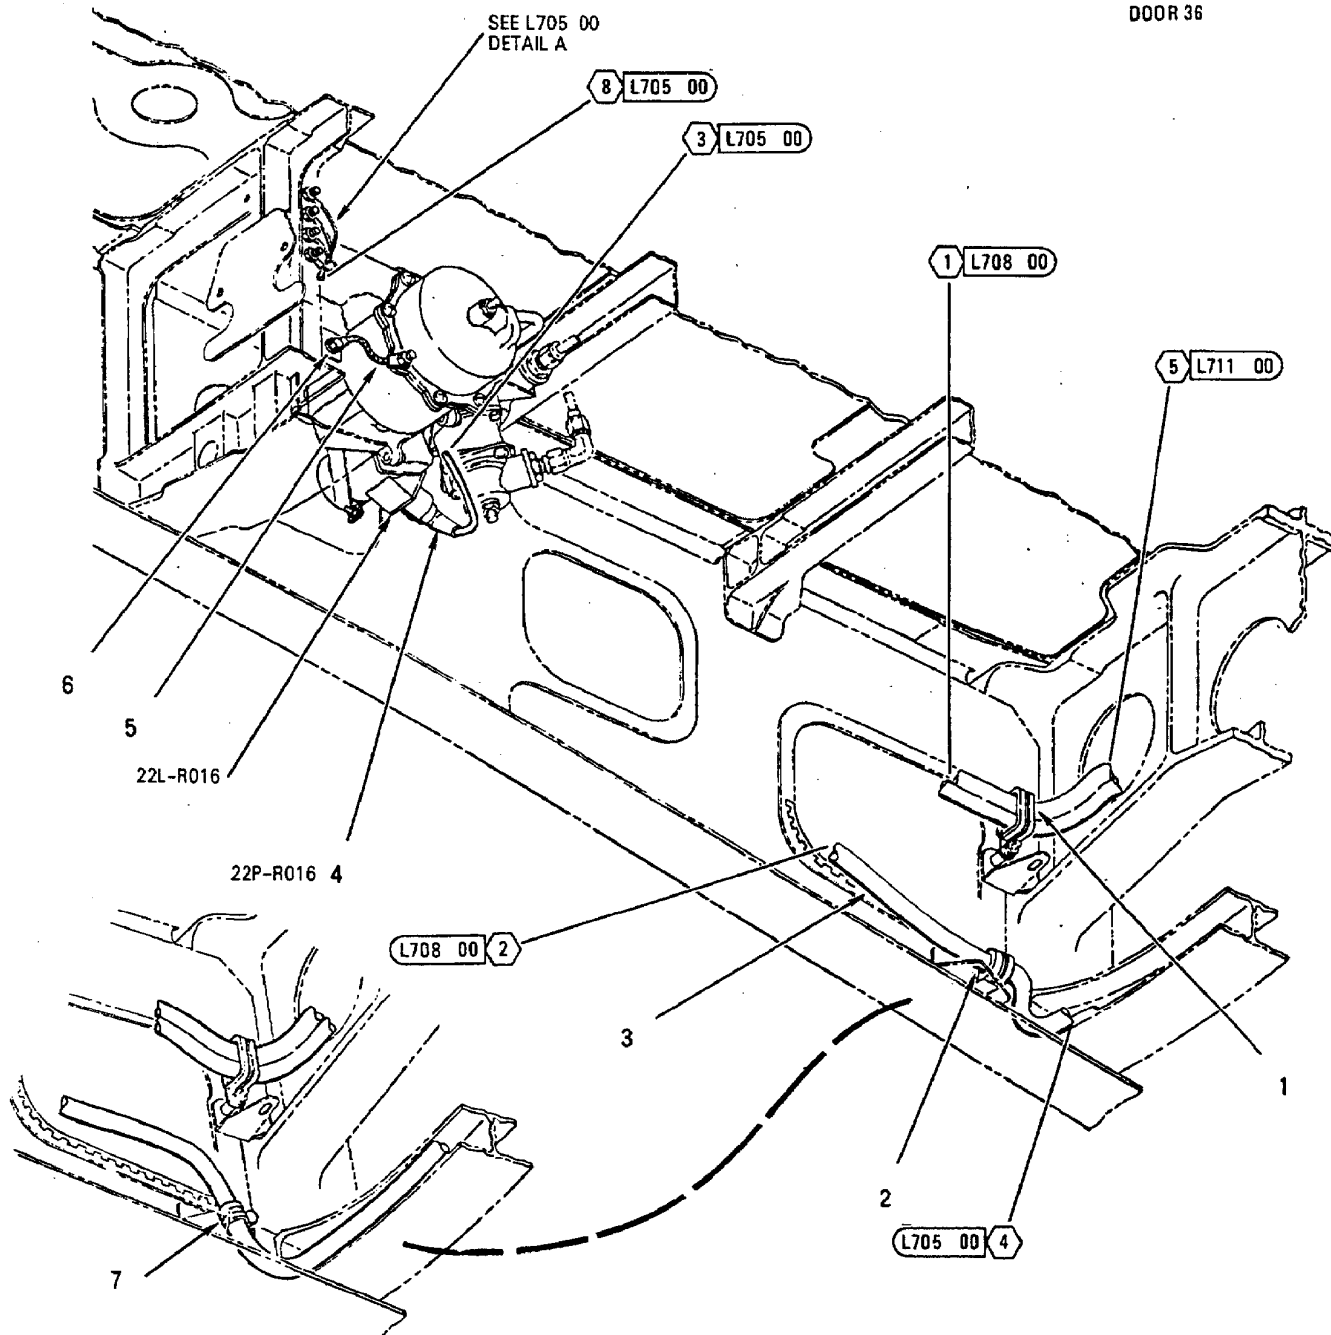

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1712D8-16T	CLAMP	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	C	PAOZZ
2	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	B*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	B*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
3	MS21266-2N	GROMMET	AR		PAOZZ
4	MS27467T9B35S	CONNECTOR, PLUG (22P-R016)	1		PAOZZ
5	MS25083-2BB4	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1291C08M	NUT (AP)	1		PAOZZ
	MS35338-42	WASHER (AP)	1		PAOZZ
	AN960JD8L	WASHER (AP)	1		PAOZZ
6	NAS673V3	BOLT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 6)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	1		PAOZZ
7	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161521
B	161522 & UP
C	161979 & UP

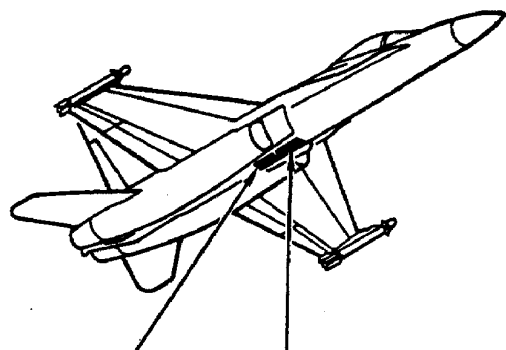

CENTER FUSELAGE

RIGHT CHEEK AREA
(ACCESS TO RIGHT
CHEEK IS THROUGH
DOOR 27 AND DOOR 36)

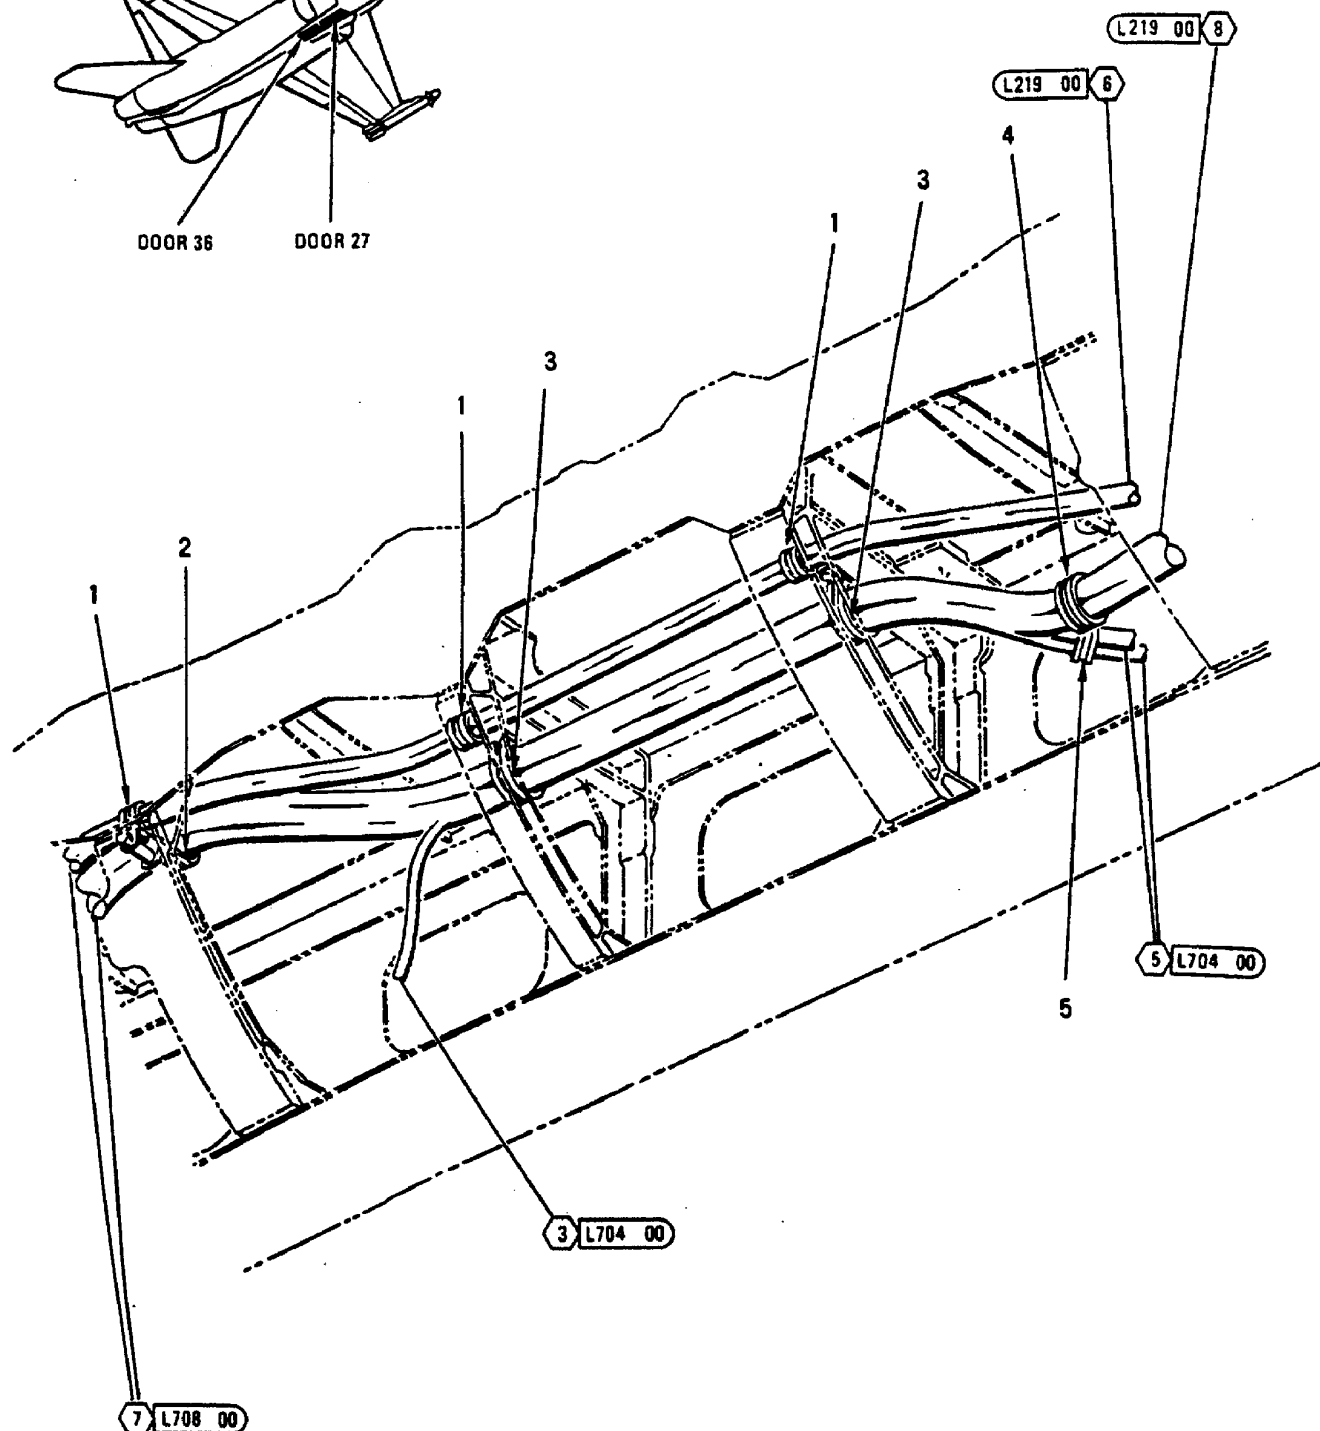


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	3	*	PAOZZ
2	830WD8G	SEE ABOVE (83930)	3	*	PAOZZ
	NAS1712D22-14T	CLAMP	1	A	PAOZZ
	NAS1712D16-24N	CLAMP	1	B	PAOZZ
	NAS673V20	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
3	JM44LC33WD17	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D17)	2	*	PAOZZ
	830WD17G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
5	NAS1712D7-14N	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 AND UP; ALSO 162394
THRU 163175 BEFORE F/A-18
AFC 253 OR F/A-18 AFC 292

B 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18
AFC 292

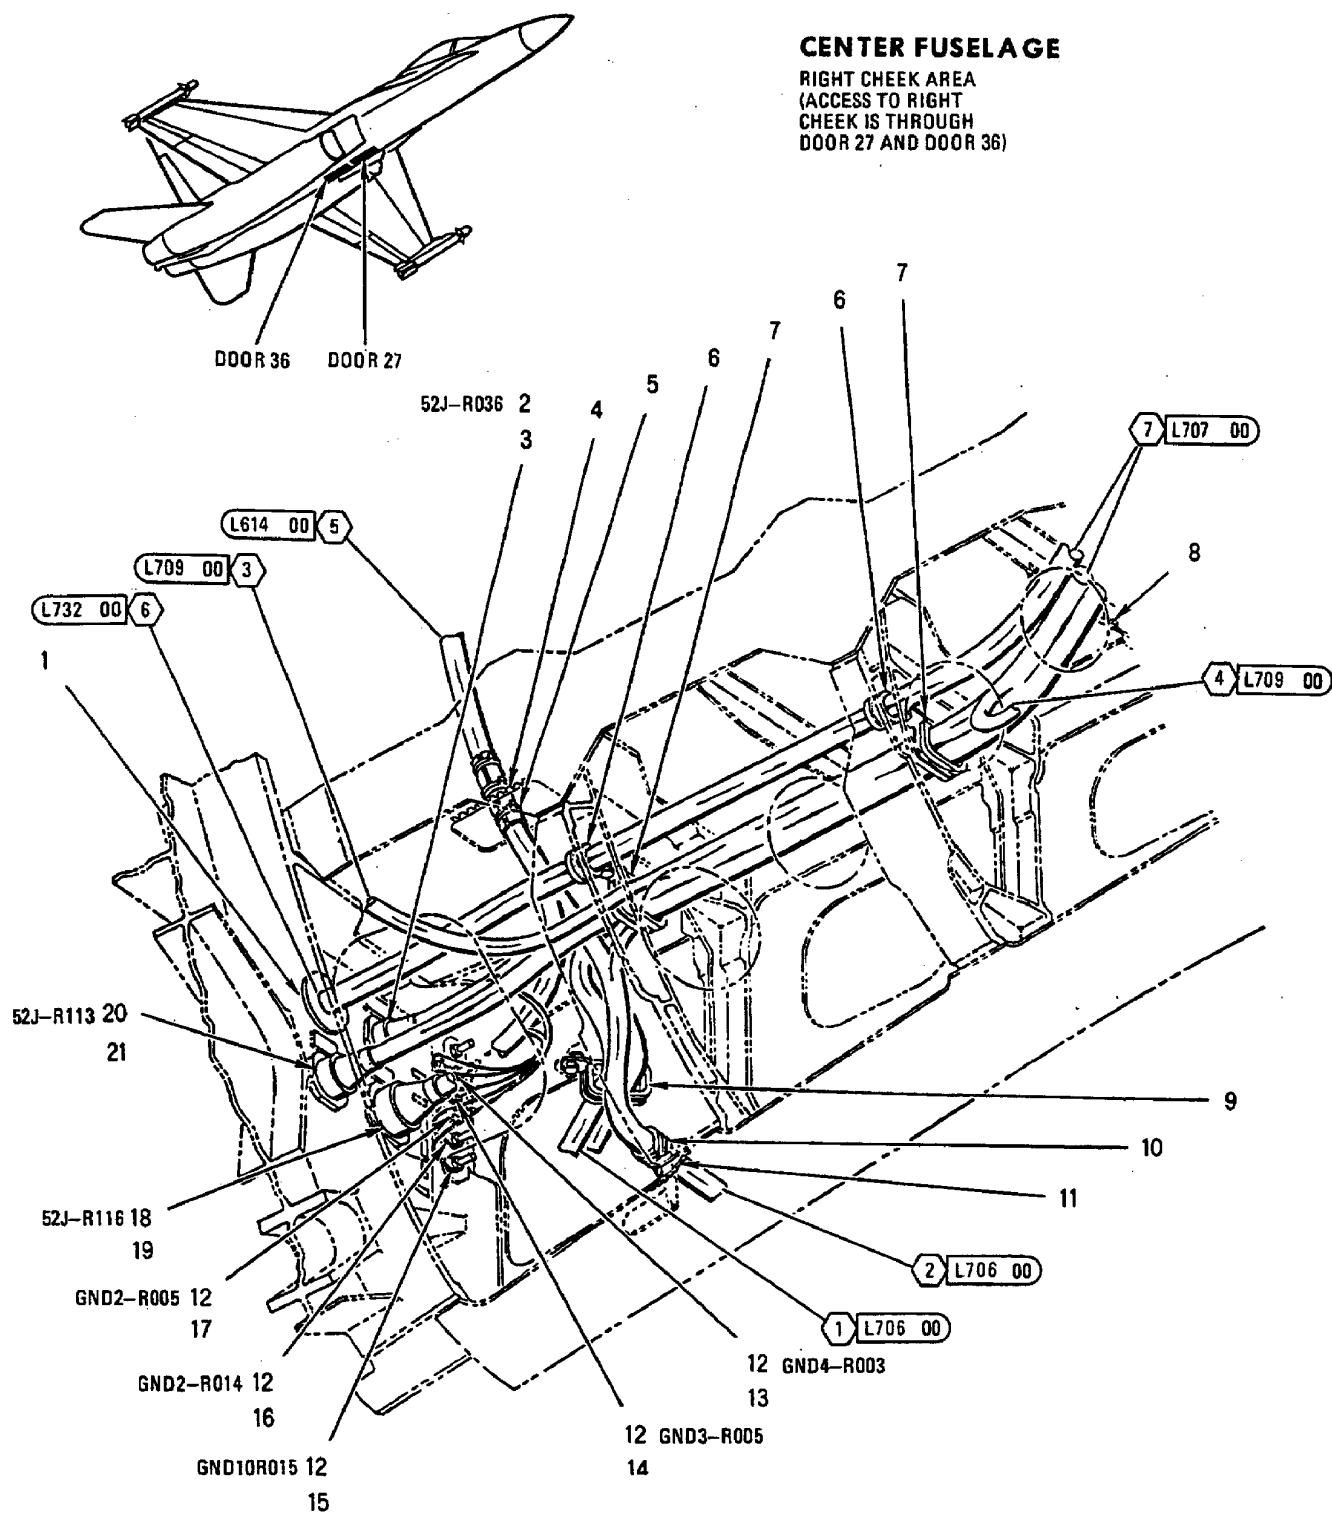

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74B878001-129	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
2	MS27468T13B35S	CONNECTOR, PLUG (52J-R036)	1		PAOZZ
3	74A885621-2372	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R036)	1		MDOZZ
4	MS21266-3N	GROMMET	AR		PAOZZ
5	74A885639-2005	INSULATION SHEET, ELECTRICAL (76301) ...	1	A	MGOZZ
	MS3367-5-0	STRAP (AP)	3	A	PAOZZ
6	JM44LC44WD8	CLAMP, LOOP (22175)	2	*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	2	*	PAOZZ
7	NAS1712D14-22T	CLAMP	2	B	PAOZZ
	NAS1712D16-24N	CLAMP	2	C	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
8	MS21266-2N	GROMMET	AR		PAOZZ
9	NAS1712D8-16T	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	NAS43DD3-15	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
10	JM44LC44WD9	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D9)			
	830WD9G	SEE ABOVE (83930)	1	B*	PAOZZ
	MS21919WDG12	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
11	MS21266-3N	GROMMET	AR		PAOZZ
12	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 12)	5		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 12)	5		PAOZZ
13	74A885621-2263	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-R003)	1		MDOZZ
14	74A885621-2262	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R005)	1		MDOZZ
15	74A885621-2426	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R015)	1		MDOZZ
16	74A885621-2424	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R014)	1		MDOZZ
17	74A885621-2261	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R005)	2		MDOZZ
18	MS27468T21B39S	CONNECTOR, RECEPTACLE (52J-R116)	1		PAOZZ
19	74A885621-2189	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R116)	2		MDOZZ
20	MS27468T25B35S	CONNECTOR, RECEPTACLE (52J-R113)	1		PAOZZ
21	74A885621-2188	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R113)	2		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE USABLE ON

- A 161966 & UP
- B 161353 AND UP; ALSO 162394
THRU 163175 BEFORE F/A-18
AFC 253 OR F/A-18 AFC 292
- C 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18
AFC 292





CENTER FUSELAGE

DOOR 12R, DOOR 37R,
DOOR 39R AND DOOR 129R
RIGHT NACELLE

LEGEND


- 1 161353 THRU 161521
- 2 161522 AND UP
- 3 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292

3 CONFIGURATION X

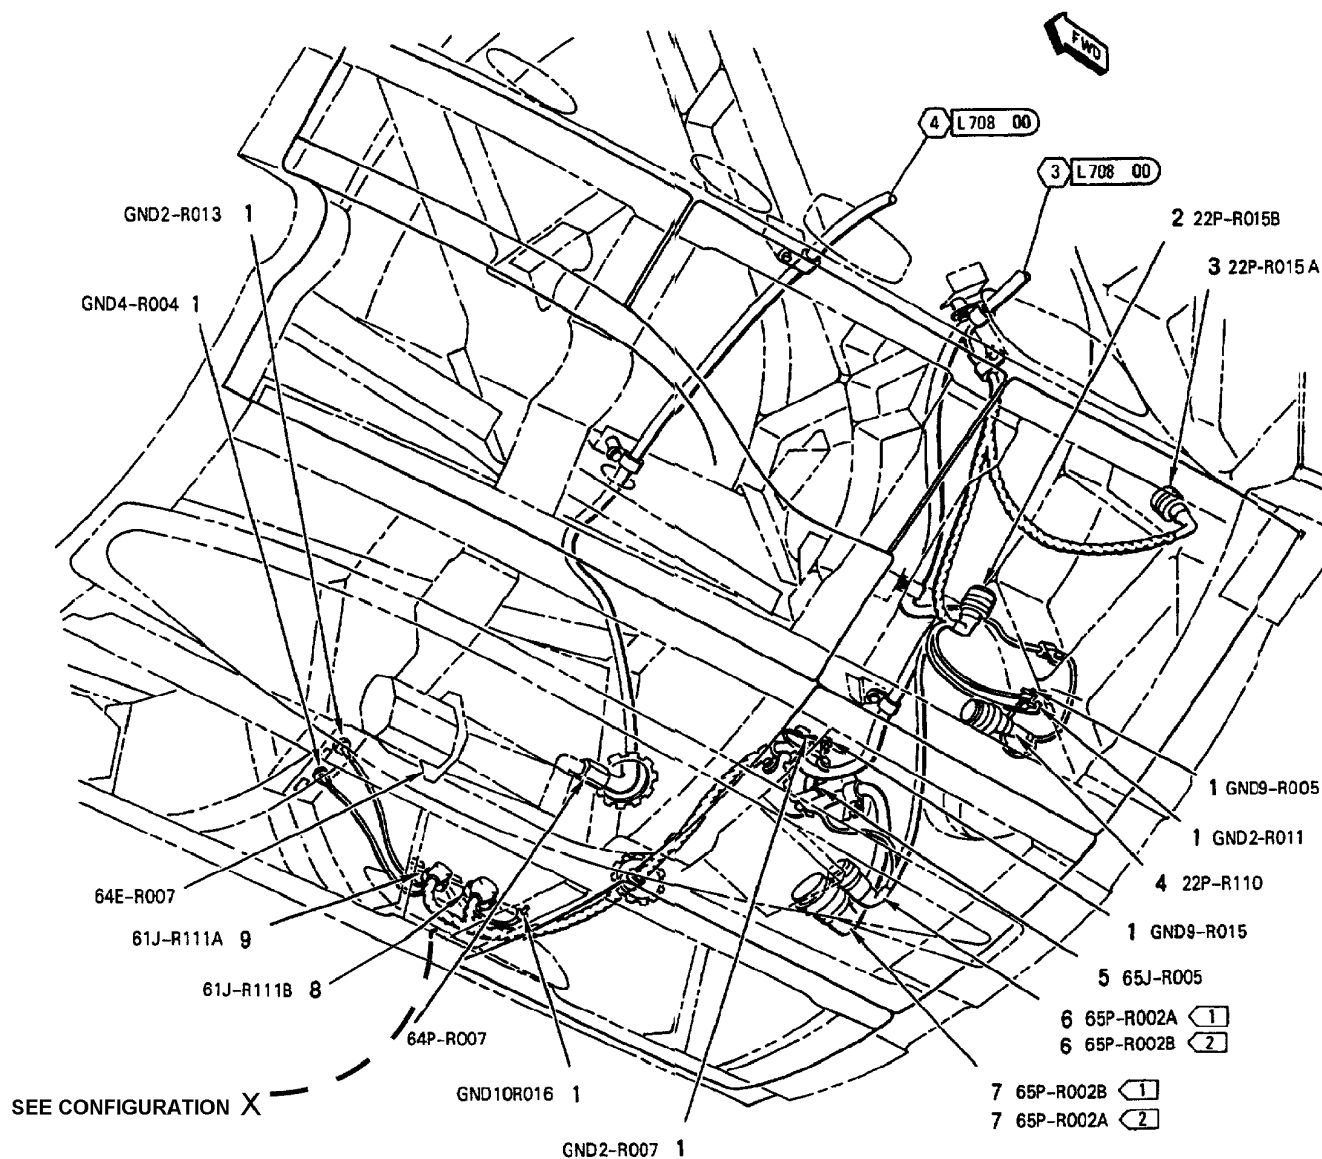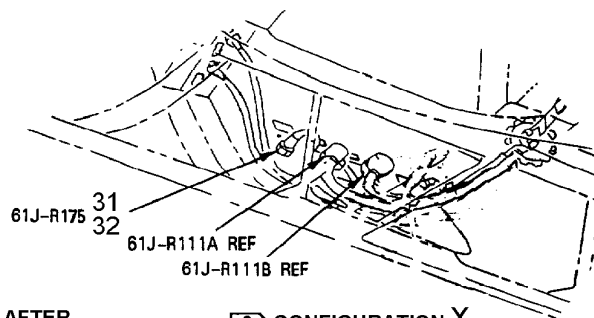

CENTER FUSELAGE

DOOR 12R, DOOR 37R,
DOOR 39R AND DOOR 129R
RIGHT NACELLE

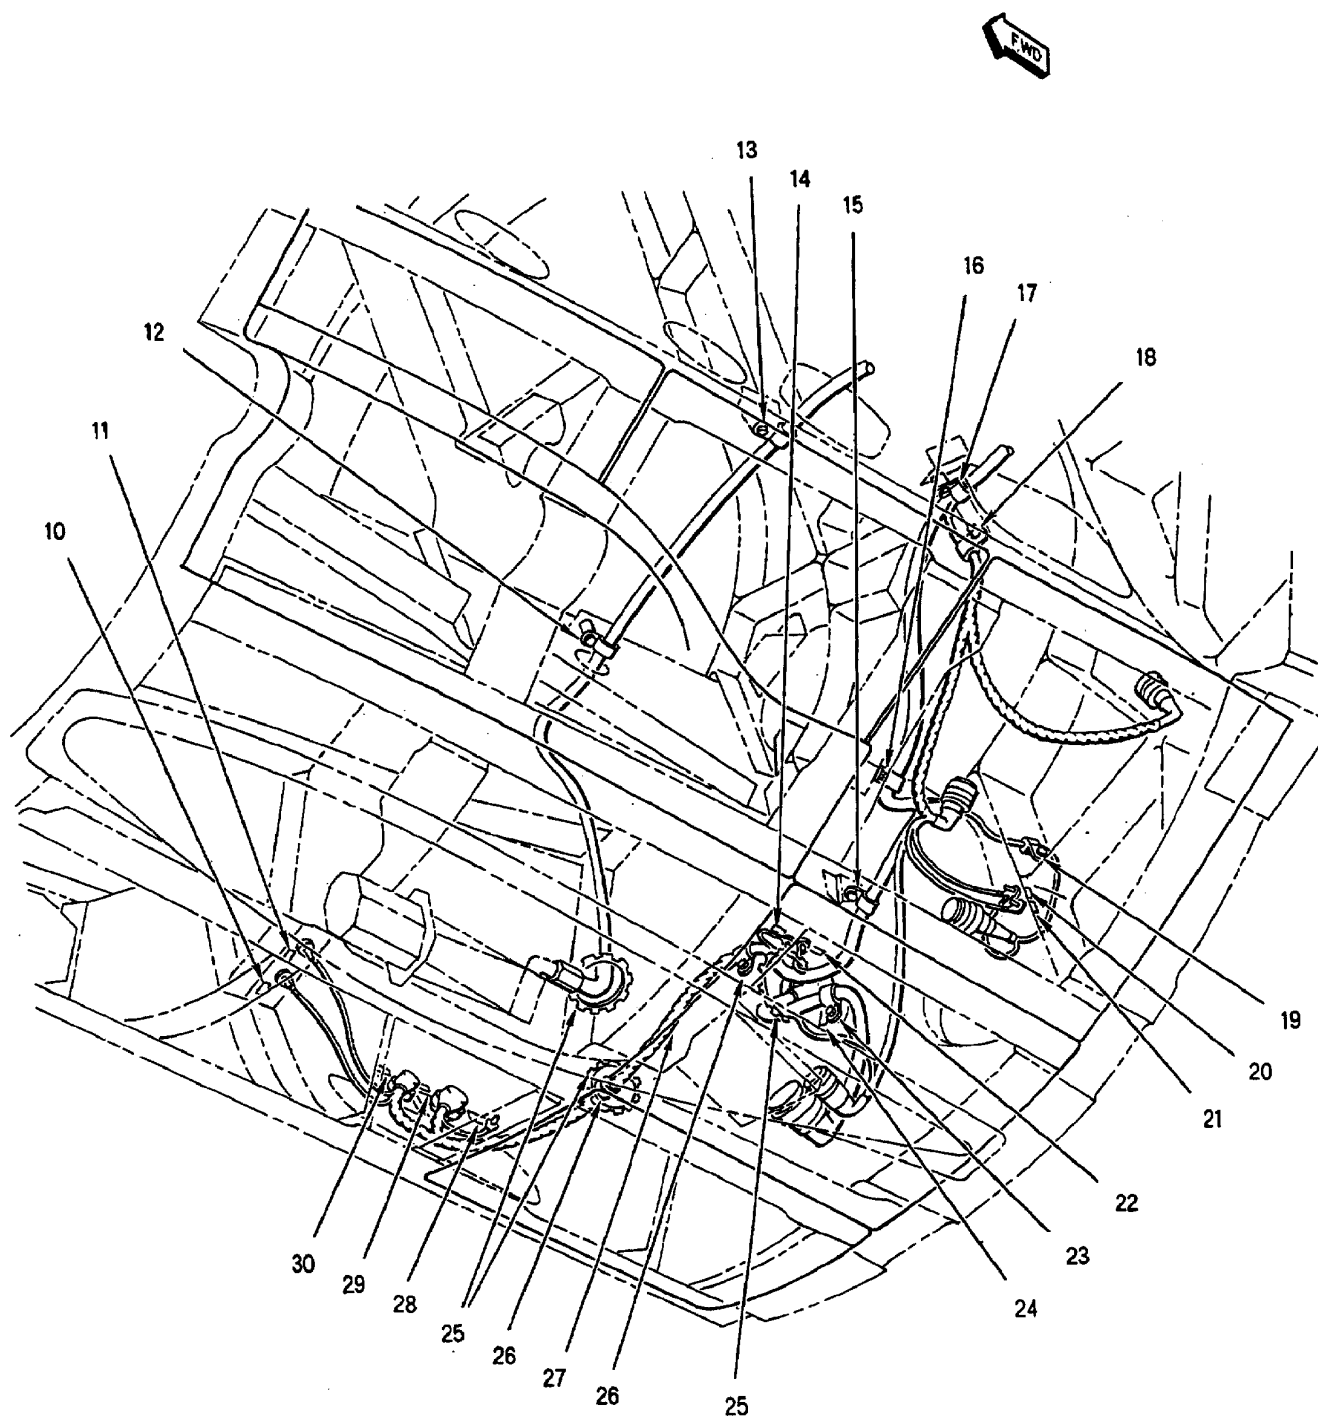


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1291C3M	NUT	7		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	7		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	7		PAOZZ
2	MS27467T9B35SA	CONNECTOR, PLUG (22P-R015B)	1		PAOZZ
3	MS27467T9B35S	CONNECTOR, PLUG (22P-R015A)	1		PAOZZ
4	MS27467T9B35S	CONNECTOR, PLUG (22P-R110)	1		PAOZZ
5	MS3472W18-32P	CONNECTOR, RECEPTACLE (65J-R005)	1		PAOZZ
	NAS1096-1-6	SCREW (AP)	4		PAOZZ
	AN960-6L	WASHER (AP)	4		PAOZZ
	NAS1291C06M	NUT (AP)	4	A	PAOZZ
6	MS3476W12-10SX	CONNECTOR, PLUG (65P-R002A)	1	C	PAOZZ
	MS3476W12-10SX	CONNECTOR, PLUG (65P-R002B)	1	D	PAOZZ
7	MS3476W18-32S	CONNECTOR, PLUG (65P-R002B)	1	C	PAOZZ
	MS3476W18-32S	CONNECTOR, PLUG (65P-R002A)	1	D	PAOZZ
8	MS27656T15B97S	CONNECTOR, RECEPTACLE (61J-R111B)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
9	MS27656T13B35S	CONNECTOR, RECEPTACLE (61J-R111A)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
10	74A885621-2407	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-R004)	1		MGOZZ
11	74A885621-2408	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R013)	1		MGOZZ
12	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V9	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
13	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
14	74A885621-2044	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R007)	1		MGOZZ
15	JM44LC44WD8	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	MS21919WDG7	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
17	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V9	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
18	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
19	M85052/1-4	CLAMP	1	E	PAOZZ
	MS21042L3	NUT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
20	74A885621-2089	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R005)	1		MGOZZ
21	74A885621-2048	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R011)	1		MGOZZ
22	74A885621-2500	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R015)	1		MGOZZ
23	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
24	74A885621-2343	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 65J-R005)	1		MGOZZ
25	MS21266-3N	GROMMET	AR		PAOZZ
26	M85052/1-6	CLAMP	2	G	PAOZZ
	MS21919WDG8	CLAMP	2	F	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
27	500024-2	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TB6)	AR	B*	PAOZZ
	95340	SEE ABOVE (78570)	AR	B*	PAOZZ
28	74A885621-2498	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R016)	1		MGOZZ
29	74A885621-2358	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-R111B)	1		MGOZZ
30	74A885621-2359	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-R111A)	1		MGOZZ
31	82-5770	CONNECTOR, RECEPTACLE..... ELECTRICAL (74868) (MCDONNELL SPEC 5M2496-001) (61J-R175)	1		PAOZZ
32	74A885621-2749	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 61J-R175)	1		MGOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161358 AND UP
C	161353 THRU 161521

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
						D		161522 AND UP			
						E		161742 AND UP			
						F		162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292			
						G		161353 AND UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292			

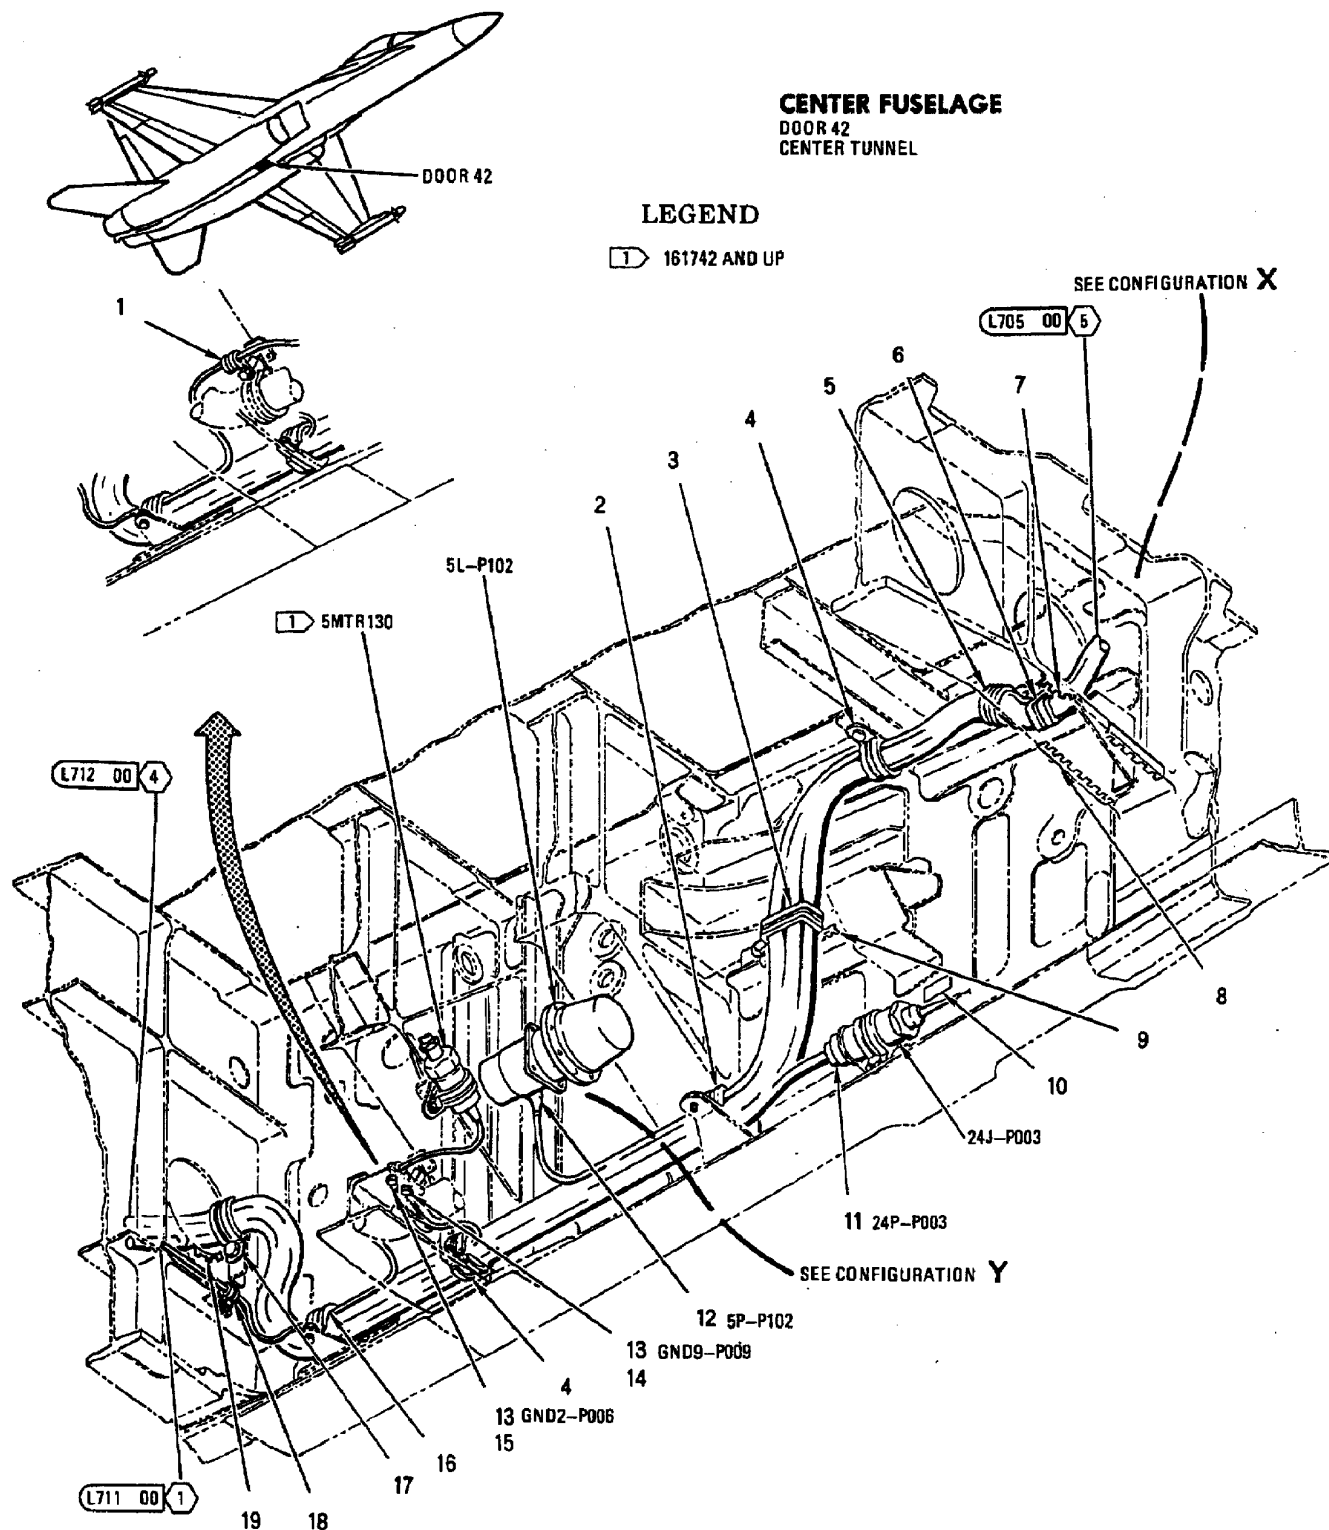

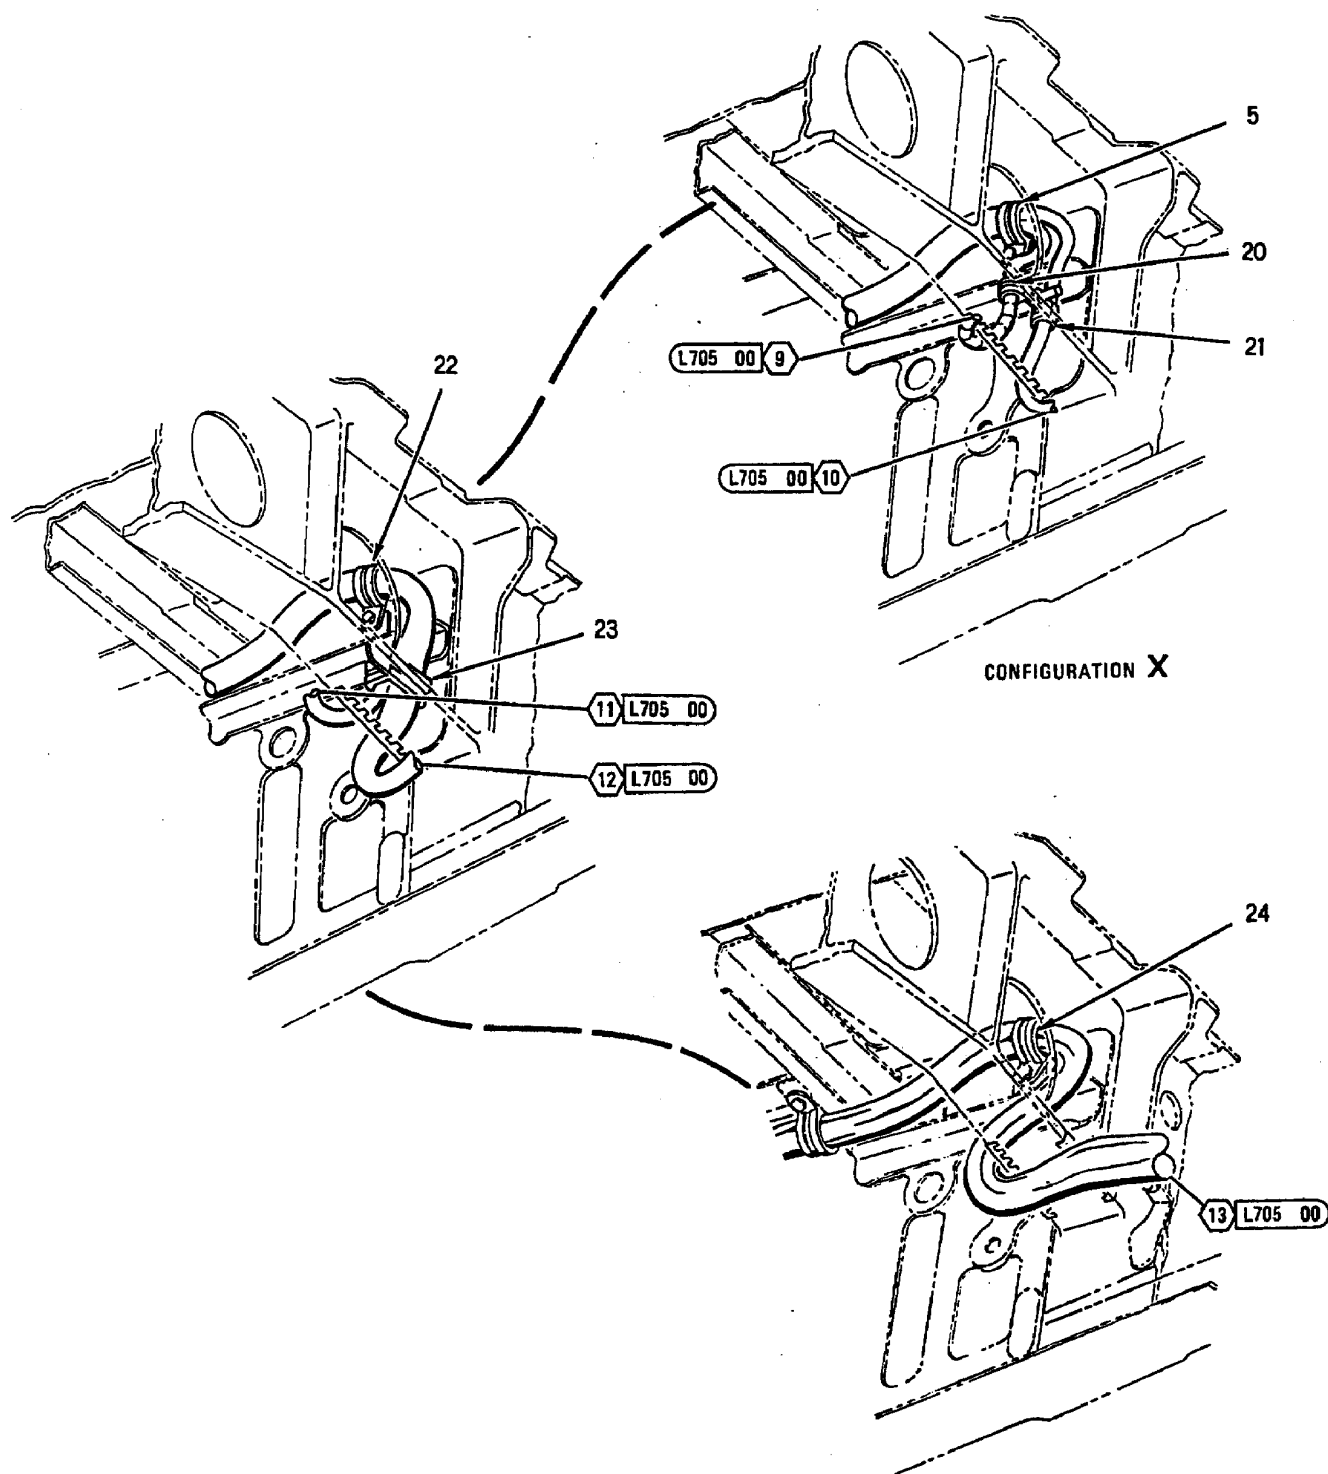

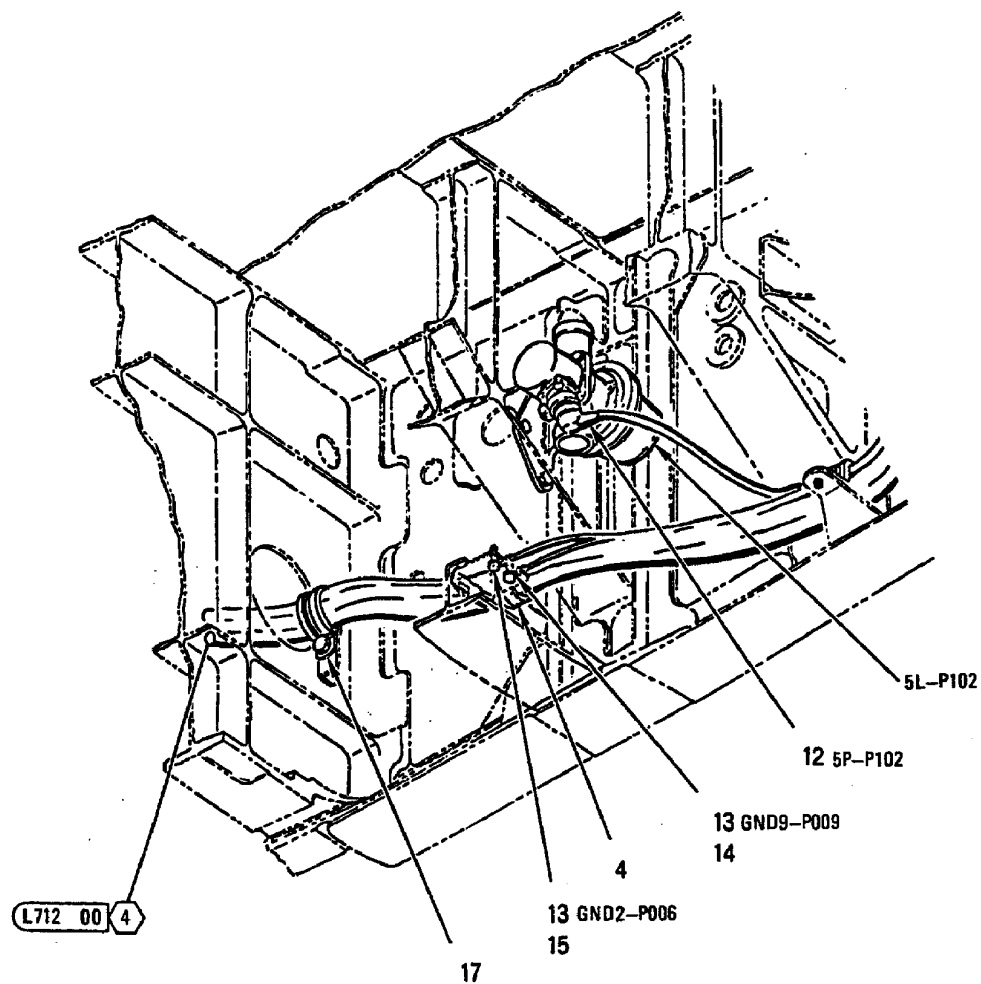

CONFIGURATION Y
161353 THRU 161741

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG4	CLAMP	1	J	PAOZZ
	NAS673V20	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	NAS43DD3-64	SPACER (AP)	1	J	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	J*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	J*	PAOZZ
2	NAS1712D9-18T	CLAMP	1	E	PAOZZ
	NAS1712D8-16T	CLAMP	1	H	PAOZZ
	NAS1712D7-14N	CLAMP	1	K	PAOZZ
	NAS1712D8-14K	CLAMP	1	L	PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-24	SPACER (AP)	1	G	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	NAS1712D9-18T	CLAMP	1	E	PAOZZ
	NAS1712D8-16T	CLAMP	1	H	PAOZZ
3	NAS1712D7-14N	CLAMP	1	R	PAOZZ
	NAS1712D8-14K	CLAMP	1	L	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	E*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	F*	PAOZZ
4	830WD12G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	F*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
5	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	F*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
6	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
	NAS1712D9-18T	CLAMP	1	M	PAOZZ
	NAS1712D8-14T	CLAMP	1	J	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
7	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
	MS21266-8N	GROMMET	AR	J	PAOZZ
	MS21266-4N	GROMMET	AR	E	PAOZZ
8	MS21266-IN	GROMMET	AR		PAOZZ
	74A885621-2366	MARKER, IDENTIFICATION-AVIONICS (76301) (FOR REF DES 24U-P003)	1		MDOZZ
11	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SA) (24P-P003)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-P003)	1	G	PAOZZ
12	MS27467T9B35S	CONNECTOR, PLUG (5P-P102)	1		PAOZZ
13	MS25082-3	NUT	2	G	PAOZZ
	NAS1291C3M	NUT	2	L	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 13)	2		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
14	74A885621-2083	MARKER, IDENTIFICATION-AVIONICS(76301) (FOR REF DES GND9-P009)	1		MDOZZ
15	74A885621-2035	MARKER, IDENTIFICATION-AVIONICS (76301) (FOR REF DES GND2-P006)	1		MDOZZ
16	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	J*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	J*	PAOZZ
	NAS673V3	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J	PAOZZ
17	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	E*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	F*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
18	MS21919WDG4	CLAMP	1	J	PAOZZ
	NAS673V3	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J*	PAOZZ
19	MS21266-3N	GROMMET	AR	J	PAOZZ
20	M85052/1-6	CLAMP	1	C	PAOZZ
	NAS673V21	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-48	SPACER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
21	M85052/1-10	CLAMP	1	C	PAOZZ
22	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	B*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
23	NAS1712D9-18T	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
24	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	A*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS. (INTRO)

CODE USABLE ON


A 161353

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		B						161358 THRU 161519			
		C						161520 THRU 161524			
		D						161525 & UP			
		E						161353 THRU 161519			
		F						161520 & UP			
		G						161353 THRU 161761			
		H						161520 THRU 161741			
		J						161742 & UP			
		K						161742 THRU 161761			
		L						161925 & UP			
		M						161525 THRU 161741			


CENTER FUSELAGE DOOR 42 CENTER TUNNEL

LEGEND

1 161353 THRU 161741

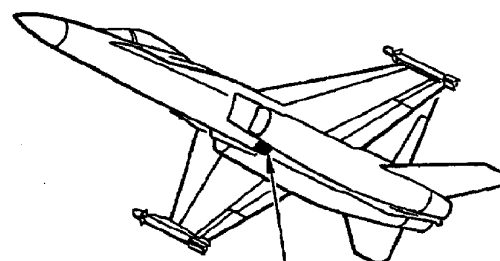

DOOR 42

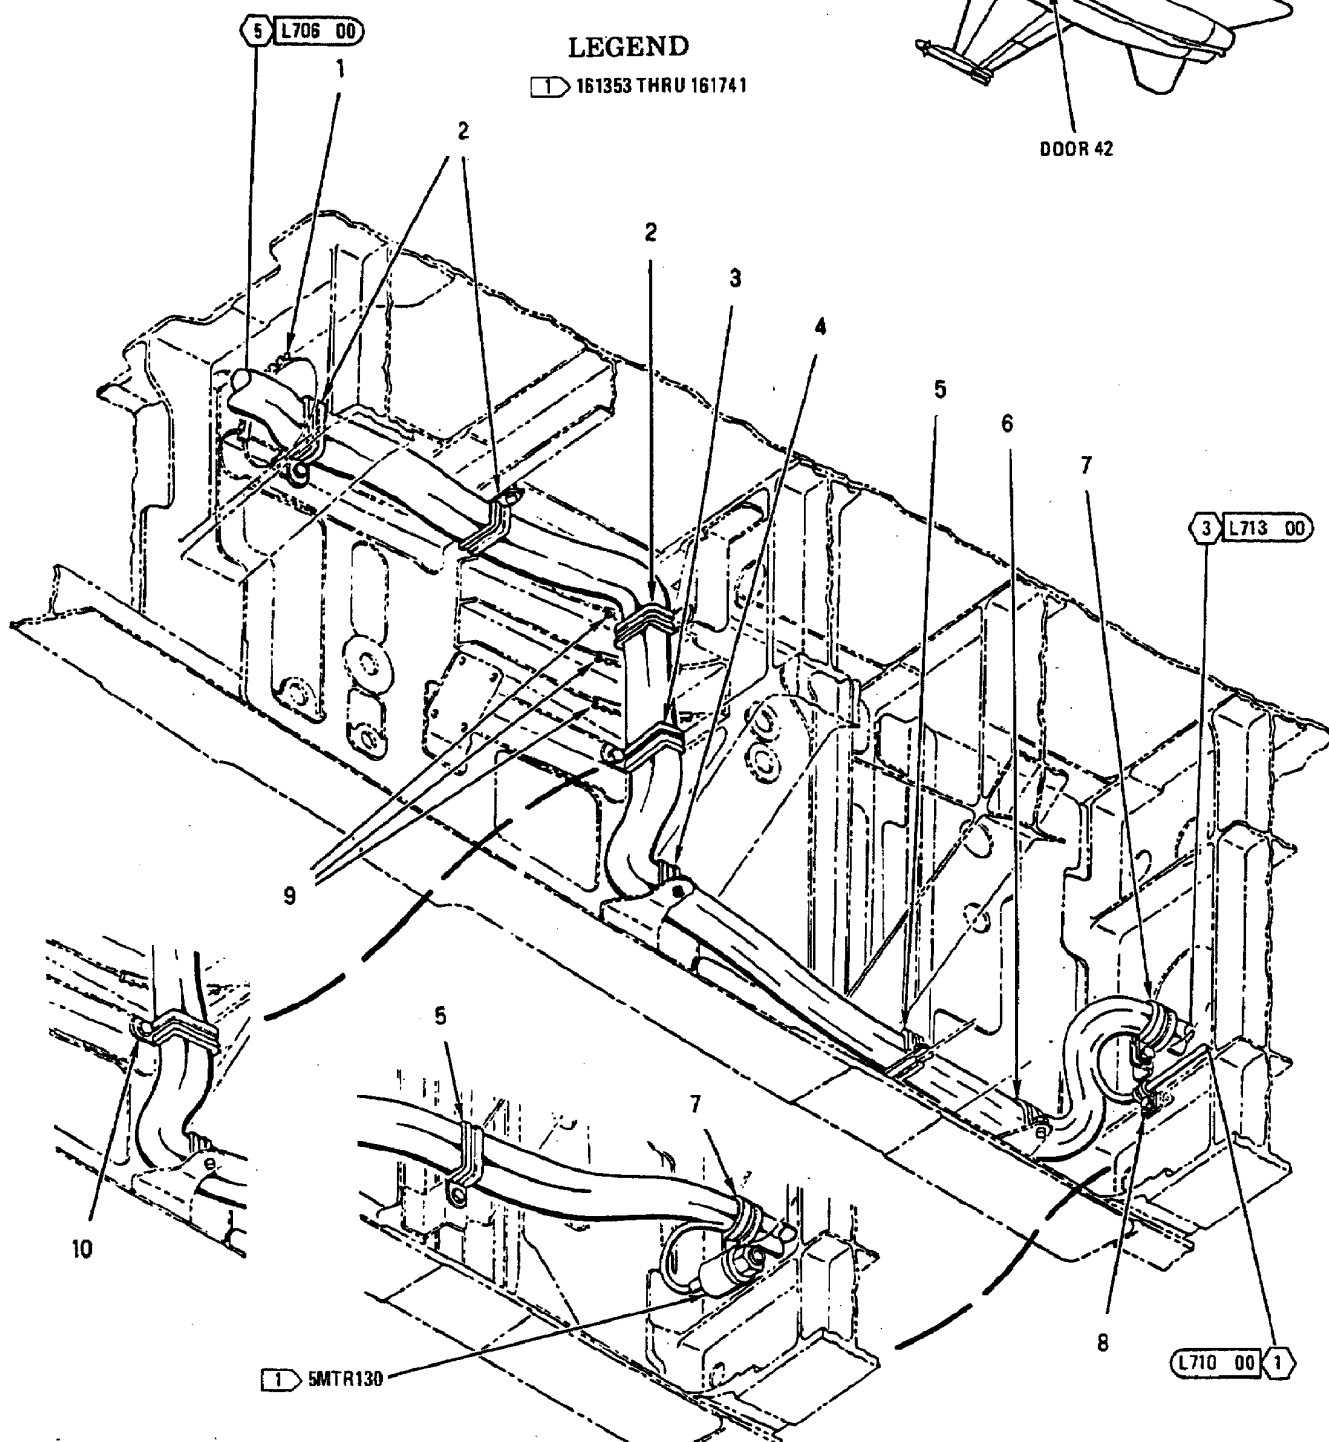

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR	E	PAOZZ
	MS21266-7N	GROMMET	AR	F	PAOZZ
2	NAS1712D8-16T	CLAMP	3		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
3	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1712D8-16T	CLAMP	1	G	PAOZZ
4	NAS1712D16-8K	CLAMP	1	F	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
5	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS1712D8-16T	CLAMP	1		PAOZZ
6	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	NAS1291C3M	NUT (AP)	1		PAOZZ
	NAS1712D8-16T	CLAMP	1	C	PAOZZ
8	NAS1712D16-8T	CLAMP	1	D	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
9	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
10		(MCDONNELL SPEC ST3M523C3M1)			
	JM44LC33WD14	CLAMP, LOOP (22175)	1	D*	PAOZZ
11		(MCDONNELL SPEC ST9M630D14)			
	830WD14G	SEE ABOVE (83930)	1	D*	PAOZZ
12	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
13	A11144-4-3	NUT, CLIP (AP) (72962)	1	D	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
14	JM44LC33WD14	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D14)			
15	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
16	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
17		(MCDONNELL SPEC ST3M523C3M1)			
	MS21919WDG4	CLAMP	1	D	PAOZZ
18	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
19	A11144-4-3	NUT, CLIP (AP) (72962)	1	D	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
20	MS21266-2N	GROMMET	AR	C	PAOZZ
	NAS1712D16-8T	CLAMP	1	A	PAOZZ
21	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
22	A11144-4-3	NUT, CLIP (AP) (72962)	1	A	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161718
B	161720 & UP
C	161353 THRU 161741
D	161742 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		E						161353 THRU 161761			
		F						161925 & UP			
		G						161720 THRU 161761			


CENTER FUSELAGE

DOOR 47
CENTER TUNNEL

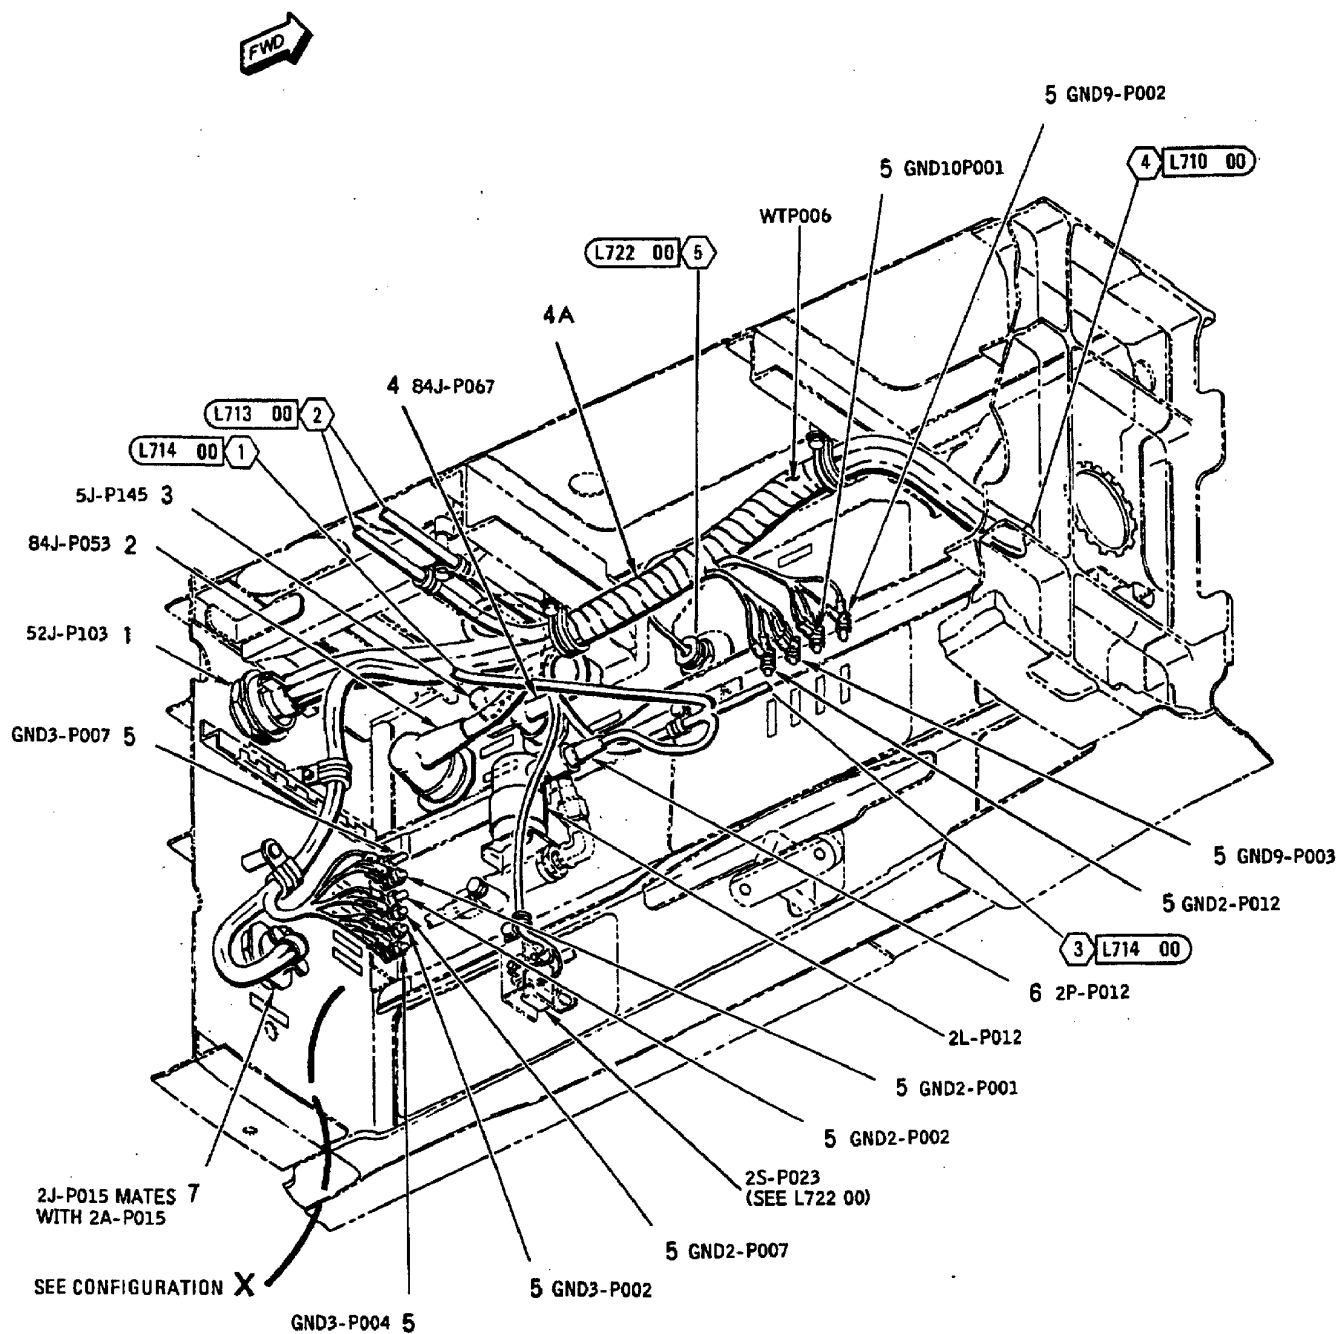

CENTER FUSELAGE

DOOR 47
CENTER TUNNEL

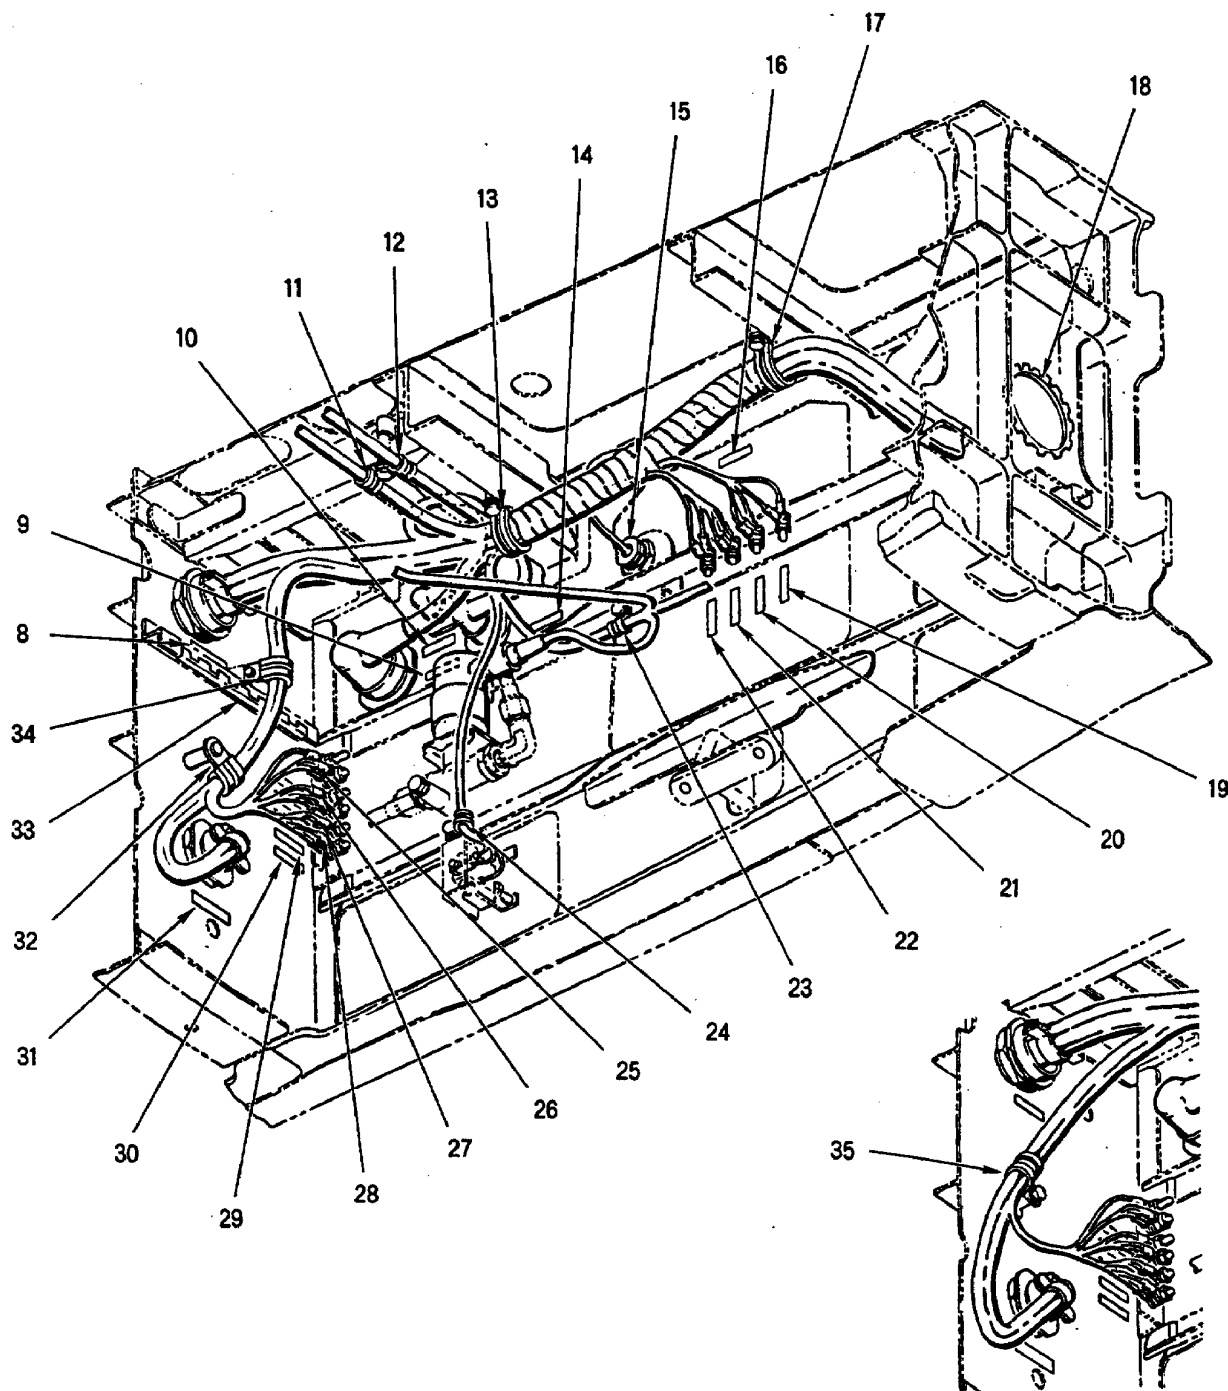

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	D38999/24KG35SN	CONNECTOR, PLUG (REPLACES TVS07RK-21-35SN) (52J-P103)	1		PAOZZ
	TVS07RK-21-35SN	CONNECTOR, RECEPTACLE, ELECTRICAL (76301) (MCDONNELL SPEC ST5M1614KG35SN) (USE UNTIL EXHAUSTED) (52J-P103)	1	C	PAOZZ
	4M36-14001	WASHER (76301) (AP)	1	H	PAOZZ
2	MS27468T25B35S	CONNECTOR, RECEPTACLE (84J-P053)	1		PAOZZ
3	MS27468T13B35S	CONNECTOR, RECEPTACLE (5J-P145)	1		PAOZZ
4	MS27468T15B35S	CONNECTOR, RECEPTACLE (84J-P067)	1		PAOZZ
4A	T0004	TUBING, PLASTIC, SPIRAL (66794) (MCDONNELL SPEC 14M912TN4)	AR	E*	PAOZZ
	500024-1	SEE ABOVE (6M033)	AR	E*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	E*	PAOZZ
	SC-606-1/4	SEE ABOVE (96904)	AR	E*	PAOZZ
5	MS21042L3	NUT	10	F	PAOZZ
	NAS1291C3M	NUT	10	G	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	10		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 5)	10		PAOZZ
6	MS27467T9B35S	CONNECTOR, PLUG (2P-P012)	1		PAOZZ
7	D38999/24KF32SN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-19-32SN) (2J-P015)	1		PAOZZ
	TVS07RK-19-32SN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KF32SN) (USE UNTIL EX- HAUSTED) (2J-P015)	1	C	PAOZZ
8	74A885621-2193	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P103)	1		MDOZZ
9	74A885621-2300	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P053)	1		MDOZZ
10	74A885621-2354	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 5J-P145)	1		MDOZZ
11	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
12	M85052/1-4	CLAMP	1		PAOZZ
13	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74A885621-2201	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P067)	1		MDOZZ
15	74B878001-125	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	B	PAOZZ
16	74A885621-2158	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTP006)	1		MDOZZ
17	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144A7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
18	MS21266-4N	GROMMET	AR	F	PAOZZ
	MS21266-8N	GROMMET	AR	G	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
19	74A885621-2079	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P002)	1		MDOZZ
20	74A885621-2109	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10P001)	1		MDOZZ
21	74A885621-2241	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-P003)	1		MDOZZ
22	74A885621-2356	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P012)	1		MDOZZ
23	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
24	M85052/1-2	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
25	74A885621-2353	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P007)	1		MDOZZ
26	74A885621-2028	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P001)	1		MDOZZ
27	74A885621-2030	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P002)	1		MDOZZ
28	74A885621-2036	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-P007)	1		MDOZZ
29	74A885621-2059	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P002)	1		MDOZZ
30	74A885621-2061	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-P004)	1		MDOZZ
31	74A885621-2406	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 2J-P015)	1		MDOZZ
32	M85052/1-5	CLAMP	1	G	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
33	MS21266-1N	GROMMET	AR	G	PAOZZ
34	M85052/1-7	CLAMP	1	G	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	A11144A7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	G*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	G*	PAOZZ
35	M85052/1-5	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE USABLE ON

A 161353 THRU 161361

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		B						161362 & UP			
		C						161353 THRU 161761			
		D						DELETED			
		E						163160 & UP			
		F						161353 THRU 161741			
		G						161742 & UP			
		H						163092 & UP			

CENTER FUSELAGE

DOOR 47
CENTER TUNNEL

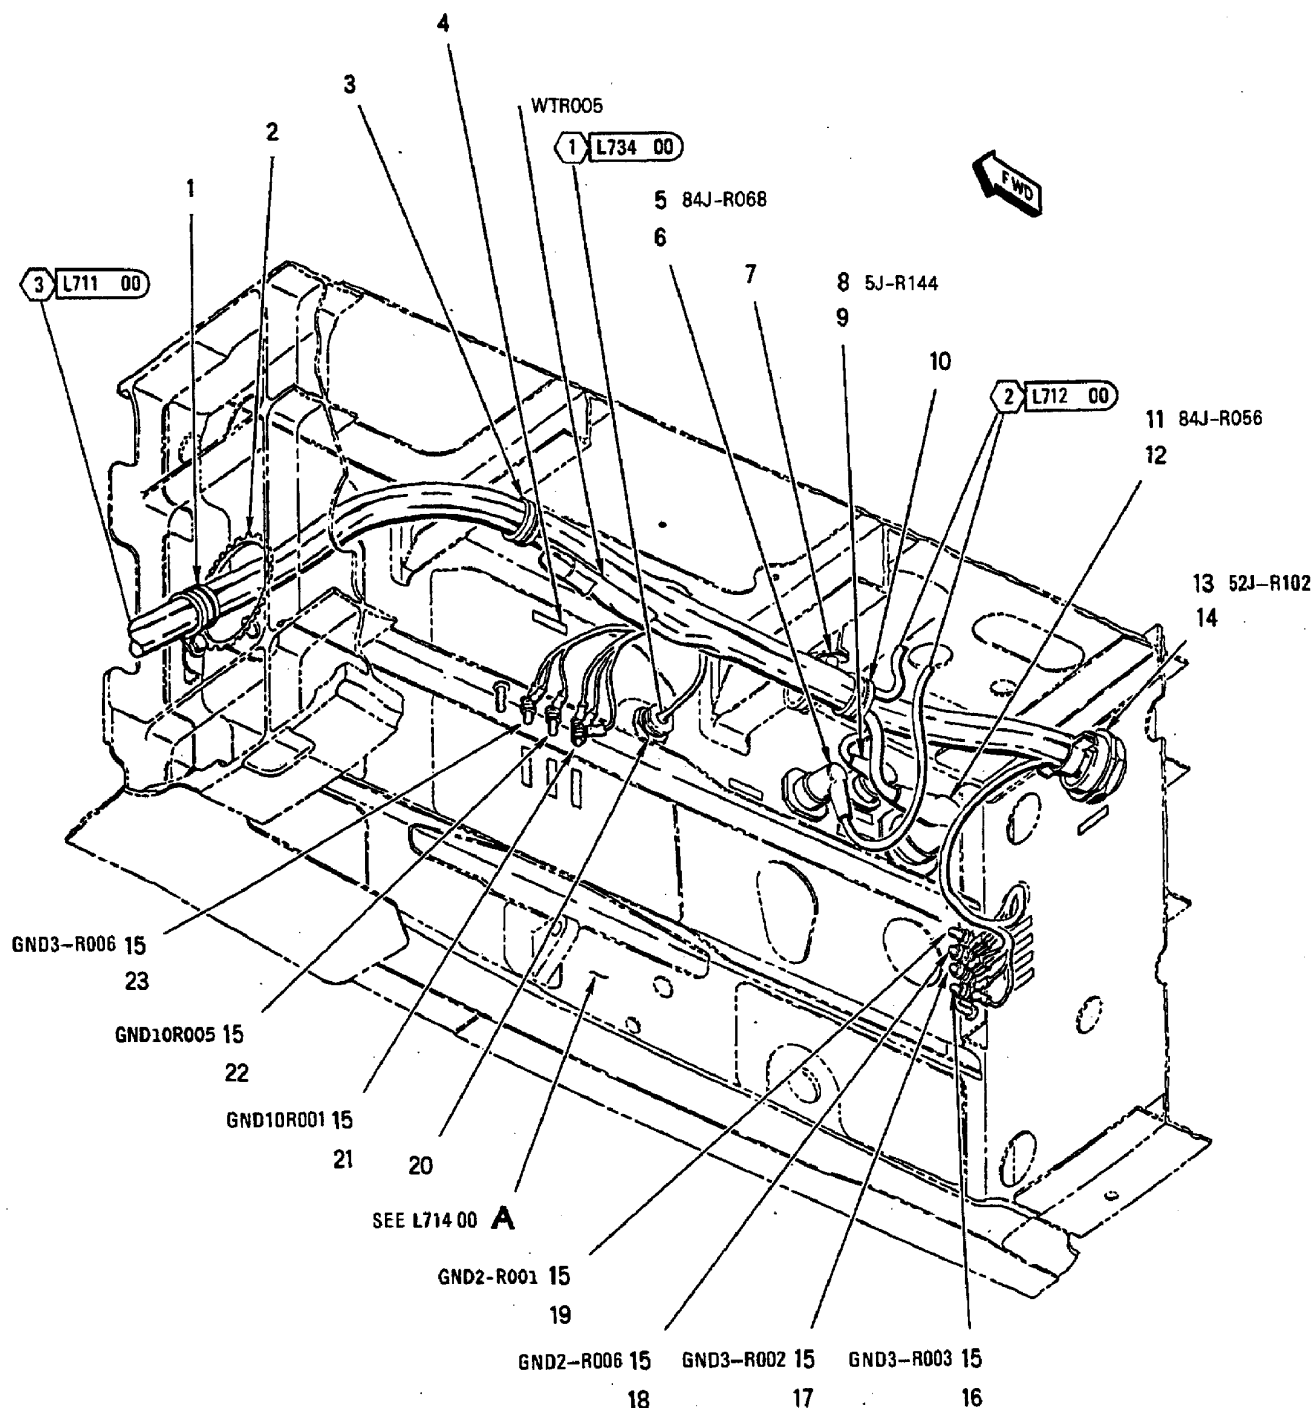

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
2	MS21266-4N	GROMMET	AR	F	PAOZZ
	MS21266-8N	GROMMET	AR	G	PAOZZ
3	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72963) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
	130091	SEE ABOVE (76530)	1	E*	PAOZZ
4	74A885621-2167	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTR005)	1		MDOZZ
5	MS27468T15B35S	CONNECTOR, RECEPTACLE (84J-R068)	1		PAOZZ
6	74A885621-2187	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R068)	1		MDOZZ
7	ST9M620A16G	CLAMP (76301)	REF		PAOZZ
8	MS27468T13B35S	CONNECTOR, RECEPTACLE (5J-R144)	1		PAOZZ
9	74A885621-2355	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 5J-R144)	1		MDOZZ
10	JM44LC33WD16	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D16)	1	*	PAOZZ
	830WD16G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V14	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-48	SPACER (AP)	1		PAOZZ
11	MS27468T25B35S	CONNECTOR, RECEPTACLE (84J-R056)	1		PAOZZ
12	74A885621-2186	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R056)	1		MDOZZ
13	D38999/24KH35SN	CONNECTOR, PLUG (REPLACES TVS07RK-23-35SN) (52J-R102)	1		PAOZZ
	TVS07RK-23-35SN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KH35SN) (USE UNTIL EXHAUSTED) (52J-R102)	1	C	PAOZZ
	4M36-15007	WASHER (76301) (AP)	1	H	PAOZZ
14	74A885621-2303	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R102)	1		MDOZZ
15	MS21042L3	NUT	7	D	PAOZZ
	NAS1291C3M	NUT	7	E	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 15)	7		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 15)	7		PAOZZ
16	74A885621-2064	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R003)	1		MDOZZ
17	74A885621-2063	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R002)	1		MDOZZ
18	74A885621-2043	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R006)	1		MDOZZ
19	74A885621-2038	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R001)	1		MDOZZ



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
20	74B878001-125	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	B	PAOZZ
21	74A885621-2114	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R001)	1		MDOZZ
22	74A885621-2118	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R005)	1		MDOZZ
23	74A885621-2357	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND3-R006)	1		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP
C	161353 THRU 161761
D	161353 THRU 162444
E	162445 & UP
F	161353 THRU 161741
G	161742 & UP
H	163092 & UP

CENTER FUSELAGE

DOOR 47
CENTER TUNNEL

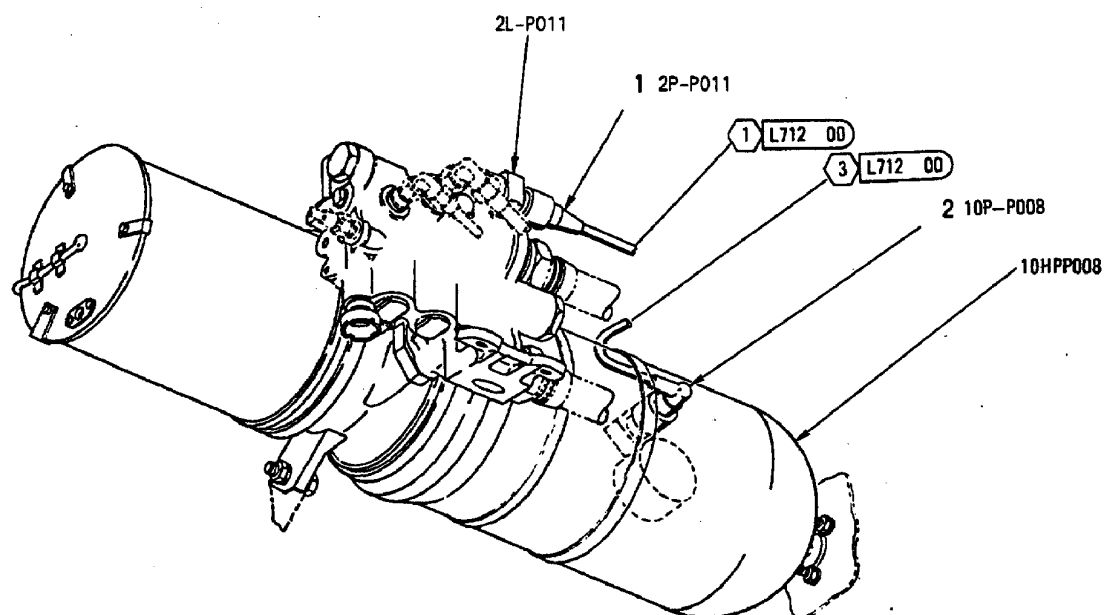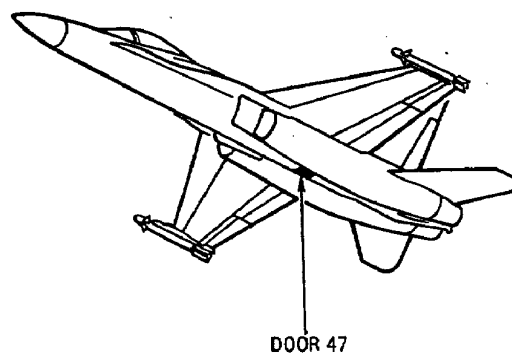



A
OF L713 00

INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			
1	MS27467T11B98S	CONNECTOR, PLUG (2P-P011)	1		PAOZZ
2	MS27467T11B98S	CONNECTOR, PLUG (10P-P008)	1		PAOZZ

CENTER FUSELAGE

000R 52
CENTER TUNNEL

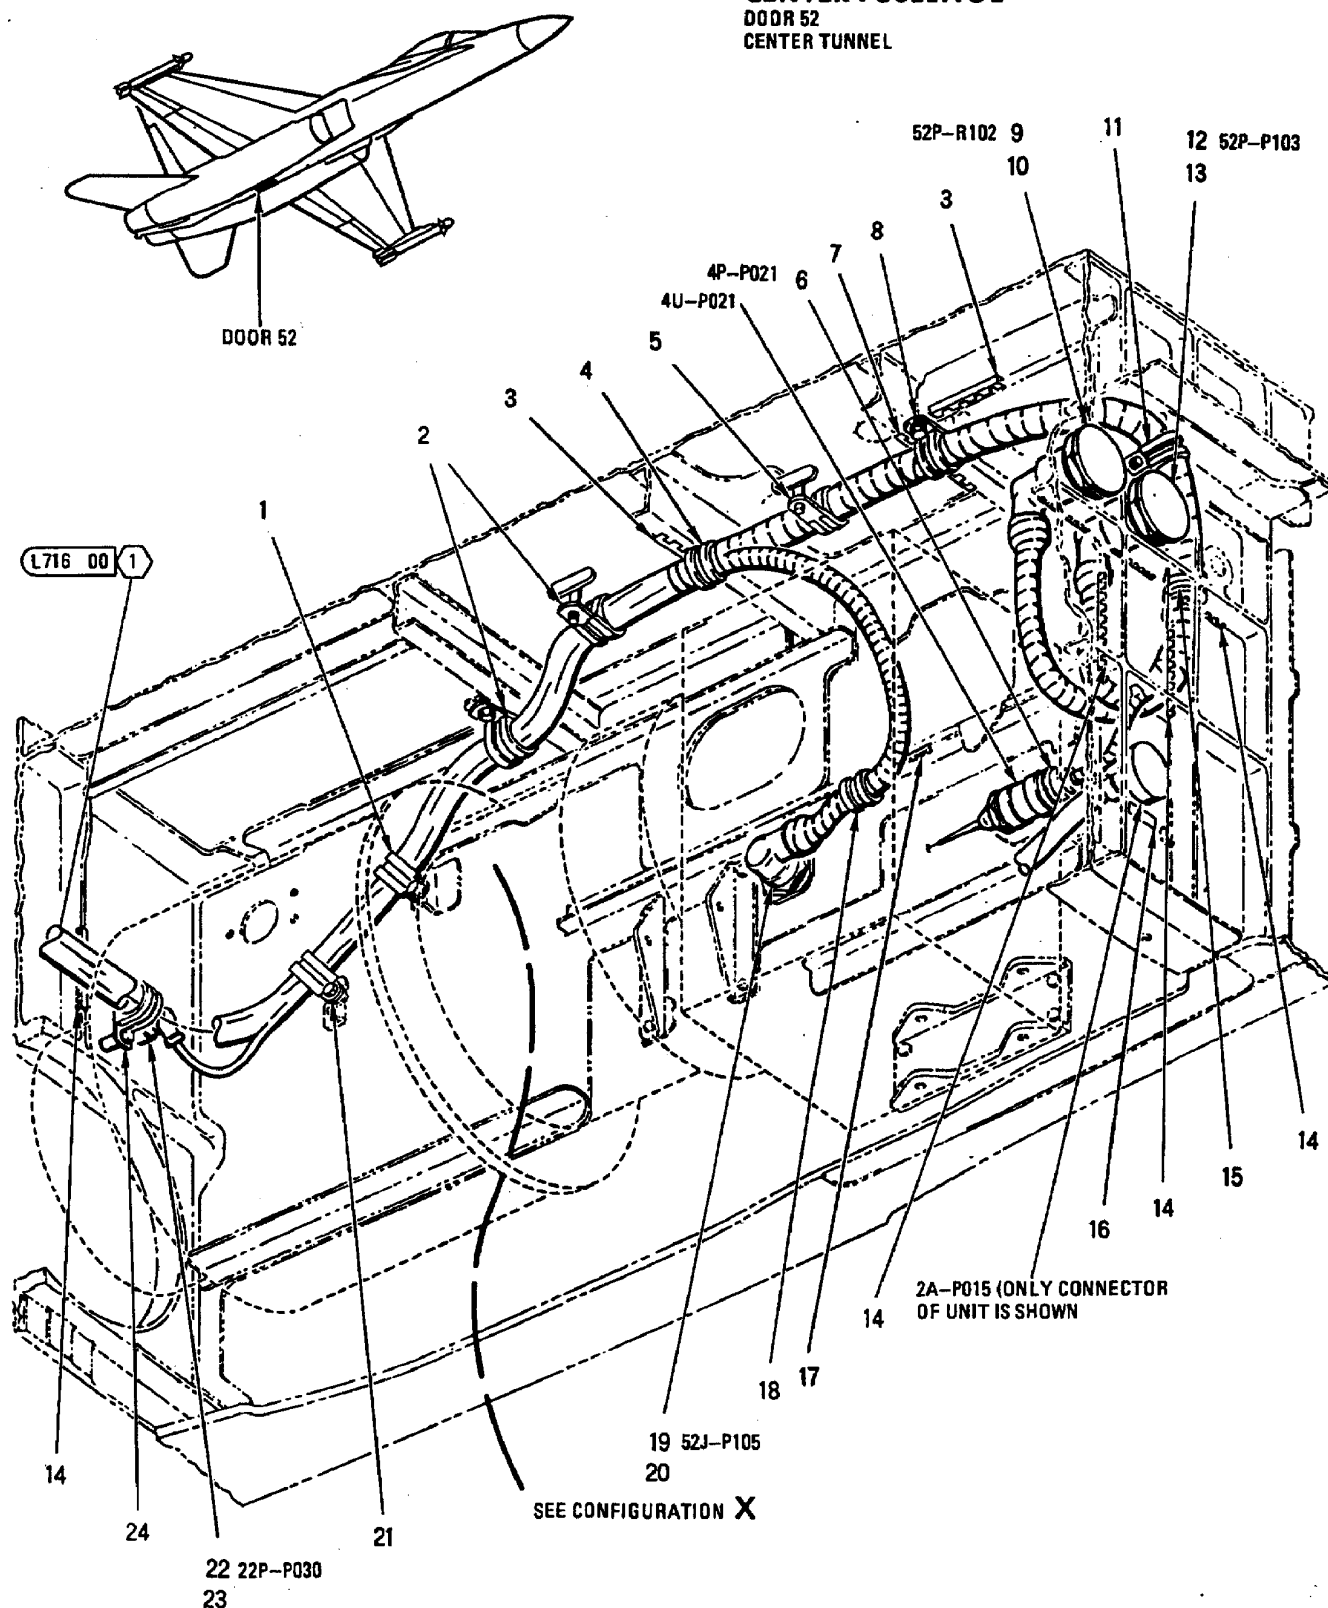

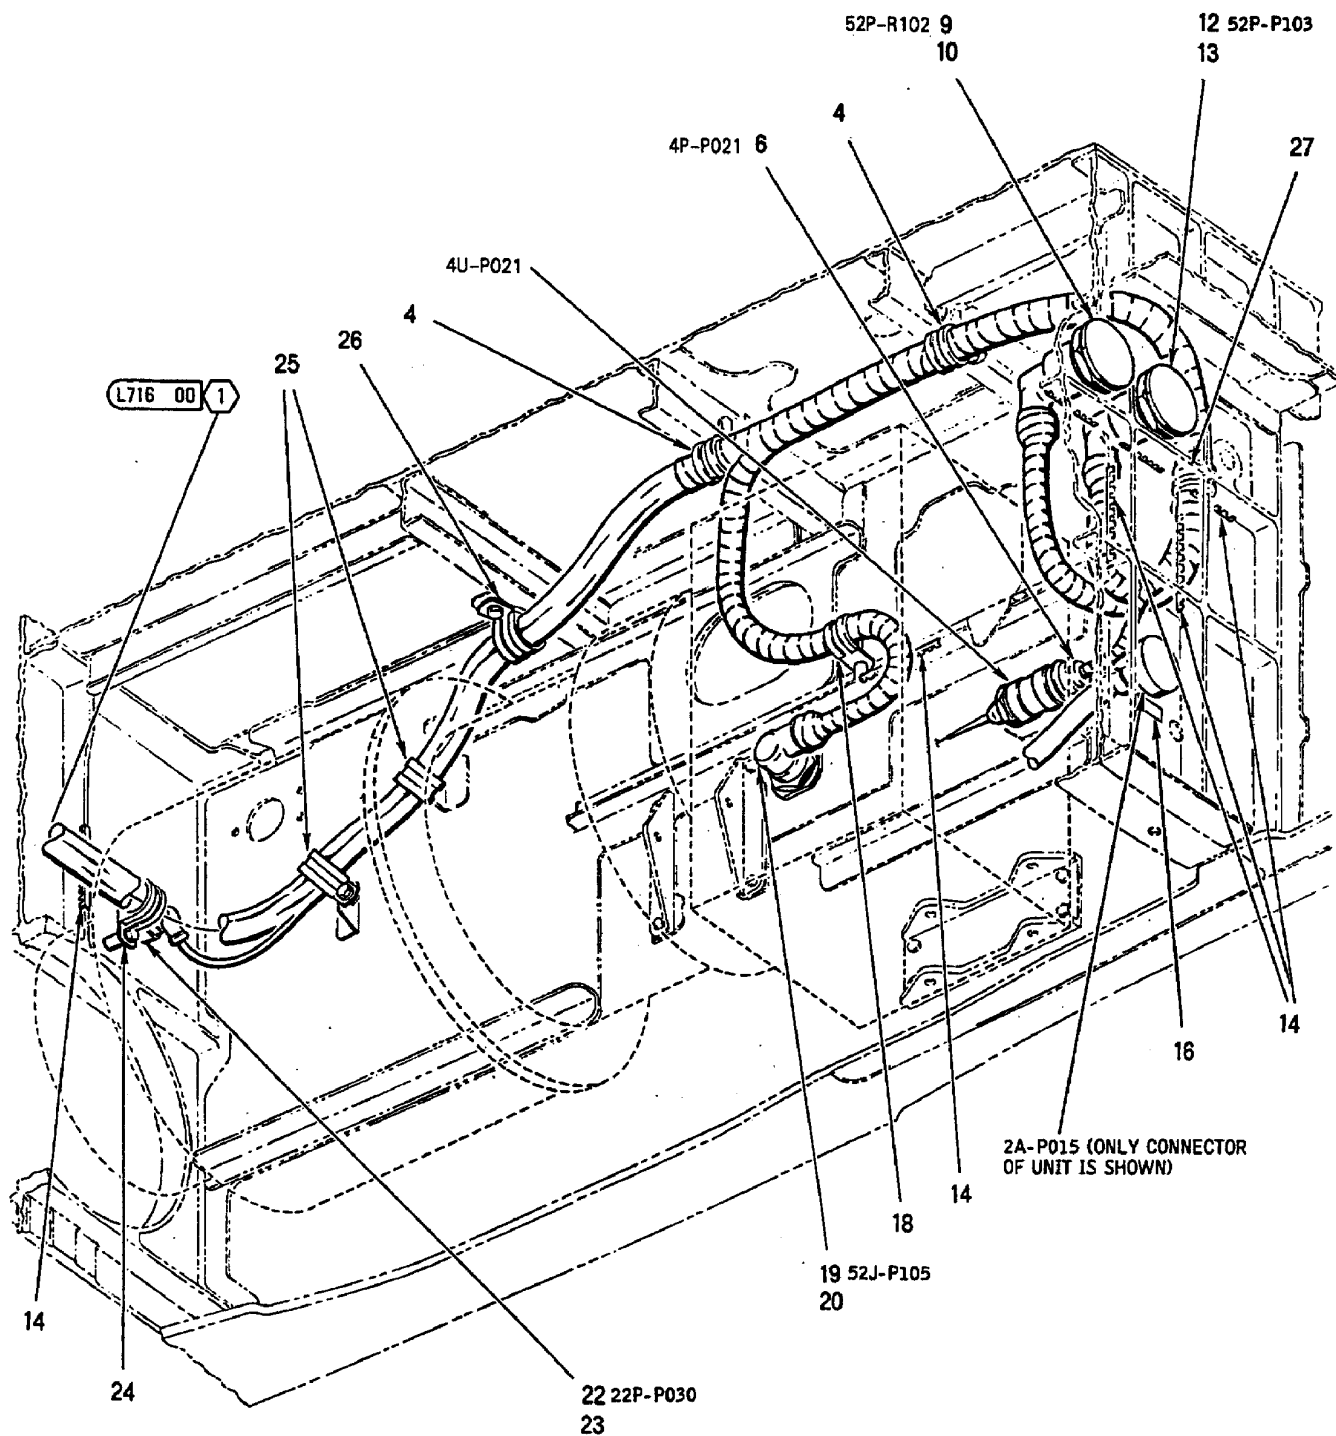


CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	C*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	C	PAOZZ
2	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	2	C*	PAOZZ
	830WD10G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
3	MS21266-1N	GROMMET	AR	D	PAOZZ
4	MS25281-10	CLAMP	1	B	PAOZZ
	MS25281-13	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
5	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	C*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
6	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-P021)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-P021)	1	A	PAOZZ
7	MS21266-2N	GROMMET	AR	F	PAOZZ
8	MS25281-10	CLAMP	1	B	PAOZZ
	MS25281-13	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	H	PAOZZ
	NAS673V4	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1	G	PAOZZ
9	D38999/26KH35PN	CONNECTOR, PLUG (REPLACES TVS06RK-23-35PN) (52P-R102)	1		PAOZZ
	TVS06RK-23-35PN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST9M1586KH35PN) (USE UNTIL EXHAUSTED) (52P-R102)	1	A	PAOZZ
10	74A885621-2303	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R102)	1		MDOZZ
11	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	C*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
12	D38999/26KG35PN	CONNECTOR, PLUG (REPLACES TVS06RK-21-35PN) (52P-P103)	1		PAOZZ
	TVS06RK-21-35PN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M15126KG35PN) (USE UNTIL EXHAUSTED) (52P-P103)	1	A	PAOZZ
13	74A885621-2193	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P103)	1		MDOZZ
14	MS21266-2N	GROMMET	AR	J	PAOZZ
15	MS21919WDG6	CLAMP	1	K*	PAOZZ
	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	G*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	G*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
16	74A885621-2406	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 2J-P015)	1		MDOZZ
17	MS21266-2N	GROMMET	AR		PAOZZ
18	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	D38999/24KG35SN	CONNECTOR, PLUG (REPLACES TVS07RK-21-35SN) (52J-P105)	1		PAOZZ
	TVS07RK-21-35SN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KG35SN) (USE UNTIL EXHAUSTED) (52J-P105)	1	A	PAOZZ
20	74A885621-2305	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P105)	1		MDOZZ
21	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	E*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ
22	D38999/26KC35SN	CONNECTOR, PLUG (REPLACES TVS06RK-13-35SN) (22P-P030)	1		PAOZZ
	TVS06RK-13-35SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KC35SN) (USE UNTIL EXHAUSTED) (22P-P030)	1	A	PAOZZ
23	74A885621-2236	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 22J-S030)	1		MDOZZ
24	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V18	BOLT (AP)	1	B	PAOZZ
	NAS673V20	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
25	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	2	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	2	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
26	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
27	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	B*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

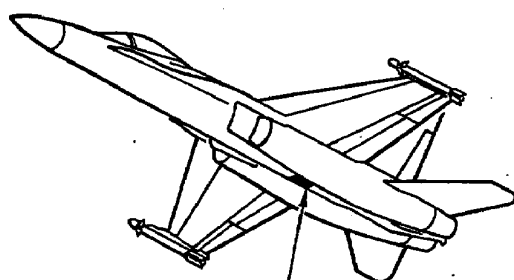

DOOR 52

CENTER FUSELAGE

DOOR 52
CENTER TUNNEL

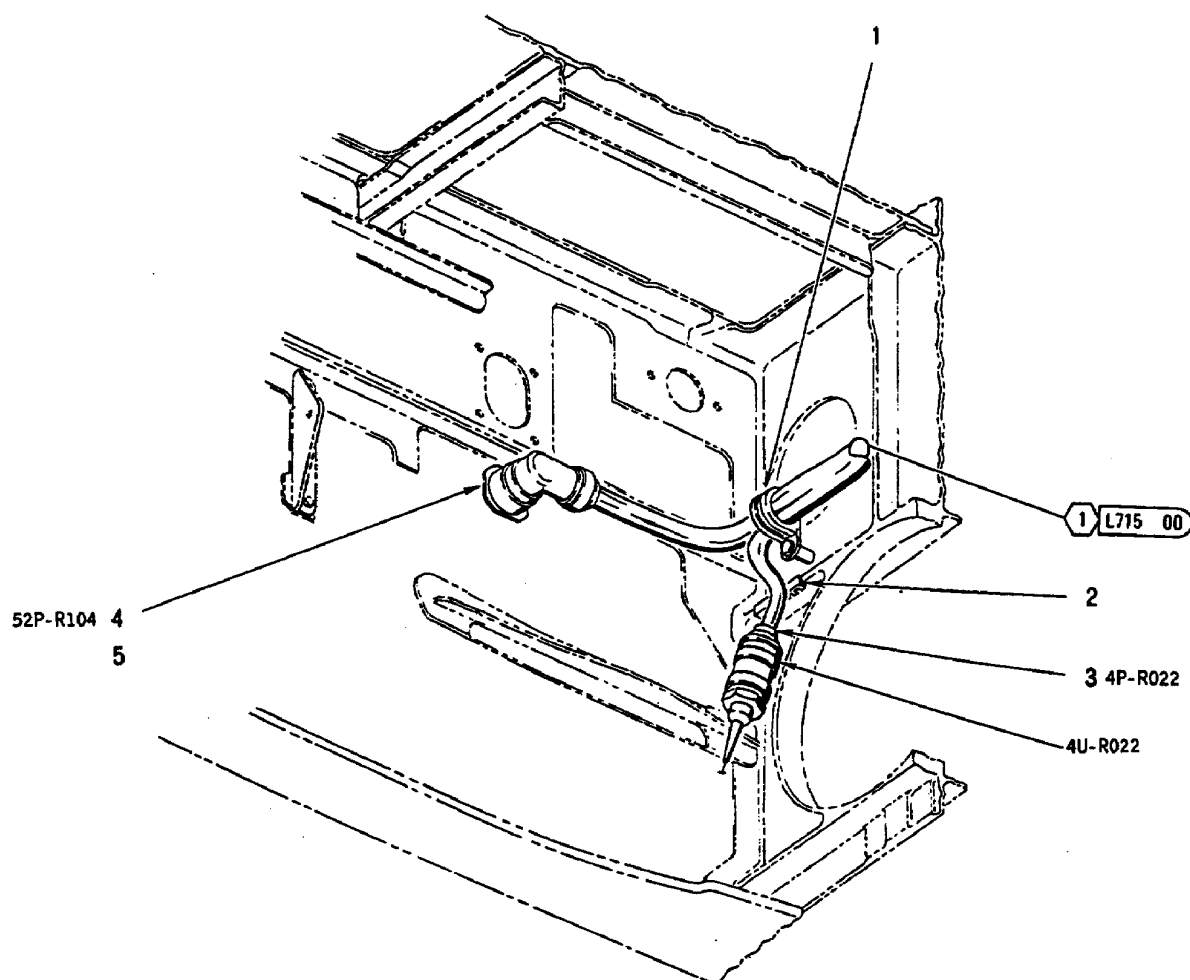


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V18	BOLT (AP)	1	B	PAOZZ
	NAS673V20	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	D	PAOZZ
	AN960JD10	WASHER	1	E	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	D38999/26KB98SN	CONNECTOR, PLUG	1		PAOZZ
		(REPLACES TVS06RK-11-98SN) (4P-R022)			
	TVS06RK-11-98SN	CONNECTOR, PLUG,	1	A	PAOZZ
		ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-R022)			
4	D38999/26KG35SN	CONNECTOR, PLUG	1		PAOZZ
		(REPLACES TVS06RK-21-35SN) (52P-R104)			
	TVS06RK-21-35SN	CONNECTOR, PLUG,	1	A	PAOZZ
		ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KG35SN) (USE UNTIL EXHAUSTED) (52P-R104)			
5	74A885621-2304	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R104)	1		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161761
B	161353 THRU 161741
C	161742 & UP
D	161353 THRU 162462
E	162463 & UP

CENTER FUSELAGE LEFT MAIN LANDING GEAR

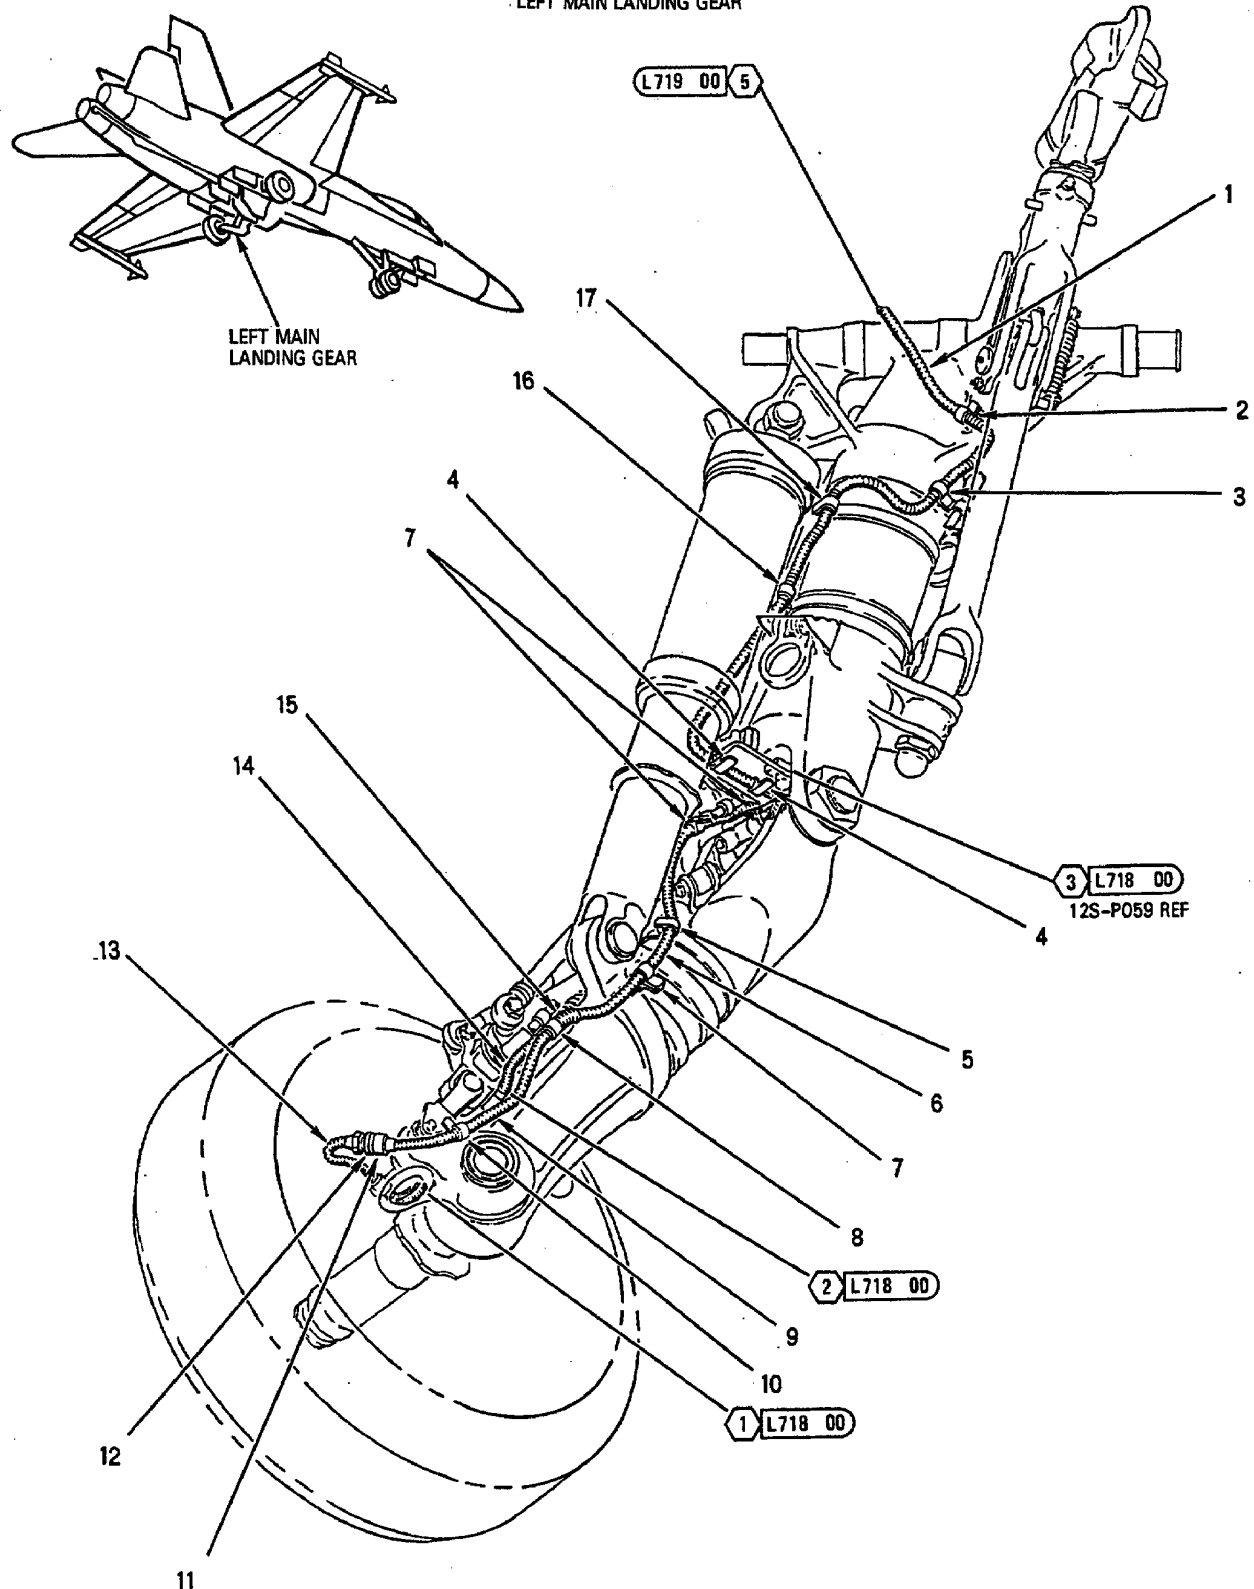


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A600118-2009	TUBING (76301)	1		MGOZZ
2	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V42	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS42DD6-64	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	M85052/1-8	CLAMP	2		PAOZZ
	NAS653V5	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	M85052/1-6	CLAMP	1		PAOZZ
	NK1003696-05	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-1)			
	NAS42DD6-8	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	74A600118-2013	TUBING (76301)	1		MGOZZ
7	M85052/1-6	CLAMP	3		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
8	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V5H	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
9	74A600118-2019	TUBING (76301)	1		MGOZZ
10	M85052/1-5	CLAMP	1		PAOZZ
	NAS653V3	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
11	CRN3444-09	ADAPTER, ELECTRICAL CONDUIT (05593)	1	*	-
		(MCDONNELL SPEC ST5M1331L12C06)			
	6430-06-033-13	ADAPTER, ELECTRICAL CONDUIT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1331L12C06) (USE UNTIL EXHAUSTED)			
12	CRN3303	ADAPTER (05593) (MCDONNELL SPEC	1	*	PAOZZ
		5M1949-001)			
	NE1001	SEE ABOVE (52930)	1	*	PAOZZ
13	74A411535-1003	TUBE ASSY (76301)	1		MGOZZ
14	74A600118-2015	TUBING (76301)	1		MGOZZ
15	74A600118-2017	TUBING (76301)	1		MGOZZ
16	M85052/1-6	CLAMP	1		PAOZZ
	NK1003696-11	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-2)			
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
17	M85052/1-6	CLAMP	1		PAOZZ
	NK1003696-11	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-2)			
	AN960C10	WASHER (AP)	3		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

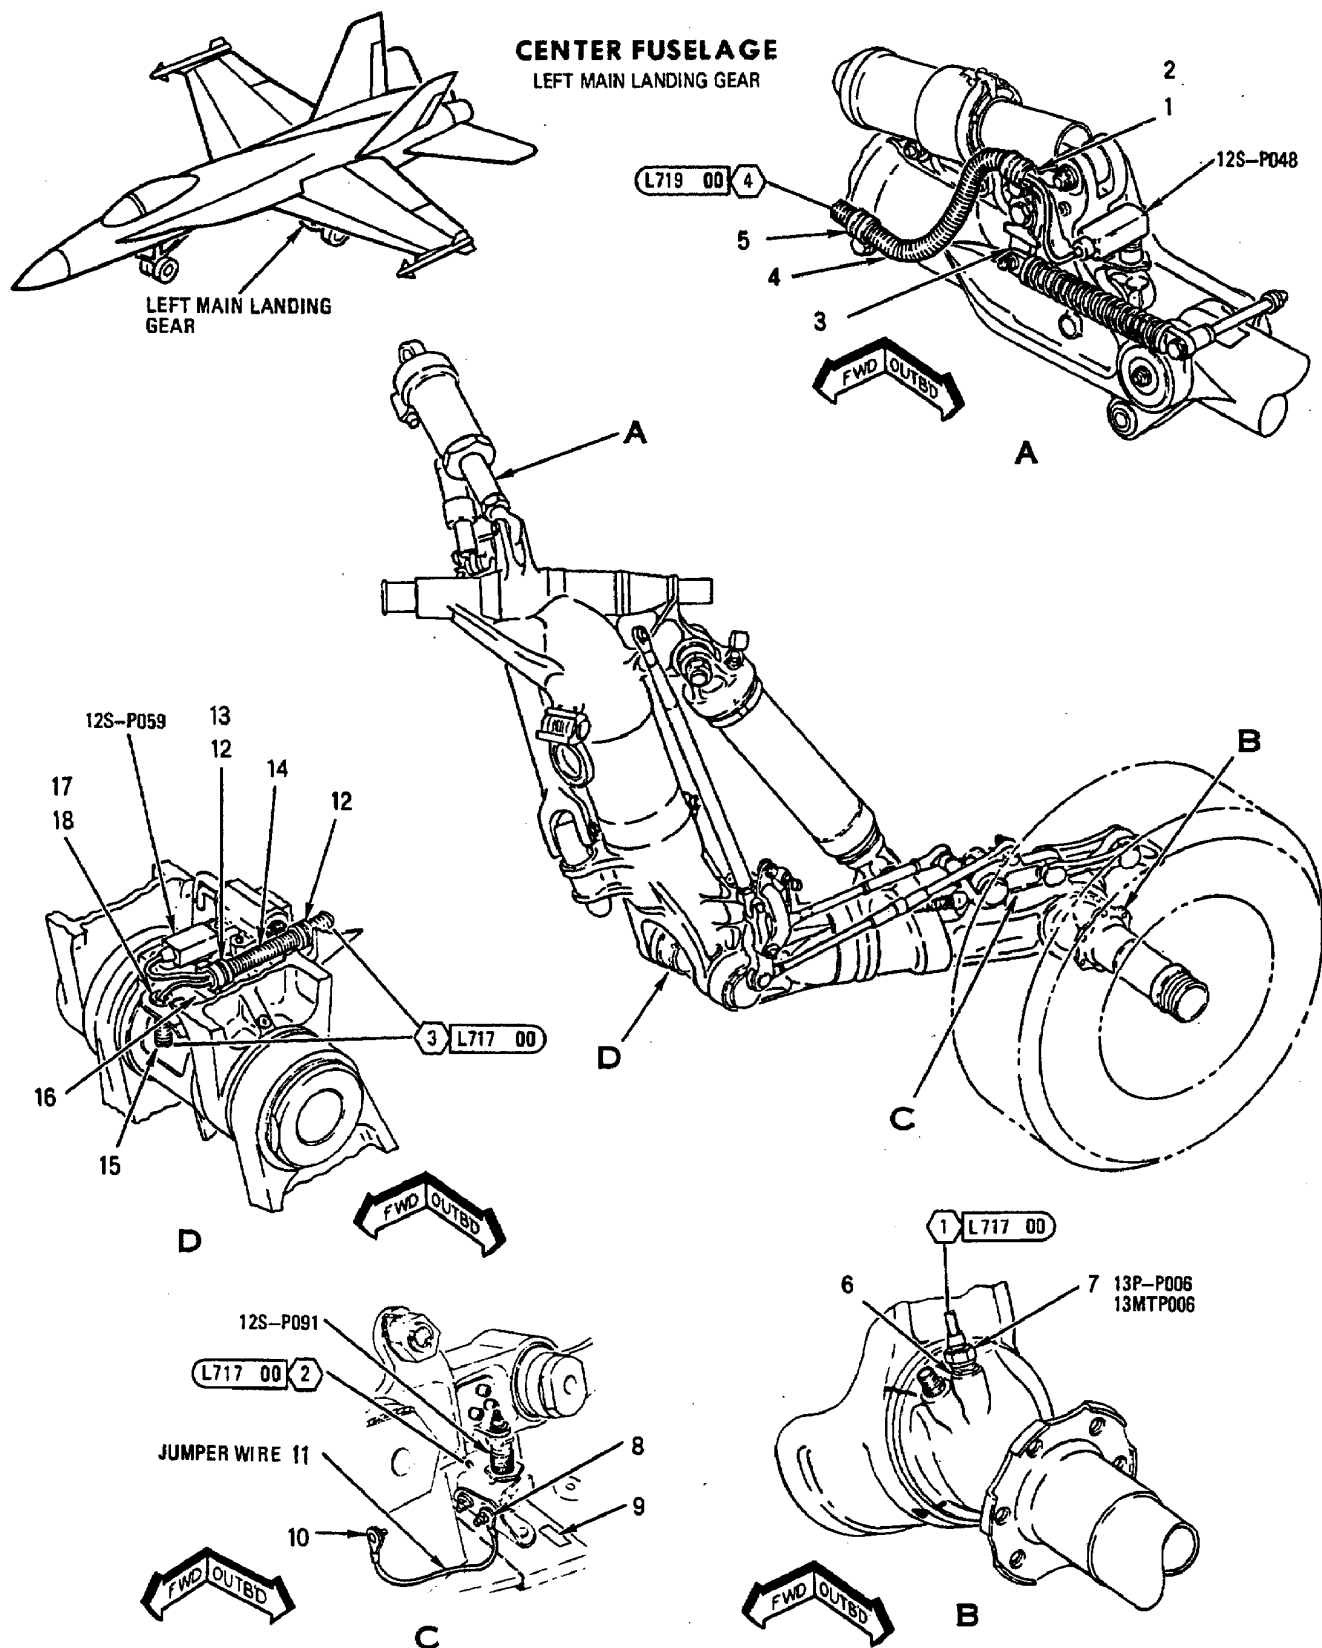

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
2	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002)			
	CTR6612-002	SEE ABOVE (64590)	1	*	PAOZZ
3	74A890601-2523	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-P048)			
4	74A600118-2003	TUBING (76301)	1		MGOZZ
5	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V1	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
6	AN815-6D	UNION	1		PAOZZ
7	MS27467T9B35S	CONNECTOR, PLUG (13P-P006)	1		PAOZZ
8	NAS653V4	BOLT	1		PAOZZ
	AN960C10	WASHER (USE WITH INDEX 8)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 8)	1		PAOZZ
9	74A890601-2856	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-P091)			
10	NAS6303U7	BOLT	1		PAOZZ
	AN960C10	WASHER (USE WITH INDEX 10)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 10)	1		PAOZZ
11	MS25083-2BB5	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
12	M85052/1-8	CLAMP	2		PAOZZ
	NAS653V5	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
13	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003)			
	CTR6612-003	SEE ABOVE (64590)	1	*	PAOZZ
14	74A600118-2009	TUBING (76301)	1		MGOZZ
15	74A600118-2013	TUBING (76301)	1		MGOZZ
16	74A890601-2525	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-P059)			
17	CRN2948	ADAPTER (05593)	1	*	PAOZZ
		(MCDONNELL SPEC 5M1697-001)			
	NE1002	SEE ABOVE (52930)	1	*	PAOZZ
18	CRN3444-06	ADAPTER, ELECTRICAL CONDUIT	1	*	PAOZZ
		(05593) (MCDONNELL SPEC ST5M1331L10C09)			
	6430-09-023-13	ADAPTER, ELECTRICAL CONDUIT	1	*	PAOZZ
		(05593) (MCDONNELL SPEC ST5M1331L10C09) (USE UNTIL EXHAUSTED)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

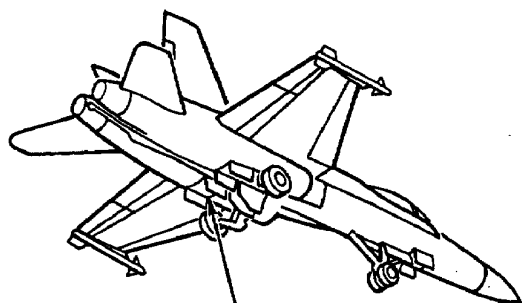

LEFT MAIN LANDING
GEAR WHEELWELL


CENTER FUSELAGE

LEFT MAIN LANDING GEAR
WHEELWELL (OUTBOARD)

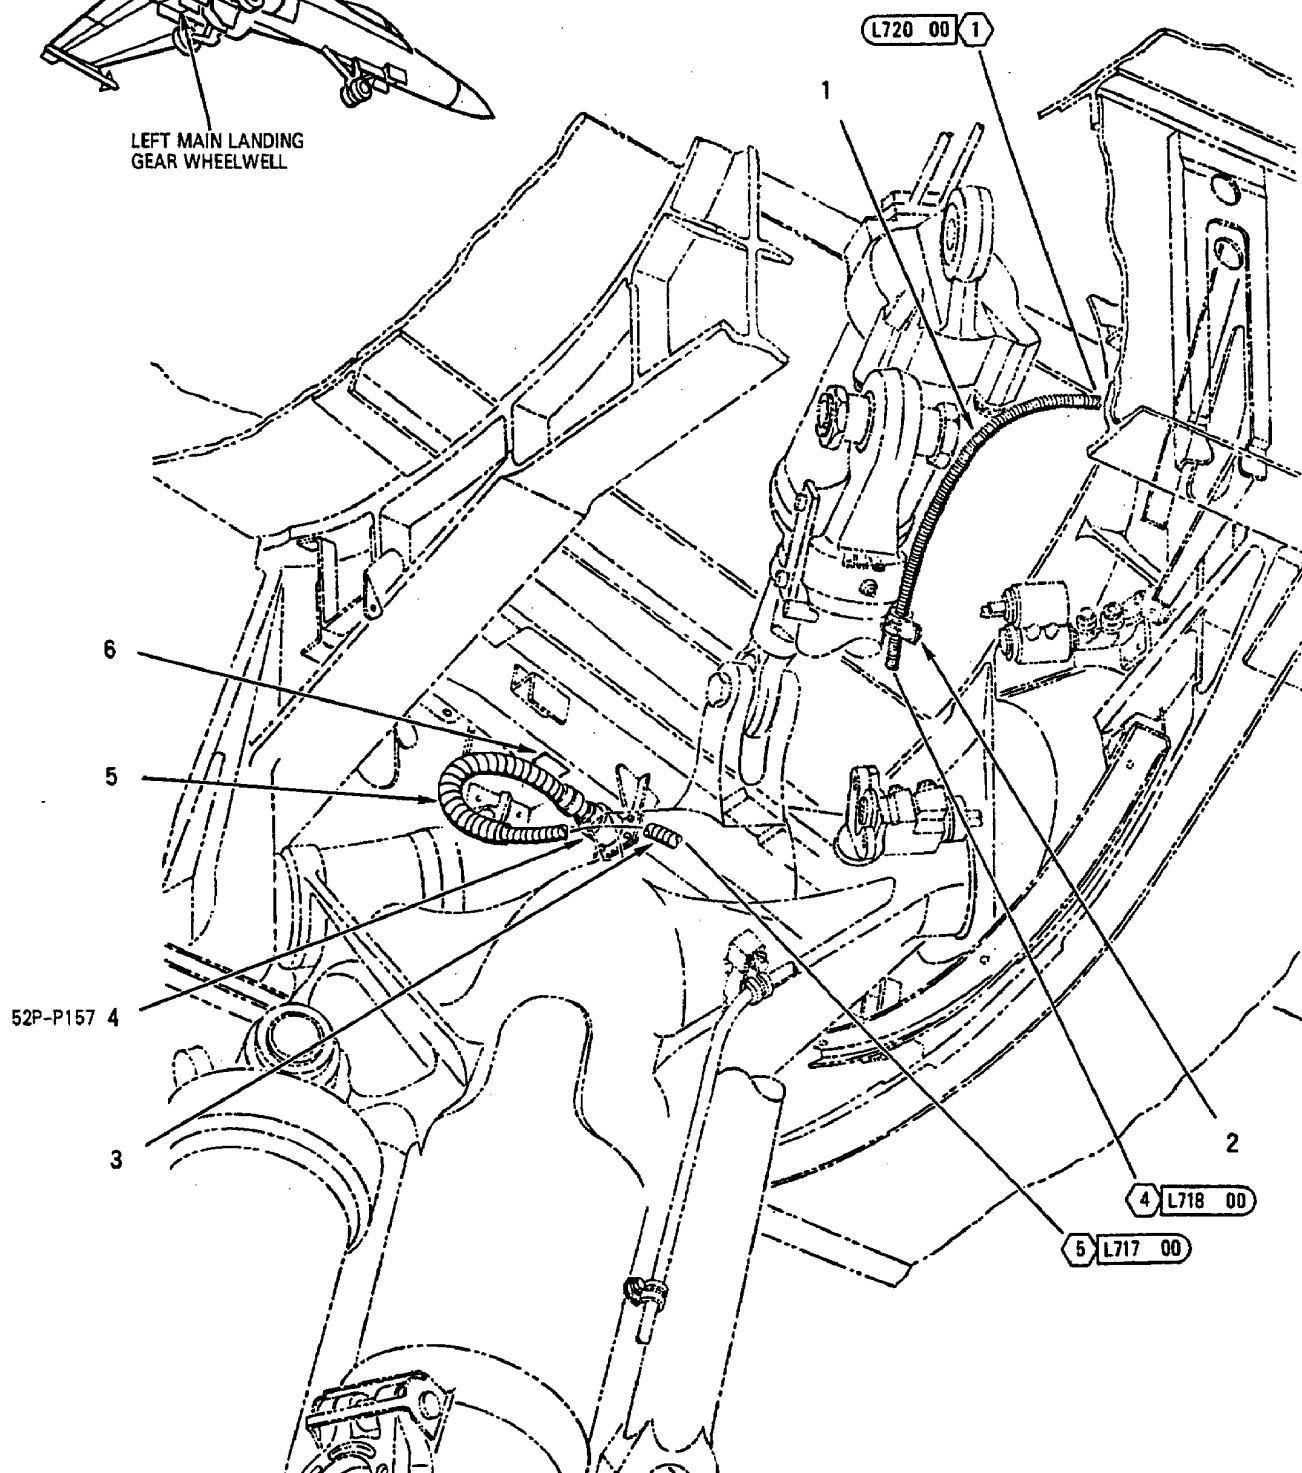


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A600118-2003	TUBING (76301)	1		MGOZZ
2	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V1	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
3	74A600118-2009	TUBING (76301)	1		MGOZZ
4	MS27467T11B35P	CONNECTOR, PLUG (52P-P157)	1		PAOZZ
	G7183-11-NF	ADAPTER, CABLE CLAMP TO	1		PAOZZ
		CONNECTOR (06324) (MCDONNELL SPEC 5M2469B11) (USE WITH INDEX 4)			
5	74A600118-2011	TUBING (76301)	1		MGOZZ
6	74A890601-2832	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 52J-P157)			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

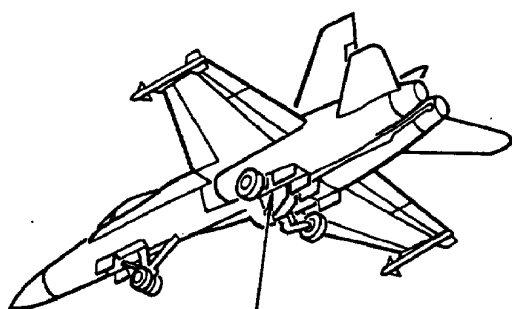

CENTER FUSELAGE LEFT MAIN LANDING GEAR WHEELWELL (INBOARD)

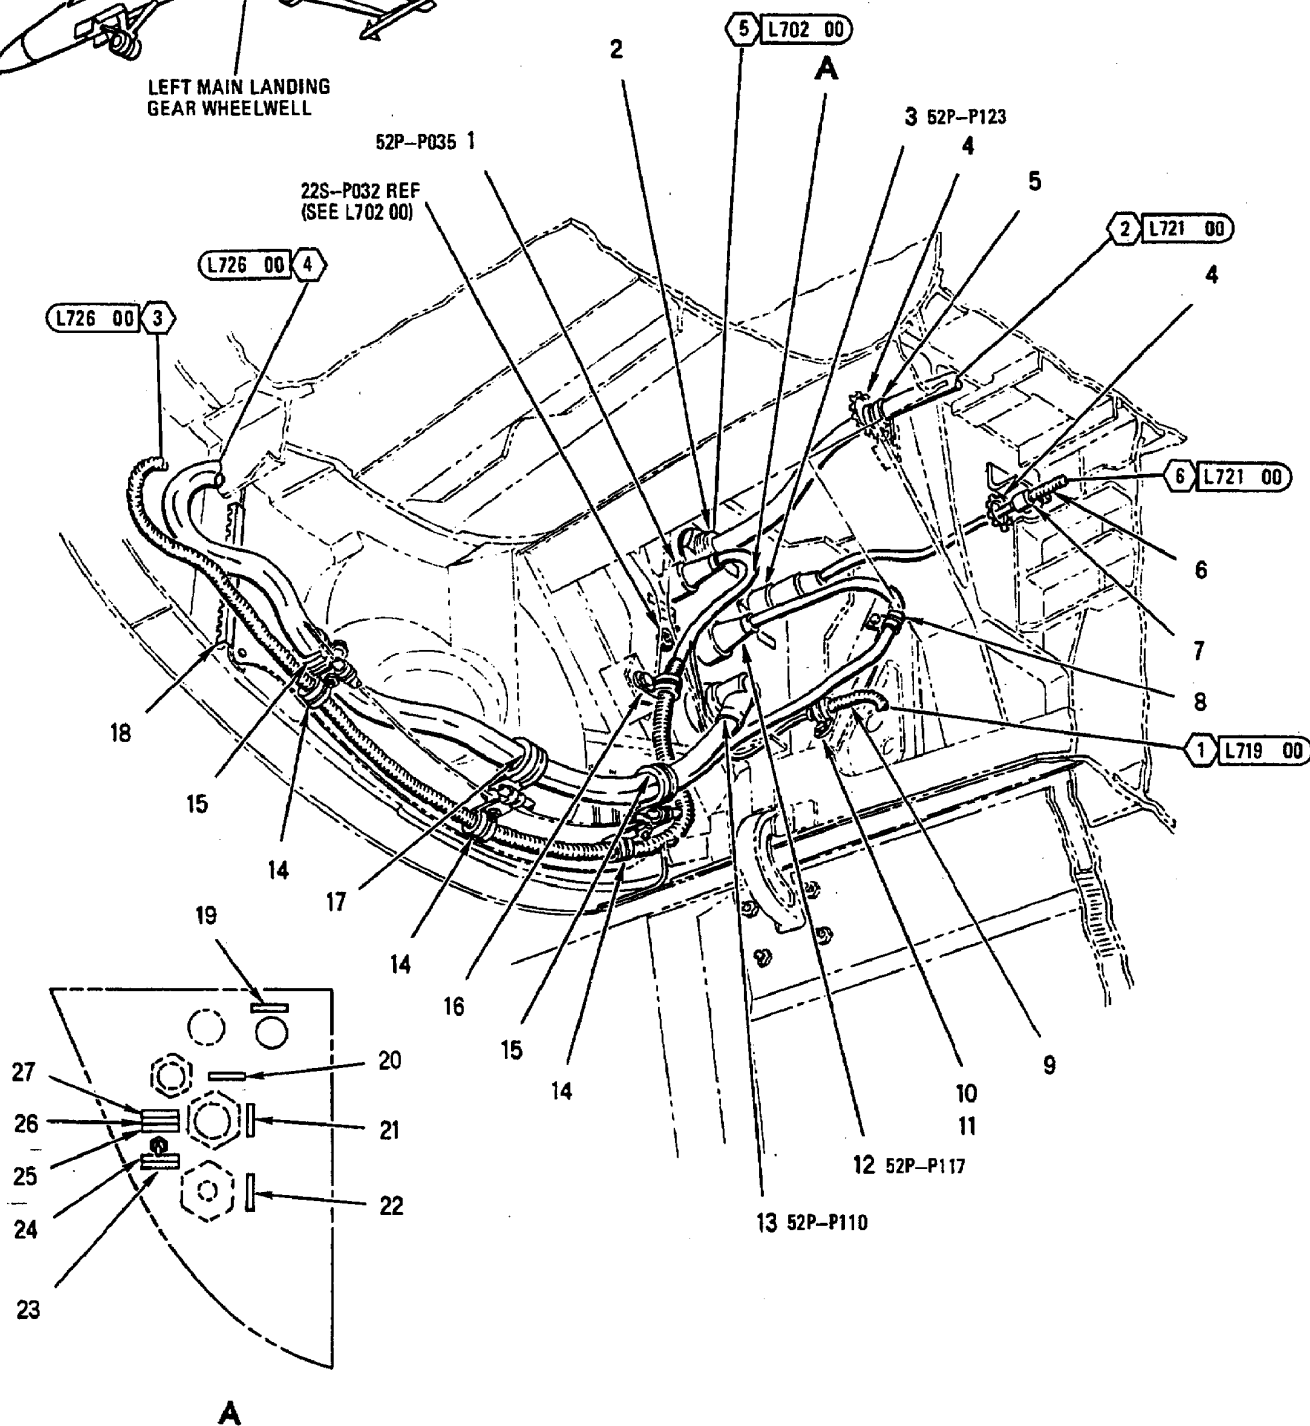

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35P	CONNECTOR, PLUG (52P-P035)	1		PAOZZ
2	74B878001-129	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
3	MS27467T15B35P	CONNECTOR, PLUG (52P-P123)	1		PAOZZ
4	MS21266-4N	GROMMET	AR		PAOZZ
5	JM44LC44WD11	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	B*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175)	1	A*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	A	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
6	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ
7	MS25281-R5	CLAMP	1	B	PAOZZ
	M85052-1-7	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
8	JM44LC44WD8	CLAMP, LOOP (22175)	1	A*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS653V3	BOLT (AP)	1	A	PAOZZ
	AN960C10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (72962)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
9	74A600118-2003	TUBING (76301)	1		MGOZZ
10	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
11	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002)			
	CTR6612-002	SEE ABOVE (64590)	1	*	PAOZZ
12	MS27467T17B99P	CONNECTOR, PLUG (52P-P117)	1		PAOZZ
13	MS27467T25B35P	CONNECTOR, PLUG (52P-P110)	1		PAOZZ
14	M85052/1-7	CLAMP	3		PAOZZ
15	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	2	B	PAOZZ
	MS25281-11	CLAMP	2	A	PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	3		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
16	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V #	BOLT (AP)	1		-
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
17	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	B	PAOZZ
	MS25281-11	CLAMP	1	A	PAOZZ
	NAS673V8	BOLT (AP)	1	B	PAOZZ
	NAS673V11	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-24	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
18	MS21266-3N	GROMMET	AR	A	PAOZZ
19	74A885621-2550	MARKER, IDENTIFICATION - AVIONICS (76301)	2		MDOZZ
		(FOR REF DES 52J-P123)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
20	74A885621-2190	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P035)	1		MDOZZ
21	74A885621-2208	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P117)	2		MDOZZ
22	74A885621-2200	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P110)	2		MDOZZ
23	74A885621-2467	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 22S-P032)	2		MDOZZ
24	74A885621-2466	MARKER, IDENTIFICATION - AVIONICS (76301)	2		MDOZZ
25	74A885621-2465	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
26	74A885621-2464	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
27	74A885621-2463	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161742 & UP
B	161353 THRU 161741

CENTER FUSELAGE LEFT MAIN LANDING GEAR WHEELWELL (INBOARD)

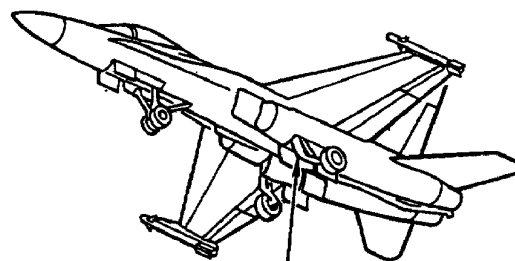

LEFT MAIN LANDING
GEAR WHEELWELL

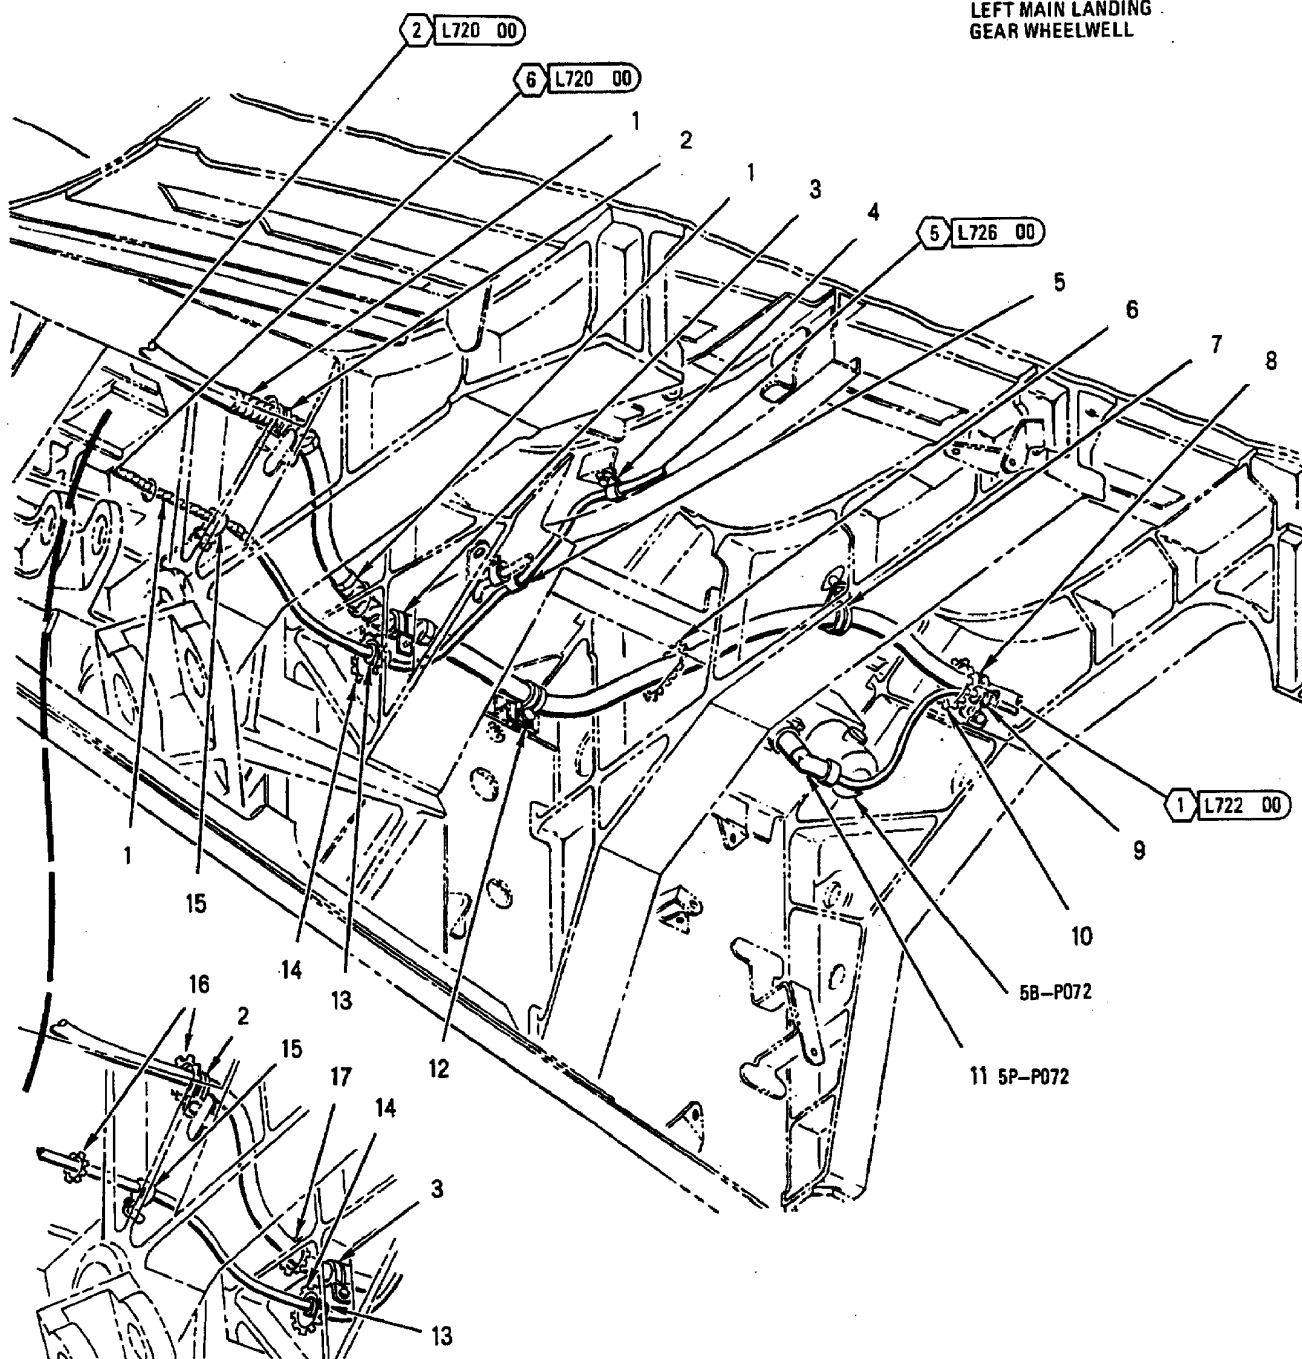

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	B*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
2	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	A*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
3	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	B*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
4	MS25281-5	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
5	MS25281-5	CLAMP	1		PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43HT3-28	SPACER (AP)	1		PAOZZ
6	MS21266-3N	GROMMET	AR		PAOZZ
7	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	A*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
8	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	A*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V9	BOLT (AP)	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
9	MS21919WDG4	CLAMP	1		PAOZZ
10	MS21266-7N	GROMMET	AR		PAOZZ
11	MS27467T11B35S	CONNECTOR, PLUG (5P-P072)	1		PAOZZ
12	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
13	MS25281-5	CLAMP	1	A	PAOZZ
	M85052-1-7	CLAMP	1	B	PAOZZ
	NAS673V10	BOLT (AP)	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
14	MS21266-2N	GROMMET	AR	A	PAOZZ
	MS21266-8N	GROMMET	AR	B	PAOZZ
15	MS25281-5	CLAMP	1	A	PAOZZ
	M85052-1-7	CLAMP	1	B	PAOZZ
	NAS673V6	BOLT (AP)	1	A	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	A	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	B	PAOZZ
	A11144-4-3	NUT CLIP (AP) (76530)	1	A	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
16	MS21266-5N	GROMMET	AR	A	PAOZZ
17	MS21266-2N	GROMMET	AR	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161741
B	161742 & UP



CENTER FUSELAGE

LEFT MAIN LANDING GEAR
WHEELWELL (INBOARD)


LEGEND

1 161702 AND UP; ALSO
161353 THRU 161528
AFTER F18 AFG 26

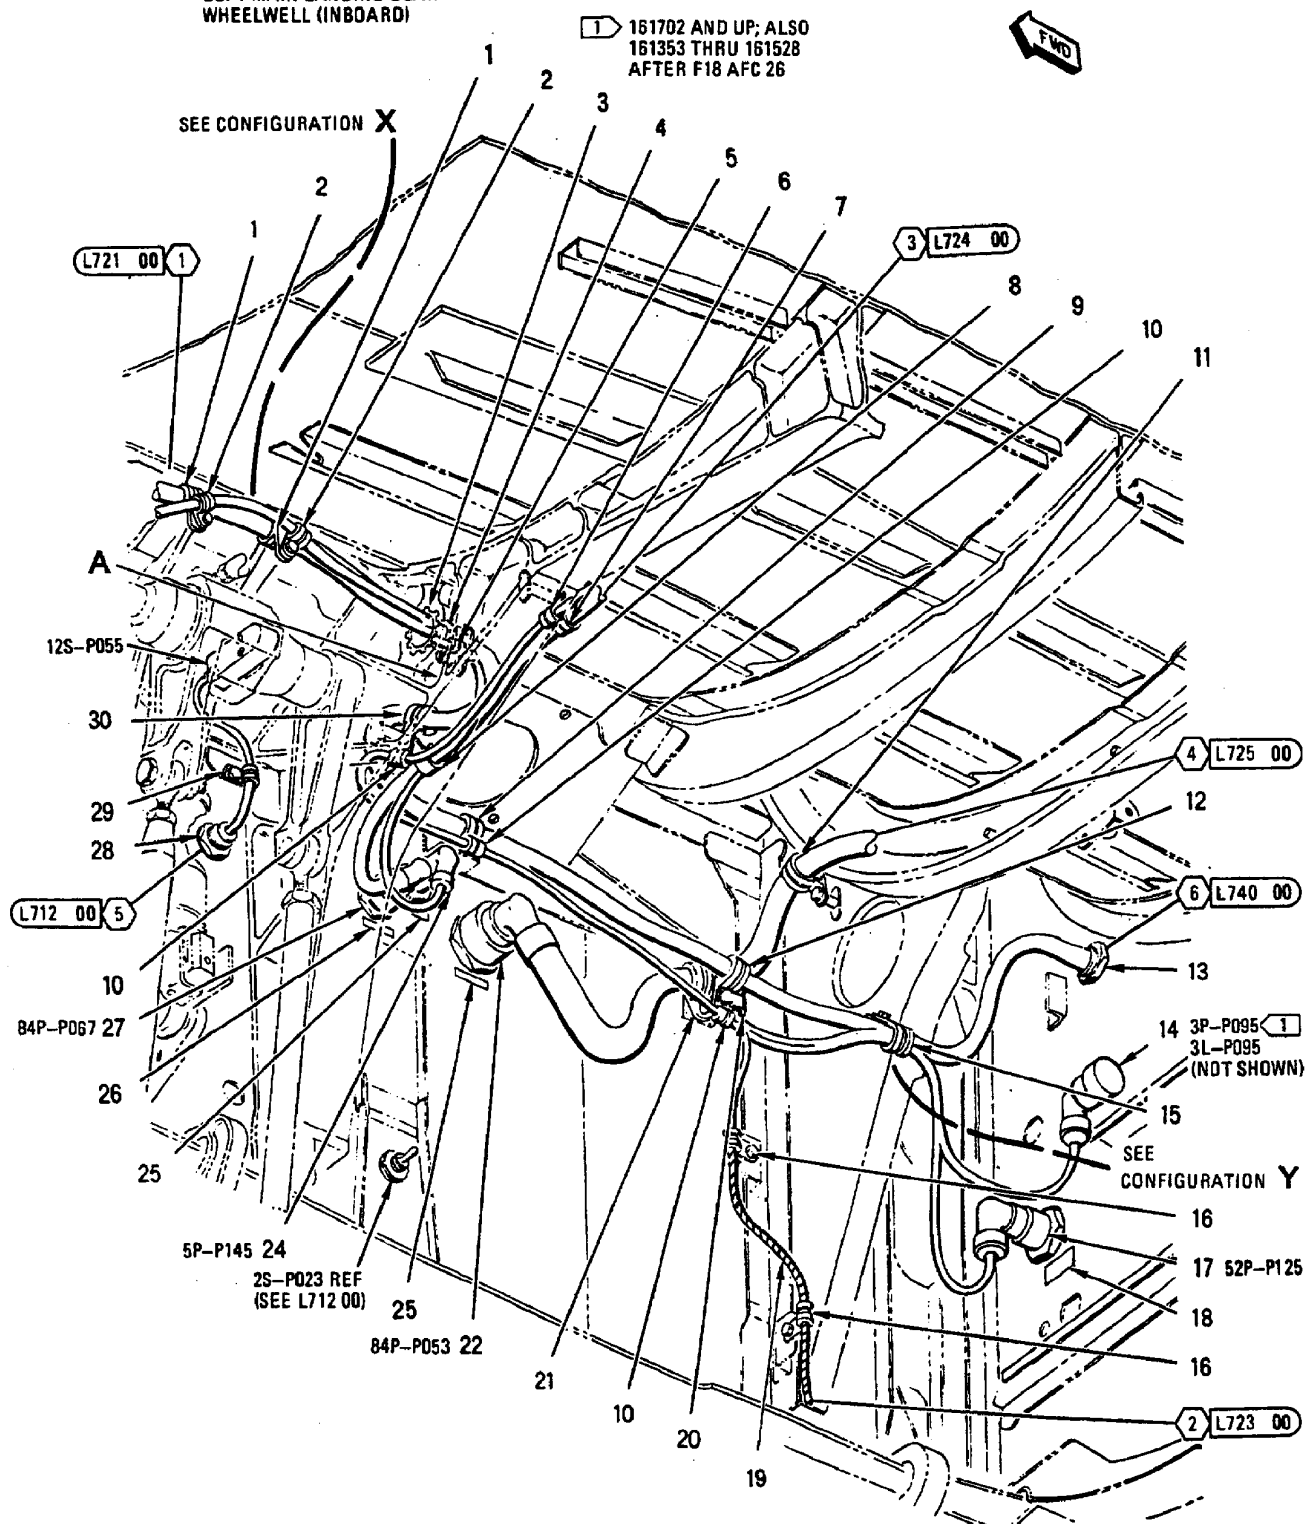

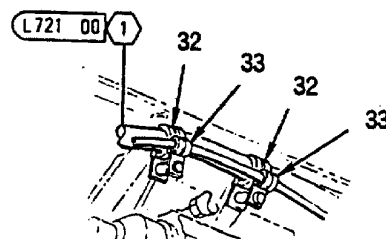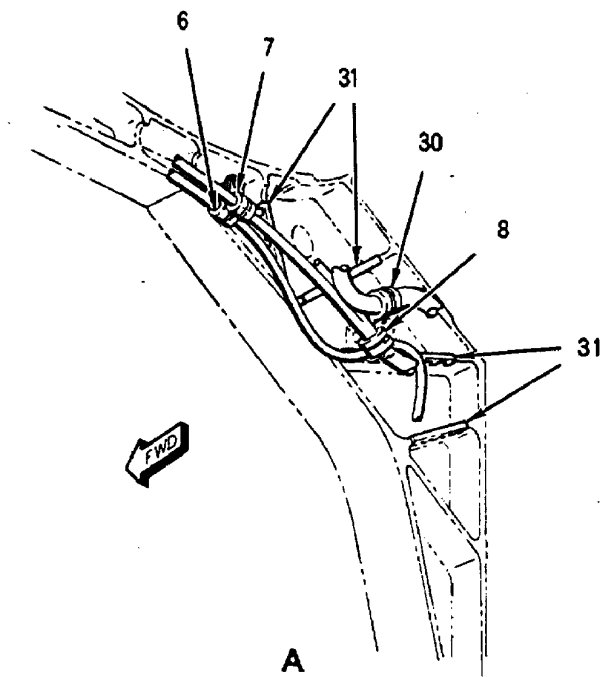

CONFIGURATION X

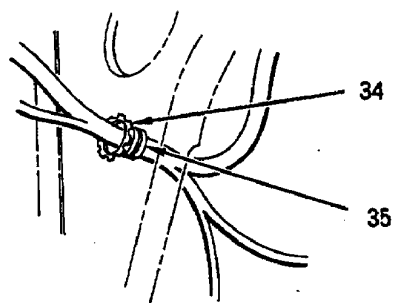

CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25281-11	CLAMP	2	B	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
2	MS21919WDG4	CLAMP	2	B	PAOZZ
3	MS21266-5N	GROMMET	AR		PAOZZ
4	JM44LC44WD11	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V9	BOLT (AP)	1	E	PAOZZ
	NAS673V3	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	F	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
5	MS21919WDG4	CLAMP	1		PAOZZ
6	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
7	M85052/1-6	CLAMP	1		PAOZZ
8	MS25281-8	CLAMP	1		PAOZZ
9	JM44LC44WD11	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	F	PAOZZ
10	MS21919WDG4	CLAMP	3		PAOZZ
11	JM44LC44WD10	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V4	BOLT (AP)	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
12	JM44LC44WD10	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V14	BOLT (AP)	1	E	PAOZZ
	NAS673V20	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
13	74B878001-109	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
14	MS27467T9B98S	CONNECTOR, PLUG (3P-P095)	1	C	PAOZZ
15	JM44LC44WD11	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	F	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
16	MS21919WDG4	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72902)	1	F*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	F*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
17	D38999/26KD35SN	CONNECTOR, PLUG (REPLACES TVS06RK-15-35SN) (52P-P125)	1		PAOZZ
	TVS06RK-15-35SN	CONNECTOR, PLUG (77820) (MCDONNELL SPEC ST5M1576KD35SN) (USE UNTIL EX- HAUSTED) (52P-P125)	1	D	PAOZZ
18	74A885621-2552	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P125)	1		MDOZZ
19	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	G*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	G*	PAOZZ
20	MS21919WDG5	CLAMP	1		PAOZZ
21	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
22	MS27467T25B35P	CONNECTOR, PLUG (84P-P053)	1		PAOZZ
23	74A885621-2300	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P053)	1		MDOZZ
24	MS27467T13B35P	CONNECTOR, PLUG (5P-P145)	1		PAOZZ
25	74A885621-2354	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 5J-P145)	1		MDOZZ
26	74A885621-2201	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-P067)	1		MDOZZ
27	MS27467T15B35P	CONNECTOR, PLUG (84P-P067)	1		PAOZZ
28	74B878001-125	CLAMP - CABLE, BULKHEAD, EMI (76301)	1	H	PAOZZ
	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301)	1	J	PAOZZ
29	MS21919WDG2	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
30	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	3		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
31	MS21266-2N	GROMMET	AR		PAOZZ
32	MS25281-11	CLAMP	2	A	PAOZZ
	NAS673V18	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	NAS43DD3-48	SPACER (AP)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
33	MS21919WDG4	CLAMP	2	A	PAOZZ
34	MS21266-3N	GROMMET	AR		PAOZZ
35	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	E*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V4	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS43DD3-12	SPACER (AP)	1	E	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


CODE	USABLE ON
A	161353 THRU 161519
B	161520 & UP
C	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 26
D	161353 THRU 161761
E	161353 THRU 161741
F	161742 & UP
G	161725 & UP
H	161353 THRU 161705
J	161706 & UP

CENTER FUSELAGE


LEFT MAIN LANDING GEAR
WHEELWELL (INBOARD)

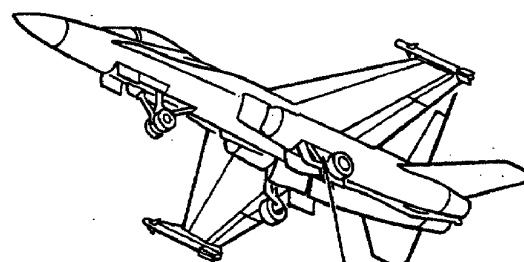

LEFT MAIN LANDING
GEAR WHEELWELL

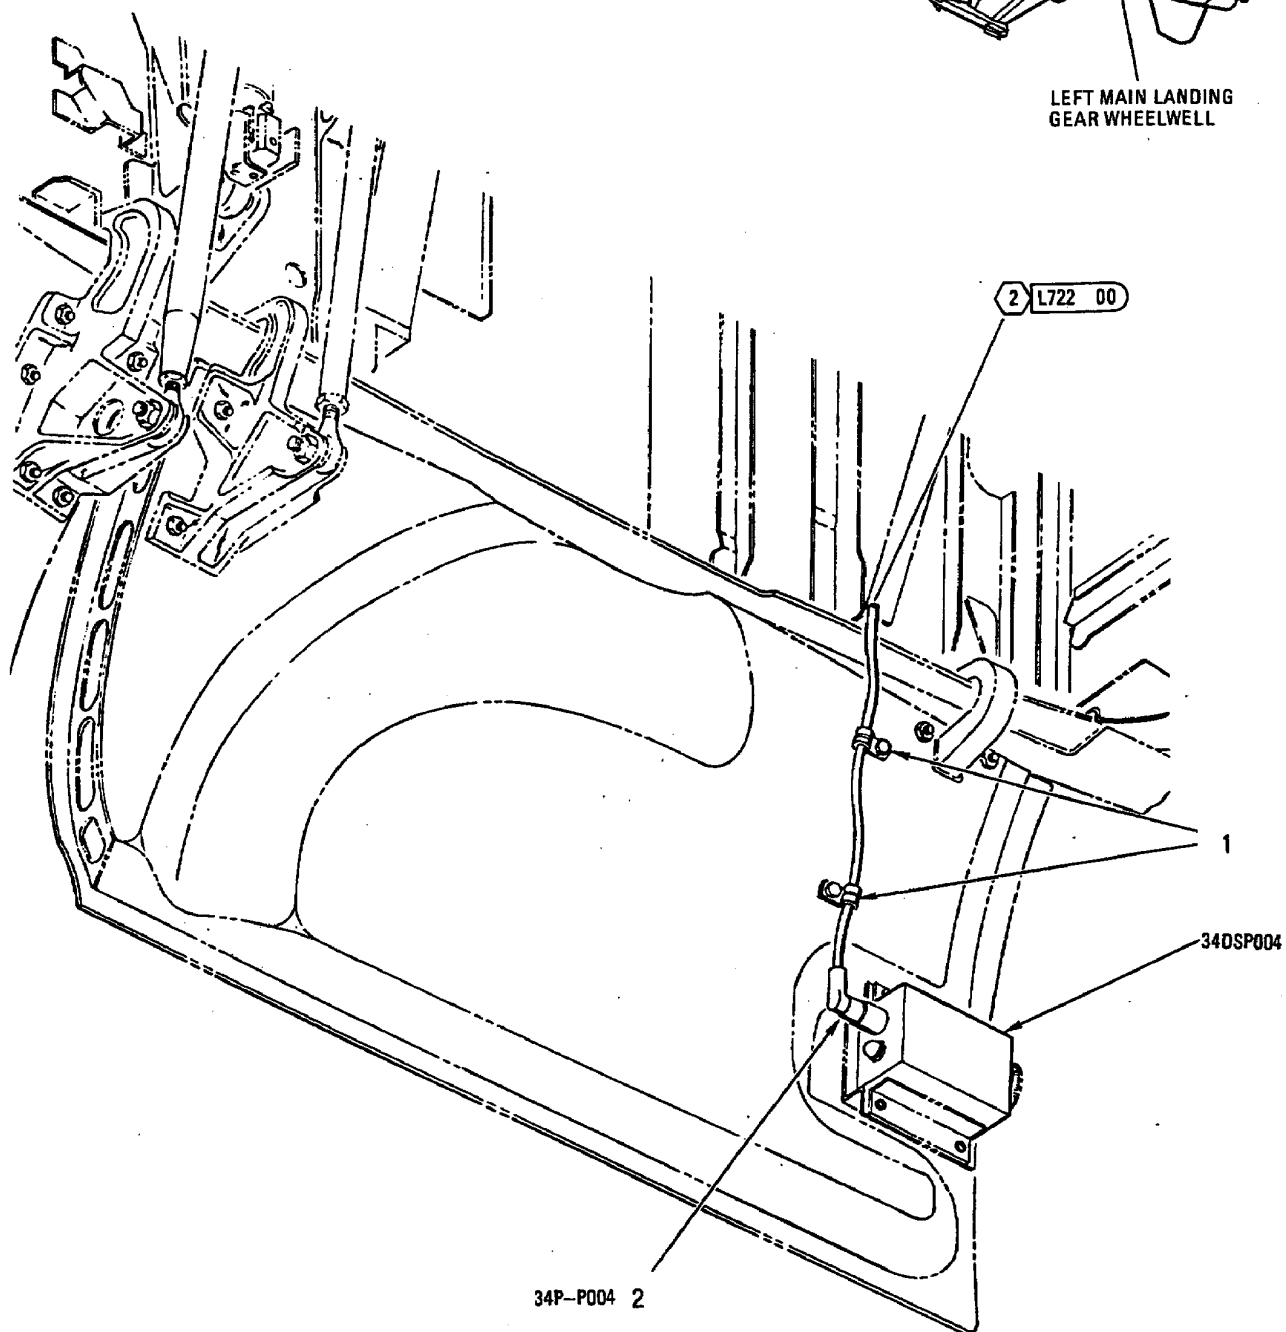

INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			
1	M85052/1-4	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27467T11B98S	CONNECTOR, PLUG (34P-P004)	1		PAOZZ

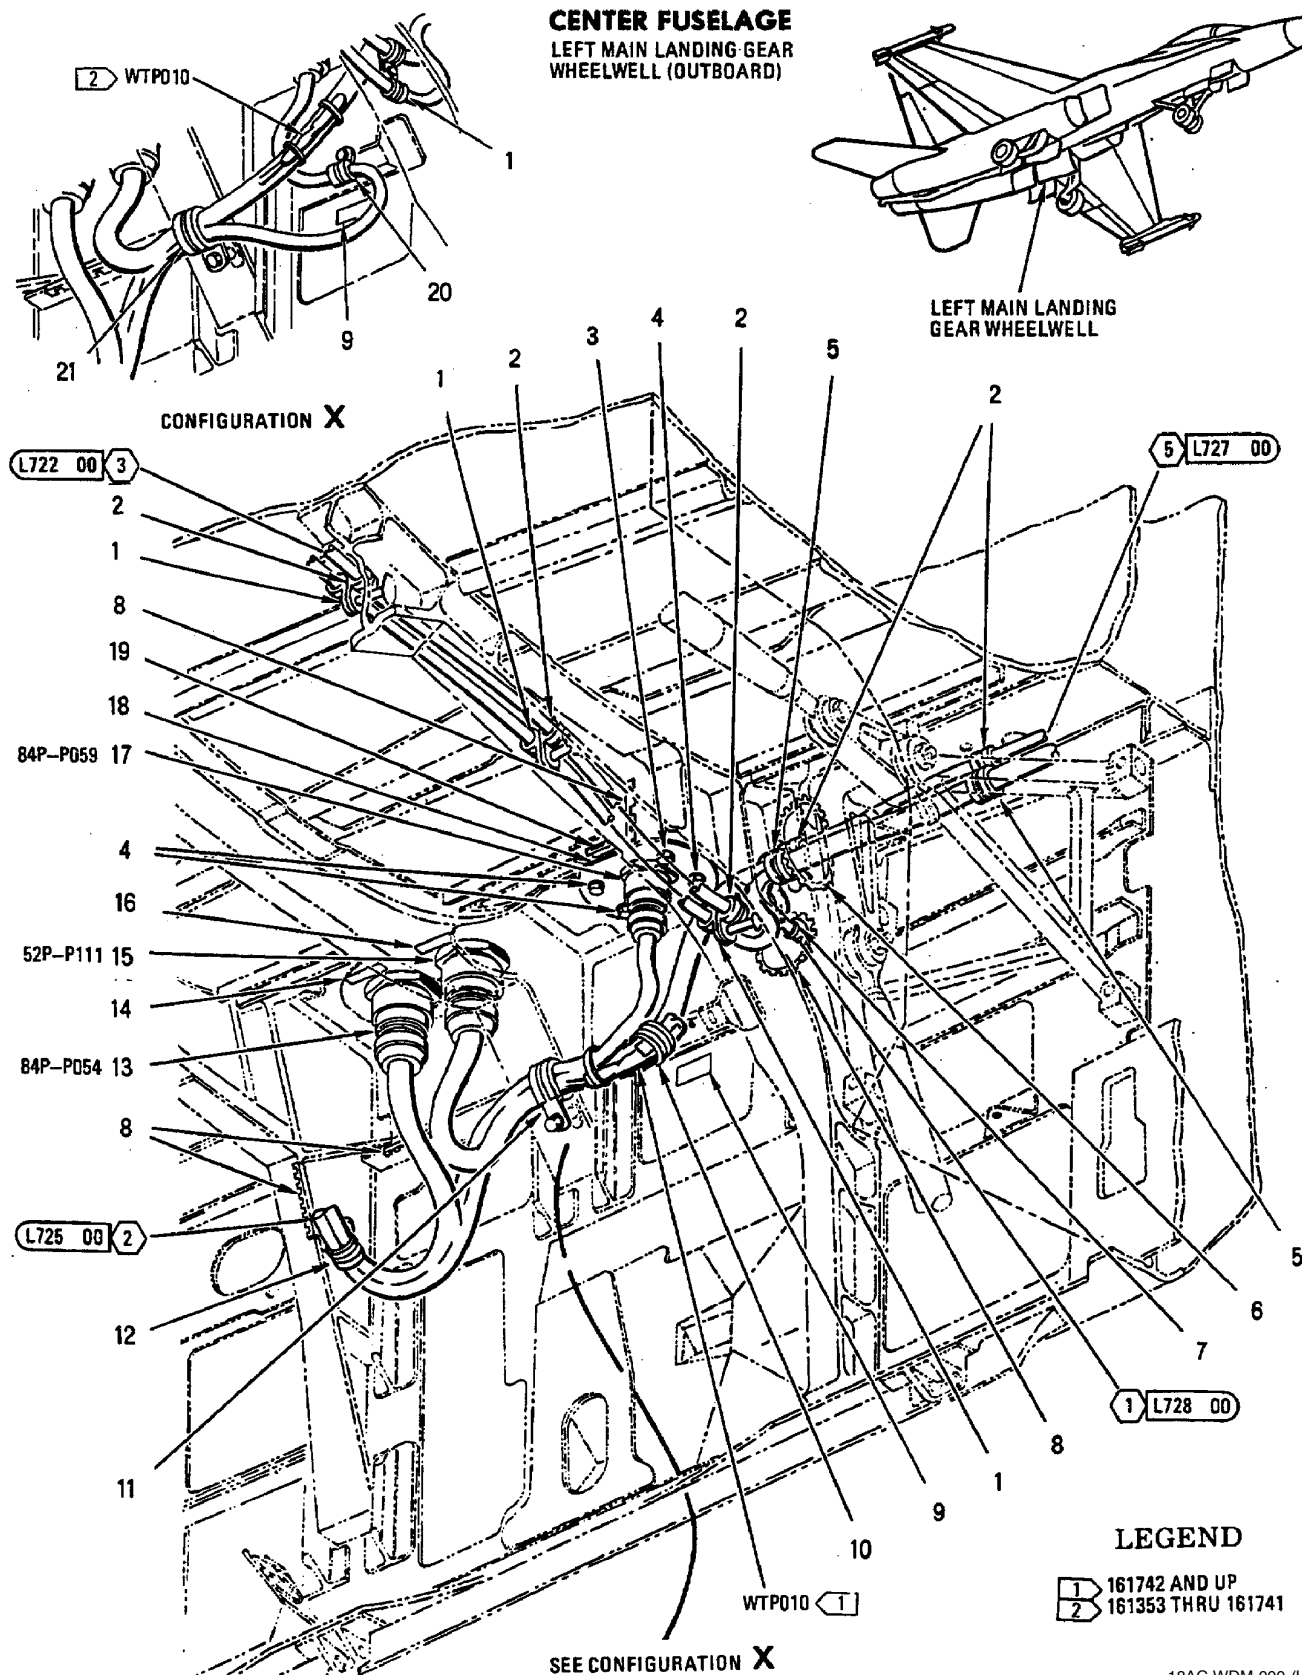


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG6	CLAMP	3		PAOZZ
	NAS673V7	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-16	SPACER (AP)	1	A	PAOZZ
2	MS21919WDG6	CLAMP	5		PAOZZ
3	NAS1801-3D11	SCREW	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	1		PAOZZ
4	NAS1801-3D11	SCREW	3	A	PAOZZ
	NAS1801-3D8	SCREW	3	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	3		PAOZZ
5	JM44LC44WD11	CLAMP, LOOP (22175)	2	*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
6	MS21266-6N	GROMMET	AR		PAOZZ
7	MS3367-1-0	STRAP	AR	B	PAOZZ
8	MS21266-2N	GROMMET	AR		PAOZZ
9	74A885621-2162	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTP010)			
10	M85052/1-15	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
11	JM44LC33WD12	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
12	JM44LC33WD15	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D15)			
	830WD15G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	MS27467T23B35S	CONNECTOR, PLUG (84P-P054)	1		PAOZZ
14	74A885621-2203	MARKER, IDENTIFICATION - AVIONICS	2		MDOZZ
		(76301) (FOR REF DES 84J-P054)			
15	MS27467T23B35SA	CONNECTOR, PLUG (52P-P111)	1		PAOZZ
16	74A885621-2204	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52J-P111)			
17	MS27467T17B35S	CONNECTOR, PLUG (84P-P059)	1		PAOZZ
18	74A885602-2087	SPACER, PLATE (76301)	1		PAOZZ
19	74A885621-2205	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-P059)			
20	M85052/1-9	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
21	JM44LC33WD18	CLAMP, LOOP (22175)	1	A*	PAOZZ
		(MCDONNELL SPEC ST9M630D18)			
	830WD18G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


CODE		USABLE ON
A		161353 THRU 161741
B		161742 & UP

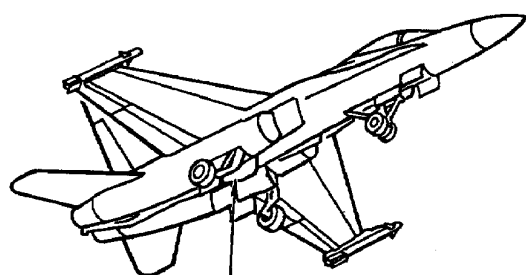

LEFT MAIN LANDING
GEAR WHEELWELL

CENTER FUSELAGE

LEFT MAIN LANDING GEAR
WHEELWELL (OUTBOARD)

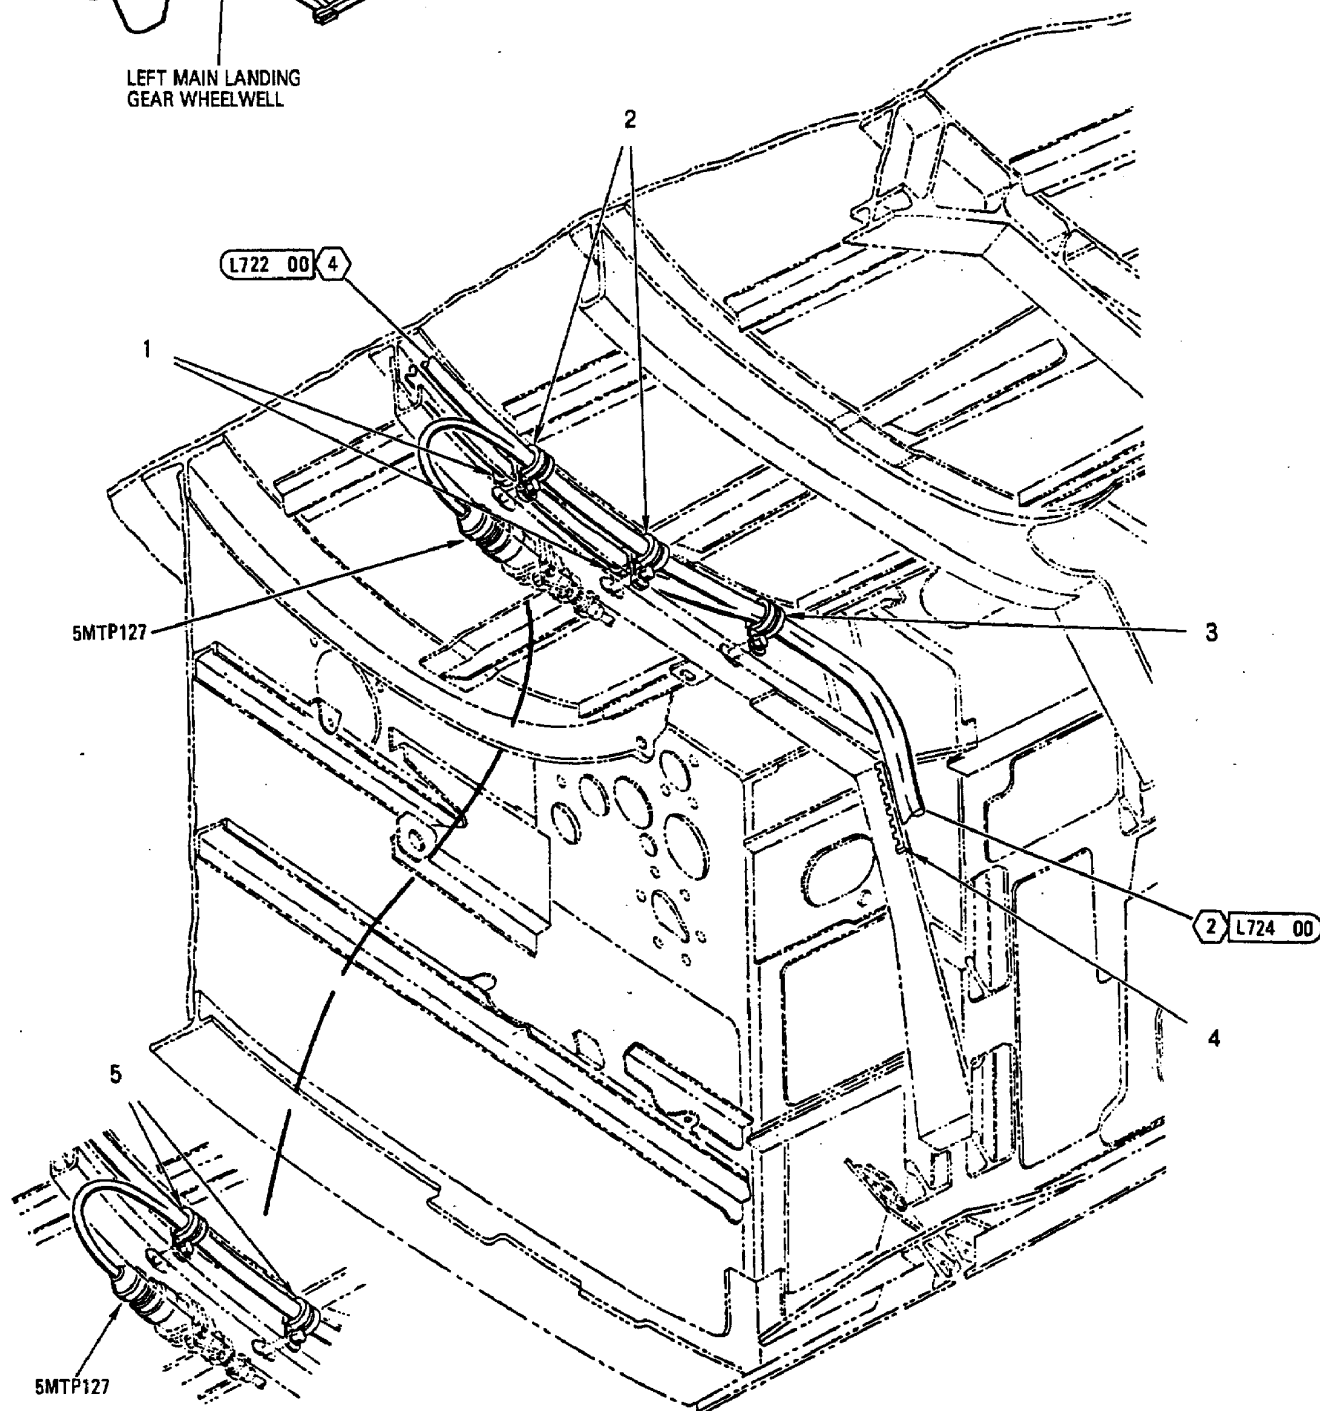


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25281-8	CLAMP	2	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
2	MS25281-8	CLAMP	2	B	PAOZZ
3	MS25281-R15	CLAMP	1	A	PAOZZ
	JM44LC33WD15	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D15)			
	830WD15G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
4	MS21266-2N	GROMMET	AR		PAOZZ
5	MS25281-15	CLAMP	2	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON


A 161353 THRU 161741


B 161742 & UP

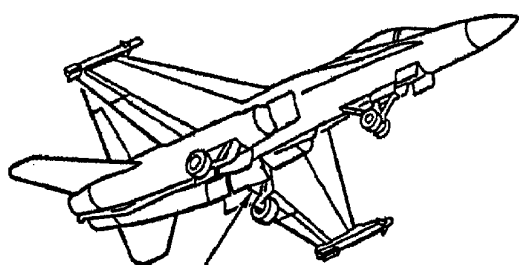

LEFT MAIN LANDING
GEAR WHEELWELL

CENTER FUSELAGE LEFT MAIN LANDING GEAR WHEELWELL (OUTBOARD)

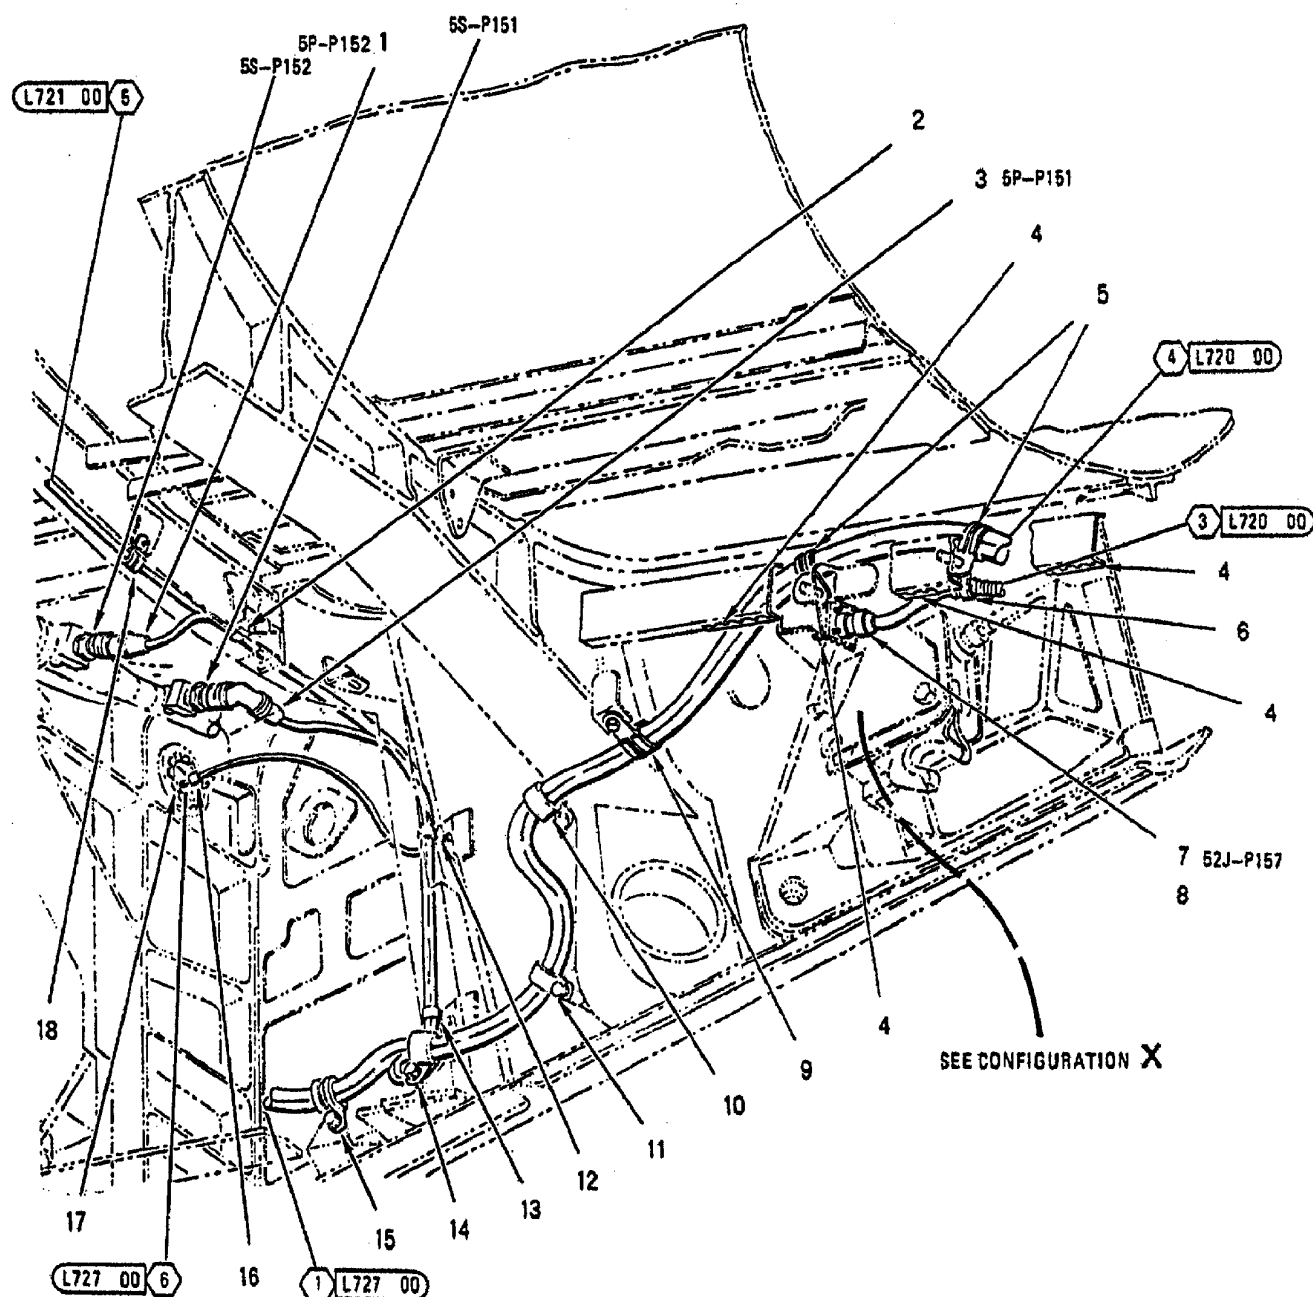

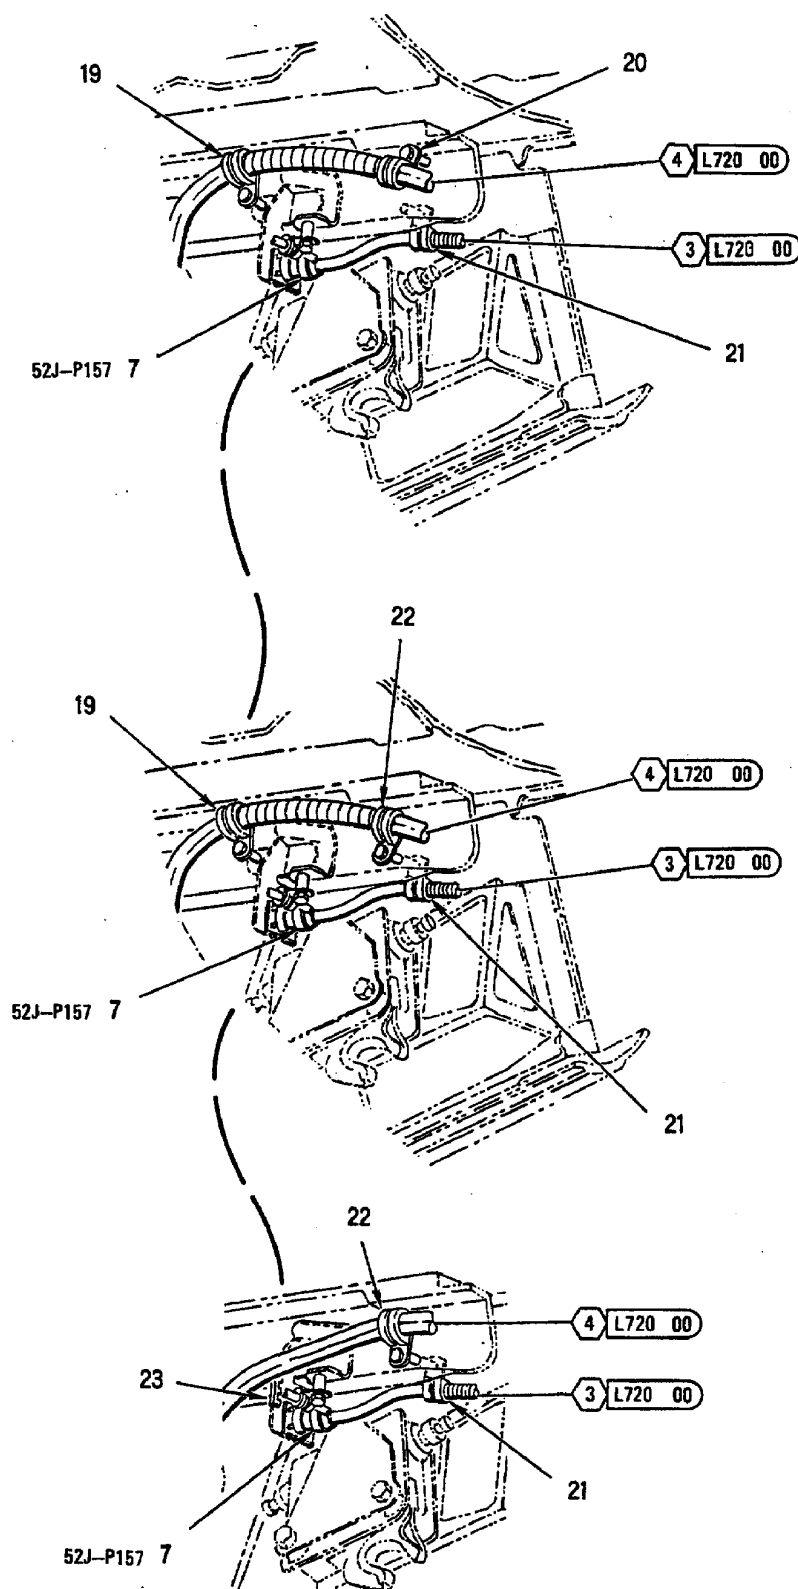

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B98S	CONNECTOR, PLUG (5P-P152)	1		PAOZZ
2	M85052/1-7	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	C*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	C*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	NAS1291C3M	NUT (AP)	1	E	PAOZZ
3	MS27467T11B98S	CONNECTOR, PLUG (5P-P151)	1		PAOZZ
4	MS21266-3N	GROMMET	AR	E	PAOZZ
5	JM44LC44WD10	CLAMP, LOOP (22175)	2	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	2	E*	PAOZZ
	NAS673V19	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS43DD3-64	SPACER (AP)	1	E	PAOZZ
	MS21042L3	NUT (AP)	1	E	PAOZZ
6	M85052/1-8	CLAMP	1	E	PAOZZ
7	MS27656T11B35S	CONNECTOR, RECEPTACLE (52J-P157)	1		PAOZZ
	NAS600-4P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
	S916-12CP	PLATE, RETAINING, ELECTRICAL	1	*	PAOZZ
		CONNECTOR (19904) (MCDONNELL SPEC ST3M823-3) (USE WITH INDEX 7)			
	1008-12	PLATE, RETAINING, ELECTRICAL	1	*	PAOZZ
		CONNECTOR (04967) (MCDONNELL SPEC ST3M823-3) (USE WITH INDEX 7)			
8	74A890601-2832	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-P157)			
9	JM44LC44WD10	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
10	MS25281-10	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1	G	PAOZZ
	NAS673V11	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-24	SPACER (AP)	1	H	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72960)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
11	MS25281-10	CLAMP	1	C	PAOZZ
	NAS673V4	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	C	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
12	M85052/1-7	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
13	M85052/1-3	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
14	MS25281-10	CLAMP	1		PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
15	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	C*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	E*	PAOZZ
	830WD14G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
16	MS25281 #	CLAMP	1		-
	M85052/1-5	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ
17	MS21266-3N	GROMMET	AR		PAOZZ
18	MS21919WDG6	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	J	PAOZZ
	130091	SEE ABOVE (76530)	1	J*	PAOZZ
19	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS653V12	BOLT (AP)	1	B	PAOZZ
	AN960C10L	WASHER (AP)	1	B	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	B	PAOZZ
	NAS1291C3M	NUT	1	B	PAOZZ
20	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	D*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V9	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	D	PAOZZ
	MS21042L3	NUT (AP)	1	D	PAOZZ
21	M85052/1-8	CLAMP	1	C	PAOZZ
	NAS653V19	BOLT (AP)	1	C	PAOZZ
	AN960C10L	WASHER (AP)	1	C	PAOZZ
	NAS42DD6-64	SPACER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
22	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	F*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V9	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	F	PAOZZ
	MS21042L3	NUT (AP)	1	F	PAOZZ
23	MS21266-2N	GROMMET	AR	A	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE	USABLE ON
A	161353 THRU 161519
B	161520 THRU 161730
C	161353 THRU 161741
D	161731 THRU 161741
E	161742 & UP
F	161353 THRU 161730
G	161353 THRU 161718
H	161720 & UP
J	161737 & UP

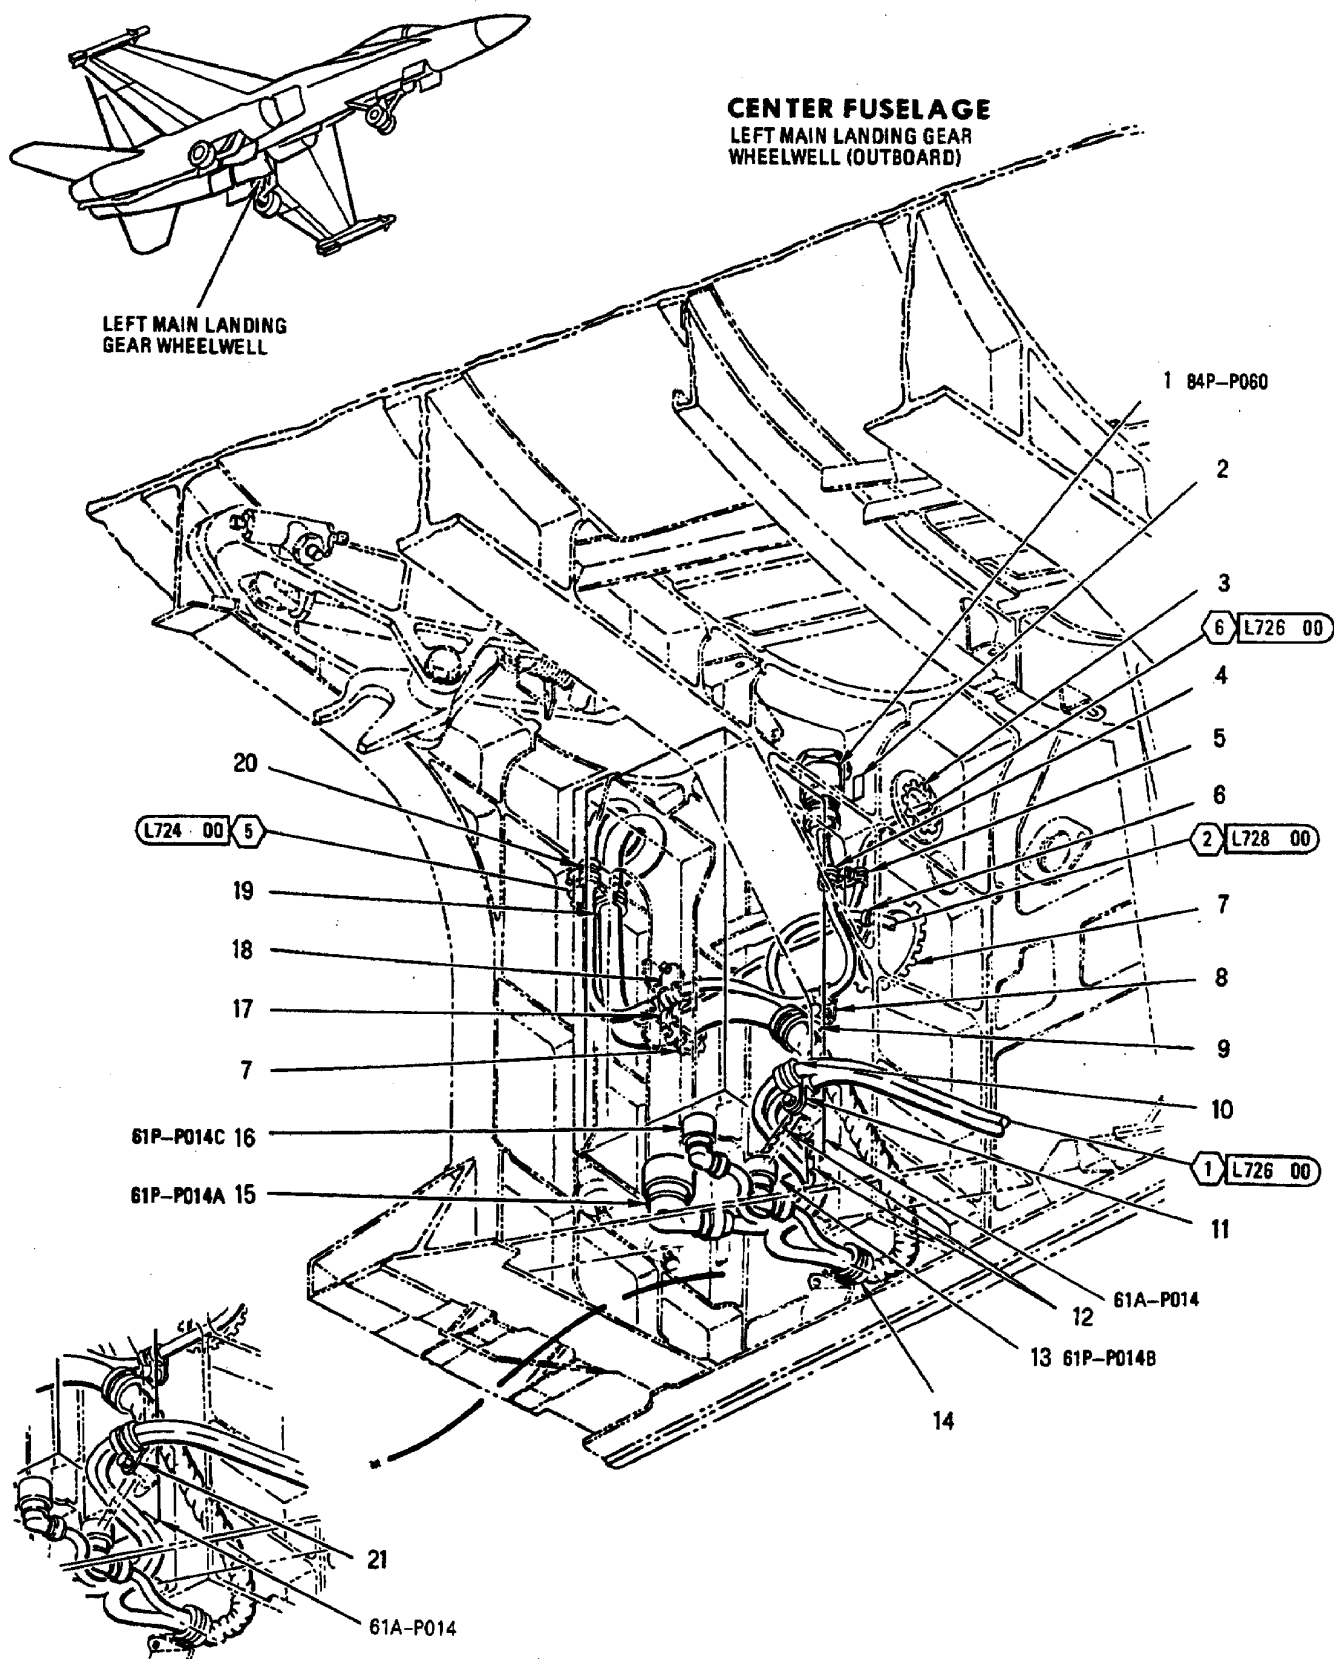

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B35S	CONNECTOR, PLUG (84P-P060)	1		PAOZZ
2	74A885621-2206	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 84J-P060)			
3	MS21266-3N	GROMMET	AR		PAOZZ
4	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	2	F	PAOZZ
5	M85052/1-7	CLAMP	1	F	PAOZZ
6	MS3367-1-0	STRAP	AR	D	PAOZZ
7	MS21266-2N	GROMMET	AR		PAOZZ
8	MS25281-8	CLAMP	1	C	PAOZZ
	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
9	JM44LC44WD10	CLAMP, LOOP (22175)	1	C*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD14	CLAMP, LOOP (22175)	1	D*	PAOZZ
		(MCDONNELL SPEC ST9M630D14)			
	830WD14G	SEE ABOVE (83930)	1	D*	PAOZZ
10	JM44LC33WD14	CLAMP, LOOP (22175)	1	G*	PAOZZ
		(MCDONNELL SPEC ST9M630D14)			
	830WD14G	SEE ABOVE (83930)	1	G*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175)	1	D*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
11	JM44LC44WD10	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
12	MS21266-3N	GROMMET	AR		PAOZZ
13	MS27467T11B35SD	CONNECTOR, PLUG (61P-P014B)	1		PAOZZ
14	MS25281-8	CLAMP	1	C	PAOZZ
	JM44LC33WD14	CLAMP, LOOP (22175)	1	D*	PAOZZ
		(MCDONNELL SPEC ST9M630D14)			
	830WD14G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
15	MS27467T23B35S	CONNECTOR, PLUG (61P-P014A)	1		PAOZZ
16	MS27467T11B35S	CONNECTOR, PLUG (61P-P014C)	1		PAOZZ
17	JM44LC44WD11	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
18	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
19	JM44LC44WD11	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
20	MS21919WDG6	CLAMP	1		PAOZZ
21	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	A*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161718
B	161720 & UP
C	161353 THRU 161741
D	161742 & UP
E	161353 THRU 161957
F	161958 & UP
G	161720 THRU 161741

LEGEND

- 1 161353 THRU 162843
- 2 162844 AND UP
- 3 161353, 161358, 161361,
161362, 161365, 161367,
161702 THRU 161987
AFTER F/A-18 AFC 74

CENTER FUSELAGE


DOOR 45L AND DOOR 46L
LEFT MISSILE LAUNCH BAY
(ON FUSELAGE BELOW WING)

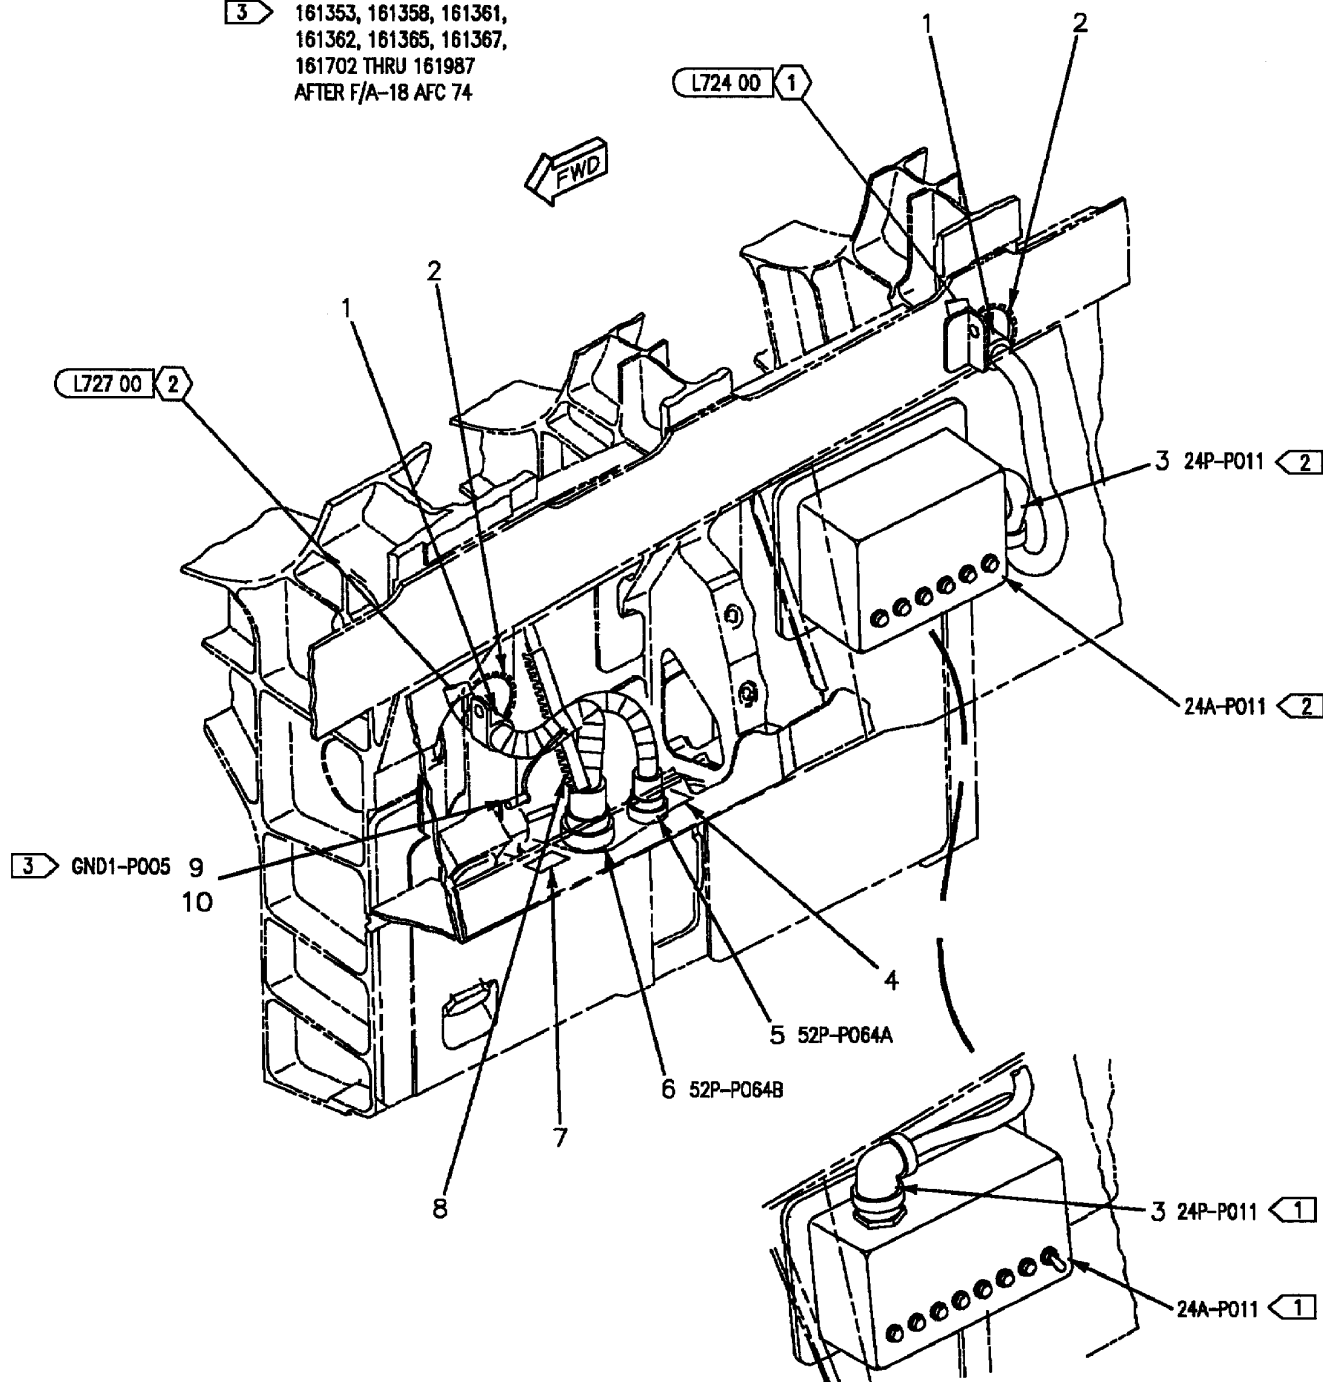

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-4	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	MS27467T17B35S	CONNECTOR, PLUG (24P-P011)	1		PAOZZ
4	74A885621-2483	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52A-P064-J1)	1		MDOZZ
5	MS27467T13B98S	CONNECTOR, PLUG (52P-P064A)	1		PAGZZ
6	MS27467T23B53S	CONNECTOR, PLUG (52P-P064B)	1		PAOZZ
7	74A885621-2484	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52A-P064-J2)	1		MDOZZ
8	MS21266-8N	GROMMET	AR		PAOZZ
9	MS21042L3	NUT	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	9M350-GND1-P005	MARKER, IDENTIFICATION - ELECTRICAL (FOR REF DES GND1-P005)	1	A	MGOZZ


CODE USABLE ON

A 161353, 161358, 161361,
161362, 161365, 161367,
161702 THRU 161987
AFTER F/A-18 AFC 74

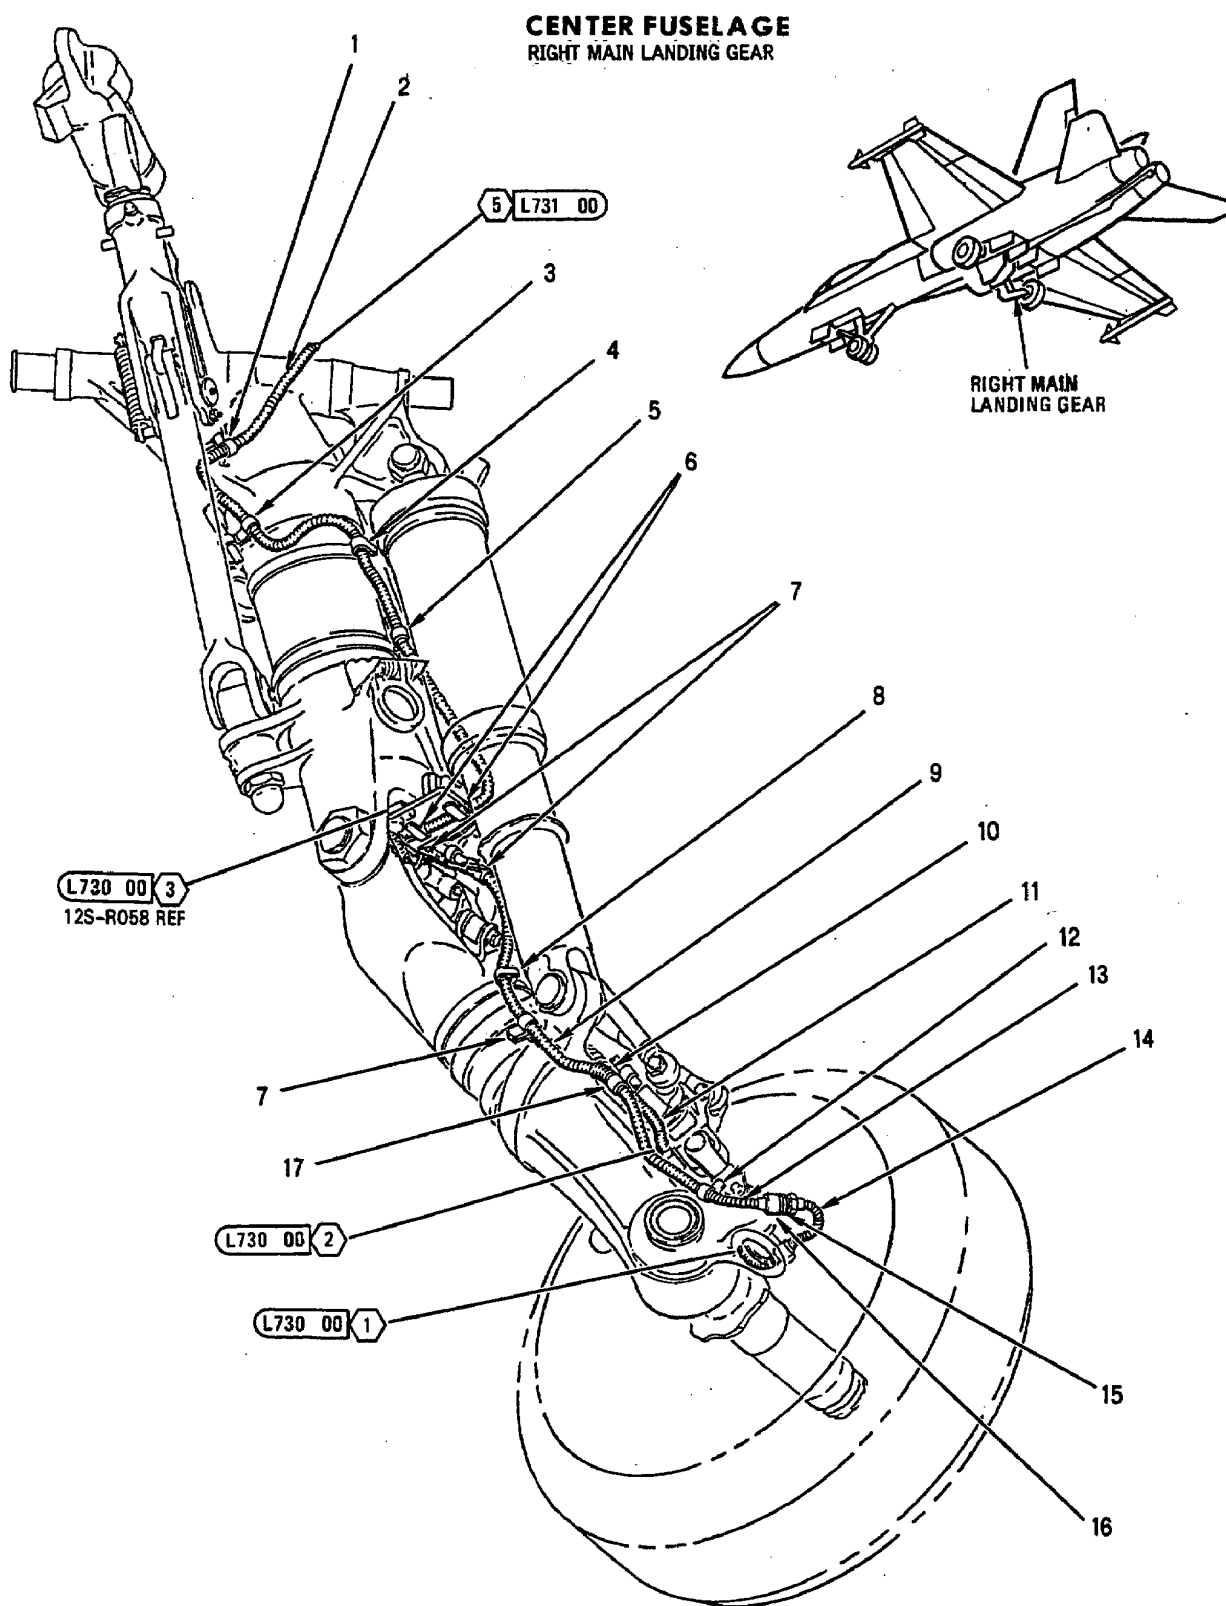

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V42	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS42DD6-64	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
2	74A600118-2009	TUBING (76301)	1		MGOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	M85052/1-8	CLAMP	1		PAOZZ
	NK1003696-11	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-2)			
	AN960C10	WASHER (AP)	3		PAOZZ
	NAS42DD6-24	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	M85052/1-8	CLAMP	1		PAOZZ
	NK1003696-11	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-2)			
	AR960C10L	WASHER (AP)	2		PAOZZ
	NAS42DD6-32	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	M85052/1-8	CLAMP	2		PAOZZ
	NAS653V5	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	M85052/1-6	CLAMP	3		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
8	M85052/1-6	CLAMP	1		PAOZZ
	NK1003696-05	LUG ASSEMBLY (AP) (98625)	1		PAOZZ
		(MCDONNELL SPEC ST9M504-1)			
	NAS42DD6-12	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
9	74A600118-2013	TUBING (76301)	1		MGOZZ
10	74A600118-2017	TUBING (76301)	1		MGOZZ
11	74A600118-2015	TUBING (76301)	1		MGOZZ
12	M85052/1-5	CLAMP	1		PAOZZ
	NAS653V3	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
13	74A600118-2019	TUBING (76301)	1		MGOZZ
14	74A411536-1003	TUBE ASSY (76301)	1		MGOZZ
15	CRN3303	ADAPTER (05593)	1	*	PAOZZ
		(MCDONNELL SPEC 5M1949-001)			
	NE1001	SEE ABOVE (52930)	1	*	PAOZZ
16	CRN3444-09	ADAPTER, ELECTRICAL CONDUIT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1331L12C06)			
	6430-06-033-13	ADAPTER, ELECTRICAL CONDUIT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1331L12C06) (USE UNTIL EXHAUSTED)			
17	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V5H	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

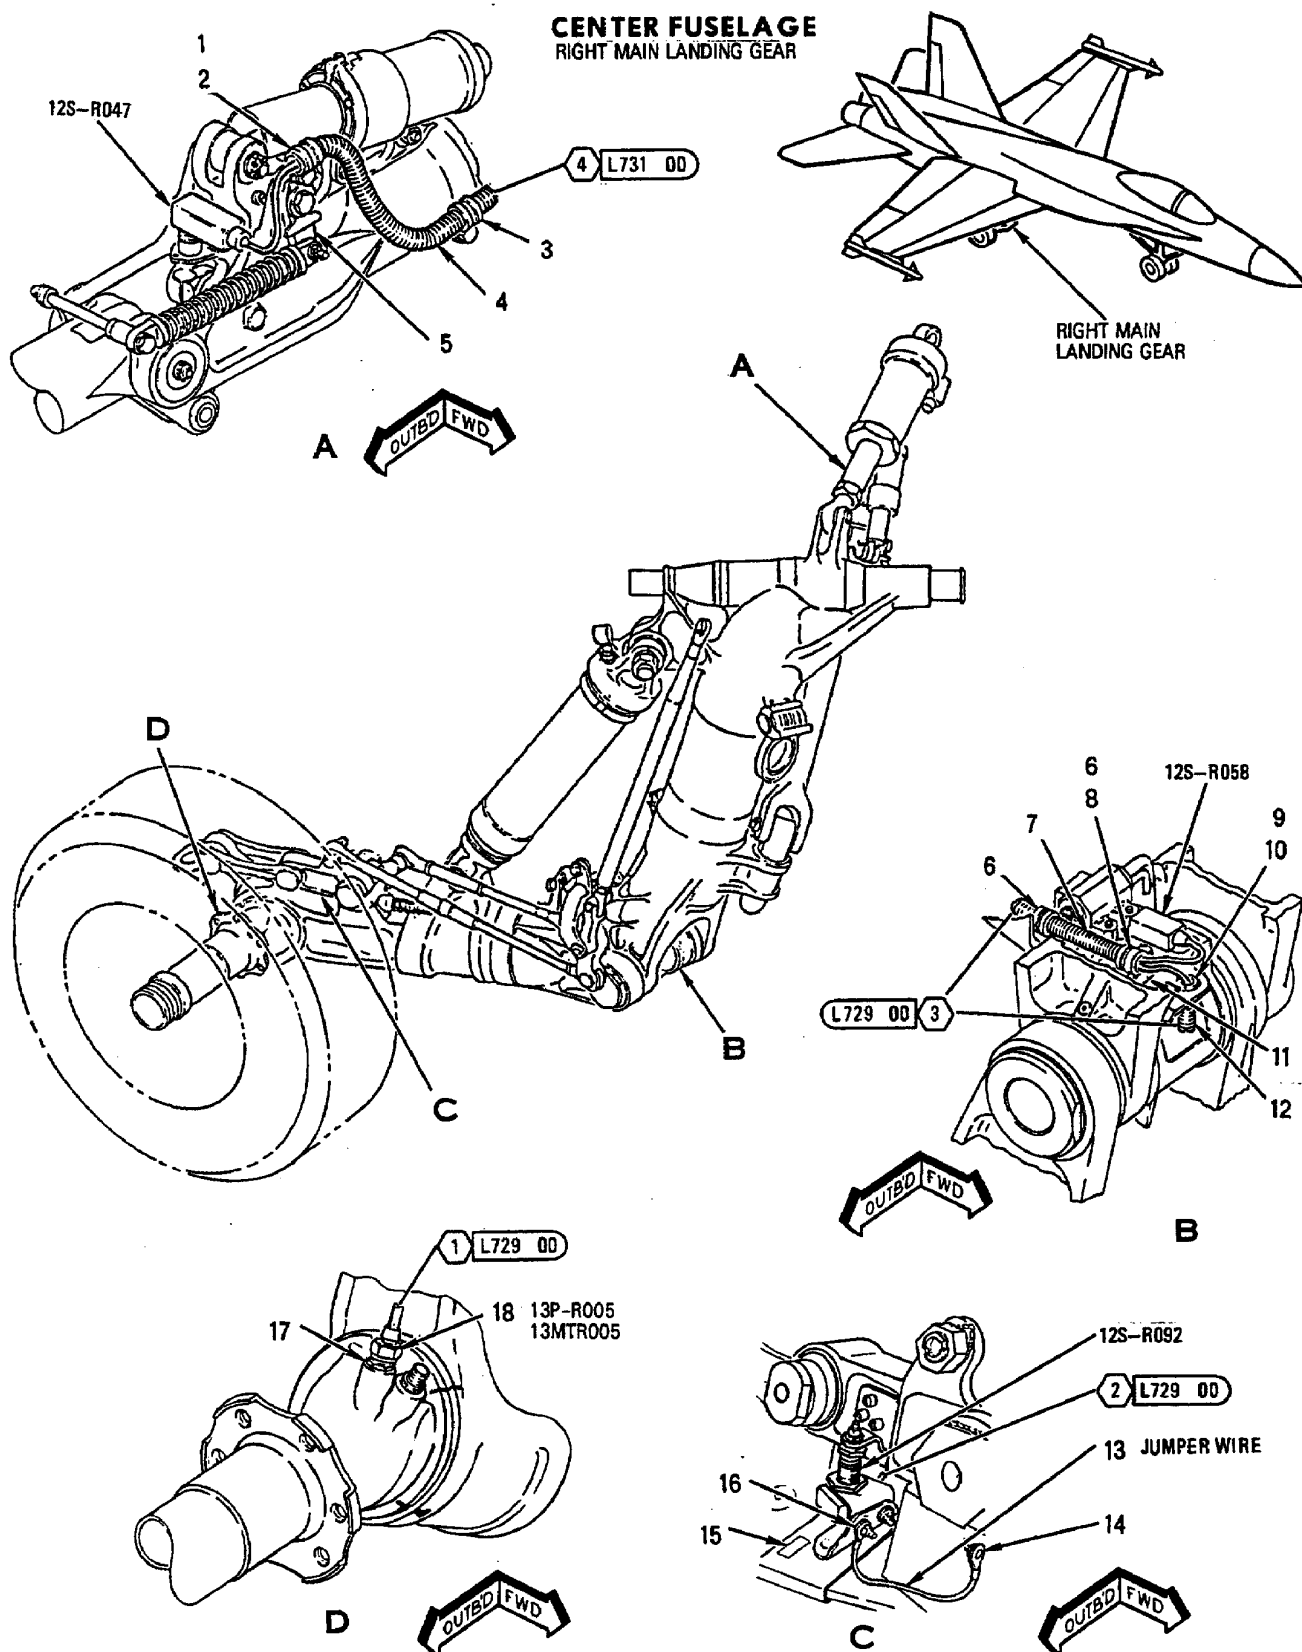

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
2	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002)			
	CTR6612-002	SEE ABOVE (64590)	1	*	PAOZZ
3	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V1	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
4	74A600118-2003	TUBING (76301)	1		MGOZZ
5	74A890601-2522	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-R047)			
6	M85052/1-8	CLAMP	2		PAOZZ
	NAS653V5	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	74A600118-2009	TUBING (76301)	1		MGOZZ
8	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	1	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003)			
	CTR6612-003	SEE ABOVE (64590)	1	*	PAOZZ
9	CRN2948	ADAPTER (05593)	1	*	PAOZZ
		(MCDONNELL SPEC 5M1697-001)			
	NE1002	SEE ABOVE (52930)	1	*	PAOZZ
10	CRN3444-06	ADAPTER, ELECTRICAL CONDUIT	1	*	PAOZZ
		(05593) (MCDONNELL SPEC ST5N1331L10C09)			
11	74A890601-2524	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-R058)			
12	74A600118-2013	TUBING (76301)	1		MGOZZ
13	MS25083-2BB5	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
14	NAS6303U7	BOLT	1		PAOZZ
	AN960C10	WASHER (USE WITH INDEX 14)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 14)	1		PAOZZ
15	74A890601-2857	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 12S-R092)			
16	NAS653V4	BOLT	1		PAOZZ
	AN960C10	WASHER (USE WITH INDEX 16)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 16)	1		PAOZZ
17	AN815-6D	UNION	1		PAOZZ
18	MS27467T9B35S	CONNECTOR, PLUG (13P-R005)	1		PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (OUTBOARD)

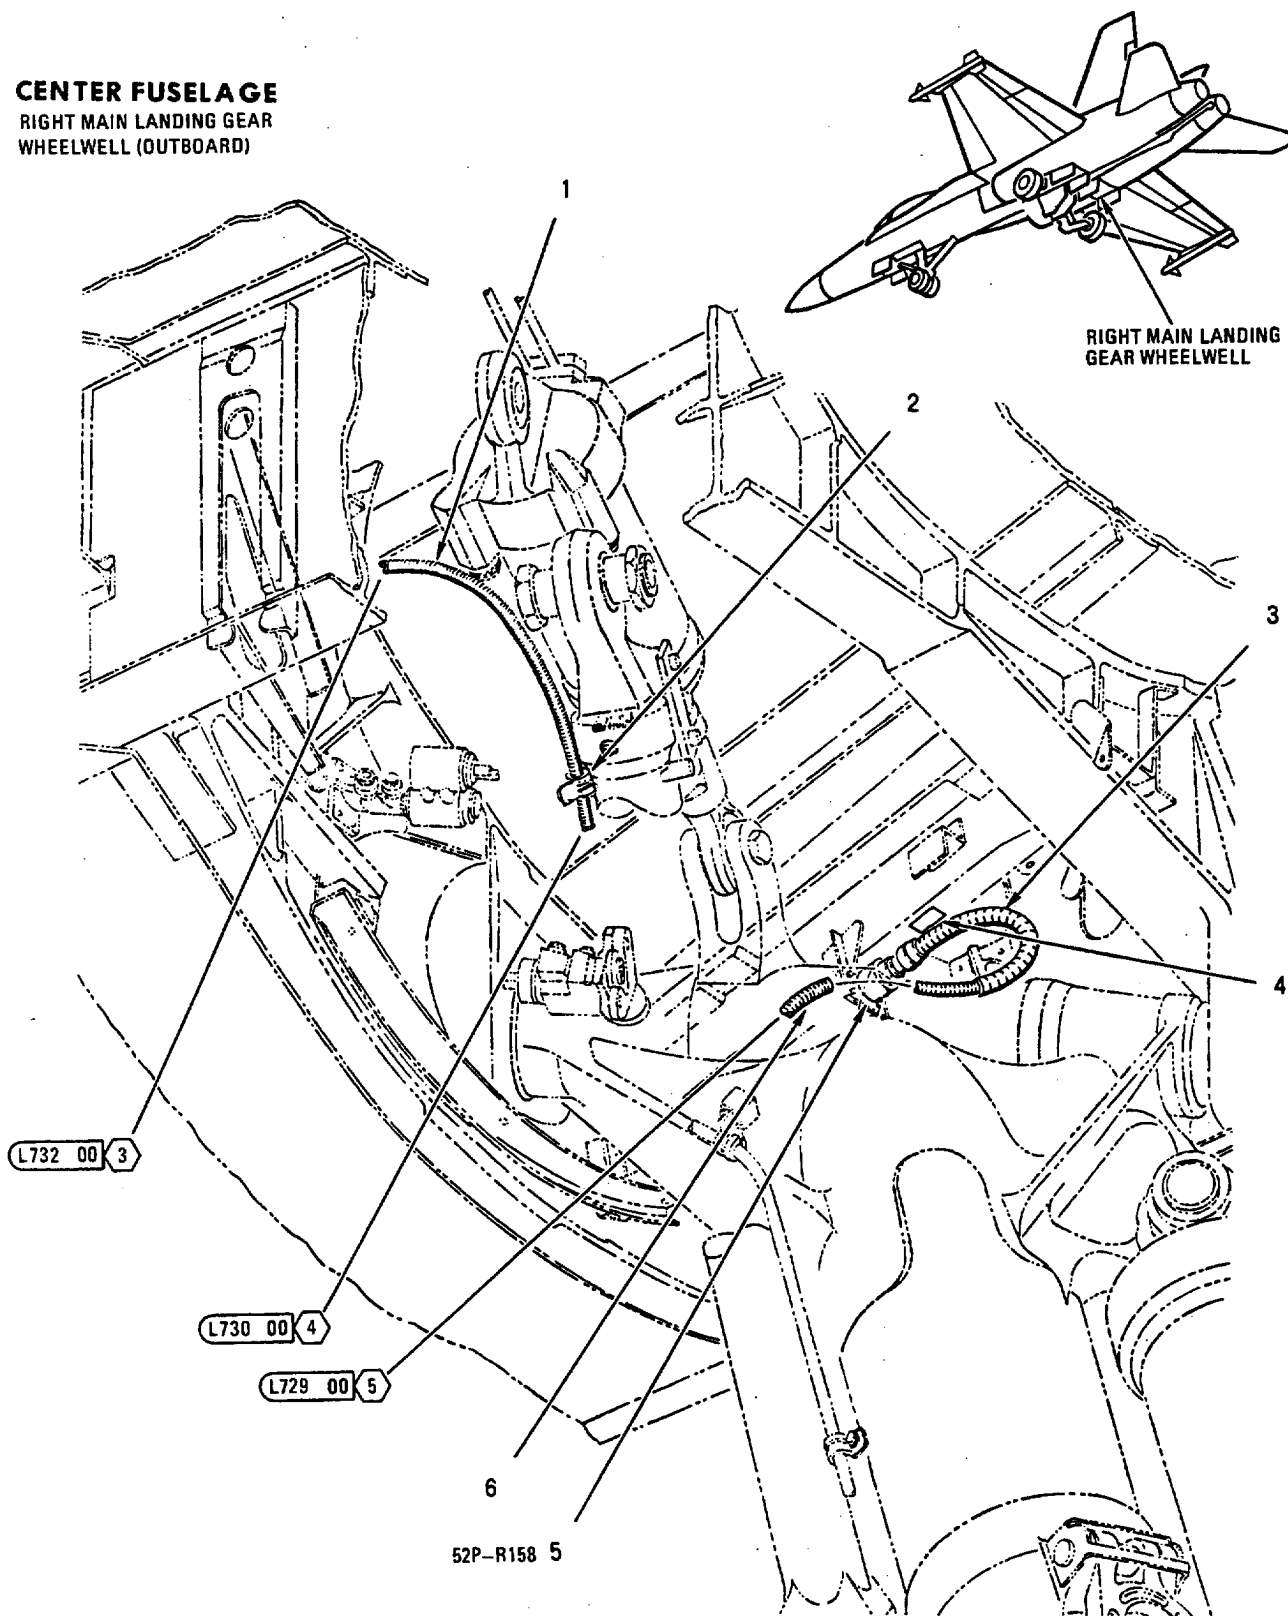


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A600118-2003	TUBING (76301)	1		MGOZZ
2	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V1	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
3	74A600118-2011	TUBING (76301)	1		MGOZZ
4	74A890601-2833	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 52J-R158)			
5	MS27467T11B35P	CONNECTOR, PLUG (52P-R158)	1		PAOZZ
	G7183-11-NF	ADAPTER, CABLE CLAMP TO	1		PAOZZ
		CONNECTOR (06324) (MCDONNELL SPEC 5M2469B11) (USE WITH INDEX 5)			
6	74A600118-2009	TUBING (76301)	1		PAOZZ

CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (INBOARD)

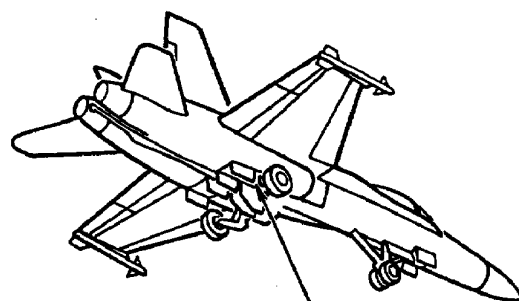

RIGHT MAIN LANDING
GEAR WHEELWELL

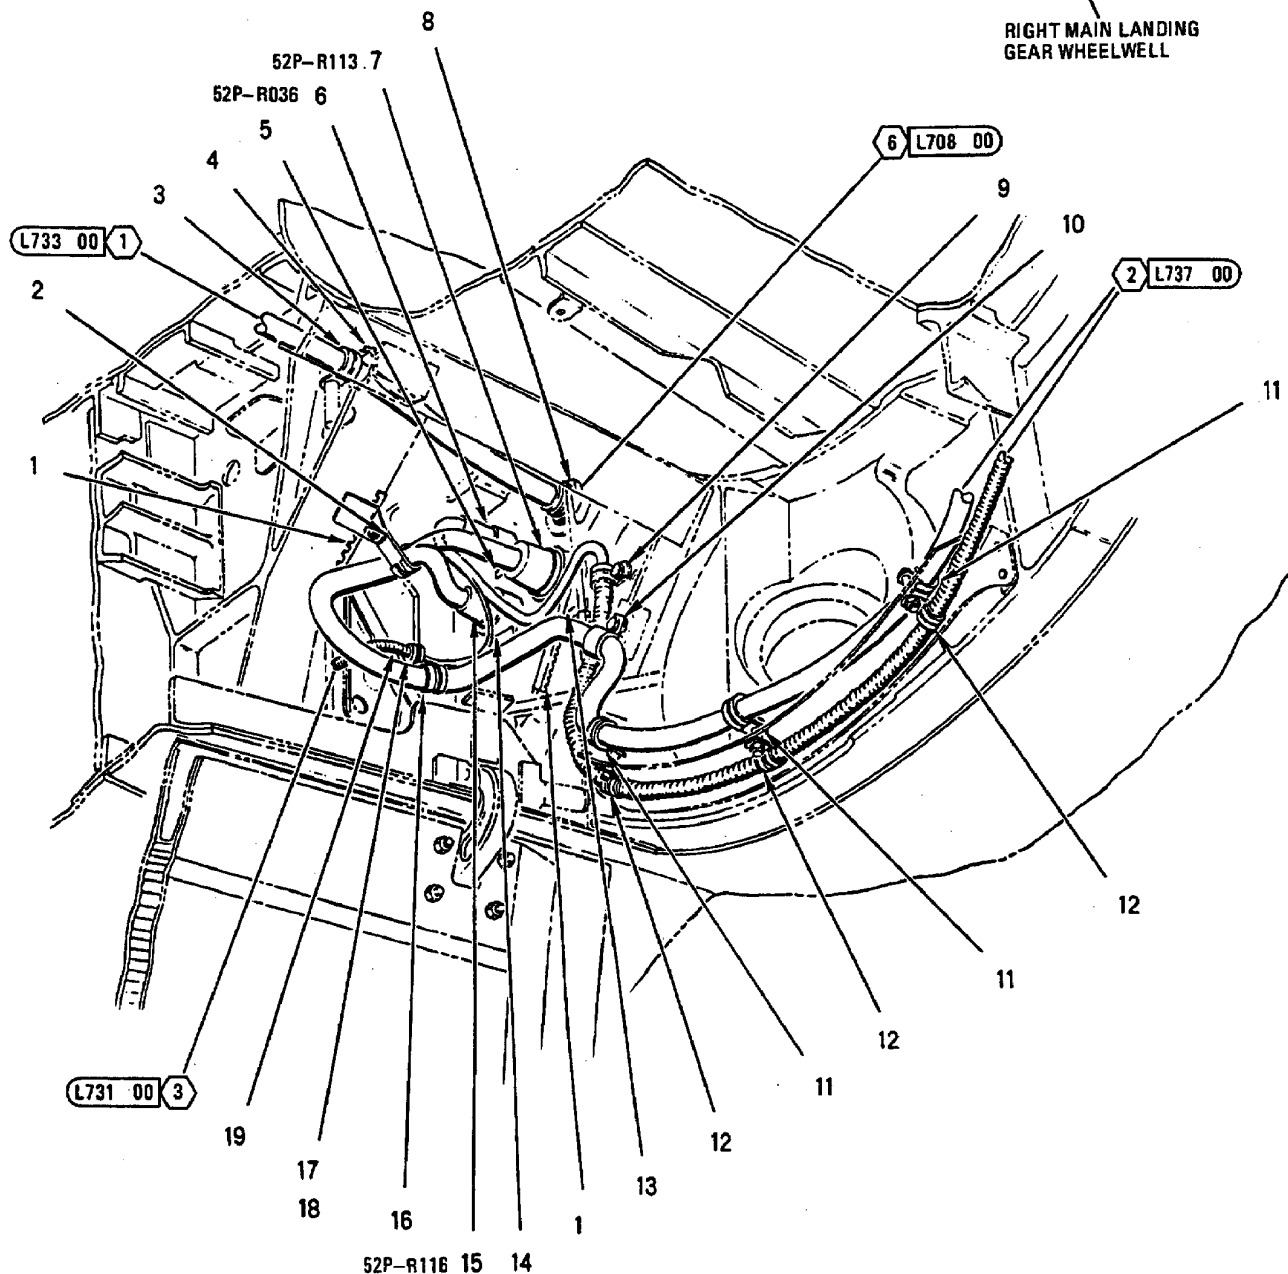


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-()N #	GROMMET	AR		-
2	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	A*	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
3	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ
4	MS21266-4N	GROMMET	AR	B	PAOZZ
	MS21266-2N	GROMMET	AR	A	PAOZZ
5	74A885621-2372	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R036)	2		MDOZZ
6	MS27467T13B35P	CONNECTOR, PLUG (52P-R036)	1		PAOZZ
7	MS27467T25B35P	CONNECTOR, PLUG (52P-R113)	1		PAOZZ
8	74B878001-129	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
9	M85052/1-8	CLAMP	1		PAOZZ
	NAS653V #	BOLT (AP)	1		-
	AN960C10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
10	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	A*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V10	BOLT (AP)	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT	1		PAOZZ
11	MS25281-8	CLAMP	3	B	PAOZZ
	MS25281-11	CLAMP	3	A	PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-24	SPACER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
12	M85052/1-7	CLAMP	3		PAOZZ
13	74A885621-2188	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R113)	2		MDOZZ
14	74A885621-2189	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-R116)	2		MDOZZ
15	MS27467T21B39P	CONNECTOR, PLUG (52P-R116)	1		PAOZZ
16	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	A*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
17	M85052/1-6	CLAMP	1		PAOZZ
	NAS653V2	BOLT (AP)	1		PAOZZ
	AN960C10L	WASHER (AP)	1		PAOZZ
18	CRN1137-2	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-002)	1	*	PAOZZ
	CTR6612-002	SEE ABOVE (64590)	1	*	PAOZZ
19	74A600118-2003	TUBING (76301)	1		MGOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161742 & UP
B	161353 THRU 161741

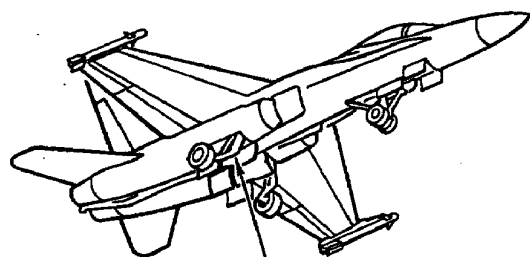

RIGHT MAIN LANDING
GEAR WHEELWELL

CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (INBOARD)

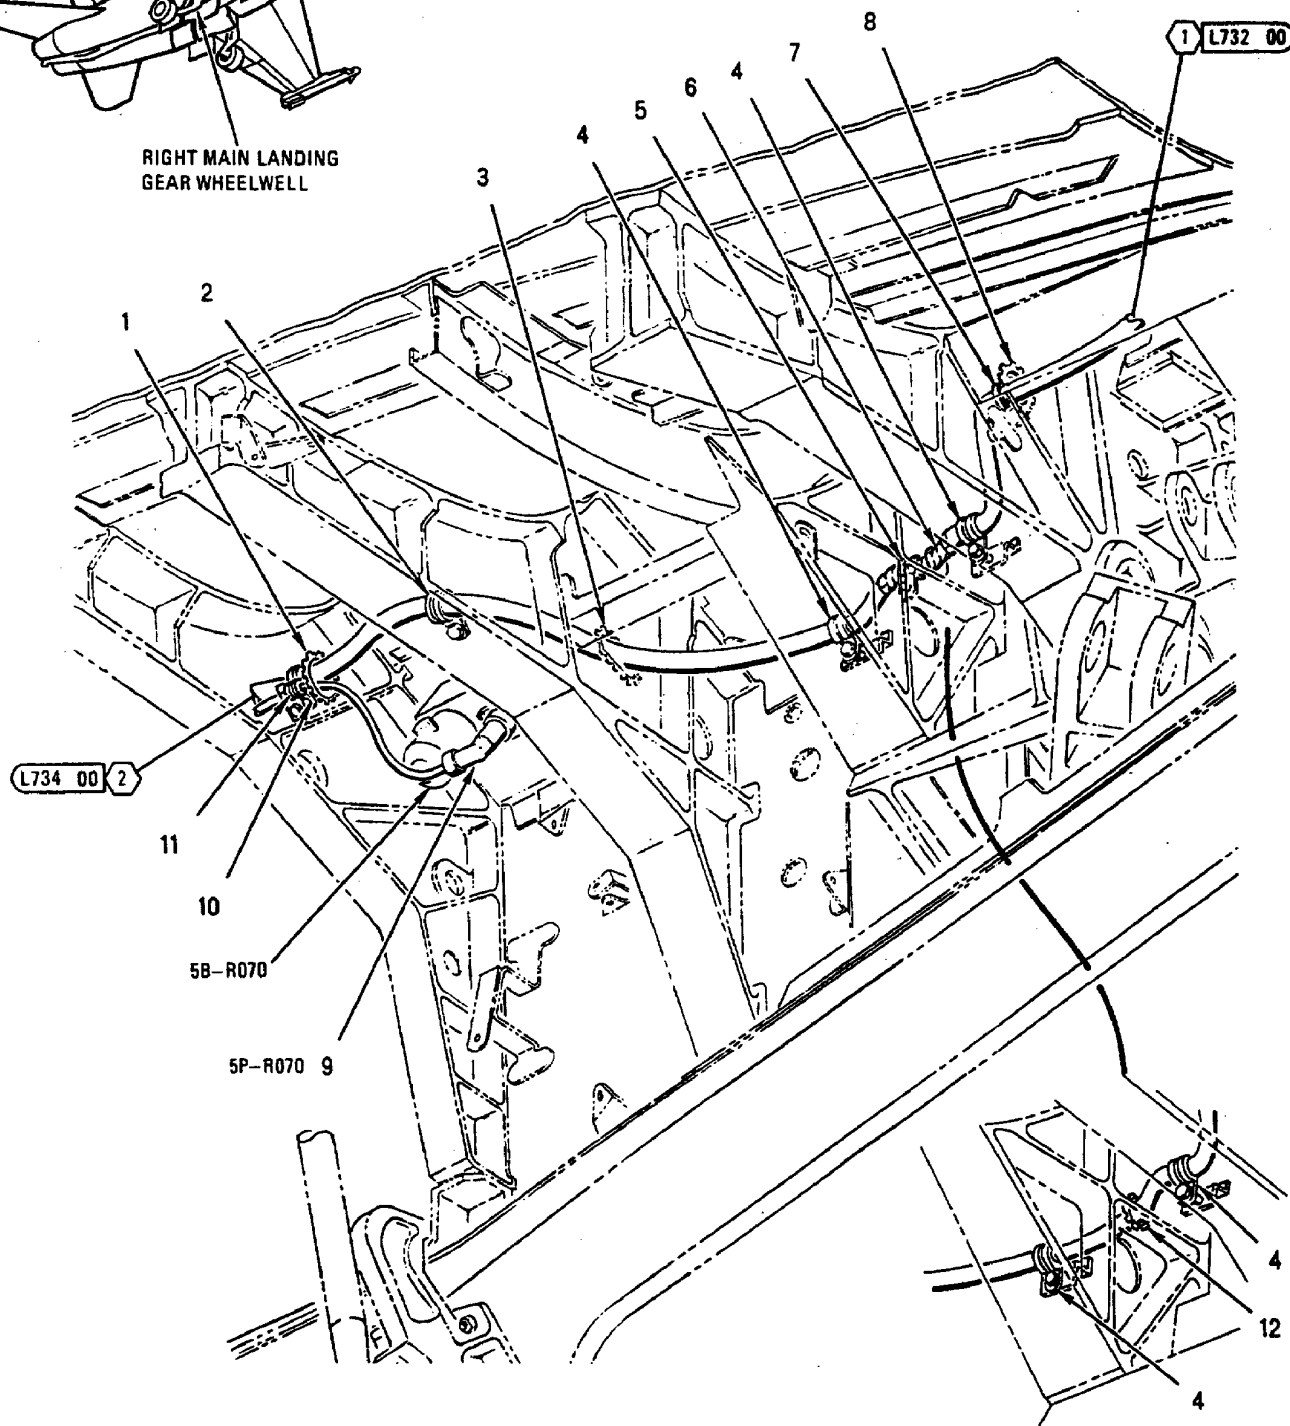


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-7N	GROMMET	AR		PAOZZ
2	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21266-3N	GROMMET	AR	A	PAOZZ
	MS21266-5N	GROMMET	AR	B	PAOZZ
4	MS25281-11	CLAMP	2	A	PAOZZ
	MS25281-8	CLAMP	1	B	PAOZZ
	NAS673V19	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
5	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	B*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
6	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	B*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
7	MS25281-11	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	B	PAOZZ
8	MS21266-5N	GROMMET	AR	A	PAOZZ
	MS21266-8N	GROMMET	AR	B	PAOZZ
9	MS27467T11B35S	CONNECTOR, PLUG (5P-R070)	1		PAOZZ
10	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V9	BOLT (AP)	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	A	PAOZZ
	MS21042L3	NUT (AP)	1	B	PAOZZ
11	M85052/1-4	CLAMP	1		PAOZZ
12	MS21266-2N	GROMMET	AR	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 THRU 161741


B 161742 & UP


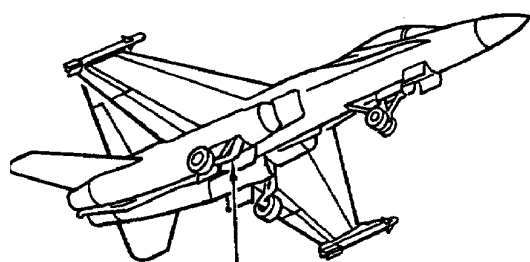


RIGHT MAIN LANDING
GEAR WHEELWELL


CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (INBOARD)

SEE CONFIGURATION X

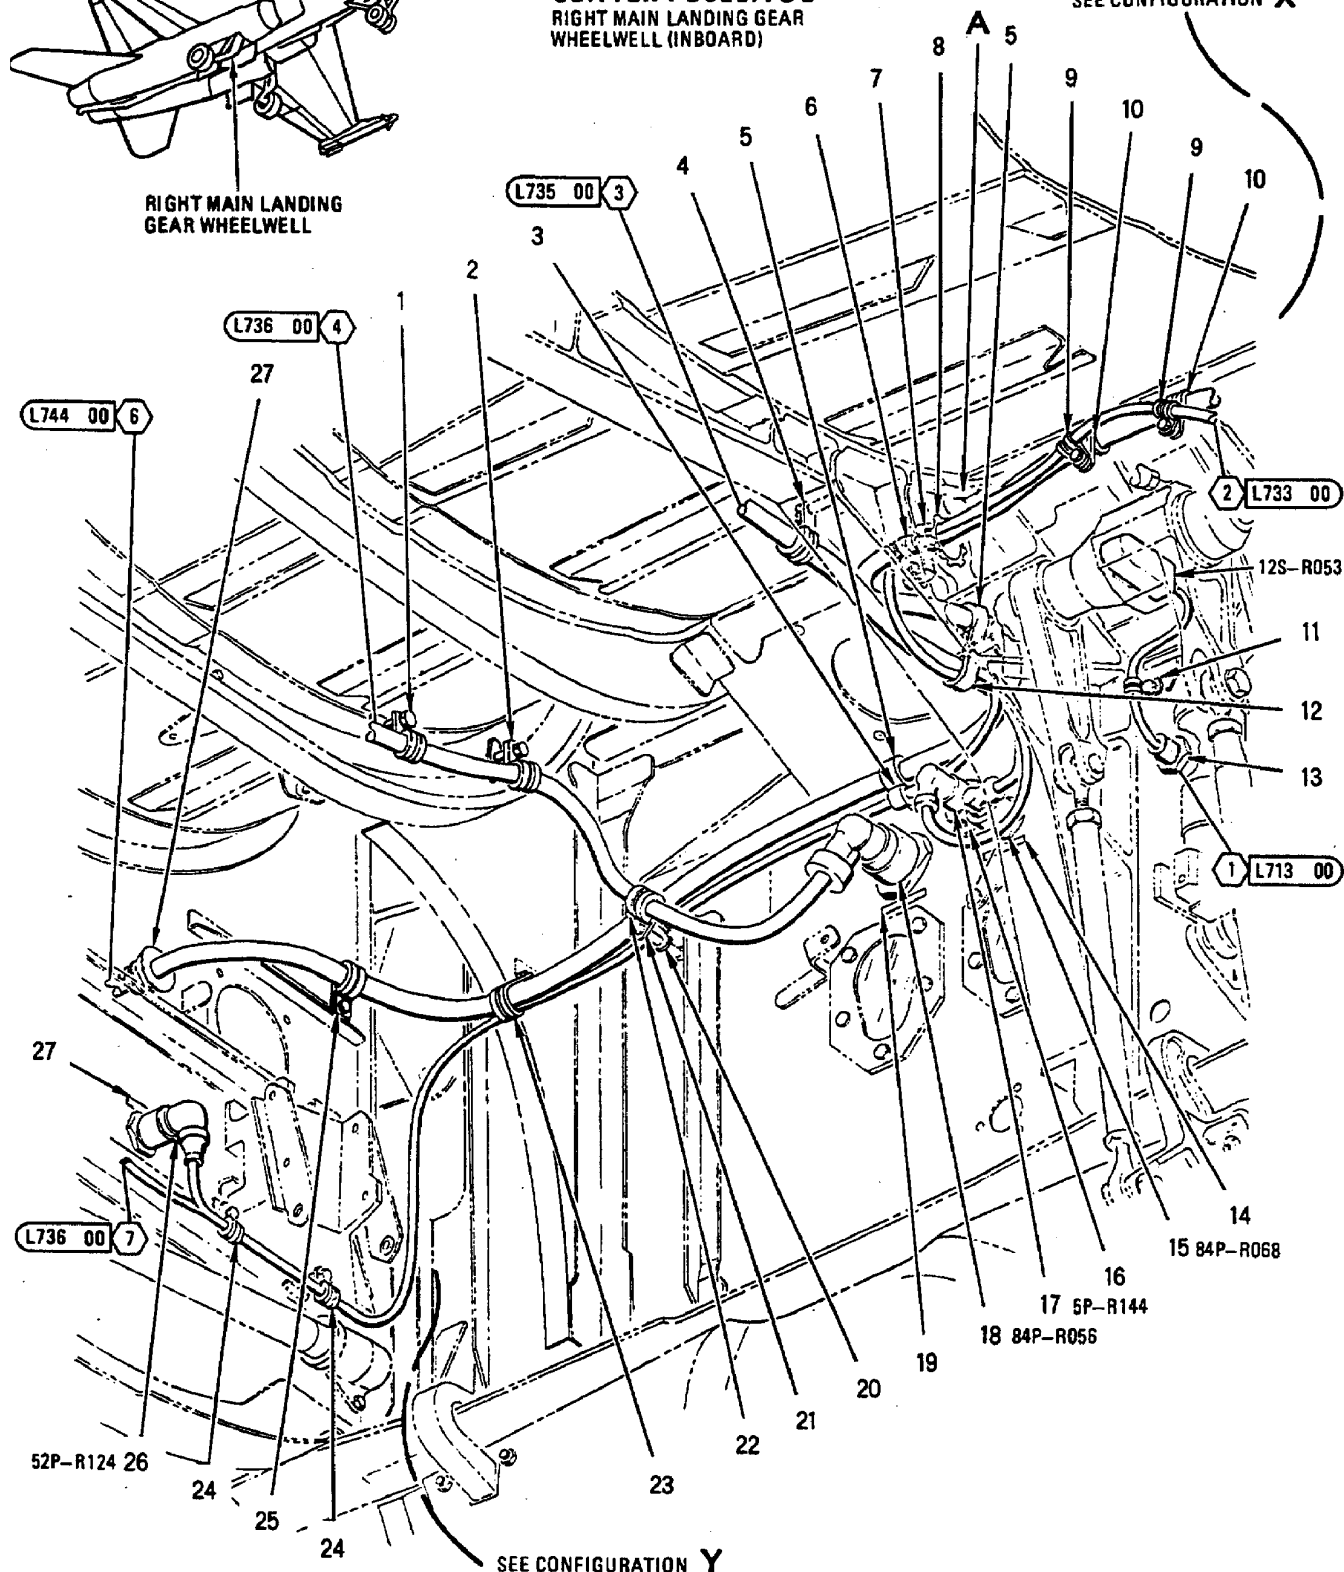


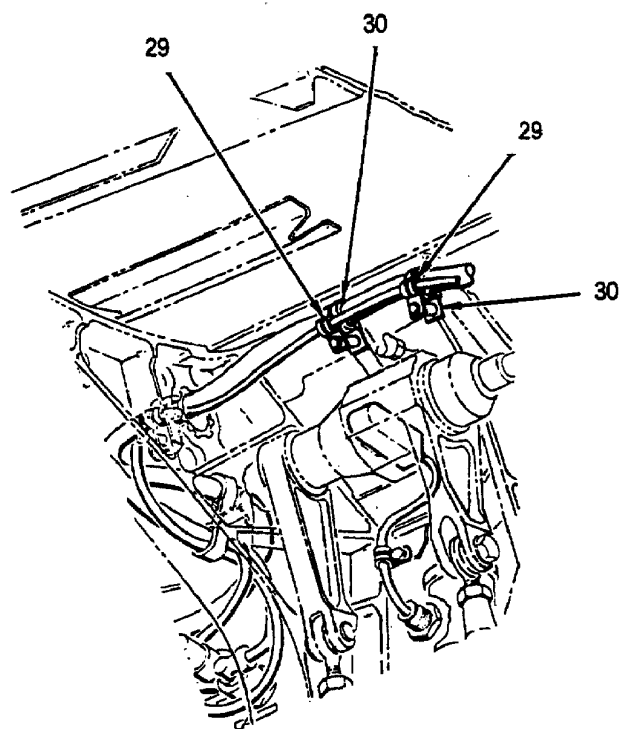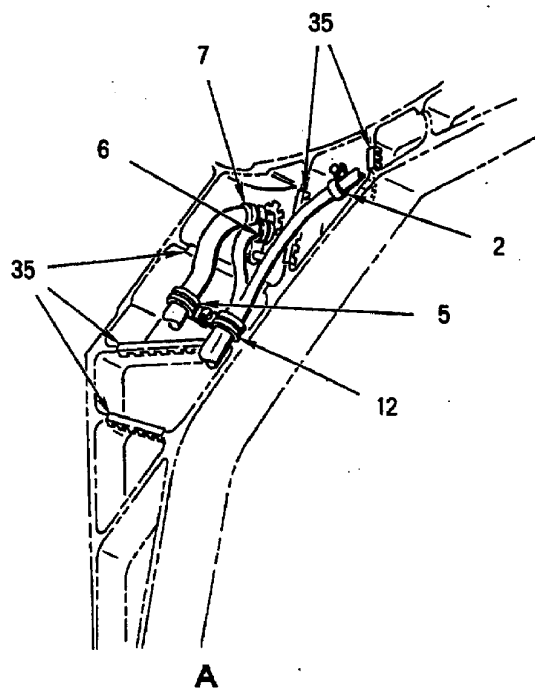

CONFIGURATION X

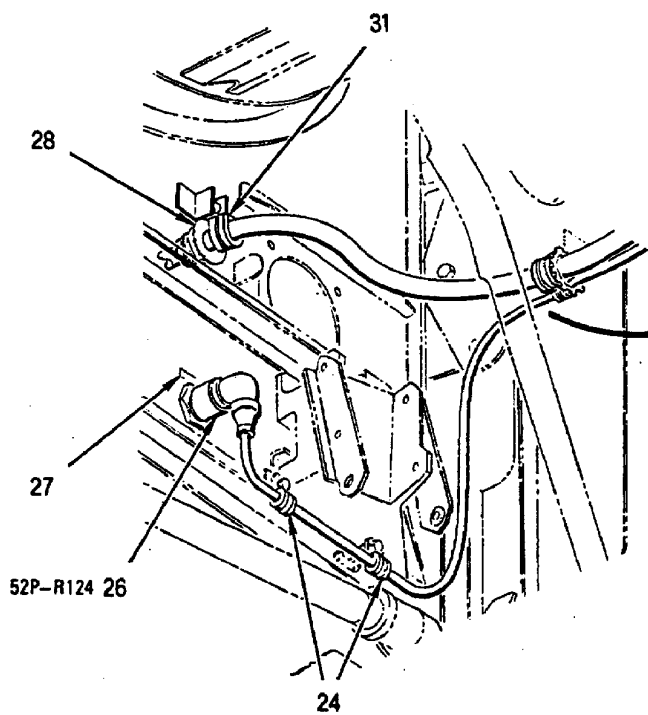


CONFIGURATION Y

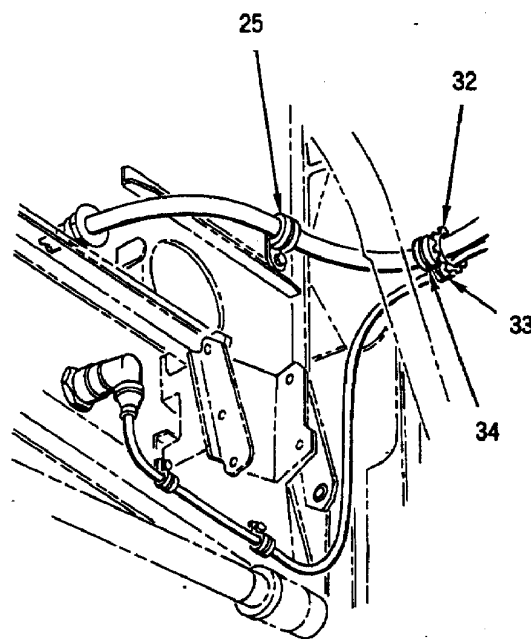

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	J	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	J	PAOZZ
	NAS673V3	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	2	J	PAOZZ
2	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS25281-5	CLAMP	1		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	H*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	H*	PAOZZ
	MS21919WDG6	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS25281-11	CLAMP	2		PAOZZ
6	MS21919WDG4	CLAMP	1		PAOZZ
7	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V9	BOLT (AP)	1	H	PAOZZ
	NAS673V3	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1	H	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J	PAOZZ
8	MS21266-5N	GROMMET	AR		PAOZZ
9	MS21919WDG4	CLAMP	2	D	PAOZZ
10	MS25281-11	CLAMP	2	D	PAOZZ
	NAS673V4	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	2	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
11	MS21919WDG2	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
12	MS25281-11	CLAMP	1	H	PAOZZ
	MS25281-8	CLAMP	1	J	PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
13	74B878001-125	CLAMP - CABLE, BULKHEAD, EMI (76301)	1	A	PAOZZ
	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301)	1	B	PAOZZ
14	74A885621-2187	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R068)	1		MDOZZ
15	MS27467T15B35P	CONNECTOR, PLUG (84P-R068)	1		PAOZZ
16	74A885621-2355	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 5J-R144)	1		MDOZZ
17	MS27467T13B35P	CONNECTOR, PLUG (5P-R144)	1		PAOZZ
18	MS27467T25B35P	CONNECTOR, PLUG (84P-R056)	1		PAOZZ
19	74A885621-2186	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R056)	1		MDOZZ
20	MS25281-5	CLAMP	1		PAOZZ
	NAS673V19	BOLT (AP)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS43DD3-48	SPACER (AP)	1		PAOZZ
21	MS25281-10	CLAMP	1		PAOZZ
22	MS25281-11	CLAMP	1		PAOZZ
23	MS21919WDG6	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	J	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
24	MS21919WDG5	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
25	JM44LC44WD11	CLAMP, LOOP (22175)	1	F*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V9	BOLT (AP)	1	K	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	F	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	F*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	F*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
26	D38999/26KB35SN	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-11-35SN) (52P-R124)			
	TVS06RK-11-35SN	CONNECTOR, PLUG, ELECTRICAL (77820)	1	G	PAOZZ
		(MCDONNELL SPEC ST5M1586KB35SN) (USE UNTIL EXHAUSTED) (52P-R124)			
27	74A885621-2551	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 52J-R124)			
28	74B878001-109	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
29	MS21919WDG4	CLAMP	2	C	PAOZZ
	NAS673V18	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
	NAS43DD3-48	SPACER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
30	MS25281-11	CLAMP	1	C	PAOZZ
31	JM44LC44WD11	CLAMP, LOOP (22175)	1	E*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	E*	PAOZZ
	NAS673V9	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	E	PAOZZ
32	MS21266-3N	GROMMET	AR	H	PAOZZ
33	MS21919WDG5	CLAMP	1	H	PAOZZ
34	JM44LC44WD11	CLAMP, LOOP (22175)	1	H*	PAOZZ
		(MCDONNELL SPEC ST9M630D11)			
	830WD11G	SEE ABOVE (83930)	1	H*	PAOZZ
	NAS673V2	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
35	MS21266-2N	GROMMET	AR	H	PAOZZ
	MS21266-4N	GROMMET	AR	J	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS
(INTRO)

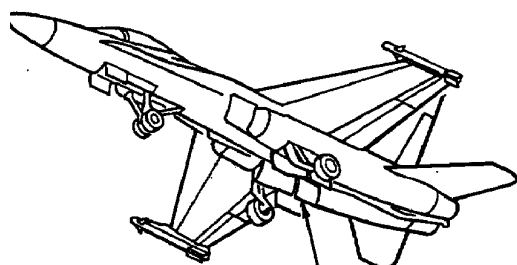


RIGHT MAIN LANDING
GEAR WHEELWELL

CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (OUTBOARD)

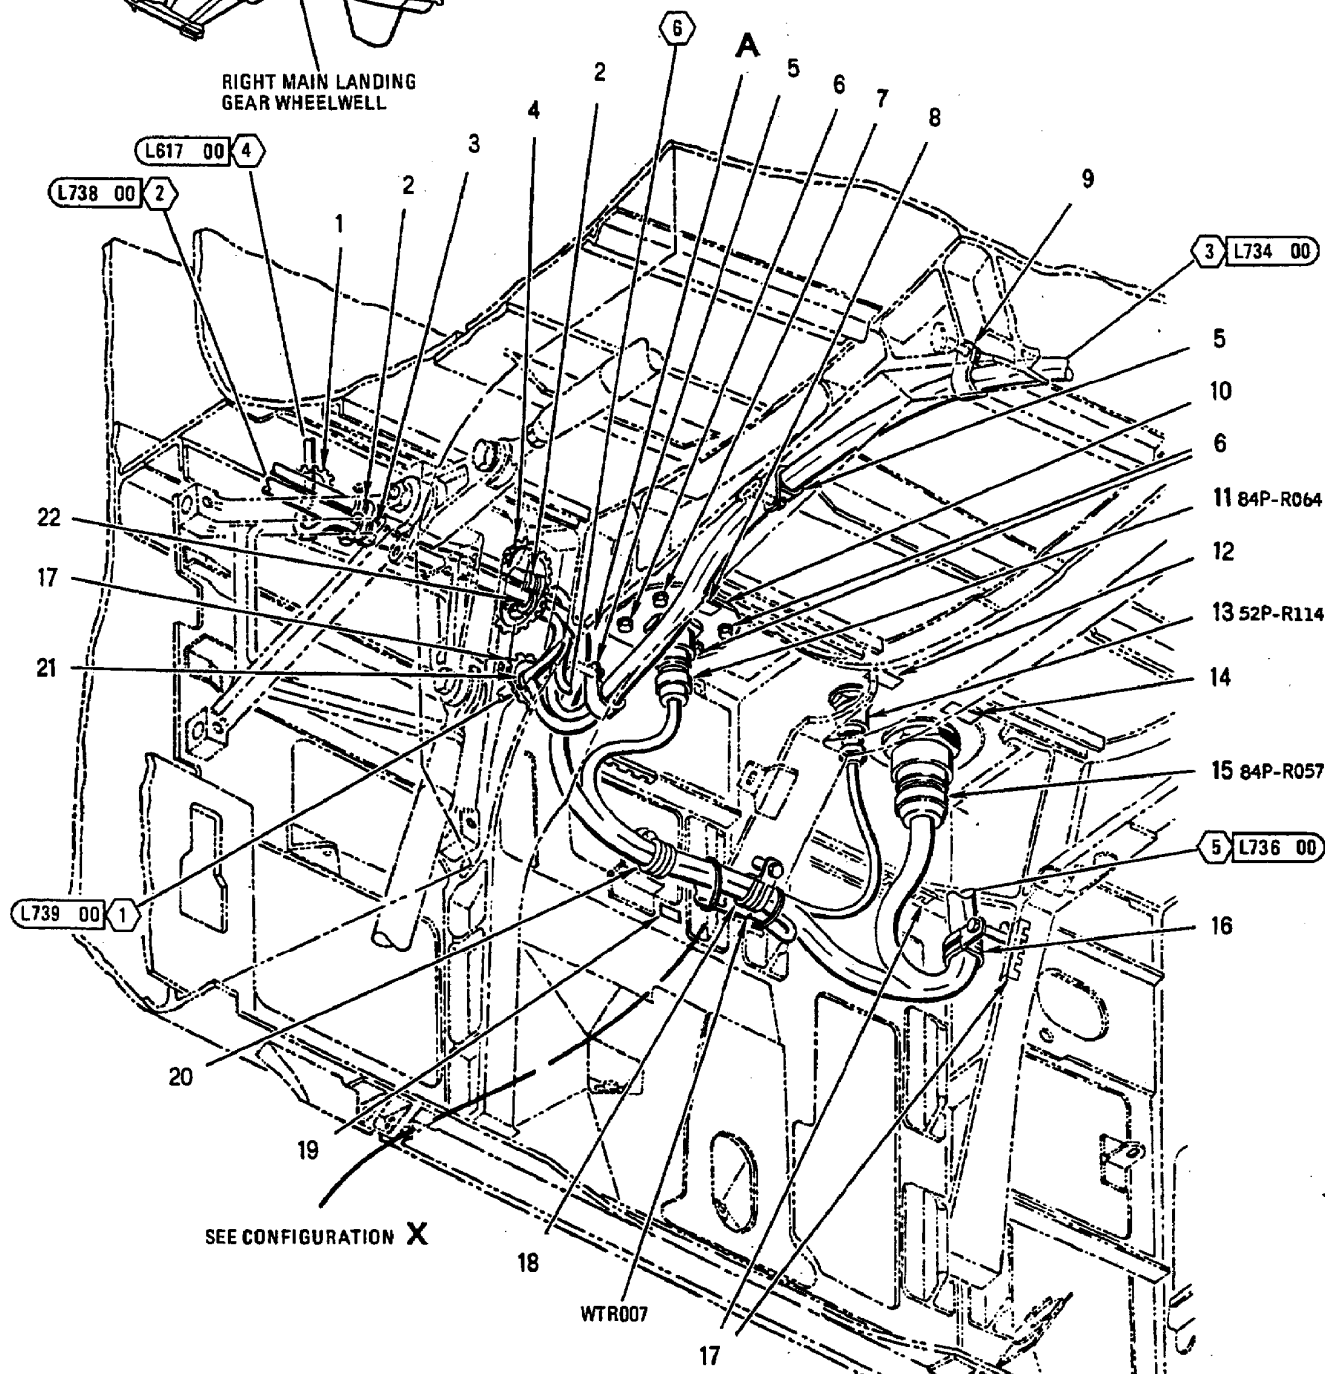

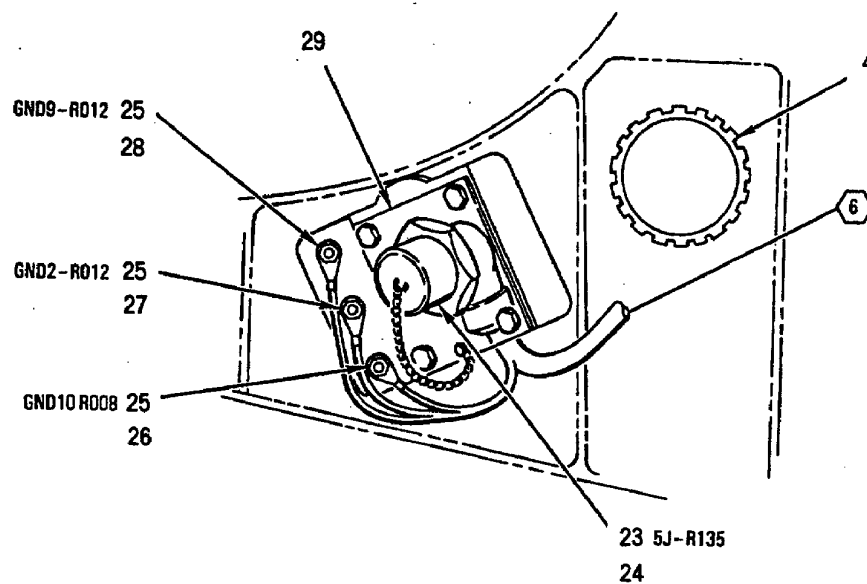

A
LOOKING FWD

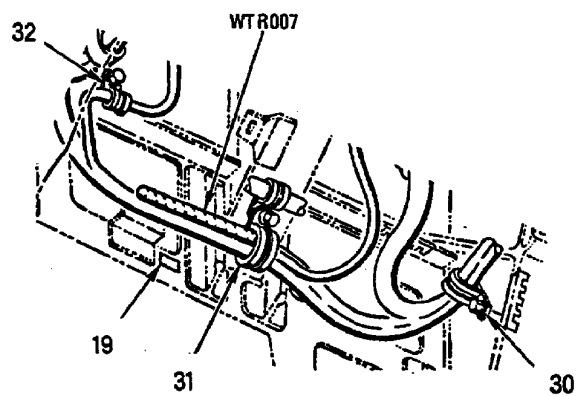

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-5N	GROMMET	AR		PAOZZ
2	MS21919WDG6	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
3	MS21919WDG6	CLAMP	1		PAOZZ
4	MS21266-6N	GROMMET	AR		PAOZZ
5	MS25281-10	CLAMP	2	A	PAOZZ
	MS21919WDG6	CLAMP	2	B	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
6	NAS1801-3D11	SCREW	3	A	PAOZZ
	NAS1801-3D8	SCREW	3	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 6)	3		PAOZZ
7	NAS1801-3D11	SCREW	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 7)	1		PAOZZ
8	74A885621-2197	MARKER, IDENTIFICATION - AVIONICS (76301)	2		MDOZZ
		(FOR REF DES 84J-R064)			
9	JM44LC44WD10	CLAMP, LOOP (22175)	1	*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	74A885602-2083	SPACER, PLATE (76301)	1		PAOZZ
11	MS27467T15B35S	CONNECTOR, PLUG (84P-R064)	1		PAOZZ
12	74A885621-2198	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 52J-R114)			
13	MS27467T11B35S	CONNECTOR, PLUG (52P-R114)	1		PAOZZ
14	74A885621-2199	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 84J-R057)			
15	MS27467T23B35S	CONNECTOR, PLUG (84P-R057)	1		PAOZZ
16	JM44LC44WD10	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
17	MS21266-2N	GROMMET	AR		PAOZZ
18	JM44LC44WD8	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
19	74A885621-2169	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES WTR007)			
20	M85052/1-10	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	MS3367-1-0	STRAP	AR	B	PAOZZ
22	MS21919WDG6	CLAMP	1	A	PAOZZ
	MS21919WDG10	CLAMP	1	B	PAOZZ
23	MS27468T17B35S	CONNECTOR, RECEPTACLE (5J-R135)	1	C	PAOZZ
	MS27502B17C	COVER (USE WITH INDEX 23)	1	C	PAOZZ
24	74A885621-2400	MARKER, IDENTIFICATION - AVIONICS (76301)	1	C	MDOZZ
		(FOR REF DES 5J-R135)			
25	MS21042L3	NUT	3	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 25)	3	C	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 25)	3	C	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
26	74A885621-2243	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10R008)	1	C	MDOZZ
27	74A885621-2244	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-R012)	1	C	MDOZZ
28	74A885621-2242	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R012)	1	C	MDOZZ
29	74A885602-1125	BRACKET, ELECTRICAL EQUIPMENT - AFT/CENTER FUSELAGE (76301)	1	C	XCOZZ
30	NAS1801-3-8	SCREW (AP)	4	C	PAOZZ
	AN960JD10L	WASHER (AP)	4	C	PAOZZ
	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	A*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	A*	PAOZZ
31	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9N630D8)	1	A*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
32	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	M85052/1-6	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161741
B	161742 & UP
C	161945 & UP

CENTER FUSELAGE

RIGHT MAIN LANDING GEAR
WHEELWELL (OUTBOARD)

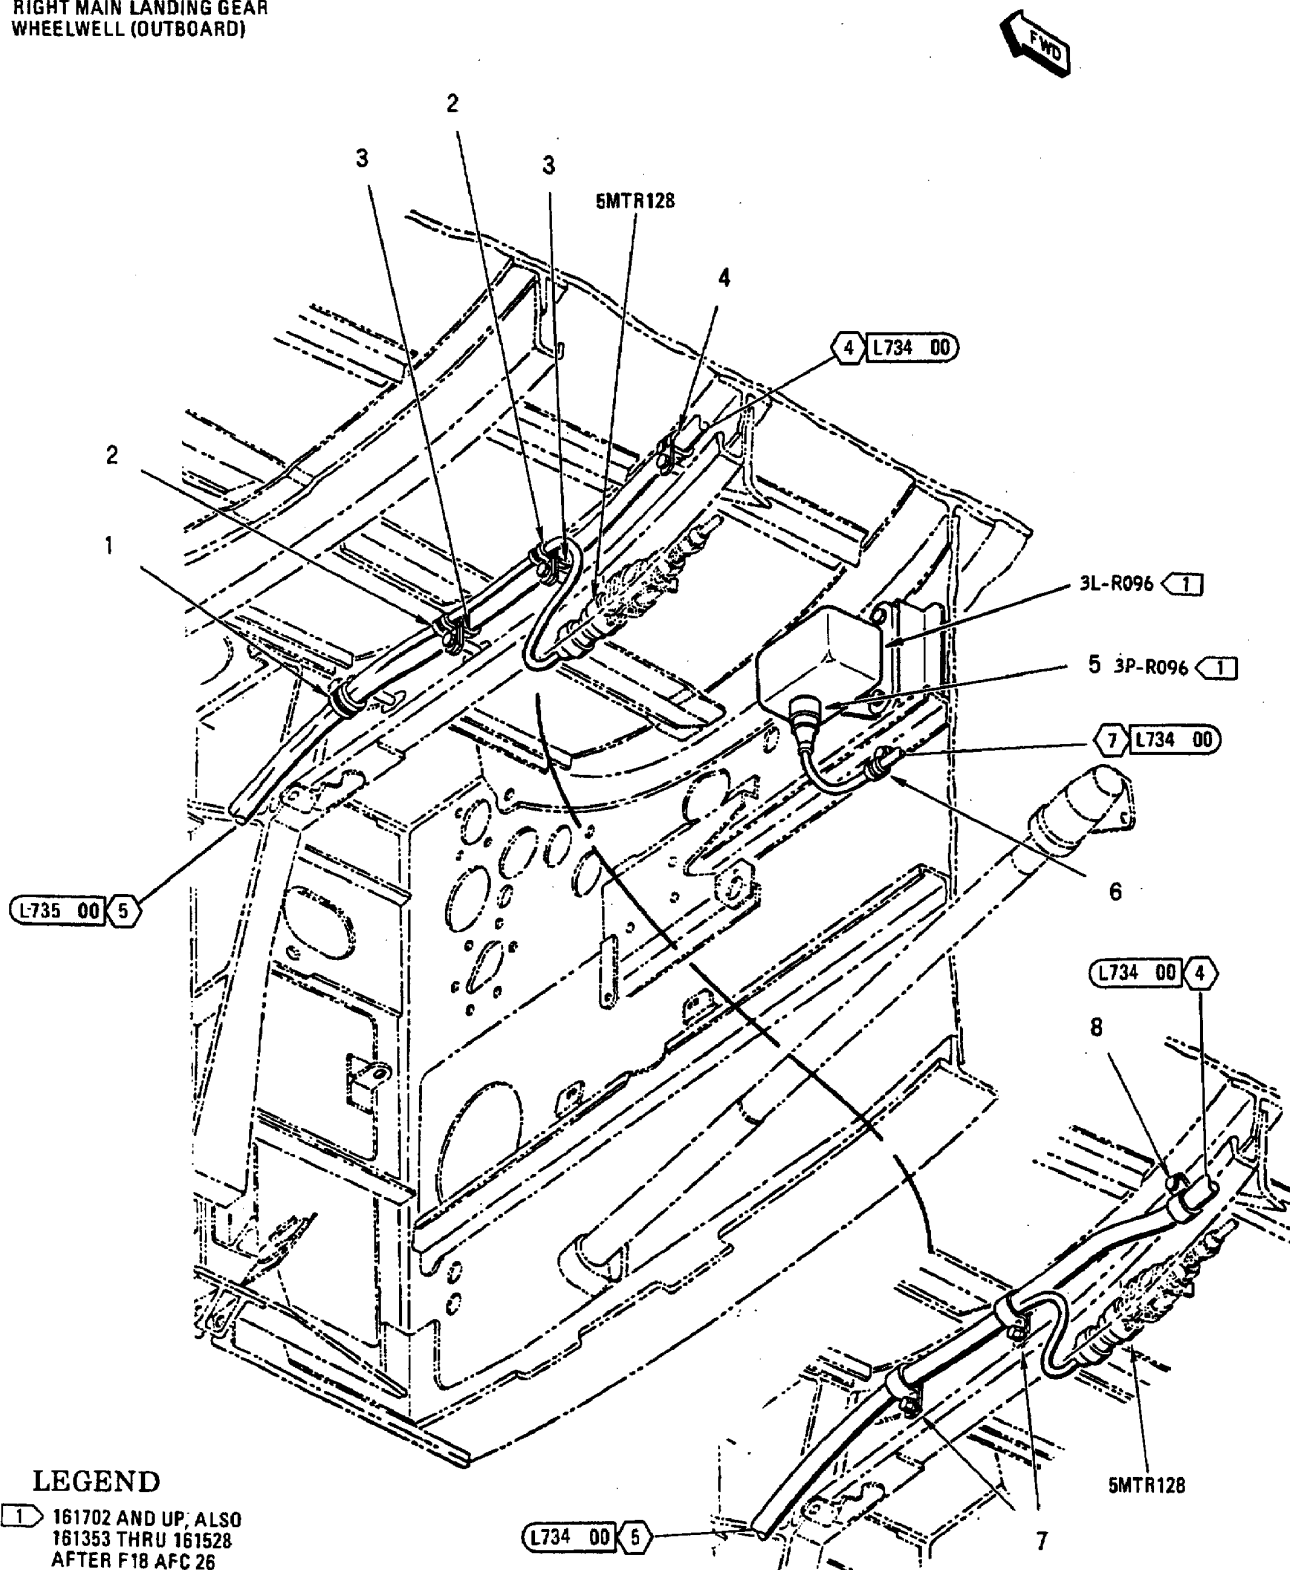


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25281-R10	CLAMP (SUPERSEDES MS25281-10)	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
2	MS25281-R4	CLAMP (SUPERSEDES MS25281-4)	2	C	PAOZZ
	NAS673V5	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
3	MS25281-R8	CLAMP (SUPERSEDES MS25281-B)	2	C	PAOZZ
4	JM44LC44WD10	CLAMP, LOOP (22175)	1	C*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
5	MS27467T9B98S	CONNECTOR, PLUG (3P-R096)	1	A	PAOZZ
6	MS21919WDG2	CLAMP	1	D	PAOZZ
	MS21919WDG5	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
7	MS25281-R10	CLAMP (SUPERSEDES MS25281-10)	2	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
8	JM44LC44WD10	CLAMP, LOOP (22175)	1	B*	PAOZZ
		(MCDONNELL SPEC ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	B	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161702 & UP; ALSO 161353 THRU 161528 AFTER F18 AFC 26
B	161353 THRU 161741
C	161742 & UP
D	161702 THRU 161741; ALSO 161353 THRU 161528 AFTER F18 AFC 26

CENTER FUSELAGE
RIGHT MAIN LANDING GEAR
WHEELWELL (OUTBOARD)

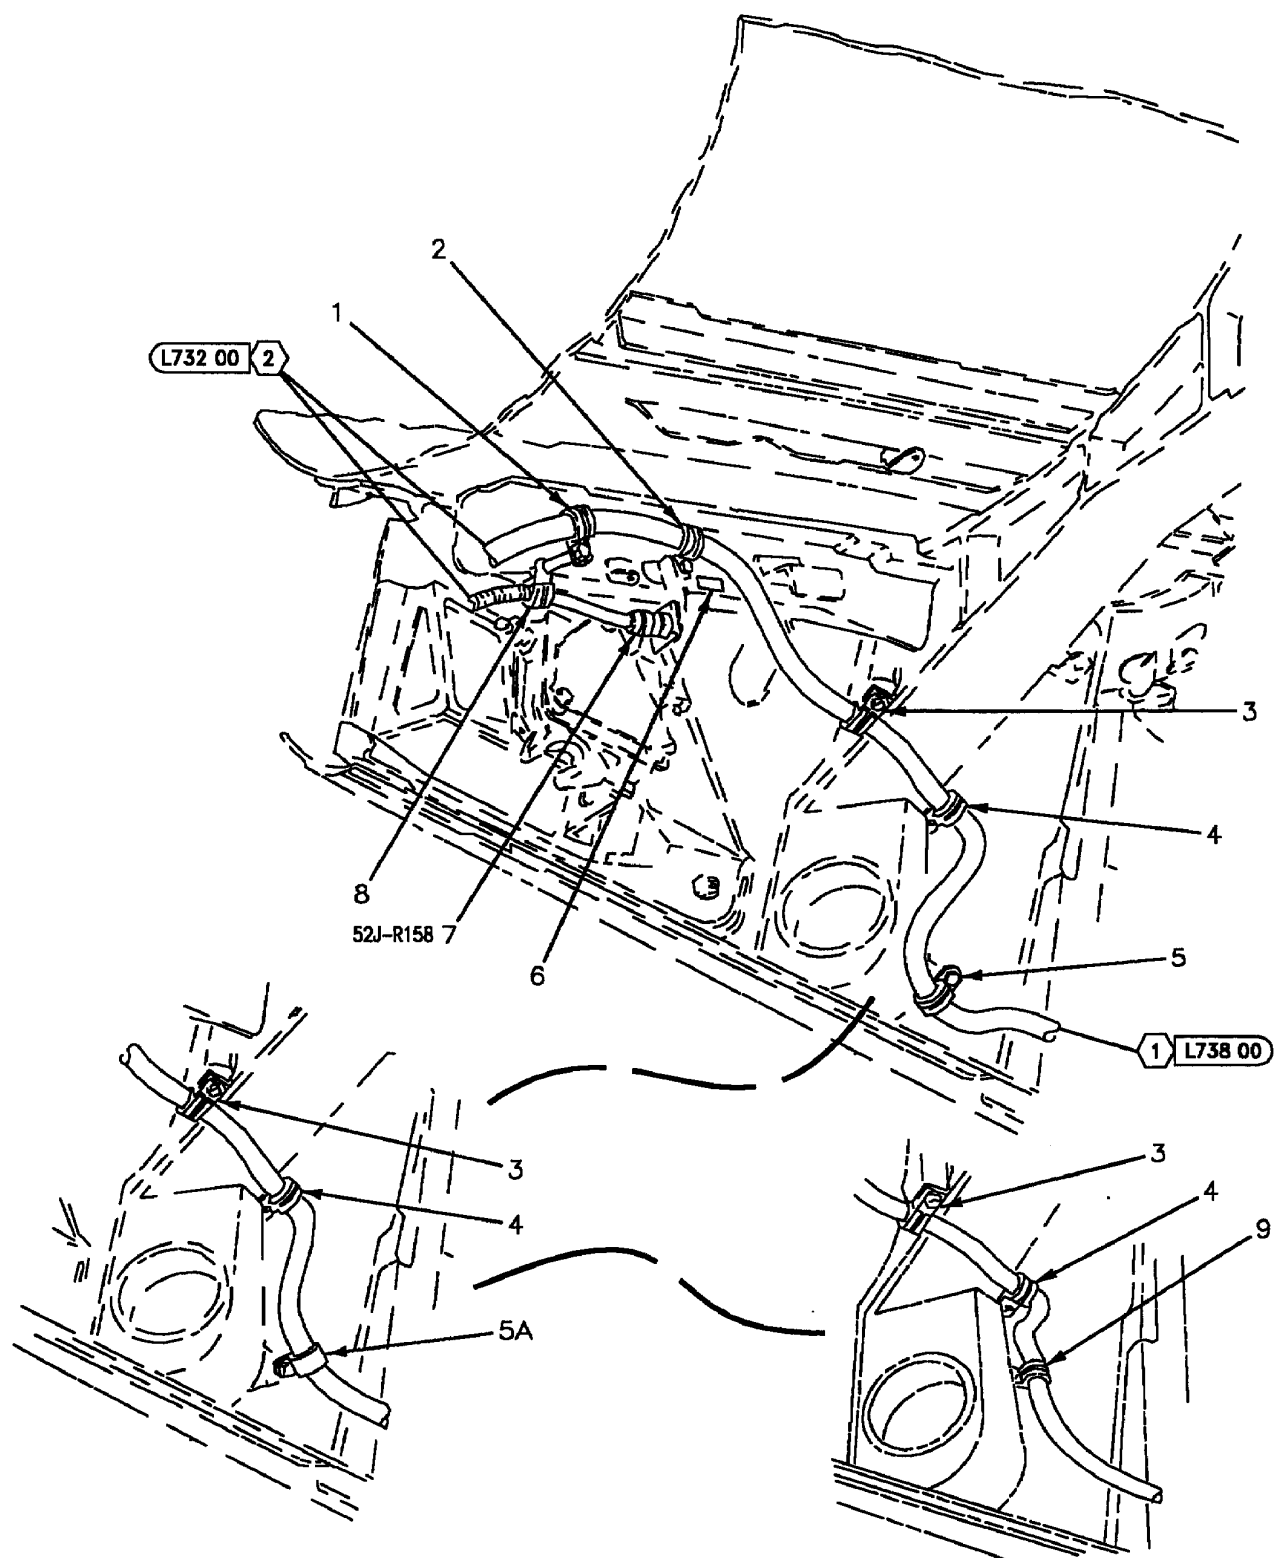


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	E*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	F*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V19	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
2	MS21042L3	NUT	1		PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	E*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	F*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	NAS673V4	BOLT (AP)	1	F	PAOZZ
3	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	E	PAOZZ
	MS25281-11	CLAMP	1	F	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	E*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	F*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	NAS673V9	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5A	NAS43DD3-24	SPACER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	MS25281-11	CLAMP	1	G	PAOZZ
	NAS673V4	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	2	G	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	G	PAOZZ
6	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	A	PAOZZ
	NAS673V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ
7	74A890601-2833	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-R158)	1		MDOZZ
	MS27656T11B35S	CONNECTOR, RECEPTACLE (52J-R158)	1		PAOZZ
	NAS600-4P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
8	S916-12CP	PLATE, RETAINING, ELECTRICAL CONNECTOR (19904) (MCDONNELL SPEC ST3M823-3) (USE WITH INDEX 7)	1	*	PAOZZ
	1008-12	PLATE, RETAINING, ELECTRICAL CONNECTOR (04967) (MCDONNELL SPEC ST3M823-3) (USE WITH INDEX 7)	1	*	PAOZZ
9	M85052/1-8	CLAMP	1		PAOZZ
	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	D	PAOZZ
	NAS673V4	BOLT (AP)	1	D	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION	UNITS PER ASSY	USE ON CODE	SM&R CODE
		1 2 3 4 5 6 7			

AN960JD10L	WASHER	1	D	PAOZZ
A11144-4-3	NUT, CLIP (AP) (72962) (AP)	1	D	PAOZZ
	(MCDONNELL SPEC ST3M523C3M1)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161741, 161966 THRU 163120
B	161353 THRU 161718
C	161720 & UP
D	161942 THRU 161965
E	161353 THRU 161741
F	161742 & UP
G	163121 & UP

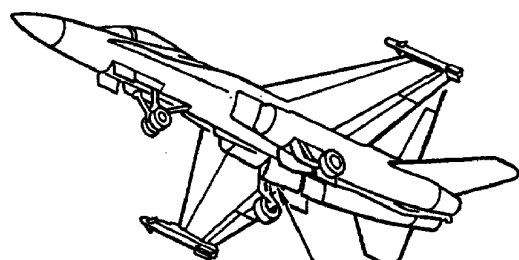


RIGHT MAIN LANDING
GEAR WHEELWELL

CENTER FUSELAGE RIGHT MAIN LANDING GEAR WHEELWELL (OUTBOARD)



24

CONFIGURATION X

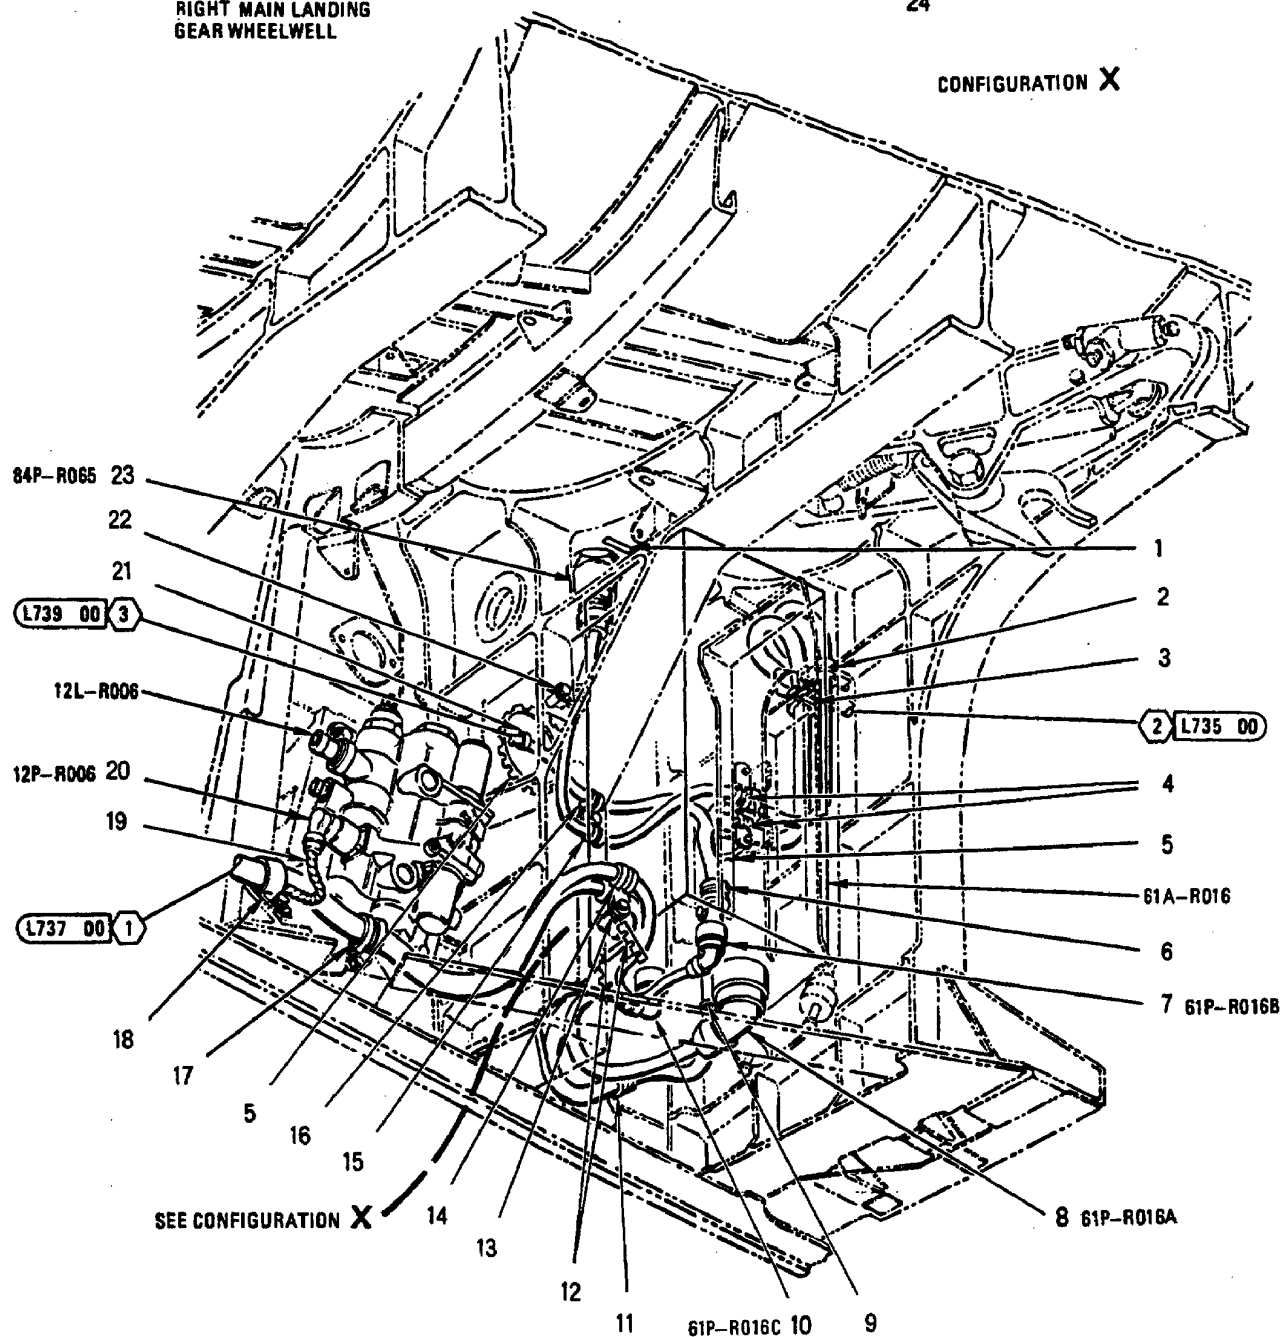


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885621-2196	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 84J-R065)	2		MDOZZ
2	MS21919WDG6	CLAMP	1		PAOZZ
3	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4	MS21919WDG6	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
7	MS27467T11B35SD	CONNECTOR, PLUG (61P-R016B)	1		PAOZZ
8	MS27467T23B35S	CONNECTOR, PLUG (61P-R016A)	1		PAOZZ
9	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	C	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	D*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
10	MS27467T11B35S	CONNECTOR, PLUG (61P-R016C)	1		PAOZZ
11	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	C	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	D*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
12	MS21266-3N	GROMMET	AR		PAOZZ
13	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
14	JM44LC33WD14	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D14)	1	F*	PAOZZ
	830WDG14G	SEE ABOVE (83930)	1	P*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	D*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	D*	PAOZZ
15	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	C	PAOZZ
	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
16	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	C*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	MS21919WDG7	CLAMP	1	D	PAOZZ
17	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD13	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D13)	1	D*	PAOZZ
	830WD13G	SEE ABOVE (83930)	1	D*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
18	MS25281-R8	CLAMP (SUPERSEDES MS25281-8)	1	C	PAOZZ
	MS25281-11	CLAMP	1	D	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
19	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	E*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	E*	PAOZZ
20	MS27467T11B98S	CONNECTOR, PLUG (12P-R006)	1		PAOZZ
21	MS3367-1-0	STRAP	AR	D	PAOZZ
22	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
23	MS27467T15B35S	CONNECTOR, PLUG (84P-R065)	1		PAOZZ
24	JM44LC44WD8	CLAMP, LOOP (22175)	1	A*	PAOZZ
		(MCDONNELL SPEC ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161718
B	161720 & UP
C	161353 THRU 161741
D	161742 & UP
E	161962 & UP
F	161720 THRU 161741

CENTER FUSELAGE
DOOR 45R AND DOOR 46R
RIGHT MISSILE LAUNCH BAY
(ON FUSELAGE BELOW WING)

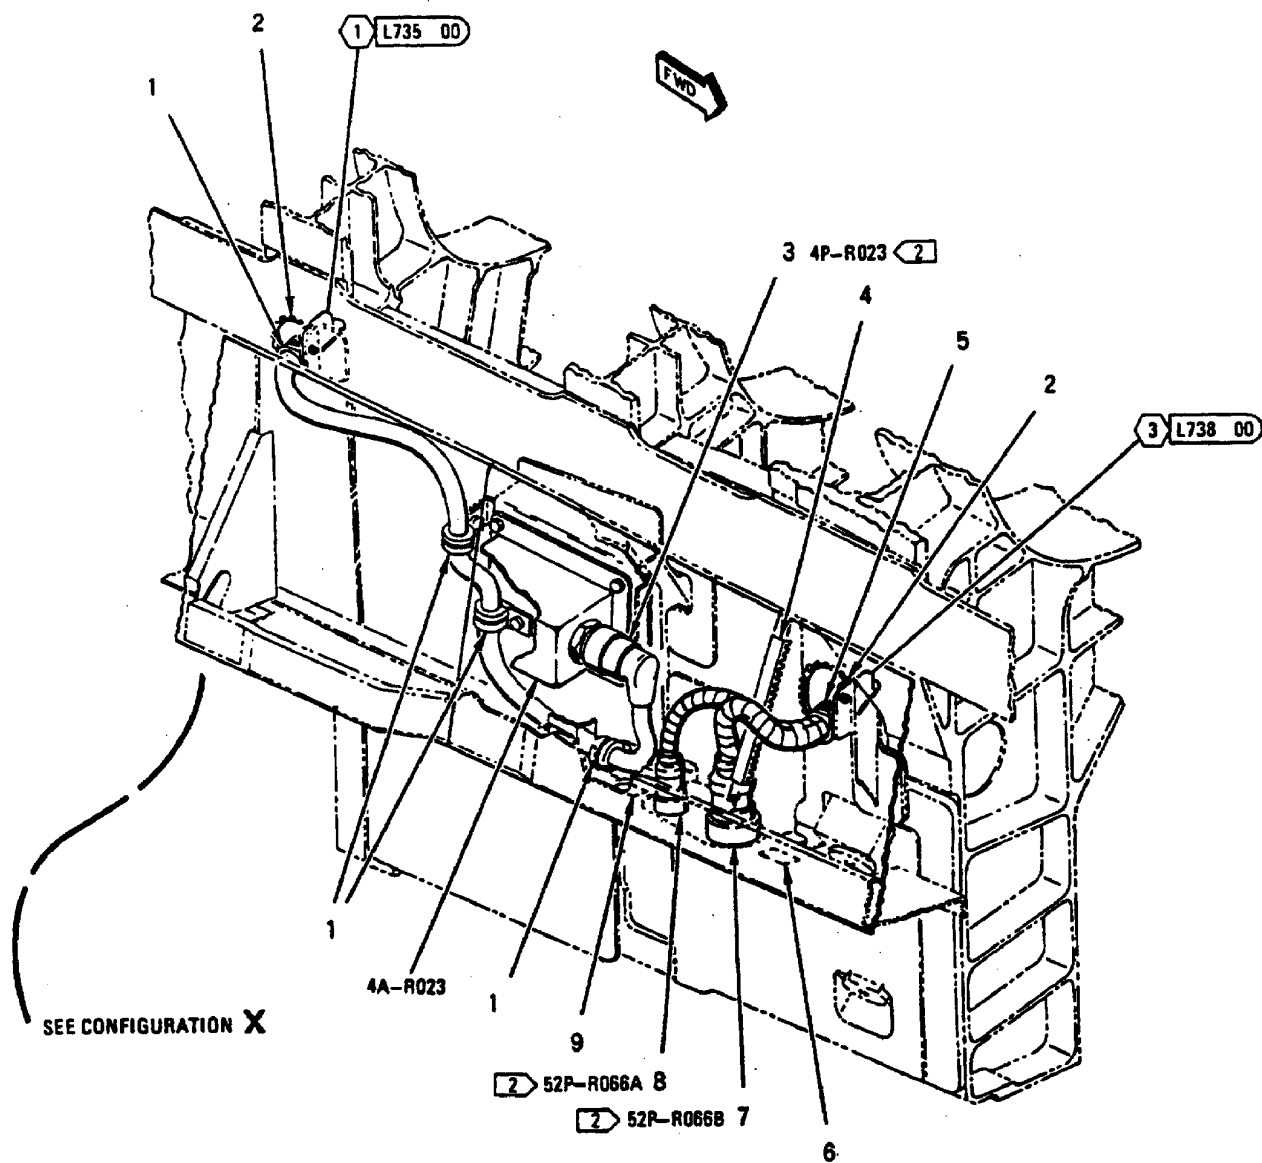


LEGEND

- 1 161353 THRU 161705
- 2 161706 AND UP
- 3 161706 THRU 161944

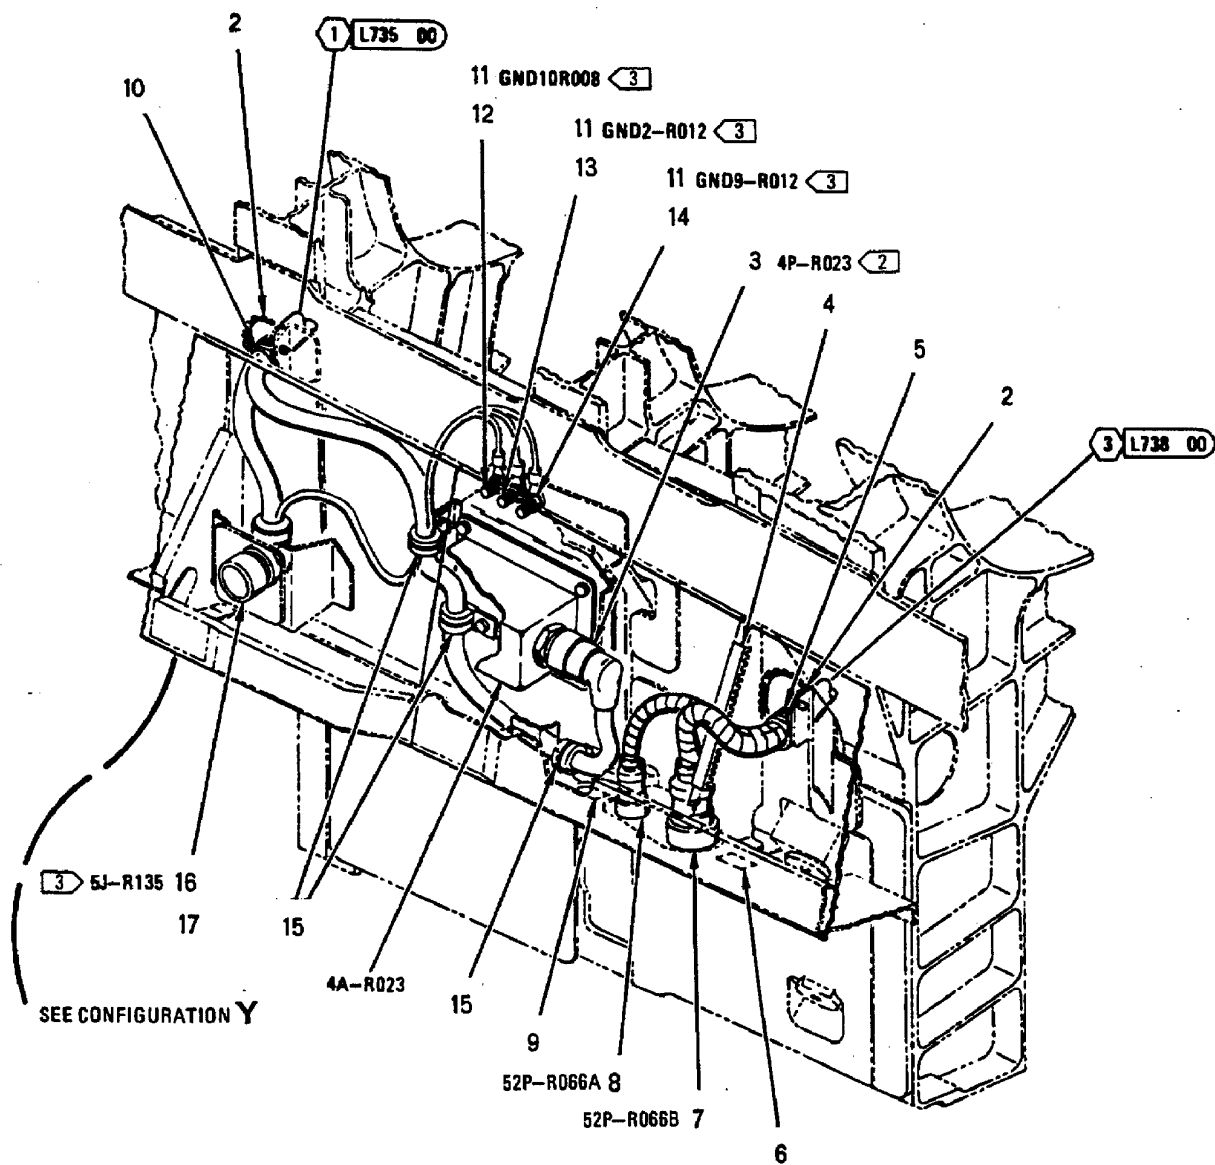

CONFIGURATION X

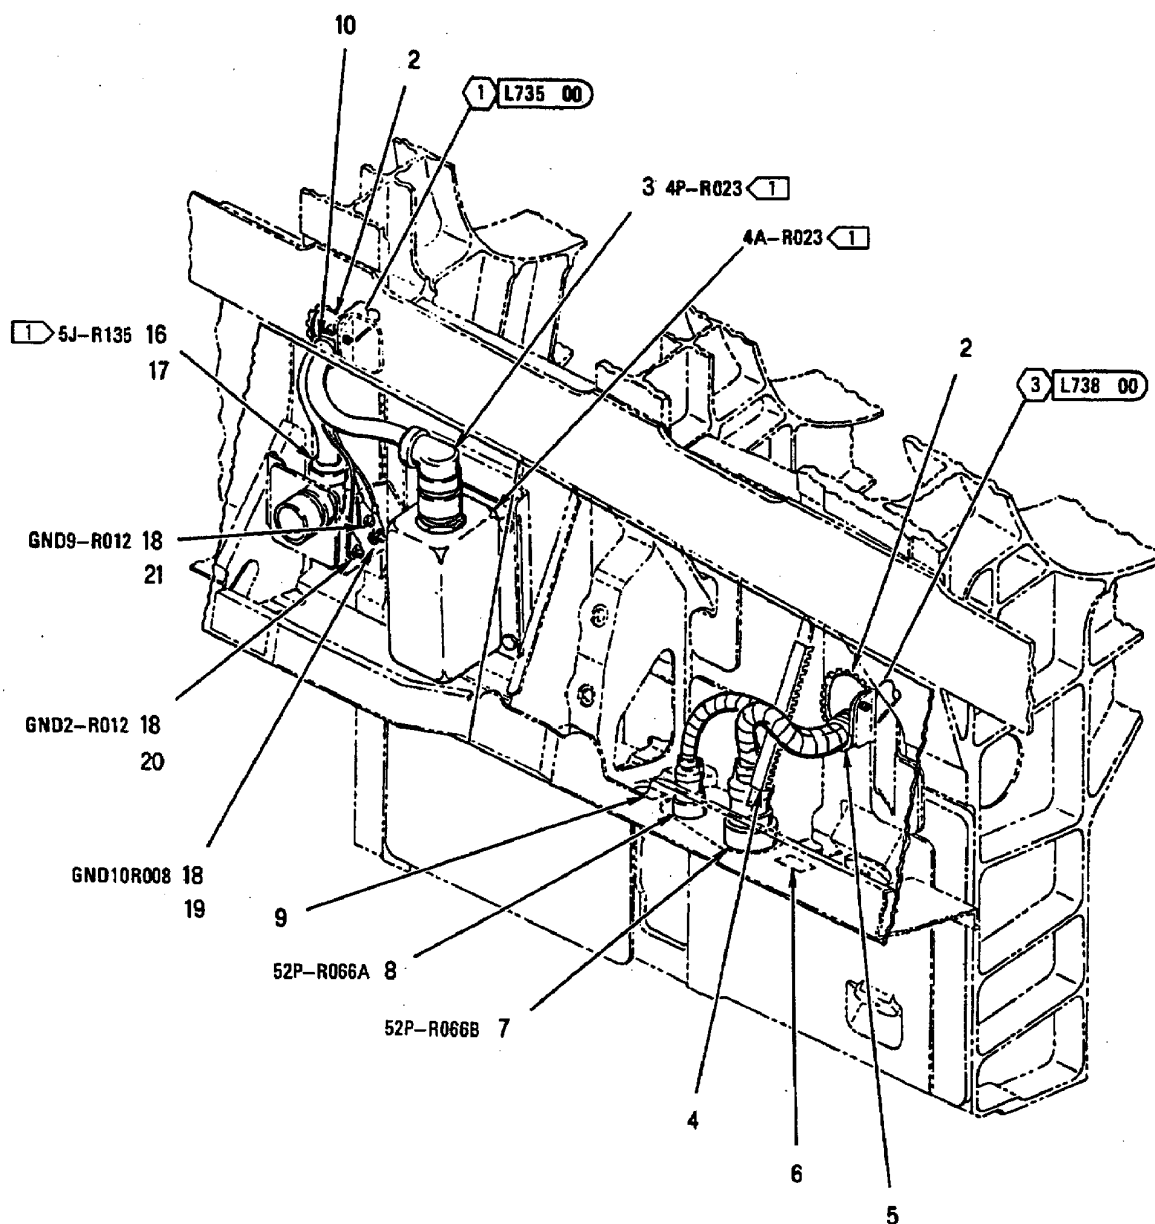


SEE CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-5	CLAMP	4	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	C	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
2	MS21266-2N	GROMMET	AR		PAOZZ
3	MS27467T17B35S	CONNECTOR, PLUG (4P-R023)	1		PAOZZ
4	MS21266-8N	GROMMET	AR		PAOZZ
5	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
6	74A885621-2486	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52A-R066-J2)			
7	MS27467T23B53S	CONNECTOR, PLUG (52P-R066B)	1		PAOZZ
8	MS27467T13B98S	CONNECTOR, PLUG (52P-R066A)	1		PAOZZ
9	74A885621-2485	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52A-R066-J1)			
10	M85052/1-4	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	D	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
11	MS21042L3	NUT	3	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 11)	3	B	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 11)	3	B	PAOZZ
12	74A885621-2243	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES GND10R008)			
13	74A885621-2244	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES GND2-R012)			
14	74A885621-2242	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES GND9-R012)			
15	M85052/1-5	CLAMP	3	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	B	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
16	MS27468T17B35S	CONNECTOR, RECEPTACLE (5J-R135)	1	D	PAOZZ
17	74A885621-2400	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) (FOR REF DES 5J-R135)			
18	MS21042L3	NUT	3	A	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 18)	3	A	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 18)	3	A	PAOZZ
19	74A885621-2243	MARKER, IDENTIFICATION - AVIONICS	1	A	MDOZZ
		(76301) (FOR REF DES GND10R008)			
20	74A885621-2244	MARKER, IDENTIFICATION - AVIONICS	1	A	MDOZZ
		(76301) (FOR REF DES GND2-R012)			

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

21	74A885621-2242	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-R012)							1	A	MDOZZ
----	----------------	--	--	--	--	--	--	--	---	---	-------


CODE	USABLE ON
A	161353 THRU 161705
B	161706 THRU 161944
C	161945 & UP
D	161353 THRU 161944

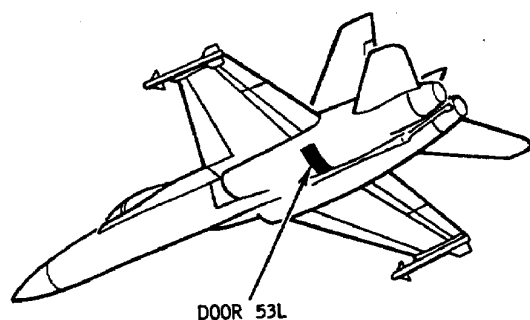

DOOR 53L

CENTER FUSELAGE

DOOR 53L
LEFT AMAD BAY

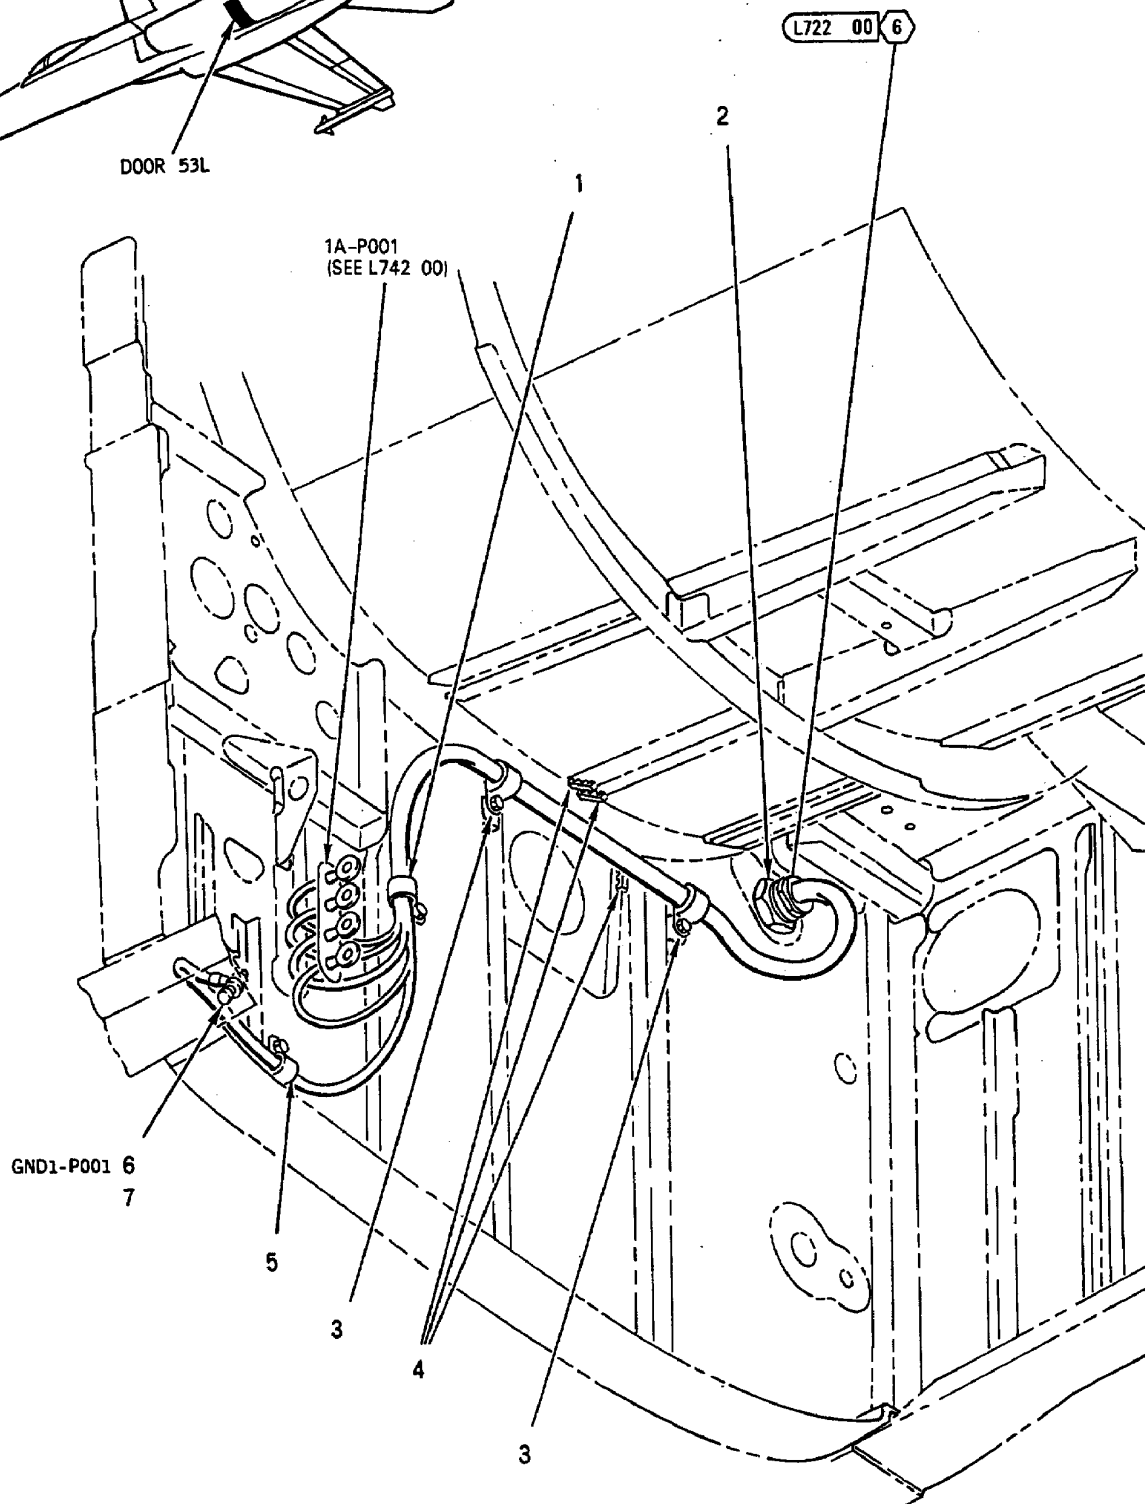


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	MS21919WDG7	CLAMP	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	74B878001-109	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
3	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	2	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	2	B*	PAOZZ
	MS21919WDG11	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
4	MS21266-1N	GROMMET	AR	A	PAOZZ
5	MS21919WDG4	CLAMP	1		PAOZZ
	NAS67V3	BOLT (AP)	1	D	PAOZZ
	NAS673V11	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1	E	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
6	NAS1291C5M	NUT	1		PAOZZ
	MS35338-45	WASHER (USE WITH INDEX 6)	1		PAOZZ
	AN960JD516L	WASHER (USE WITH INDEX 6)	2		PAOZZ
7	74A885621-2004	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-P001)	1		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161954 & UP
B	161353 THRU 161741
C	161742 & UP
D	160775 THRU 163121
E	163122 & UP


CENTER FUSELAGE

DOOR 53L
LEFT AMAD BAY

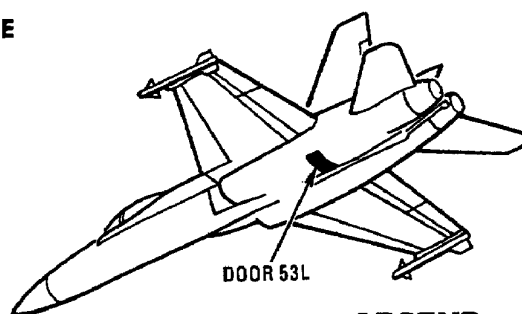

LEGEND

- 1 161702 THRU 161741
- 2 161353 THRU 161528,
161742 AND UP

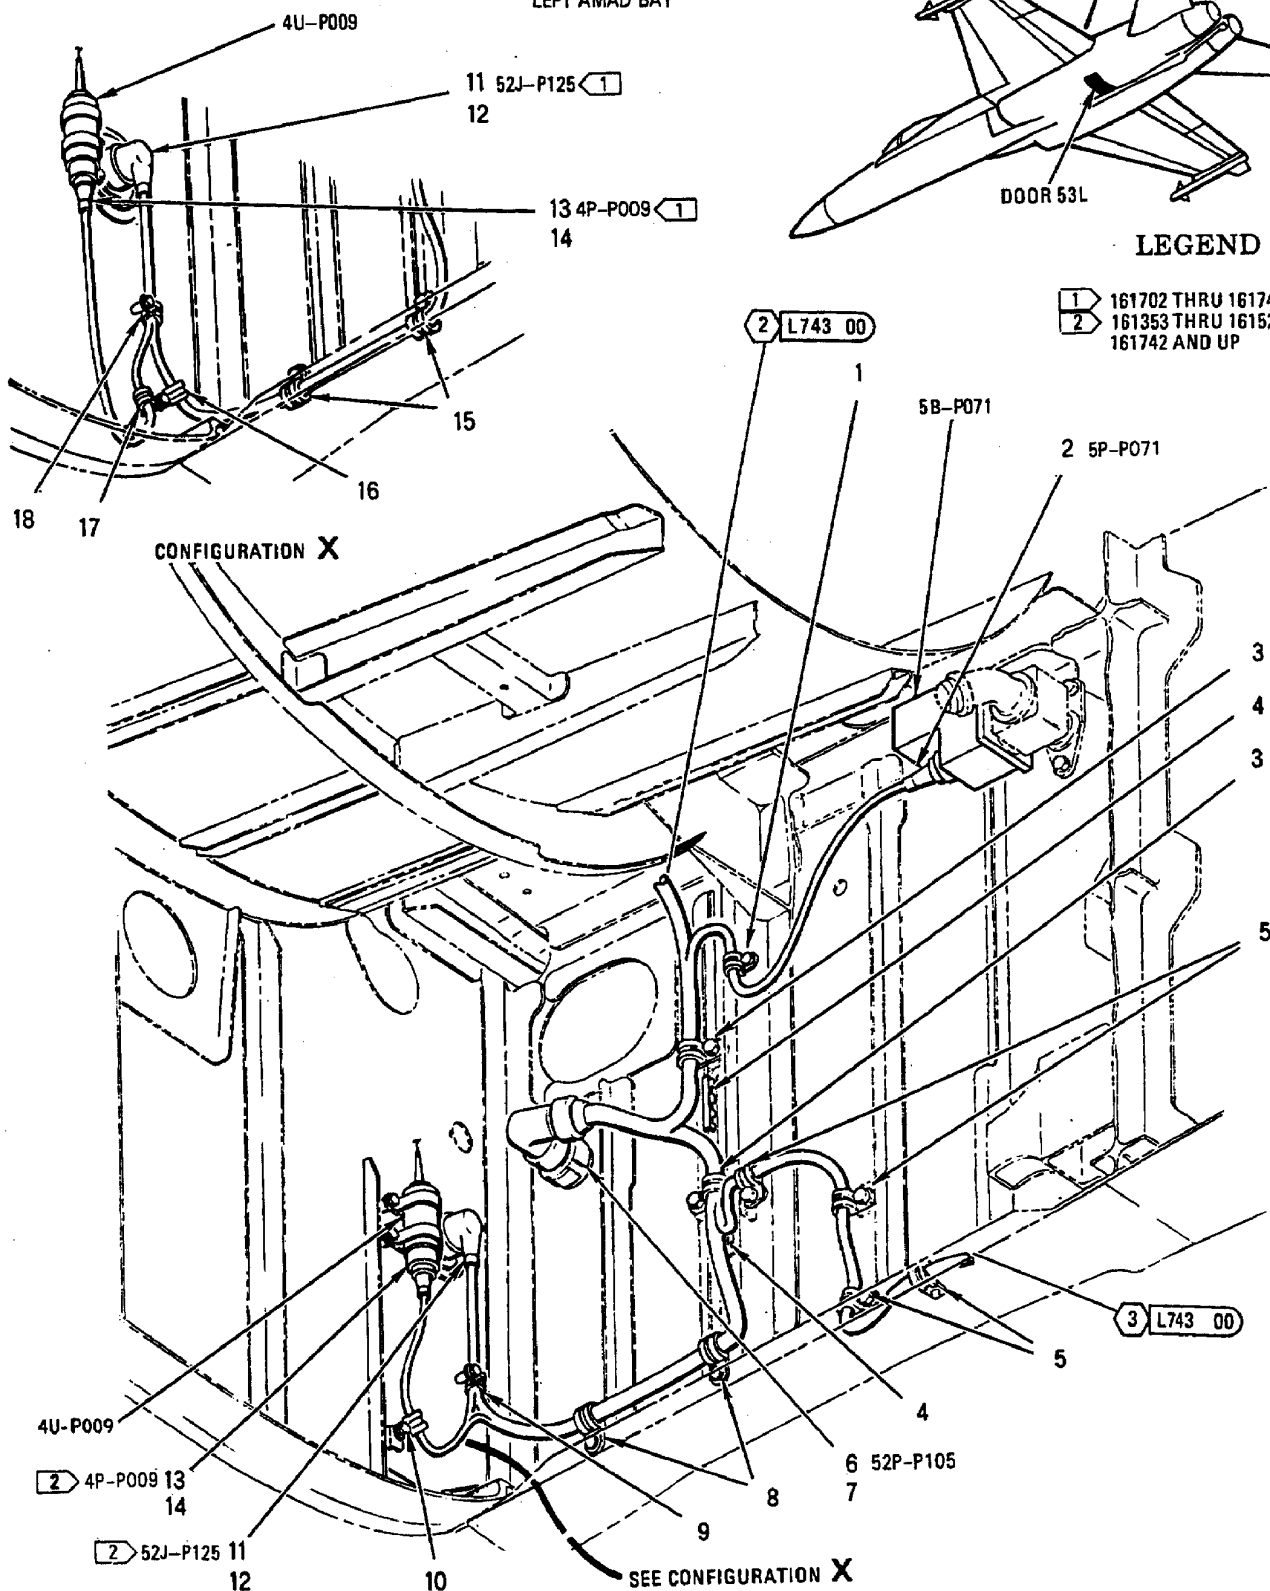

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG4	CLAMP	1	B	PAOZZ
	MS21919WDG7	CLAMP	1	A	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
2	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	MS27467T11B35S	CONNECTOR, PLUG (5P-P071)	1		PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	2	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	B*	PAOZZ
	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	2	A*	PAOZZ
3	830WD11G	SEE ABOVE (83930)	2	A*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
4	MS21266-2N	GROMMET (AP)	AR		PAOZZ
5	MS21919WDG6	CLAMP	4		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
6	D38999/26KG35PN	CONNECTOR, PLUG (REPLACES TVS06RK-21-35PN) (52P-P105)	1		PAOZZ
	TVS06RK-21-35PN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KG35PN) (USE UNTIL EXHAUSTED) (52P-P105)	1	C	PAOZZ
7	74A885621-2305	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P105)	1		MGOZZ
8	MS21919WDG4	CLAMP	2	E	PAOZZ
	NAS673V3	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
9	MS21919WDG6	CLAMP	1	E	PAOZZ
	NAS1291C3M	NUT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
10	MS21919WDG4	CLAMP	1	E	PAOZZ
	NAS673V3	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
11	D38999/24KD35PN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-15-35PN) (52J-P125)	1		PAOZZ
	TVS07RK-15-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KD35PN) (USE UNTIL EXHAUSTED) (52J-P125)	1	C	PAOZZ
12	74A885621-2552	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 52J-P125)	1		MGOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
13	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-P009)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-P009)	1	C	PAOZZ
14	74A885621-2477	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 4U-P009)	1		MGOZZ
15	MS21919WDG4	CLAMP	2	D	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
16	MS21919WDG5	CLAMP	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
17	MS21919WDG4	CLAMP	1	D	PAOZZ
18	MS21919WDG6	CLAMP	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161362 THRU 161521
B	161353 THRU 161361, 161522 & UP
C	161353 THRU 161761
D	161702 THRU 161741
E	161353 THRU 161528, 161742 & UP



CENTER FUSELAGE

DOOR 53L
LEFT AMAD BAY

LEGEND

- 1 163119 AND UP; ALSO 161353 THRU 161761
BEFORE F18 IAF 056 AND 161353 THRU
163118 AFTER F18 AFC 70
- 2 161353 THRU 161761 AFTER F18 IAF 056
AND 161925 THRU 163118 BEFORE F18 AFC 70

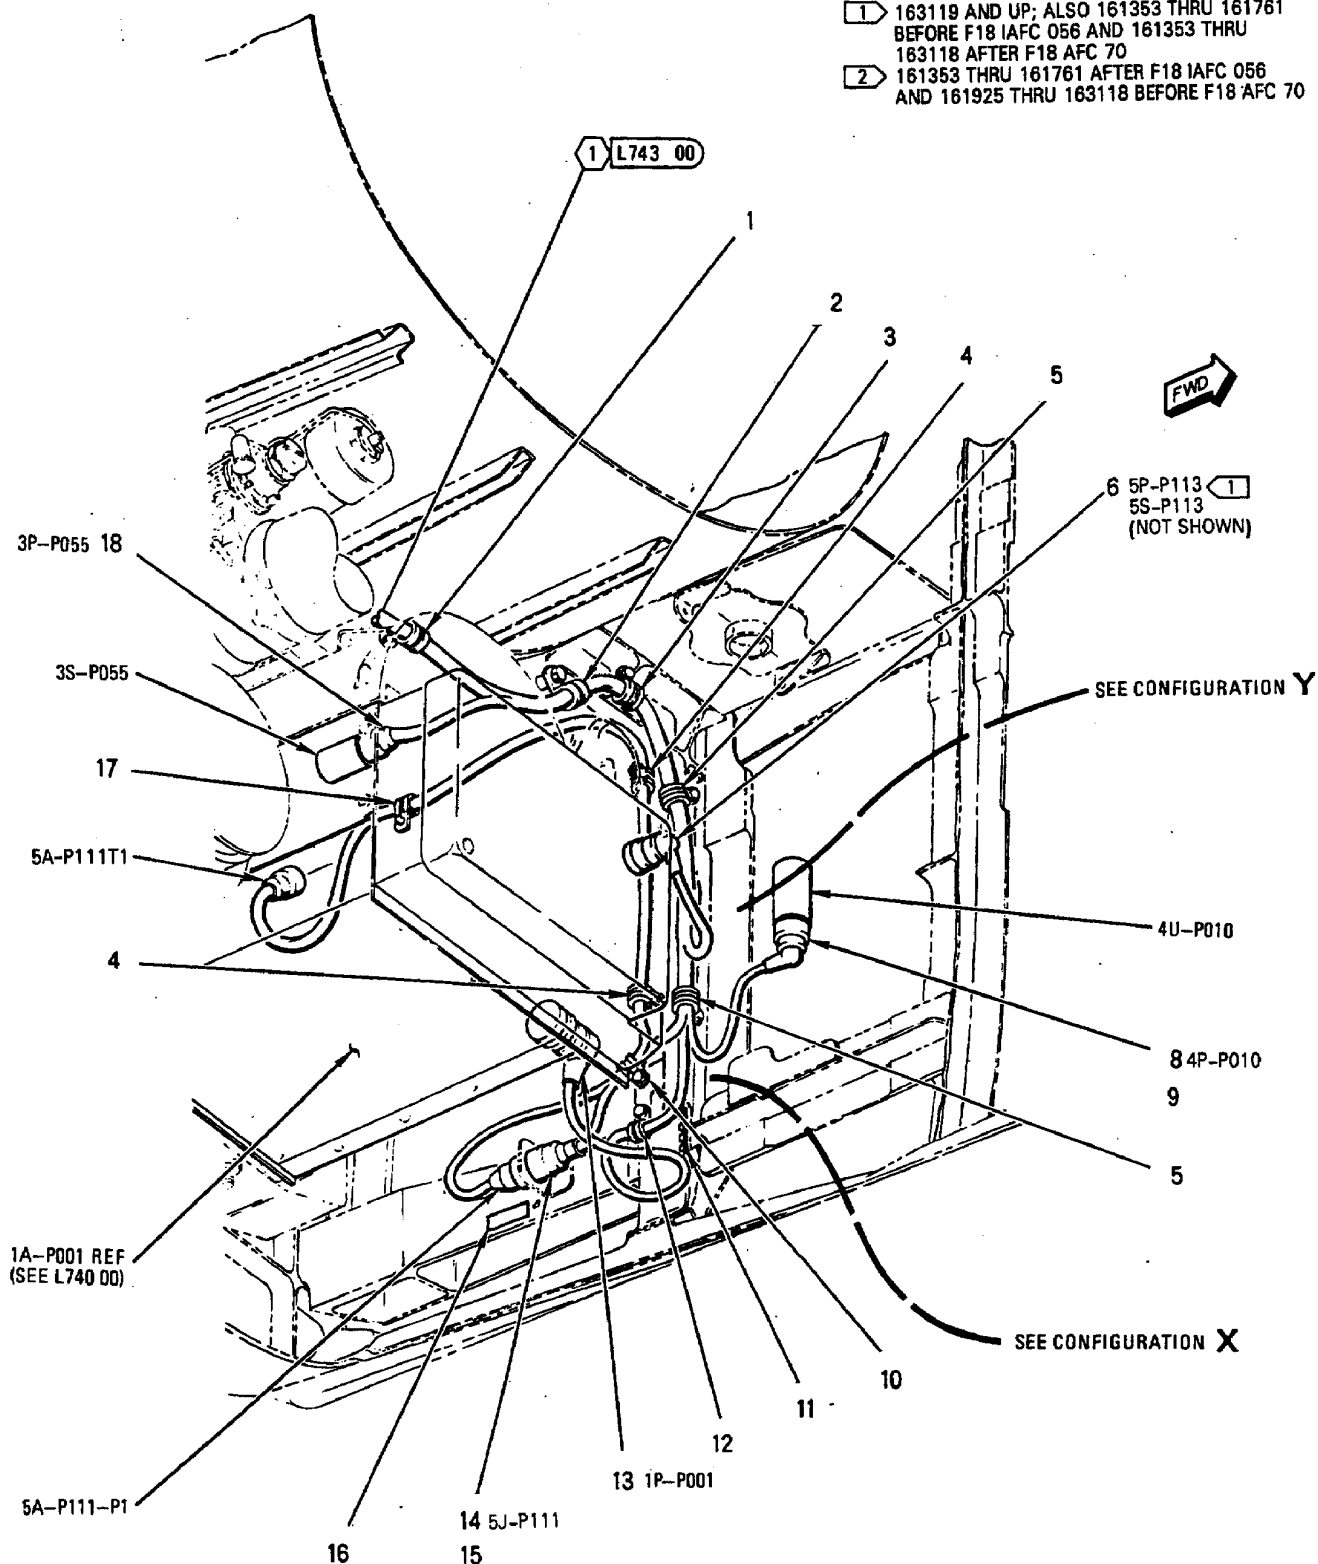

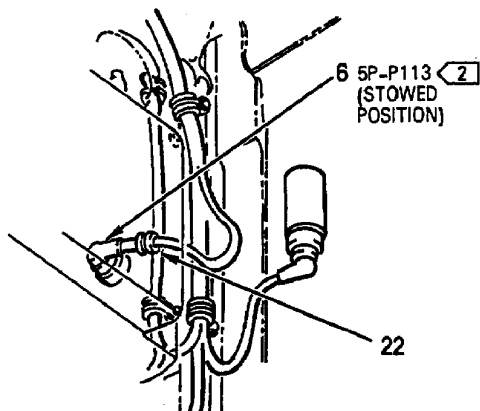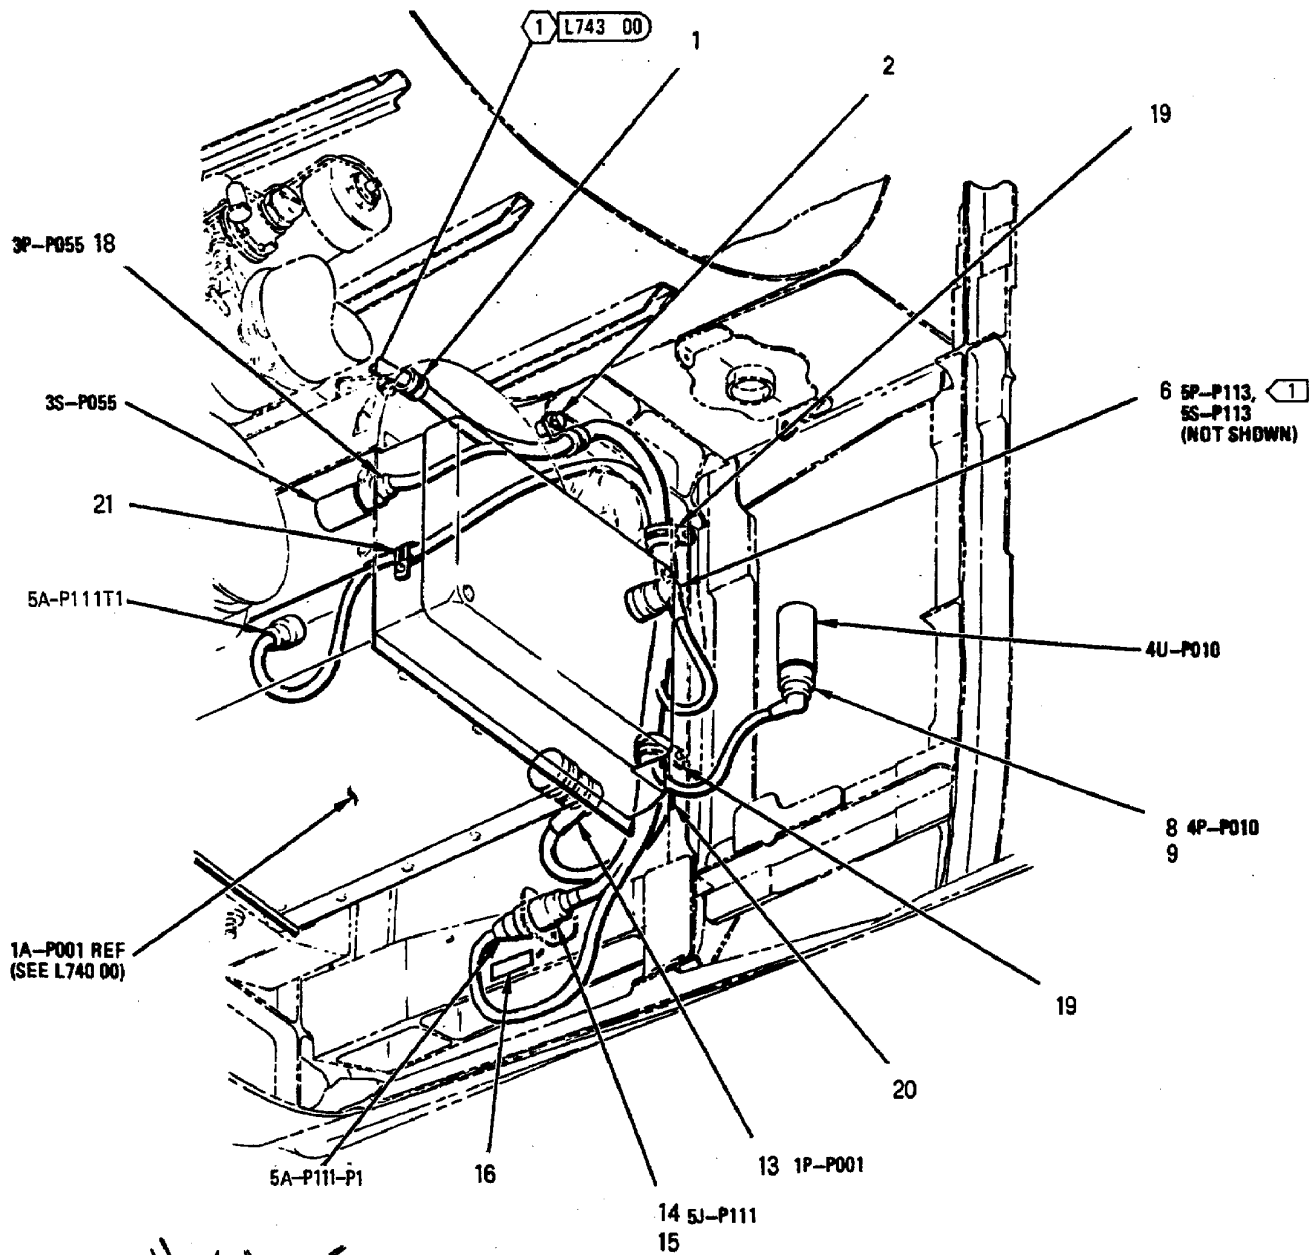

CONFIGURATION Y

CONFIGURATION X
161353 THRU 161741

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
2	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	D*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
4	MS21919WDG3	CLAMP	2	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
5	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	2	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	2	C*	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
6	MS27467T11B98S	CONNECTOR, PLUG (5P-P113)	1		PAOZZ
7		DELETED			
8	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-P010)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-P010)	1	A	PAOZZ
9	74A885621-2478	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 4U-P010)	1		MGOZZ
10	MS21919WDG5	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
11	MS21266-2N	GROMMET	AR	D	PAOZZ
12	MS21919WDG5	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
13	MS27467T15B35P	CONNECTOR, PLUG (1P-P001)	1		PAOZZ
14	MS27656T9B98S	CONNECTOR, RECEPTACLE (5J-P111)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
15	74A885621-2212	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES SJ-P111)	2		MGOZZ
16	74A885621-2582	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 5A-P111-P1)	1		MDOZZ
17	MS21919WDG3	CLAMP	1	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	C*	PAOZZ
18	MS27467T9B35S	CONNECTOR, PLUG (3P-P055)	1		PAOZZ
19	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	2	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	2	B*	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
20	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	MS21919WDG4	CLAMP	1	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
22	AN742H13	CLAMP	1	E	PAOZZ
	NAS673V4	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161761
B	161353 THRU 161741
C	161742 & UP
D	161958 & UP
E	161353 THRU 161761 AFTER F18 IAF 056 AND 161925 THRU 163118 BEFORE F18 AFC 70

CENTER FUSELAGE

DOOR 53L
LEFT AMAD BAY

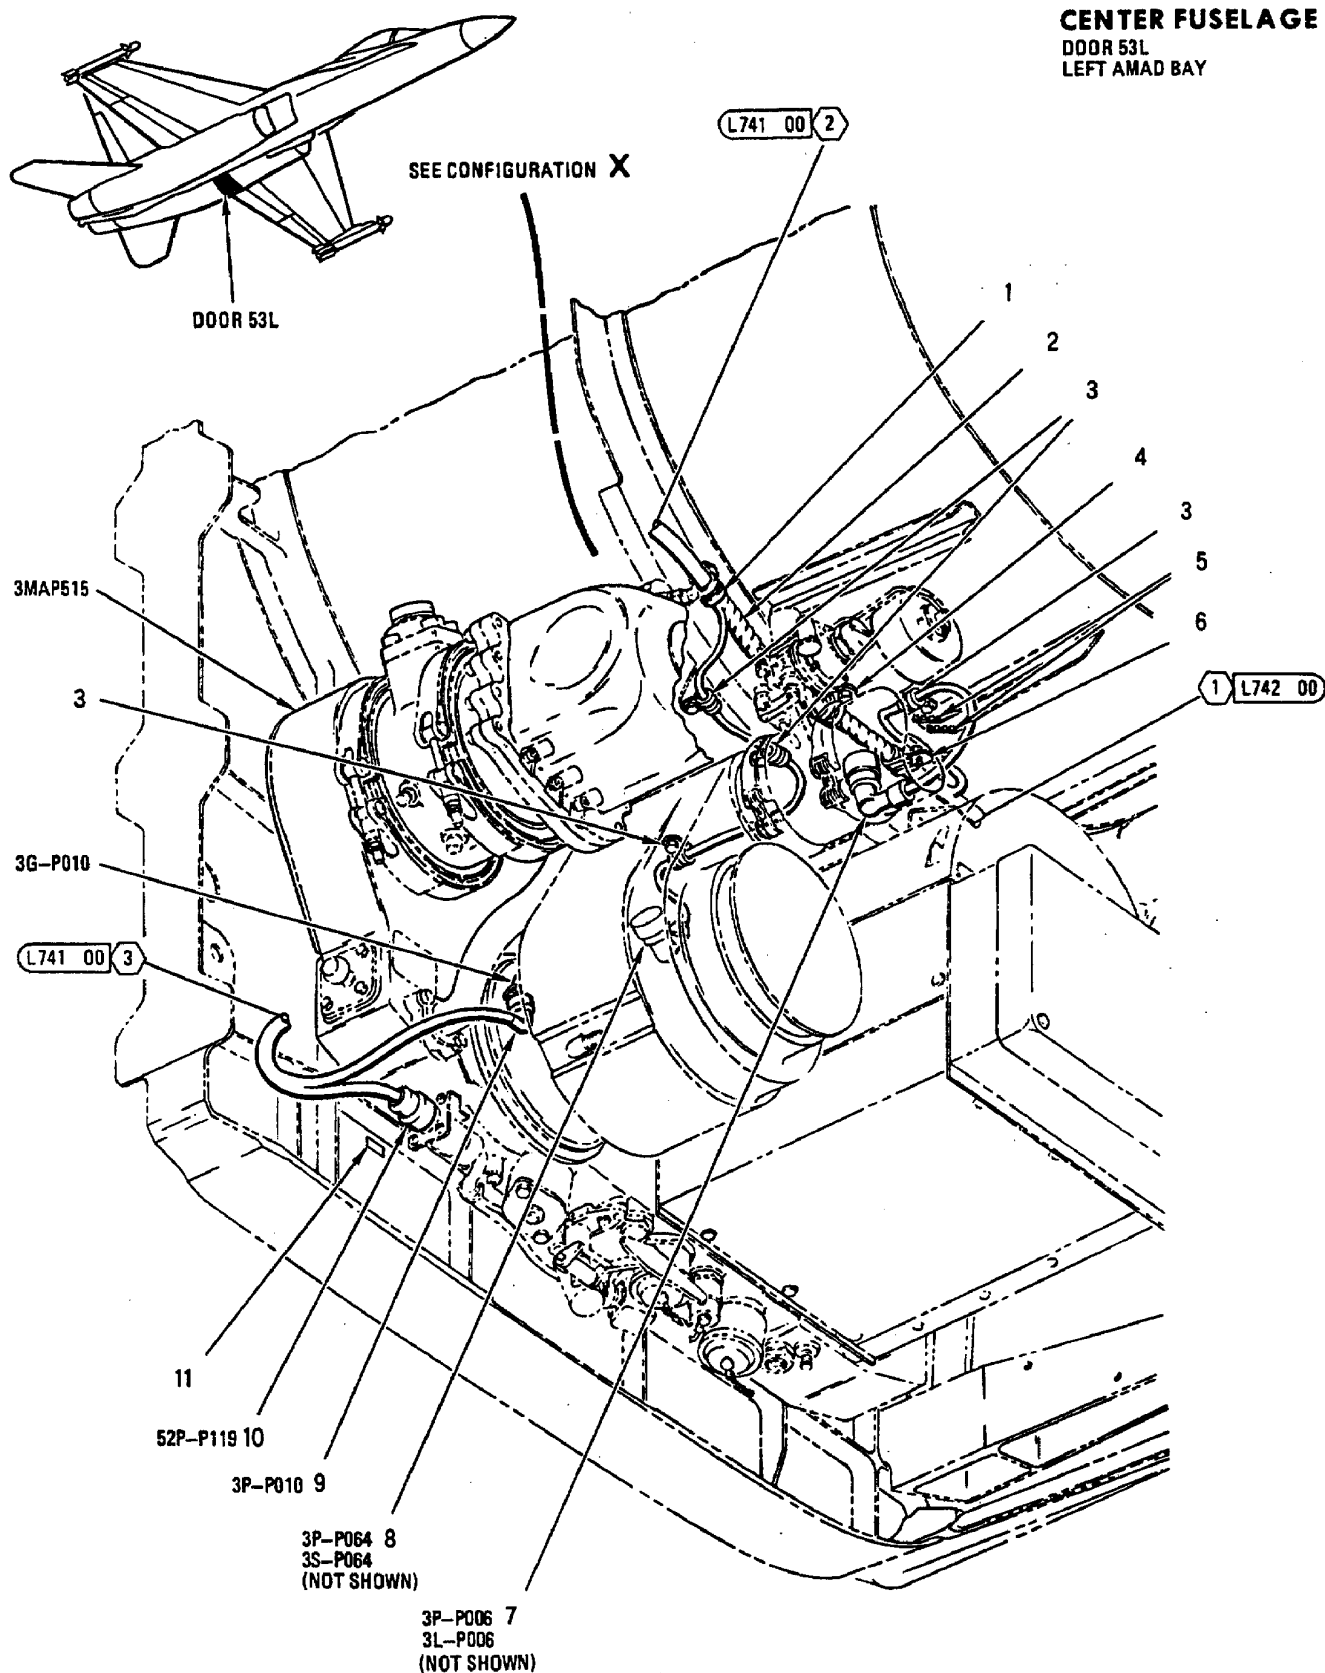

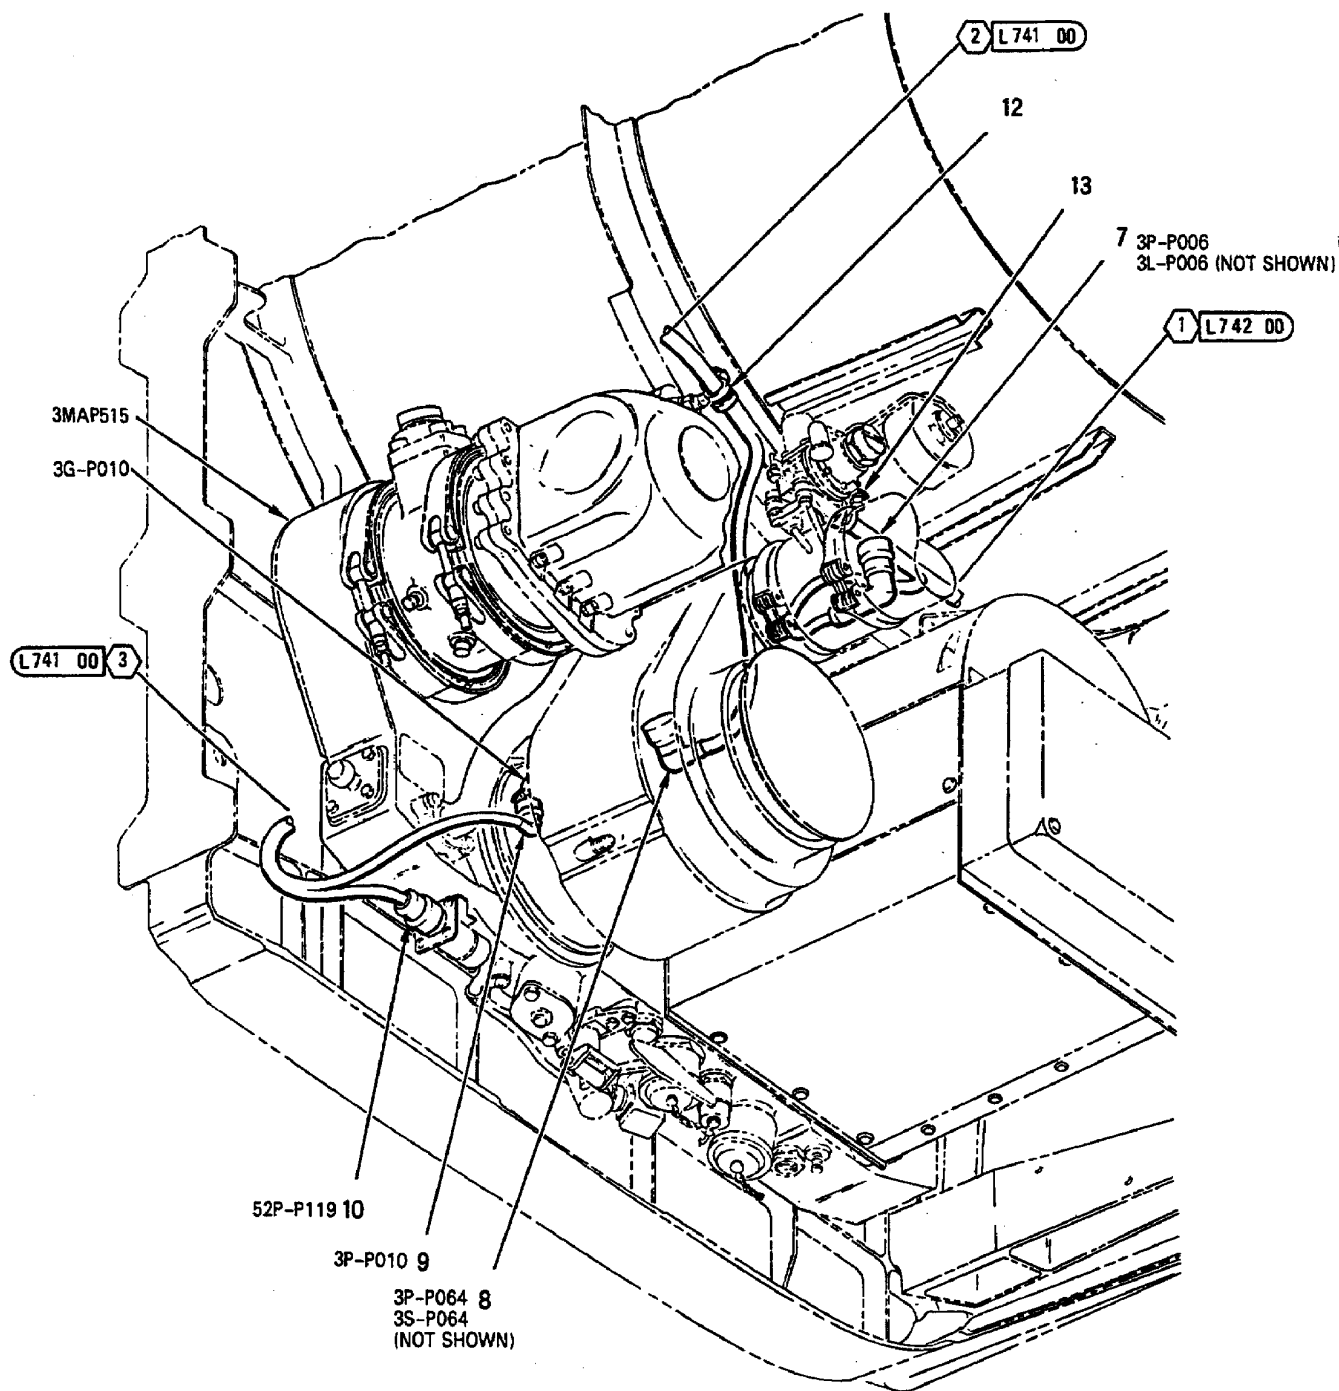

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
2	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	C*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
3	MS21919WDG5	CLAMP	4	B	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	SEE ABOVE (76530)	1	B*	PAOZZ
4	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
5	MS21266-2N	GROMMET	AR	D	PAOZZ
6	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	C*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	C*	PAOZZ
	NAS673V27	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	2	C	PAOZZ
	NAS1057T3-012	SPACER (AP)	1	E	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
7	MS27467T11B35S	CONNECTOR, PLUG (3P-P006)	1		PAOZZ
8	MS27467T9B98S	CONNECTOR, PLUG (3P-P064)	1		PAOZZ
9	MS27467T9B98S	CONNECTOR, PLUG (3P-P010)	1		PAOZZ
10	MS27467T15B35S	CONNECTOR, PLUG (52P-P119)	1		PAOZZ
11	74A885621-2335	MARKER, IDENTIFICATION - AVIONICS (76301) (L. AMAD DISC)	1		MGOZZ
12	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	A*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
13	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	A*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V3	BOLT (AP)	1	A*	PAOZZ
	AN960JD10L	WASHER (AP)	1	A*	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	SEE ABOVE (76530)	1	A*	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161944
B	161945 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161966 & UP			
		D						161966 THRU 161975			
		E						161976 & UP			

CENTER FUSELAGE

DOOR 53R
RIGHT AMAD BAY

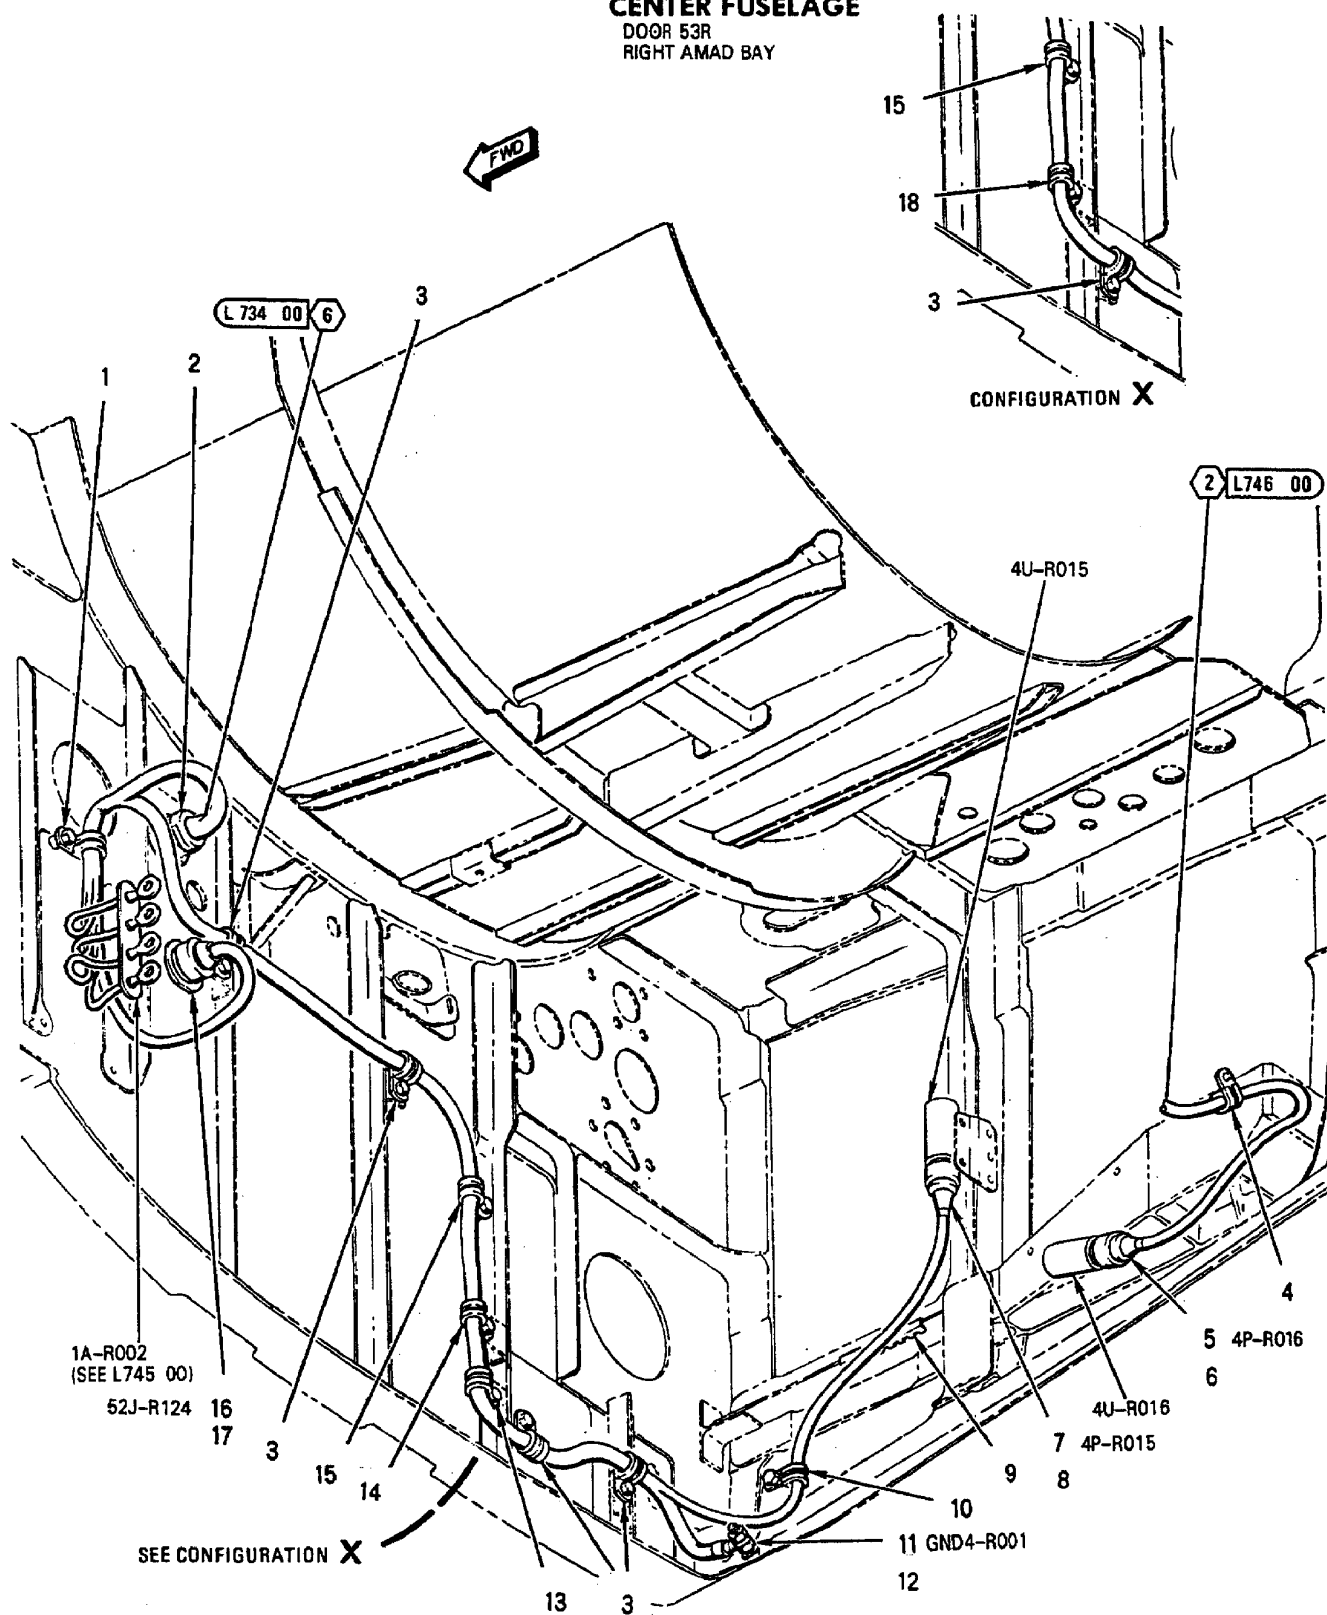


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	D*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	D*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D12)	1	E	PAOZZ
	830WD12G	SEE ABOVE (83930)	1	E	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
	130091	SEE ABOVE (76530)	1	E*	PAOZZ
2	74B878001-109	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
3	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	4	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	4	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
4	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-R016)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-R016)	1	A	PAOZZ
6	74A885621-2476	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 4U-R016)	1		MGOZZ
7	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-R015)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-R015)	1	A	PAOZZ
8	74A885621-2475	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 4U-R015)	1		MGOZZ
9	MS21266-2N	GROMMET	AR		PAOZZ
10	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
11	NAS1291C5M	NUT	1		PAOZZ
	MS35338-45	WASHER (USE WITH INDEX 11)	1		PAOZZ
	AN960JD516L	WASHER (USE WITH INDEX 11)	2		PAOZZ
12	74A885621-2068	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND4-R001)	1		MGOZZ
13	MS21919WDG6	CLAMP	1	C	PAOZZ
	NAS673V #	BOLT (AP)	1	F	-
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
14	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	E*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	E*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
15	NAS1291C3M	NUT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
16	NAS673V1	BOLT (AP)	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	D38999/24KB35PN	CONNECTOR, RECEPTACLE (REPLACES	1		PAOZZ
		TVS07RK-11-35PN) (52J-R124)			
17	TVS07RK-11-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL	1	A	PAOZZ
		(77820) (MCDONNELL SPEC			
		ST5M1614KB35PN) (USE UNTIL			
		EXHAUSTED) (52J-R124)			
	74A885621-2551	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MGOZZ
18	MS21919WDG6	(FOR REF DES 52J-R124)			
		CLAMP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	1	B	-
	NAS1291C3M	NUT (AP)	1	B	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161761
B	161353 THRU 161519
C	161520 & UP
D	161353 THRU 162909
E	163092 & UP
F	161520 THRU 162909

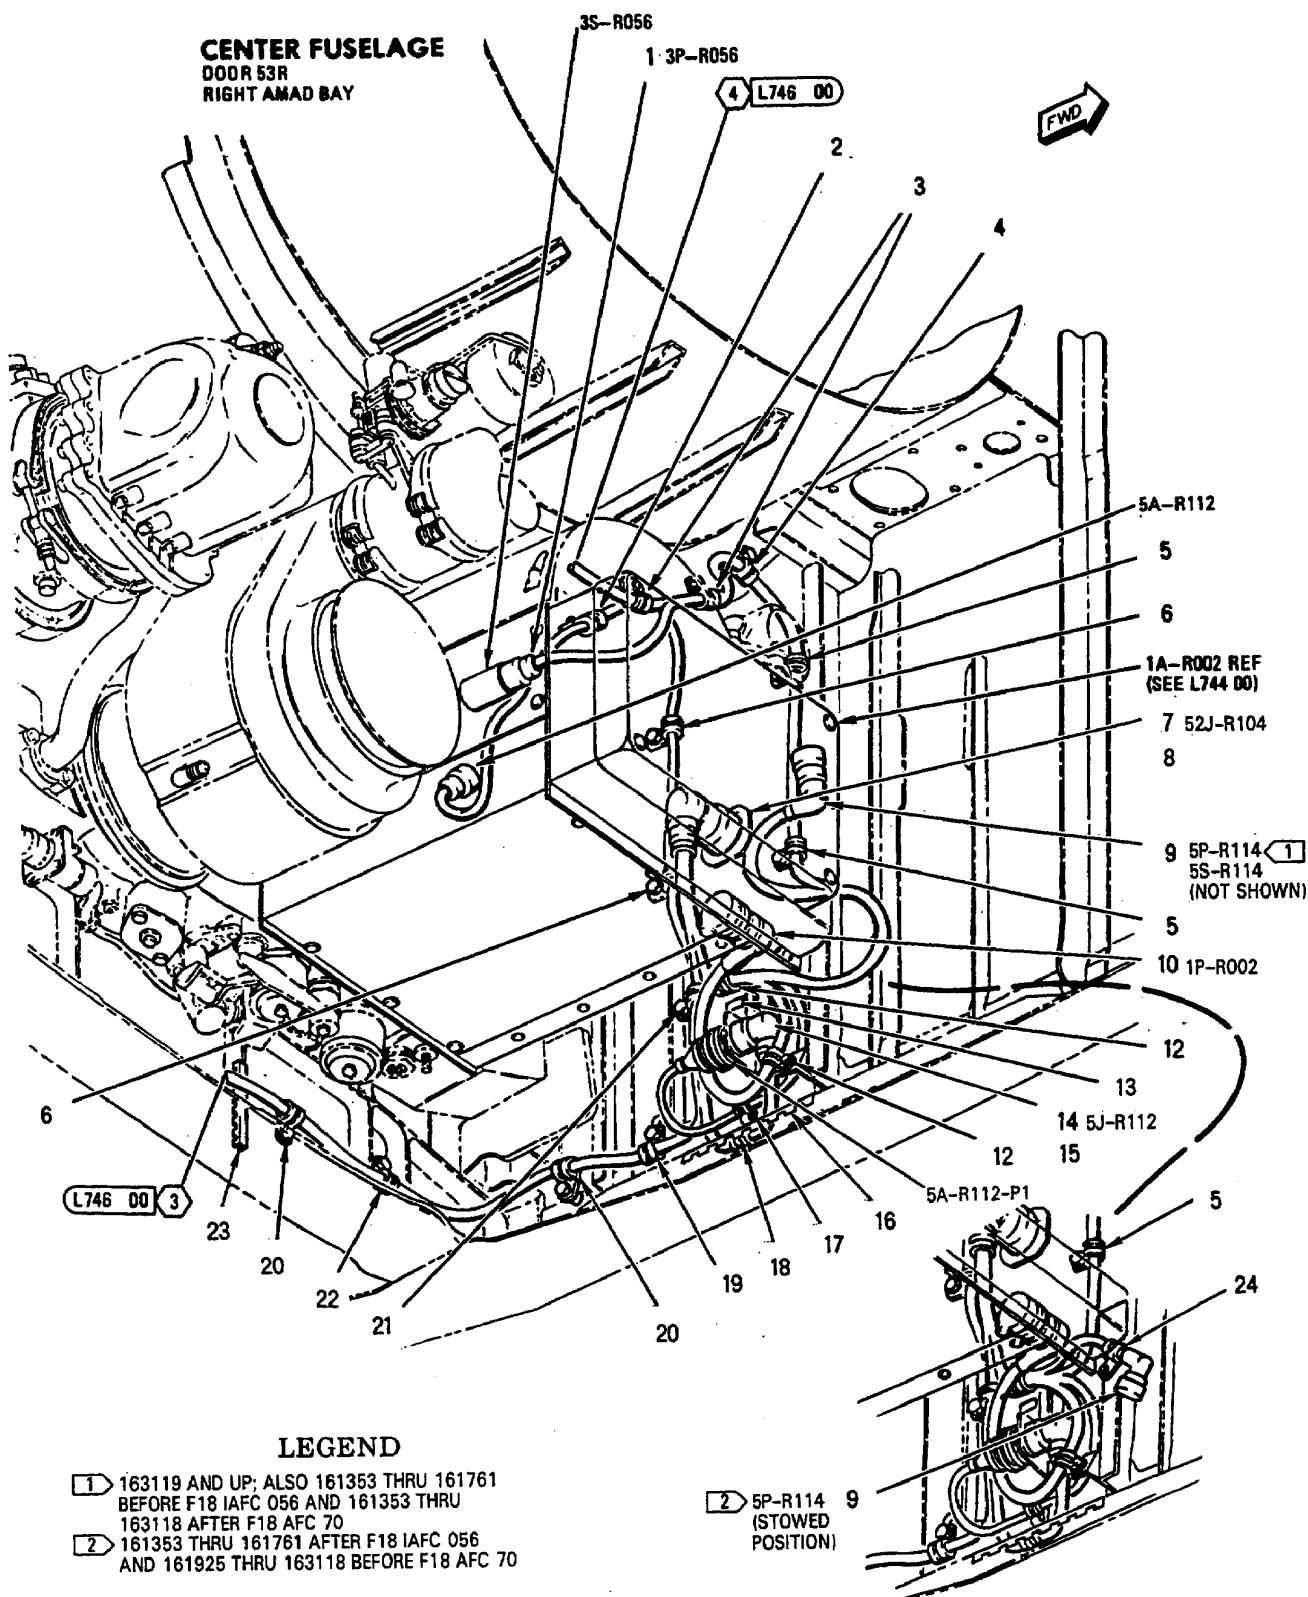

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B35S	CONNECTOR, PLUG (3P-R056)	1		PAOZZ
2	MS21919WDG4	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
3	MS21919WDG6	CLAMP	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1057T3-025	SPACER (AP)	1		PAOZZ
4	MS21919WDG4	CLAMP	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1057T3-025	SPACER (AP)	1		PAOZZ
5	MS21919WDG6	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	MS21919WDG4	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	D38999/24KG35PN	CONNECTOR, RECEPTACLE (REPLACES	1		PAOZZ
		TVS07RK-21-35PN) (52J-R104)			
	TVS07RK-21-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL	1	A	PAOZZ
		(77820) (MCDONNELL SPEC			
		ST5M1614KG35PN) (52J-R104)			
8	74A885621-2304	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MGOZZ
		(FOR REF DES 52J-R104)			
9	MS27467T11B98S	CONNECTOR, PLUG (5P-R114)	1		PAOZZ
10	MS27467T15B35P	CONNECTOR, PLUG (1P-R002)	1		PAOZZ
11		DELETED			
12	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC	2	*	PAOZZ
		ST9M630D8)			
	830WD8G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
13	74A885621-2583	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MGOZZ
		(FOR REF DES 5A-R112-P1)			
14	MS27656T9B98S	CONNECTOR, RECEPTACLE (5J-R112)	1		PAOZZ
	NAS1801-04-5	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
15	74A885621-2460	MARKER, IDENTIFICATION - AVIONICS	1		MGOZZ
		(FOR REF DES 5J-R112)			
16	MS21266-4N	GROMMET	AR	C	PAOZZ
	MS21266-4N	GROMMET	AR	D	PAOZZ
17	MS21919WDG3	CLAMP	1		PAOZZ
18	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
19	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
20	MS21919WDG6	CLAMP	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
21	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
22	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
23	MS21266-2N	GROMMET	AR		PAOZZ
24	AN742H13	CLAMP	1	B	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161761
B	161353 THRU 161761 AFTER F18 IAF 056 AND 161925 THRU 163118 BEFORE F18 AFC 70
C	161940 & UP
D	161353 THRU 161939 AFTER F18 AFC 64

CENTER FUSELAGE


DOOR 53R
RIGHT AMAD BAY

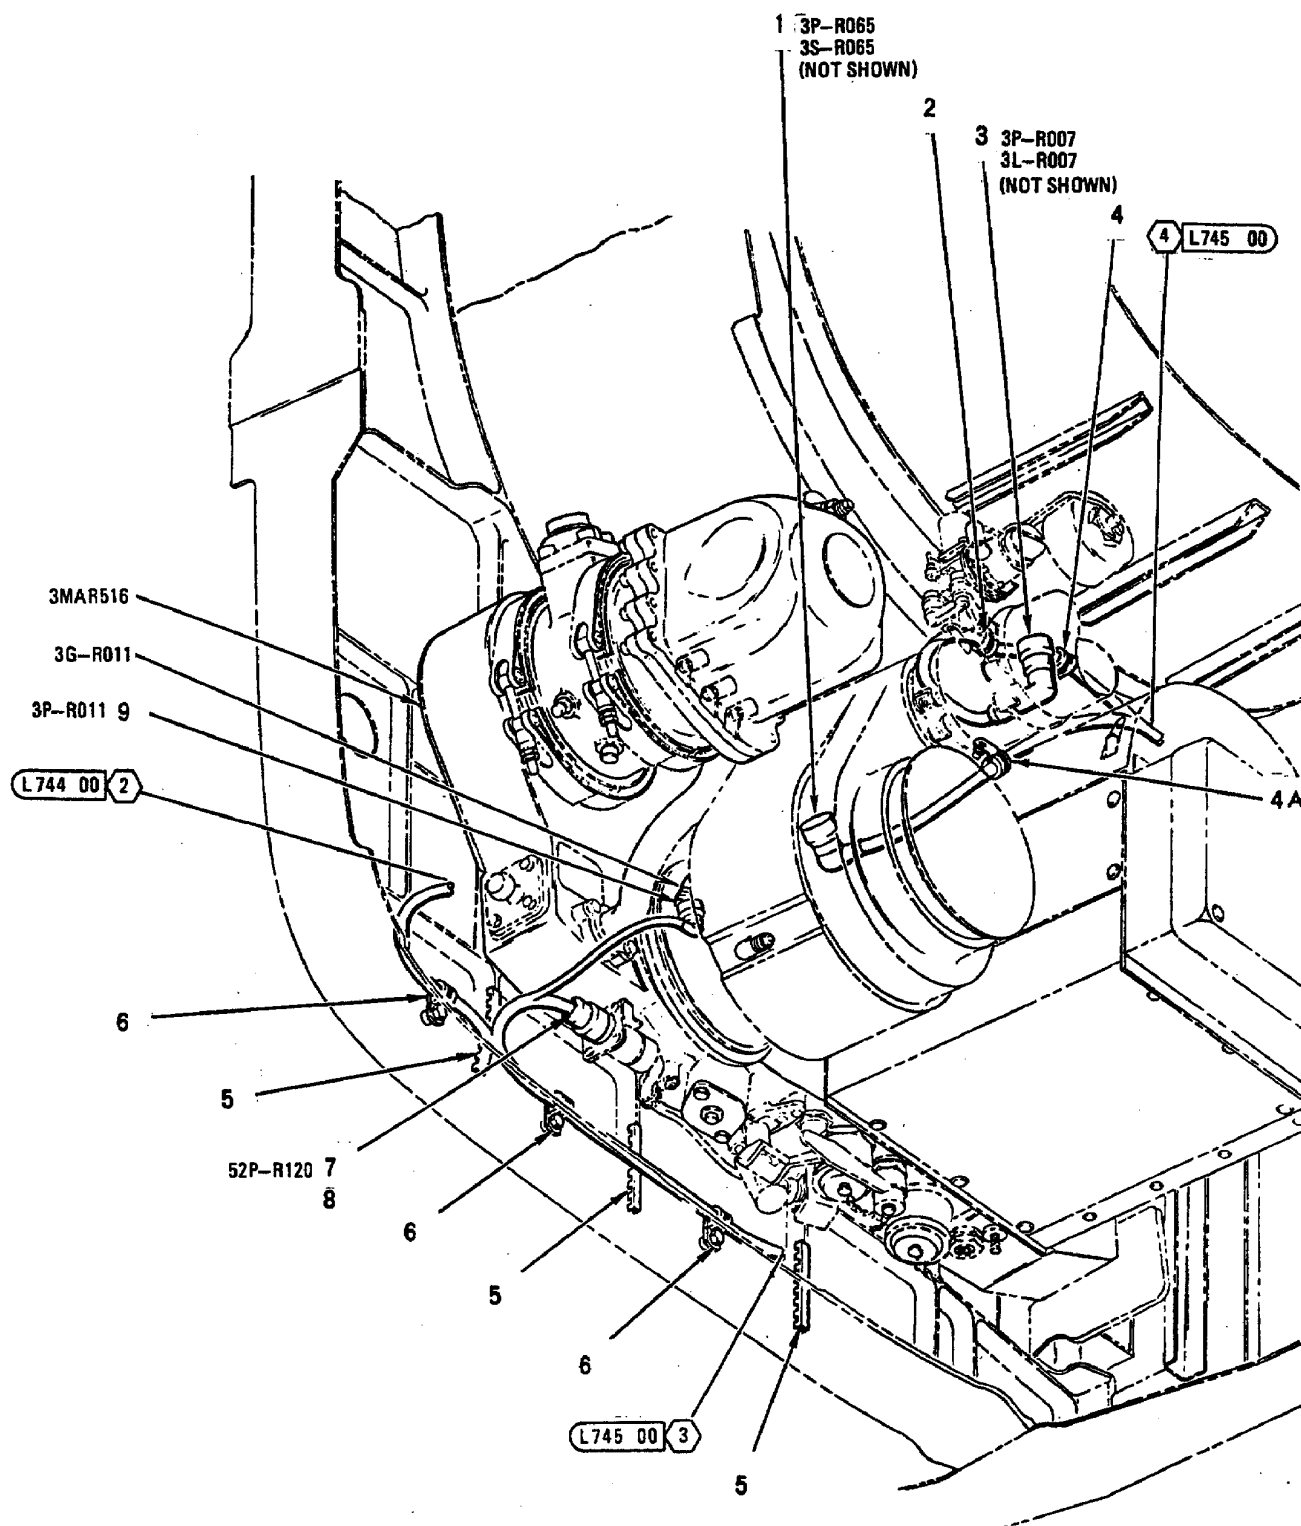


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B98S	CONNECTOR, PLUG (3P-R065)	1		PAOZZ
2	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
3	MS27467T11B35S	CONNECTOR, PLUG (3P-R007)	1		PAOZZ
4	MS21919WDG6	CLAMP	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1057T3-025	SPACER (AP)	1		PAOZZ
4A	MS21919WDG6	CLAMP	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	MS21919WDG6	CLAMP	3		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	MS27467T15B35S	CONNECTOR, PLUG (52P-R120)	1		PAOZZ
8	74A885621-2336	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR R. AMAD DISC)	1		MGOZZ
9	MS27467T9B98S	CONNECTOR, PLUG (3P-R011)	1		PAOZZ


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

AFT FUSELAGE DOOR 71L AND DOOR 72L

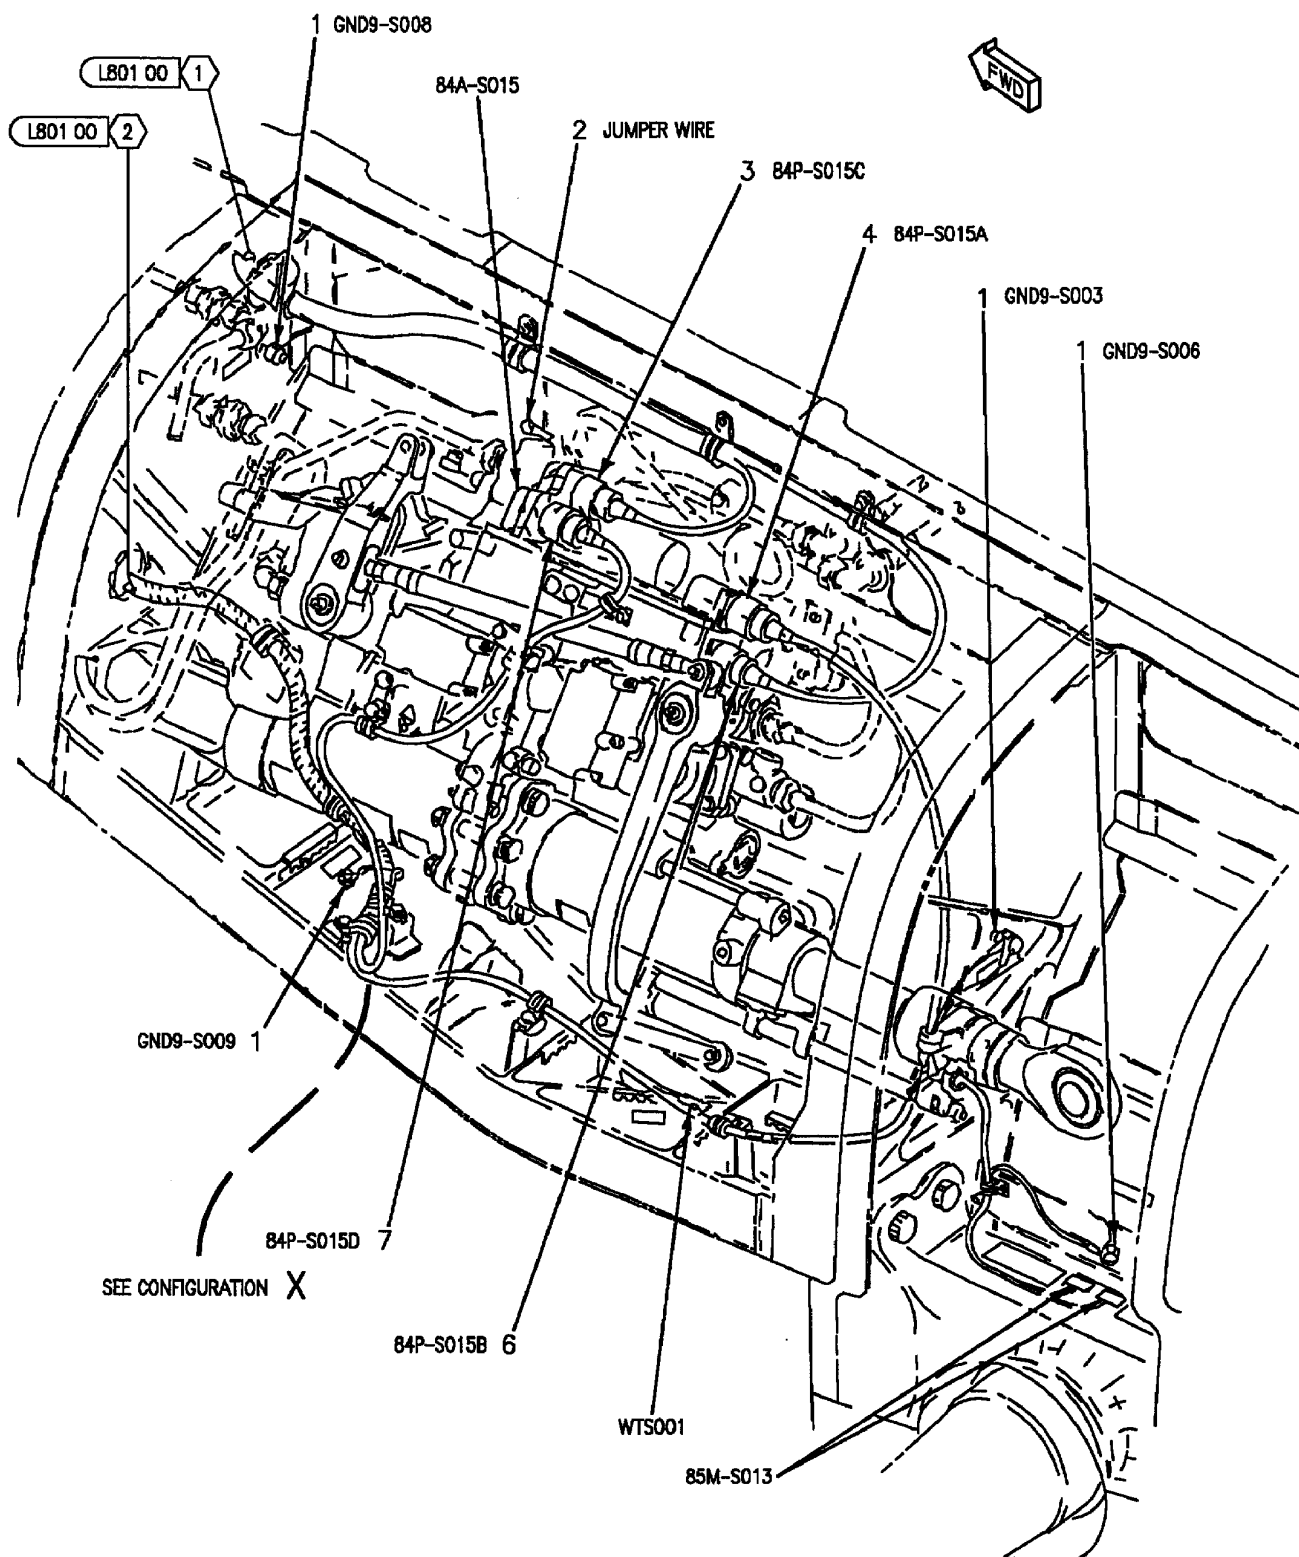

AFT FUSELAGE DOOR 71L AND DOOR 72L

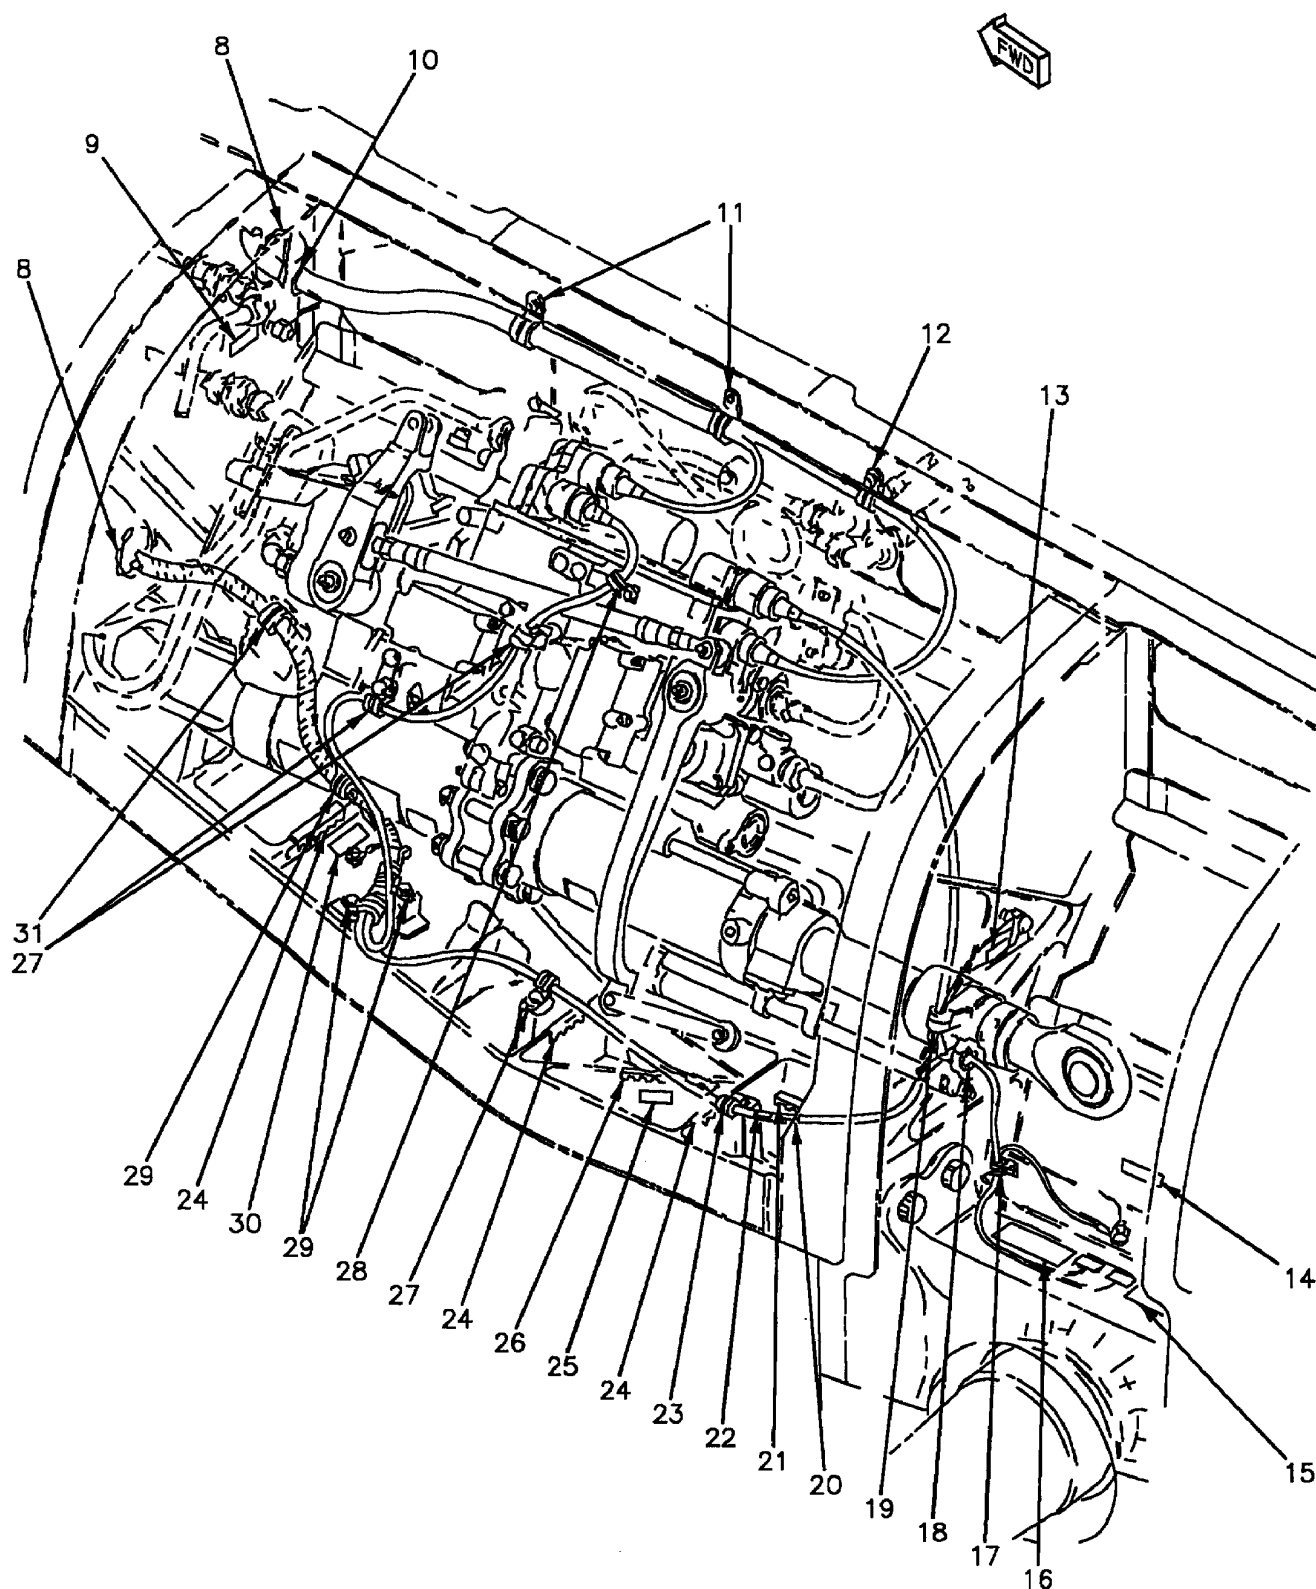

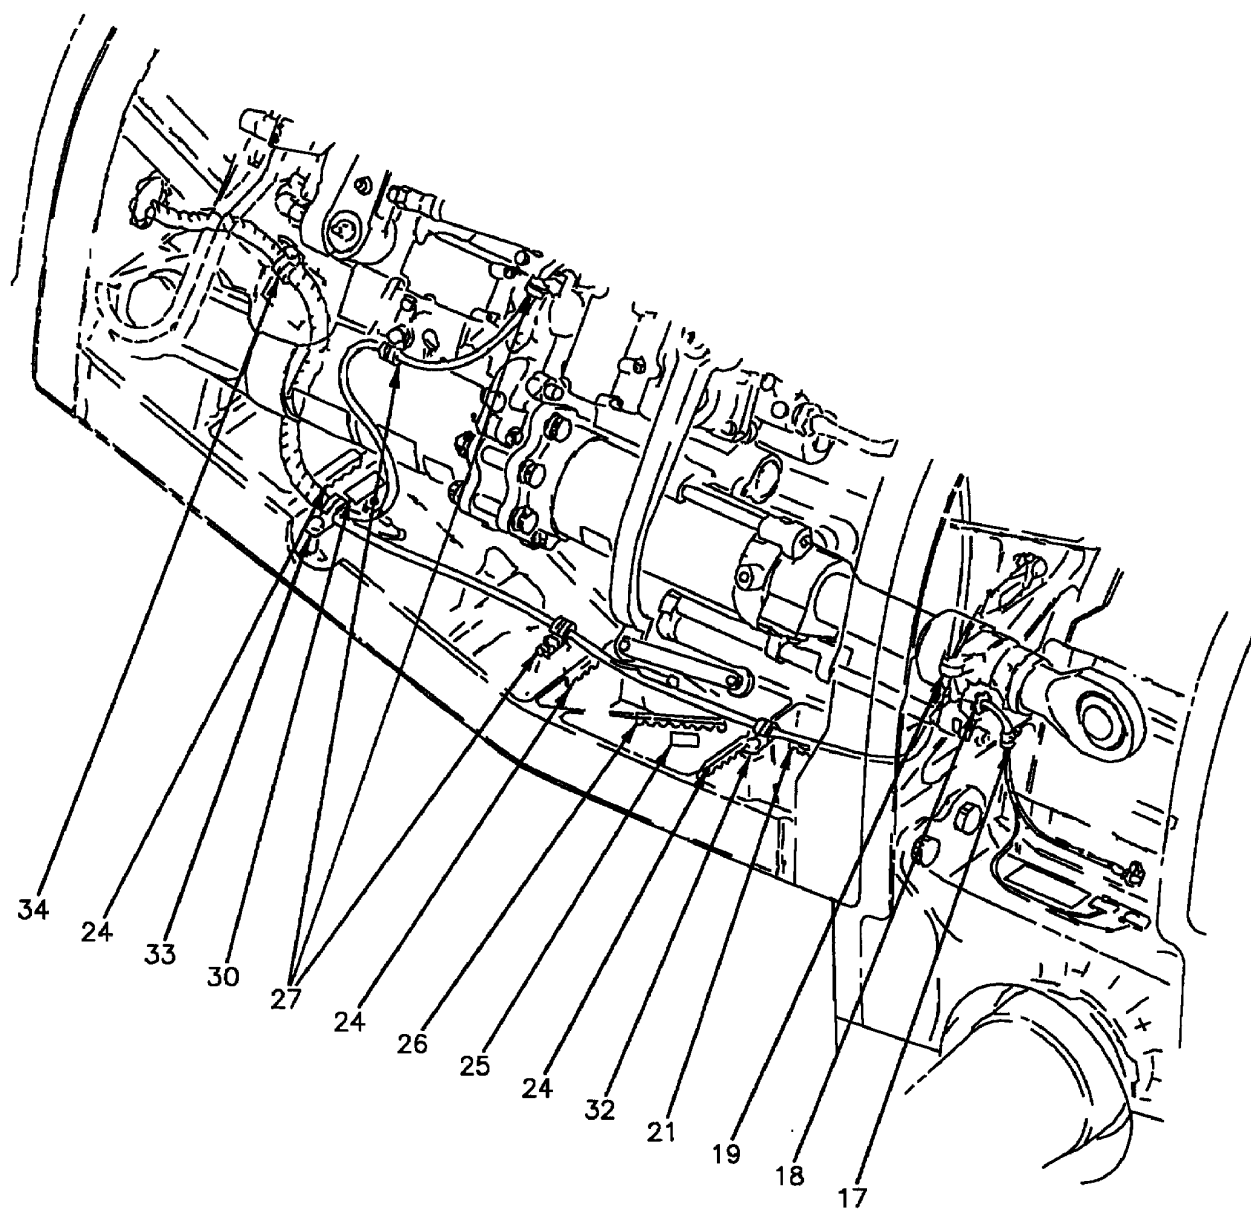

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	MS25083-5BB10	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS673V2	BOLT (AP)	2		PAOZZ
	MS35338-43	WASHER (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
3	MS27467T13B35SB	CONNECTOR, PLUG (84P-S015C)	1		PAOZZ
4	MS27467T13B35S	CONNECTOR, PLUG (84P-S015A)	1		PAOZZ
5		DELETED			
6	MS27467T13B35SA	CONNECTOR, PLUG (84P-S015B)	1		PAOZZ
7	MS27467T13B35SC	CONNECTOR, PLUG (84P-S015D)	1		PAOZZ
8	MS21266-2N	GROMMET	AR		PAOZZ
9	74A885621-2456	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-S008)			
10	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	2	*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	2	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
13	74A885621-2097	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-S003)			
14	74A885621-2280	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-S006)			
15	74A885621-2453	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 85M-S013)			
16	74A885621-2452	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 85M-S013)			
17	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
18	MS21266-3N	GROMMET	AR		PAOZZ
19	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
20	74A885621-2660	MARKER, IDENTIFICATION - AVIONICS (76301)	1	C	MDOZZ
		(SPARE) (FOR REF DES 85M-S013)			
21	MS21266-5N	GROMMET	AR		PAOZZ
22	74A885621-2659	MARKER, IDENTIFICATION - AVIONICS (76301)	1	C	MGOZZ
		(PR1) (FOR REF DES 85M-S013)			
23	MS21919WDG6	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
24	MS21266-()N #	GROMMET	AR		-
25	74A885621-2171	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTS001)	1		MDOZZ
26	MS21266-4N	GROMMET	AR		PAOZZ
27	MS21919WDG6	CLAMP	3		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
28	MS21919WDG10	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
29	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	3	B*	PAOZZ
	830WD8G	SEE ABOVE (83930)	3	B*	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
30	74A885621-2501	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-S009)	1		MDOZZ
31	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	B*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	B*	PAOZZ
	NAS673V4	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	B	PAOZZ
32	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
33	JM44LC44WD8	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D8)	1	A*	PAOZZ
	830WD8G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
34	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	A*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	A*	PAOZZ
	NAS673V4	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


CODE	USABLE ON
A	161353 THRU 161761
B	161925 & UP
C	162826 & UP

AFT FUSELAGE

DOORS 67L, 88L AND 89L

LEGEND

1 162415 AND UP

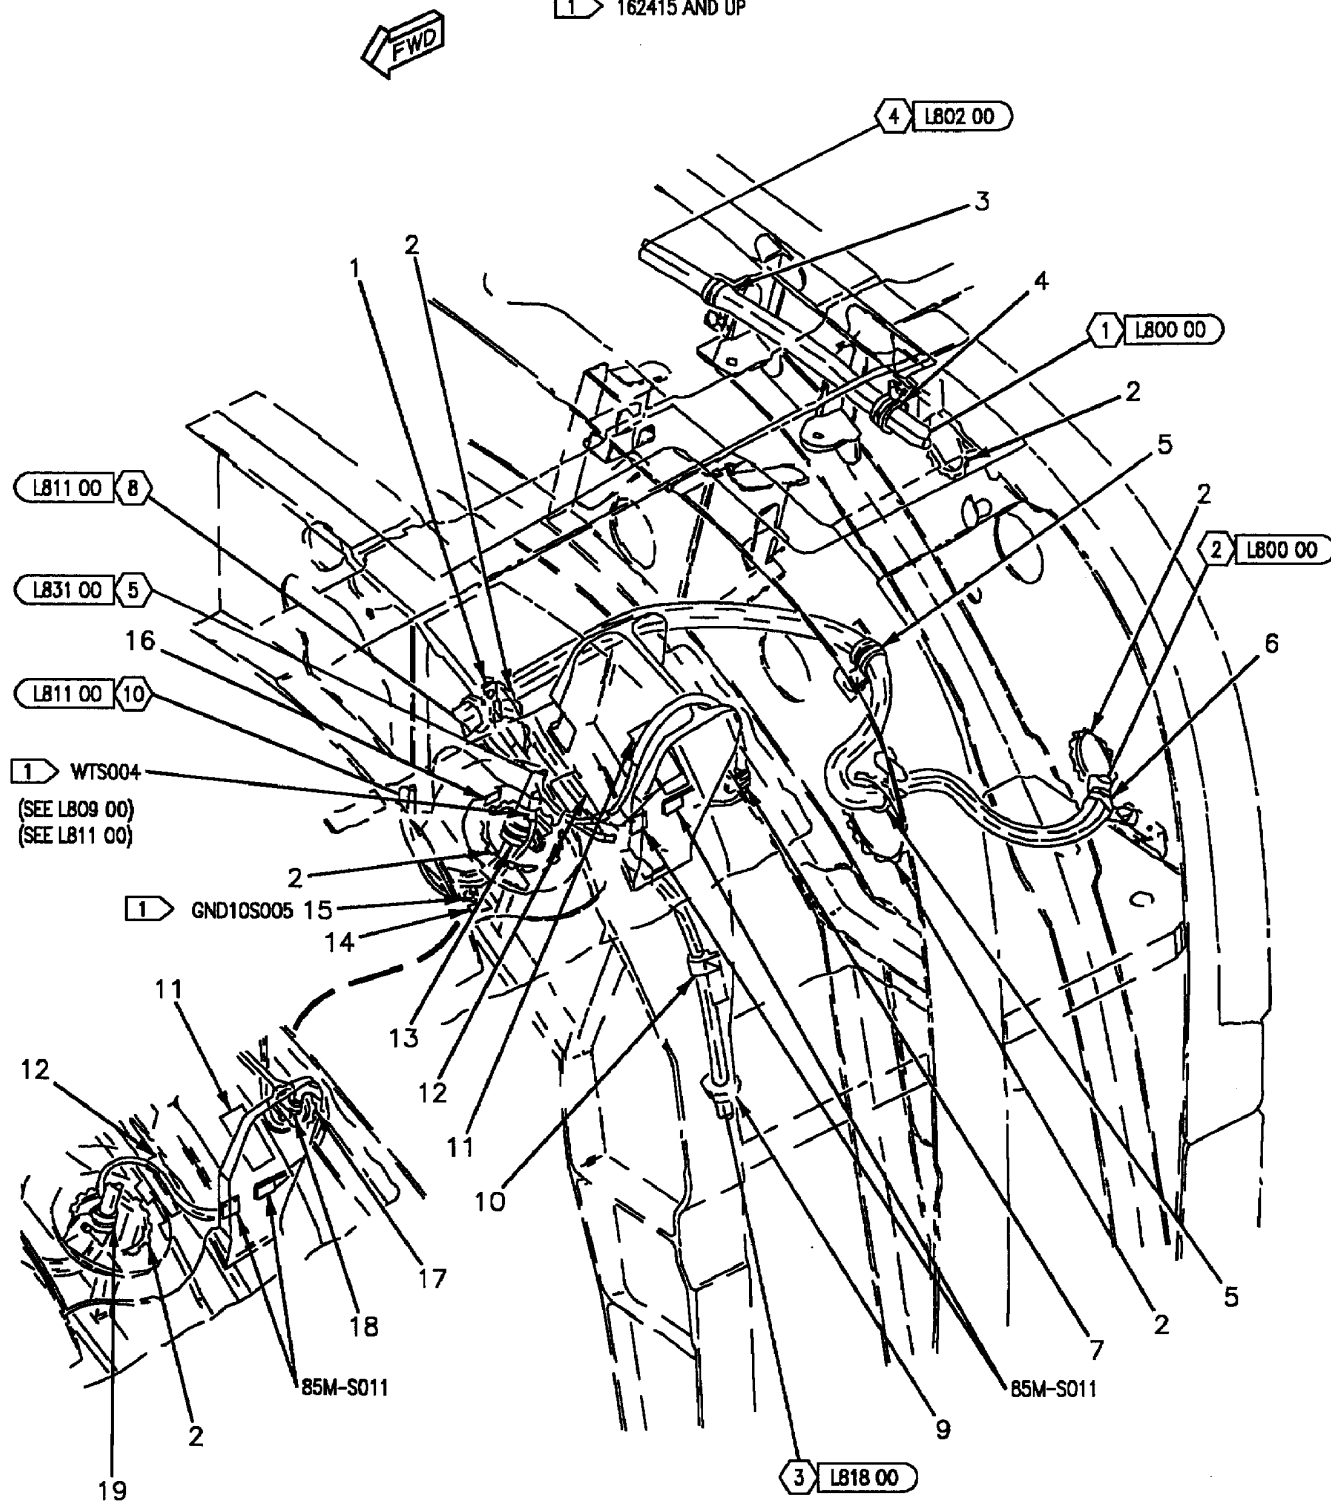

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
4	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
5	M85052/1-10	CLAMP	2	E	PAOZZ
	M85052/1-15	CLAMP	2	F	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
6	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	NAS673V5	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	C	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	D	PAOZZ
7	M85052/1-3	CLAMP	1	E	PAOZZ
	MS24693C277	SCREW (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
8		DELETED			
9	74B878001-143	CLAMP - CABLE, BULKHEAD, EMI (76301)	1		PAOZZ
	AN960C1216	WASHER (USE WITH INDEX 9)	1		PAOZZ
10	M85052/3-7	CLAMP	1	G	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10	WASHER (AP)	1	G	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	G*	PAOZZ
	130091	SEE ABOVE (76530)	1	G*	PAOZZ
11	74A885621-2672	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 85M-S011 (SPARE))			
12	74A885621-2671	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 85M-S011 (PRI))			
13	M85052/1-10	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74A885621-2647	MARKER, IDENTIFICATION - AVIONICS (76301)	1	D	MDOZZ
		(FOR REF DES GND10 S011)			
15	MS21042L3	NUT	1	D	PAOZZ
	MS35338-43	WASHER, LOCK (USE WITH INDEX 15)	1	D	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 15)	1	D	PAOZZ
16	74A885621-2174	MARKER, IDENTIFICATION - AVIONICS (76301)	1	D	MDOZZ
		(FOR REF DES WTS004)			
17	NAS557-4A	GROMMET	1	C	PAOZZ
18	M85052/3-4	CLAMP	1	C	PAOZZ
	NAS673V1	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	C	PAOZZ
19	M85052/1-4	CLAMP	1	C	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE

NAS673V1	BOLT (AP)	1	C	PAOZZ
AN960JD10L	WASHER (AP)	1	C	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE USABLE ON

A	DELETED
B	DELETED
C	161353 THRU 161761
D	161925 & UP
E	161353 THRU 161528
F	161702 & UP
G	162826 & UP

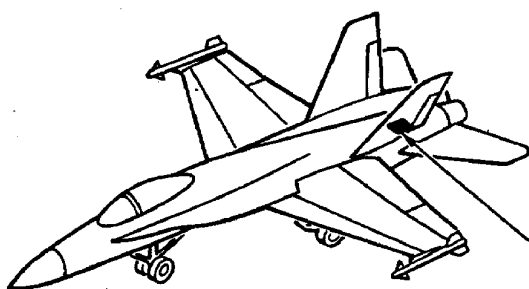

DOOR 67L
(INBD OF LEFT
VERTICAL FIN)

AFT FUSELAGE DOOR 67L

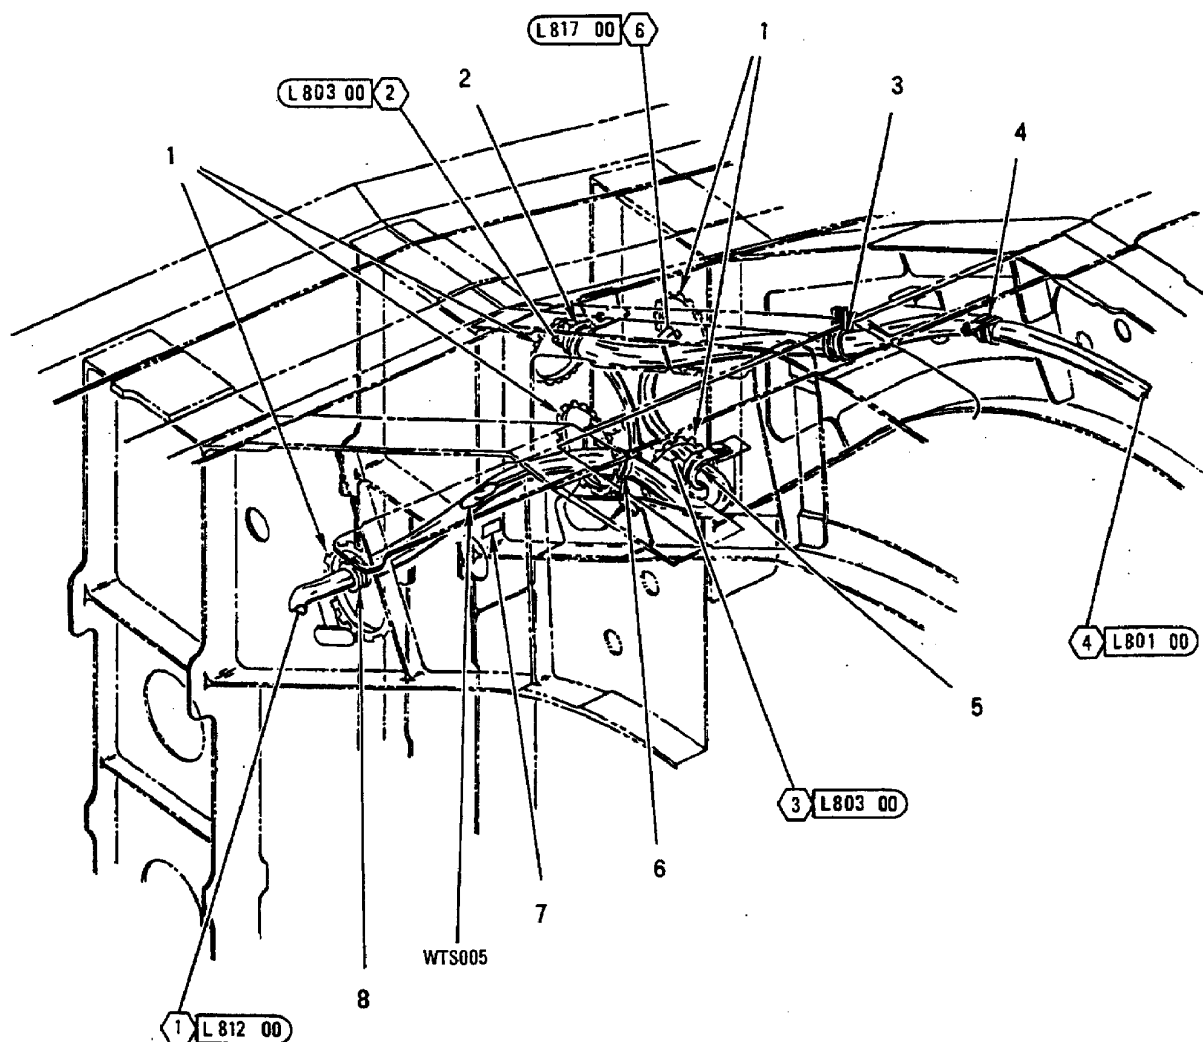

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR		PAOZZ
2	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
4	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
5	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
6	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
7	74A885621-2175	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTS005)			
8	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)



CODE USABLE ON

A 161732 & UP

AFT FUSELAGE

DOOR 67R

DOOR 67R
(INBOARD OF
RIGHT VERTICAL FIN)

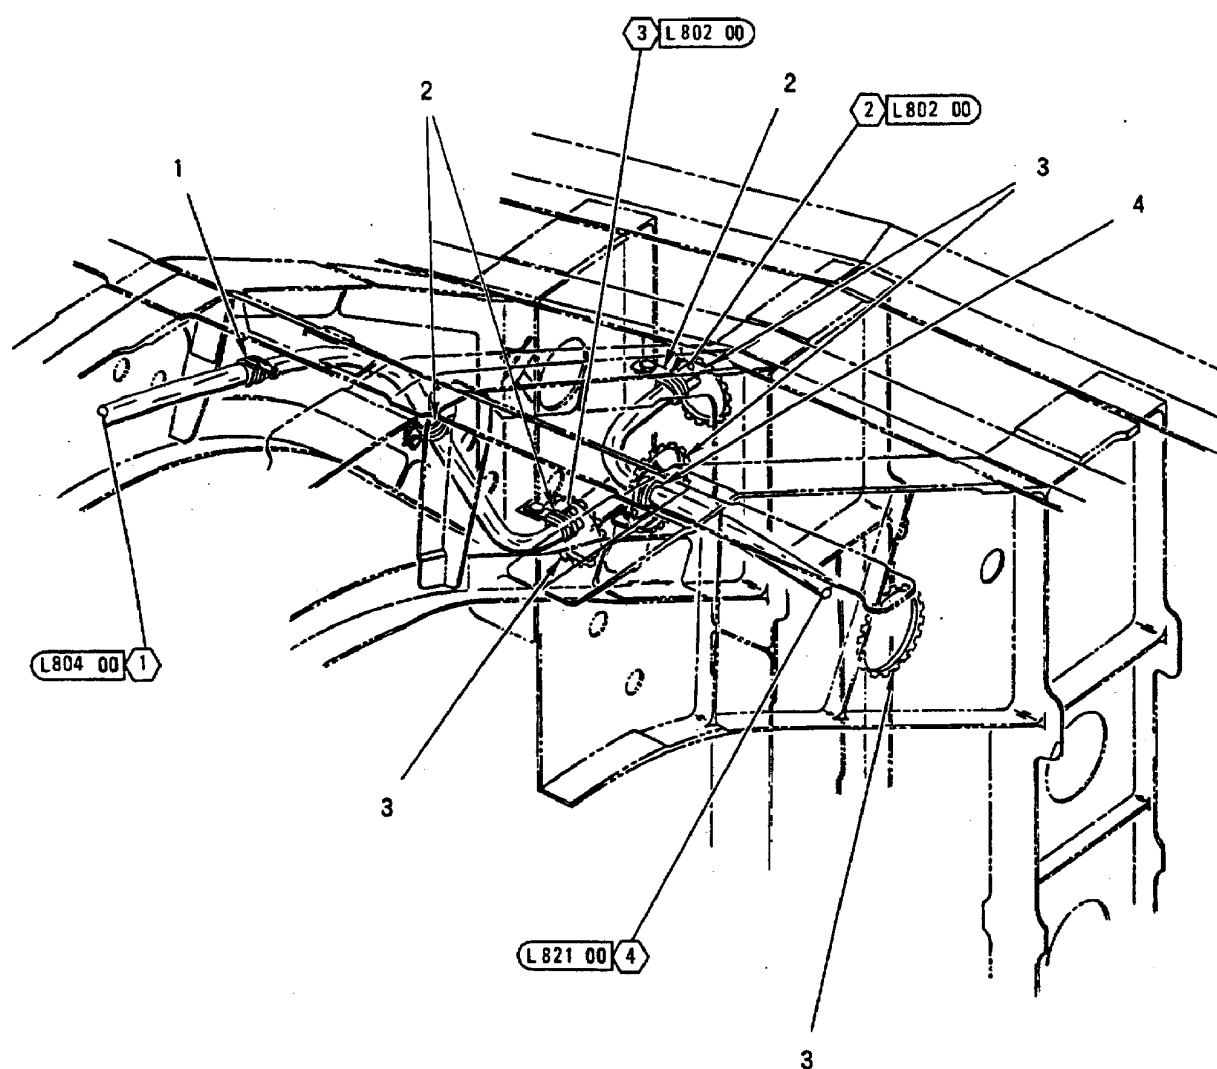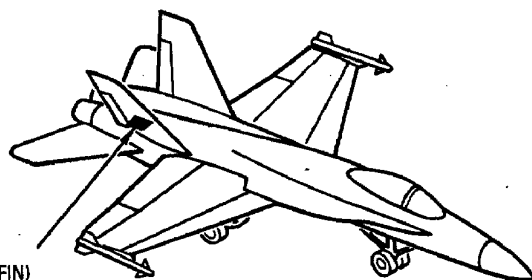

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530)	1		PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
2	M85052/1-8	CLAMP	3		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21266-2N	GROMMET	AR		PAOZZ
4	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161732 & UP
B	161353 THRU 161761
C	161925 & UP

AFT FUSELAGE DOOR 87R AND DOOR 86R

LEGEND

1 162415 AND UP

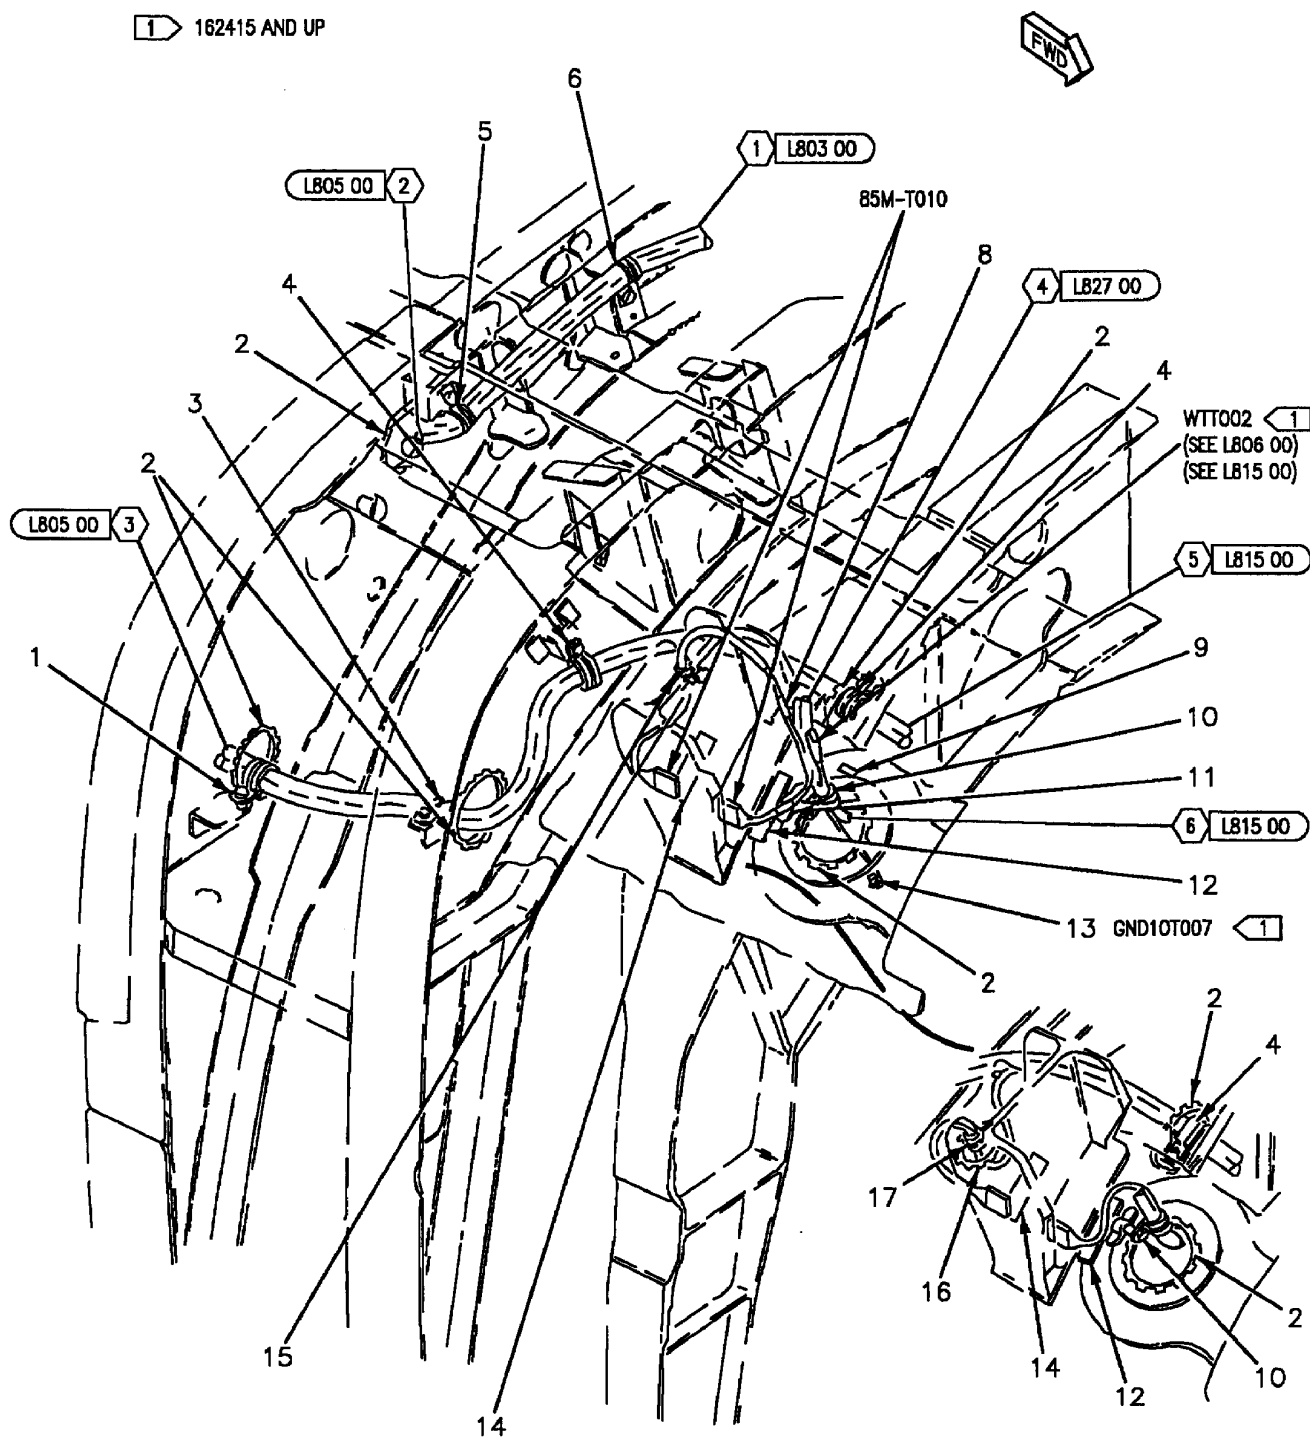

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-16	SPACER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
4	M85052/1-8	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
5	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D10)	1	*	PAOZZ
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
7		DELETED			
8	74A885621-2668	MARKER, IDENTIFICATION - AVIONICS (76301) (SPARE) (FOR REF DES 85M-T010)	1	E	MDOZZ
9	74A885621-2177	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTT002)	1	D	MDOZZ
10	M85052/1-10	CLAMP	1	B	PAOZZ
	M85052/1-15	CLAMP	1	C	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
11	74A885621-2667	MARKER, IDENTIFICATION - AVIONICS (76301) (PR1) (FOR REF DES 85M-T010)	1	E	MDOZZ
12	74A885621-2450	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 85M-T010)	1		MDOZZ
13	MS21042L3	NUT	1	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	1	D	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 13)	1	D	PAOZZ
14	74A885621-2451	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 85M-T010)	1		MDOZZ
15	M85052/1-3	CLAMP	1	D	PAOZZ
	MS24693C277	SCREW (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
16	NAS557-4A	GROMMET	1	A	PAOZZ
17	M85052/3-4	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE	USABLE ON
A	161358 THRU 162414
B	161353 THRU 161528
C	161702 & UP
D	162415 & UP
E	162826 & UP


AFT FUSELAGE


DOOR 71R AND DOOR 72R

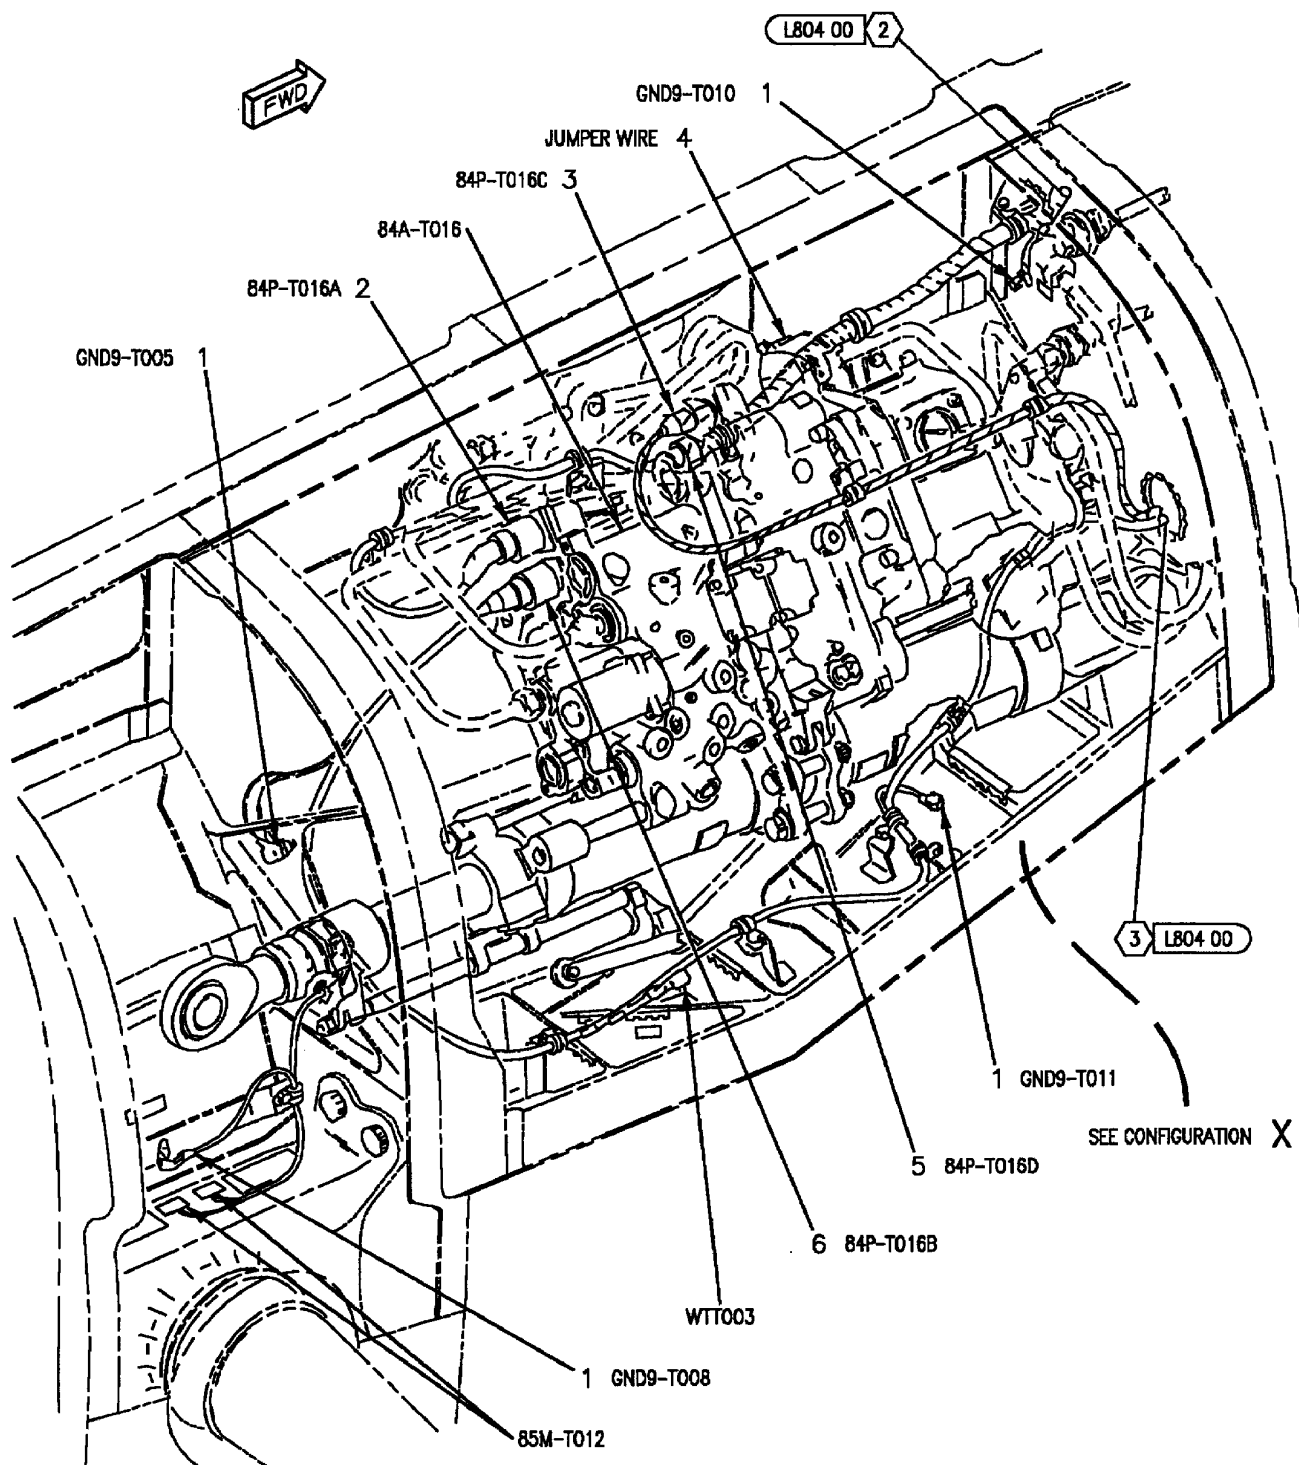

AFT FUSELAGE

DOOR 71R AND DOOR 72R

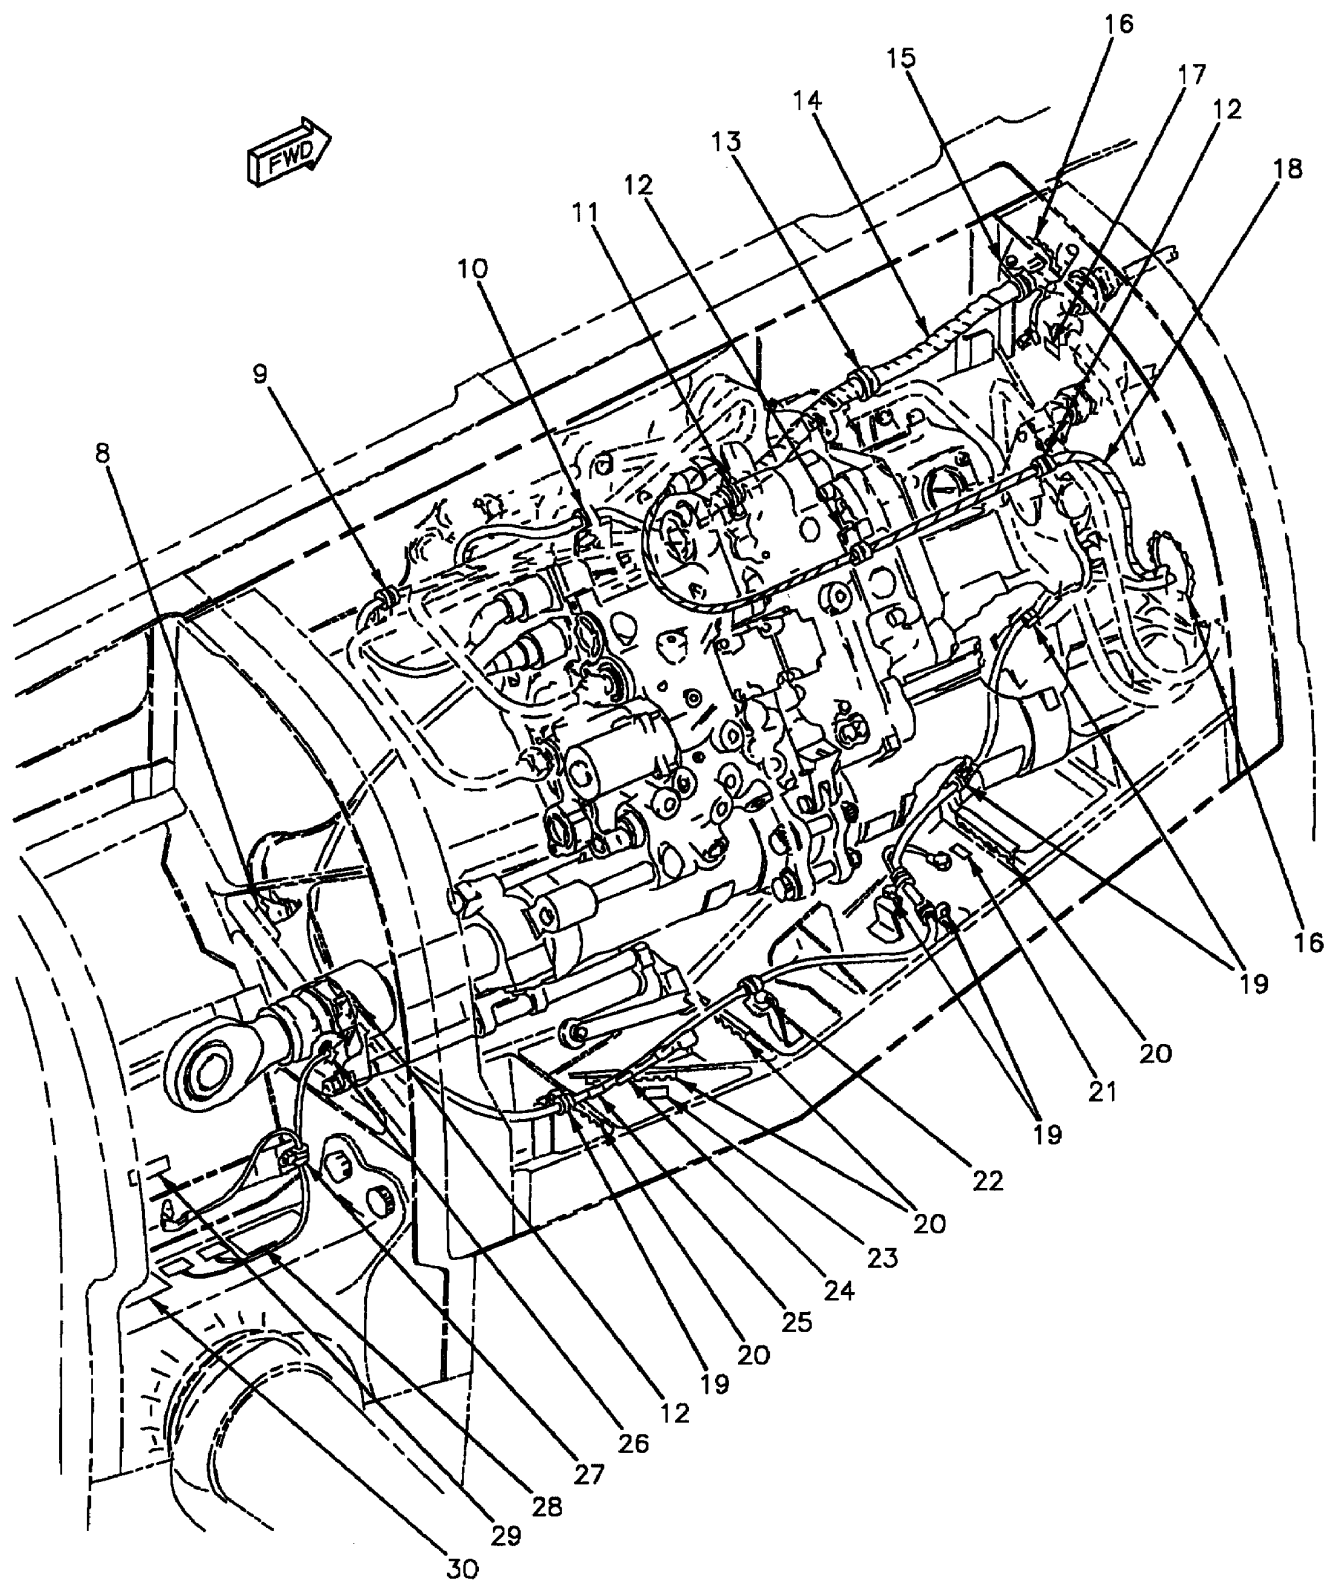

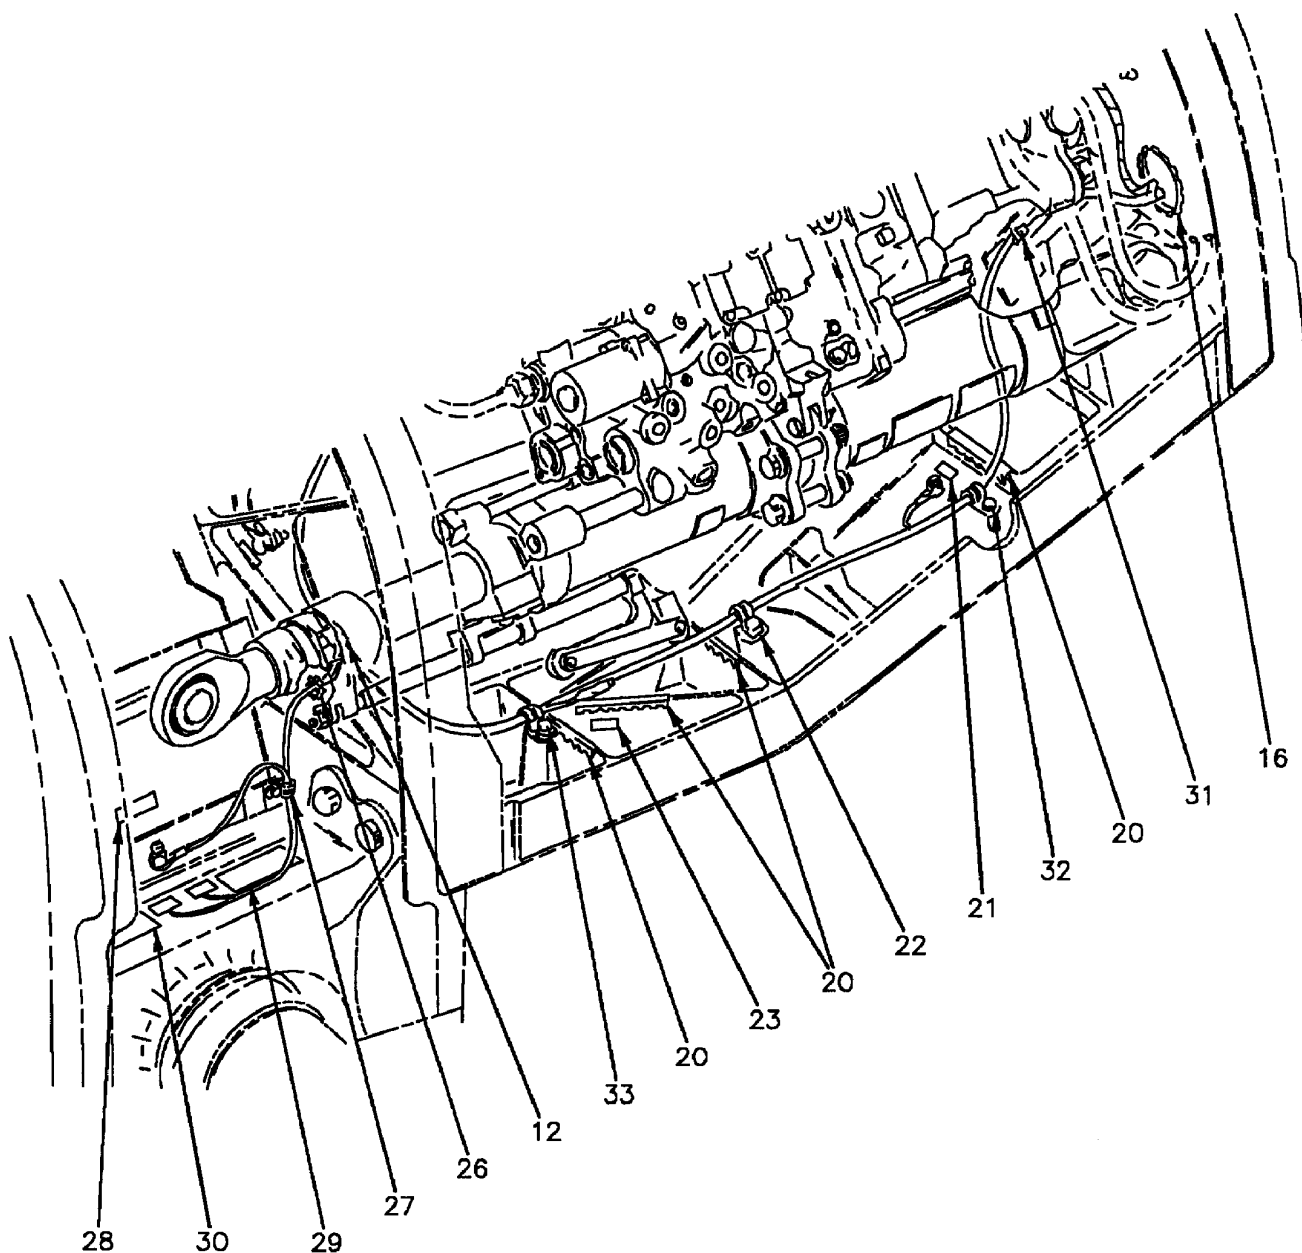

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	MS27467T13B35S	CONNECTOR, PLUG (84P-T016A)	1		PAOZZ
3	MS27467T13B35SB	CONNECTOR, PLUG (84P-T016C)	1		PAOZZ
4	MS25083-5BB10	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS673V2	BOLT (AP)	2		PAOZZ
	MS35338-43	WASHER (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
5	MS27467T13B35SC	CONNECTOR, PLUG (84P-T016D)	1		PAOZZ
6	MS27467T13B35SA	CONNECTOR, PLUG (84P-T016B)	1		PAOZZ
7		DELETED			
8	74A885621-2104	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-T005)			
9	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
10	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V25	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	C*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	D*	PAOZZ
		ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-24	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	*	PAOZZ
12	MS21919WDG6	CLAMP	3		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
13	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	C*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	D*	PAOZZ
		ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-20	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	SEE ABOVE (AP)	1	*	PAOZZ
14	500024-1	TUBING, PLASTIC SPIRAL (13577)	AR	D*	MGOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	D*	MGOZZ
15	JM44LC44WD10	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	C*	PAOZZ
		ST9M630D10)			
	830WD10G	SEE ABOVE (83930)	1	C*	PAOZZ
	JM44LC33WD12	CLAMP, LOOP (22175) (MCDONNELL SPEC	1	D*	PAOZZ
		ST9M630D12)			
	830WD12G	SEE ABOVE (83930)	1	D*	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
16	MS21266-2N	GROMMET	AR		PAOZZ
17	74A885621-2457	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-T010)	1		MDOZZ
18	SF6151-3-4	INSULATION, SLEEVEING (16357)	AR	A	MGOZZ
	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	MGOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	B*	MGOZZ
19	MS21919WDG6	CLAMP	5	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
20	MS21266-()N #	GROMMET	AR		-
21	74A885621-2502	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-T011)	1		MDOZZ
22	MS21919WDG6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
23	74A885621-2178	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTT003)	1		MDOZZ
24	74A885621-2661	MARKER, IDENTIFICATION - AVIONICS (76301) (PR1) (FOR REF DES 85M-T012)	1	E	MDOZZ
25	74A885621-2662	MARKER, IDENTIFICATION - AVIONICS (76301) (SPARE) (FOR REF DES 85M-T012)	1	E	MDOZZ
26	MS21266-3N	GROMMET	AR		PAOZZ
27	M85052/1-6	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
28	74A885621-2282	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-T008)	1		MDOZZ
29	74A885621-2455	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 85M-T012)	1		MDOZZ
30	74A885621-2454	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 85M-T012)	1		MDOZZ
31	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
32	MS21919WDG6	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
33	MS21919WDG6	CLAMP	1	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	A*	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161761
B	161925
C	161353 THRU 161942
D	161944 & UP
E	162826 & UP

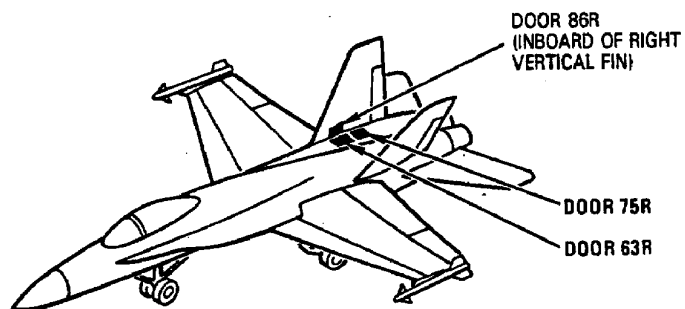


AFT FUSELAGE DOOR 63R AND DOOR 75R


LEGEND

- | | |
|---|--------------------|
| 1 | 161706 AND UP |
| 2 | 161353 THRU 161761 |
| 3 | 161353 THRU 162414 |
| 4 | 161522 THRU 162414 |

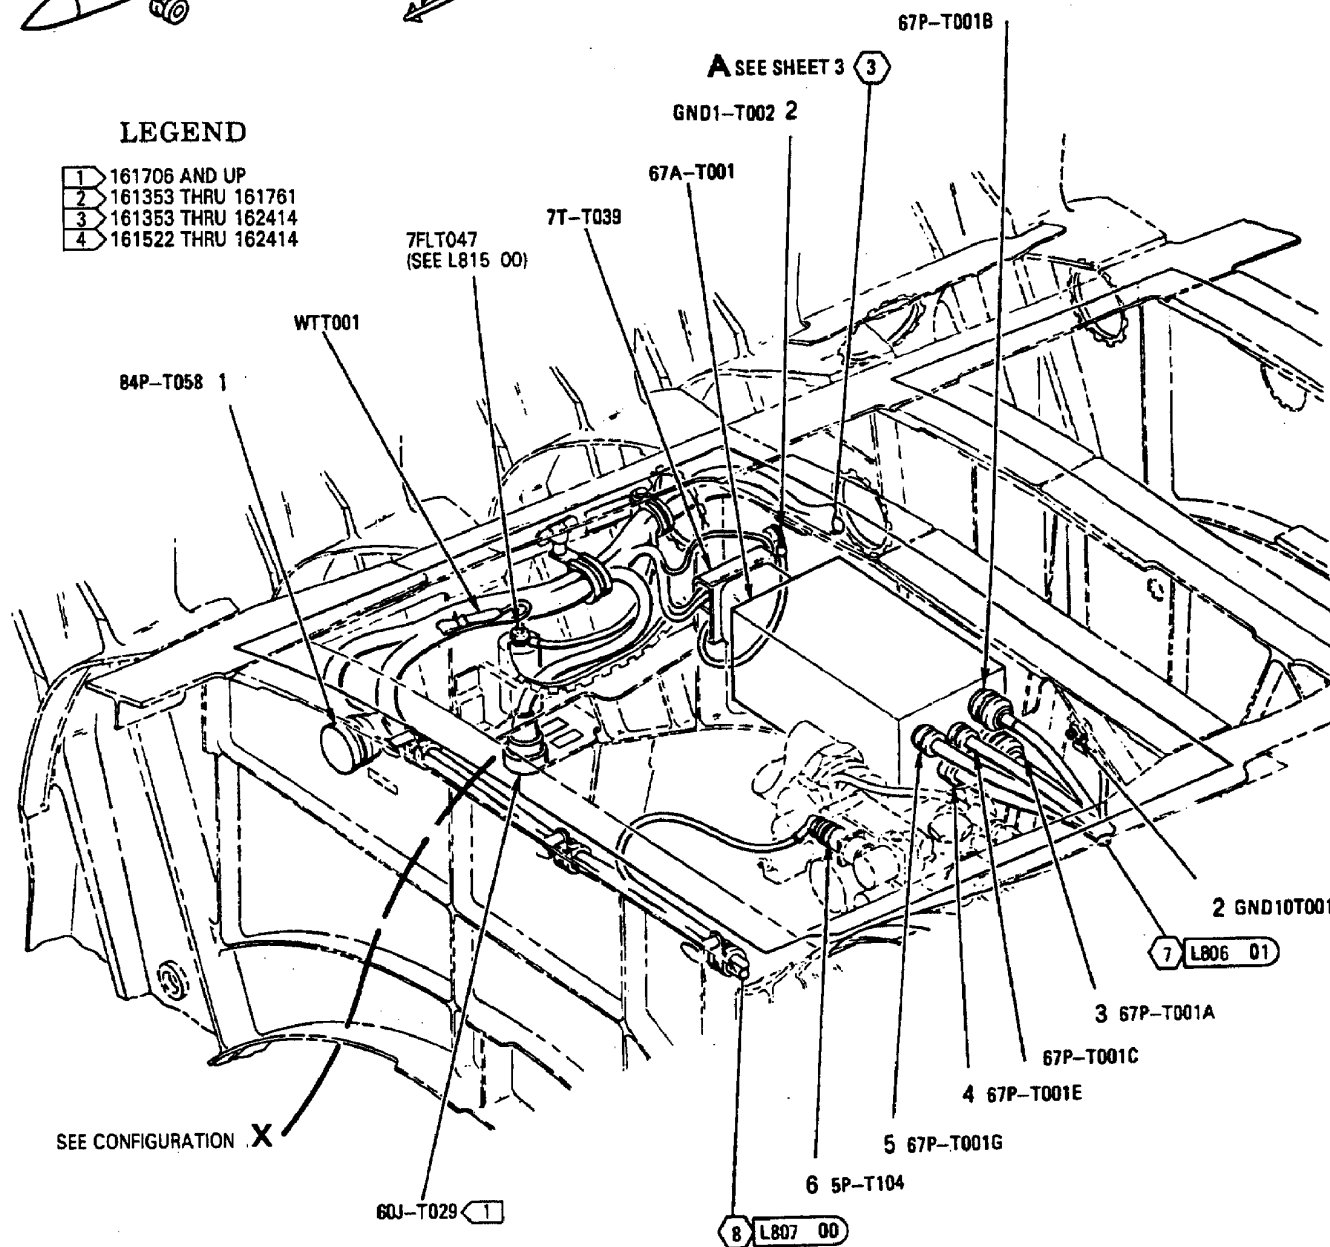

AFT FUSELAGE
DOOR 63R AND
DOOR 75R

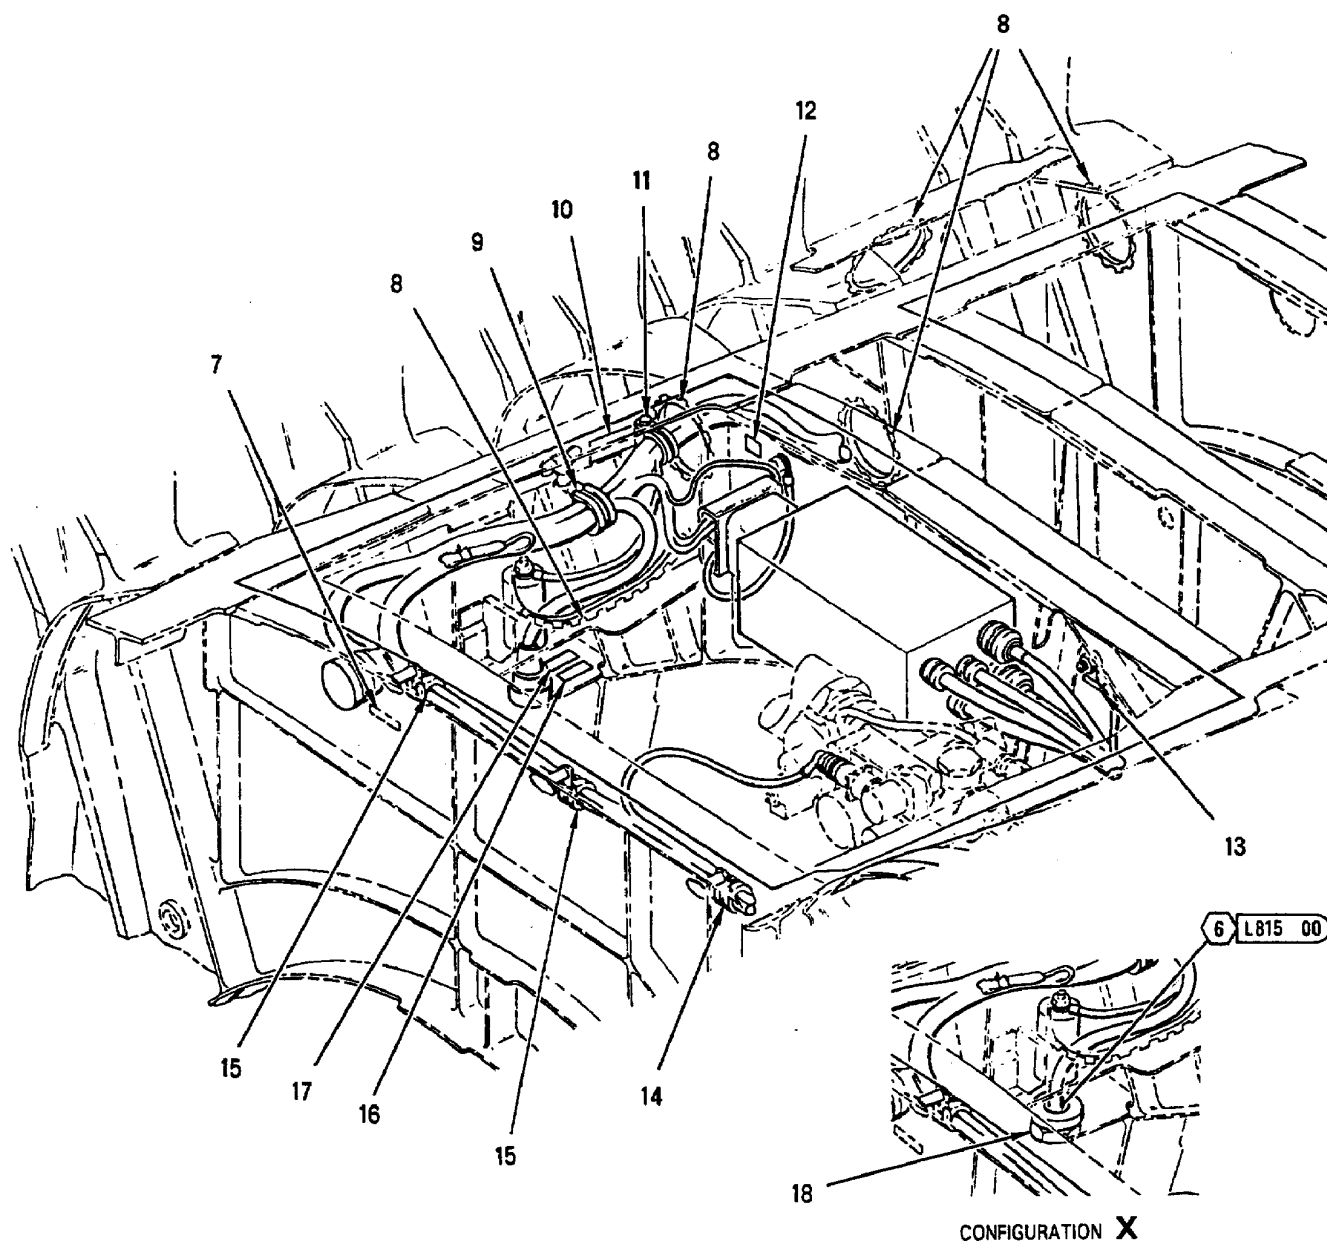

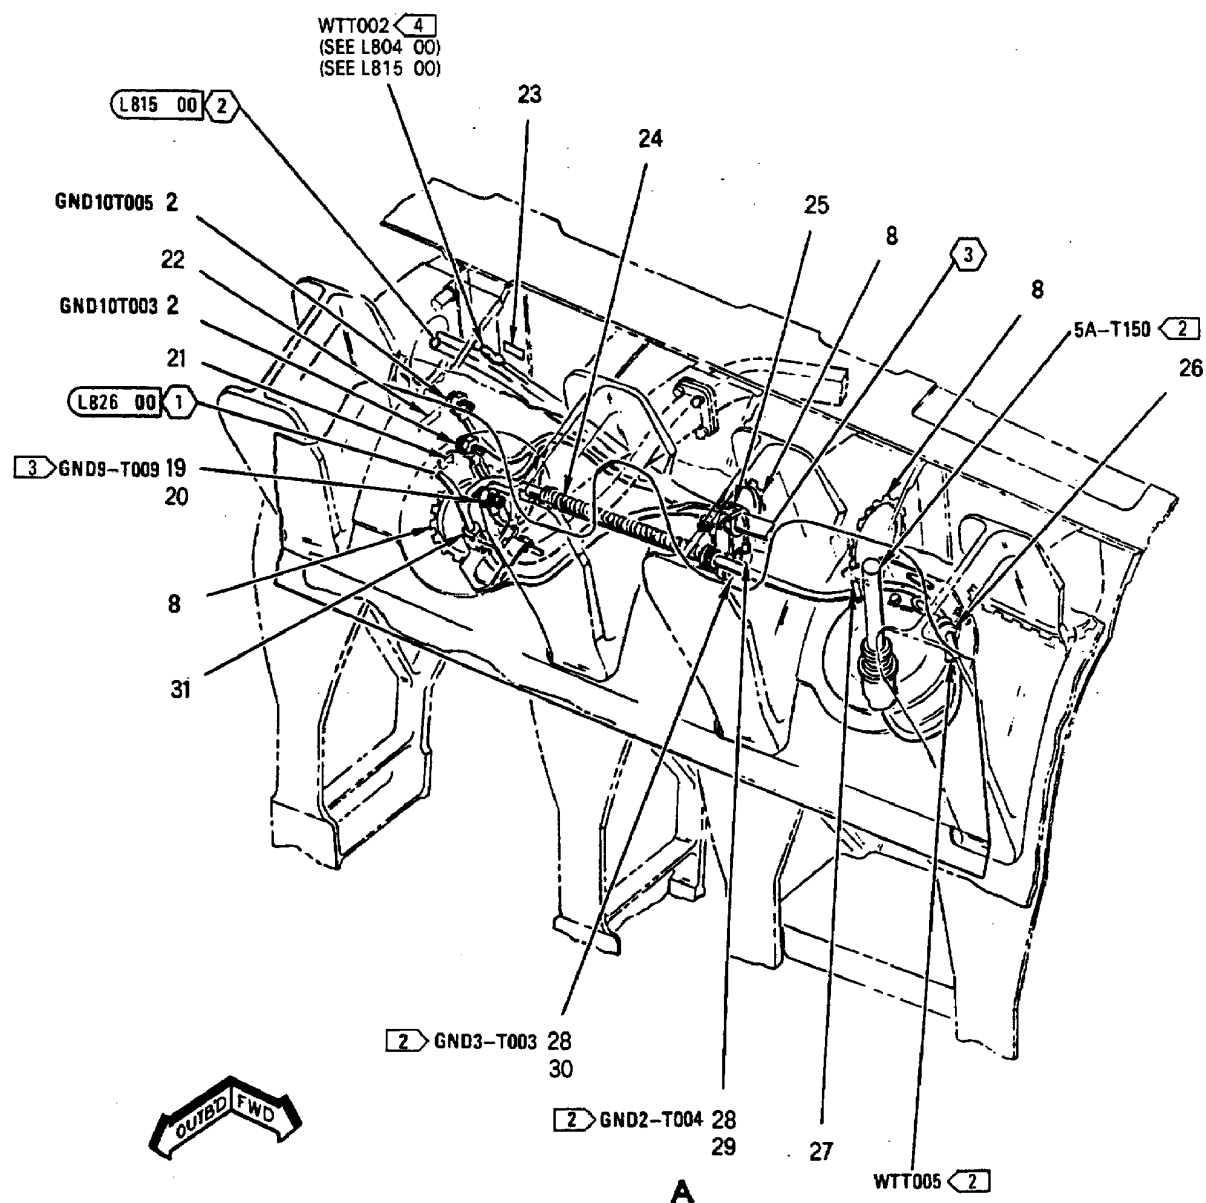

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T23B35P	CONNECTOR, PLUG (84P-T058)	1		PAOZZ
2	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	4		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 2)	4		PAOZZ
3	MS3476W14-19S	CONNECTOR, PLUG (67P-T001A)	1		PAOZZ
4	M39012/55-4026	CONNECTOR, PLUG (67P-T001E)	1		PAOZZ
5	31-8473-5	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC			
		5M1710-00001) (67P-T001G)			
	8473-5	SEE ABOVE (77820)	1	*	PAOZZ
6	MS27467T9B35S	CONNECTOR, PLUG (5P-T104)	1		PAOZZ
7	74A885621-2279	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84J-R058)			
8	MS21266-2N	GROMMET	AR		PAOZZ
9	M85052/1-12	CLAMP	1	A	PAOZZ
	M85052/1-17	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
10	74A885621-2176	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTT001)			
11	M85052/1-12	CLAMP	1	A	PAOZZ
	M85052/1-17	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	74A885621-2018	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND1-T002)			
13	74A885621-2119	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10T001)			
14	M85052/1-10	CLAMP	1	A	PAOZZ
	M85052/1-16	CLAMP	1	E	PAOZZ
	M85052/1-15	CLAMP	1	F	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
15	M85052/1-10	CLAMP	2	A	PAOZZ
	M85052/1-16	CLAMP	2	B	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
16	74A885621-2612	MARKER, IDENTIFICATION - AVIONICS	1	G	MDOZZ
		(76301) (FOR REF DES 60J-T029)			
17	74A885621-2332	MARKER, IDENTIFICATION - AVIONICS	1	J	MDOZZ
		(76301) (FOR REF DES 7FLT047)			
18	74B878001-145	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	C	PAOZZ
19	MS21042L3	NUT	1	H	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 19)	1	H	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 19)	1	H	PAOZZ
20	74A885621-2283	MARKER, IDENTIFICATION - AVIONICS	1	H	MDOZZ
		(76301) (FOR REF DES GND9-T009)			
21	74A885621-2296	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10T003)			
22	74A885621-2298	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10T005)			
23	74A885621-2177	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTT002)			
24	74A885630-1019	CONDUIT - ELECTRICAL (76301)	1	D	A0000


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	74A885630-2021	CONDUIT (76301) (PART OF INDEX 24)	1	D	MGOZZ
	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	1	D*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002)			
		(PART OF INDEX 24)			
	CTR6612-002	SEE ABOVE (64590)	1	D*	PAOZZ
25	M85052/1-12	CLAMP	1	A	PAOZZ
	M85052/1-17	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
26	M85052/1-6	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	D*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	D*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
27	M85052/3-4	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	D*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	D*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
28	MS21042L3	NUT	2	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 28)	2	D	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 28)	2	D	PAOZZ
29	74A885621-2512	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) (FOR REF DES GND2-T004)			
30	74A885621-2545	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) (FOR REF DES GND3-T003)			
31	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161353 THRU 161705
D	161353 THRU 161761
E	161702 THRU 161761
F	161925 & UP
G	161706 & UP
H	161353 THRU 162414

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


J 162853 & UP

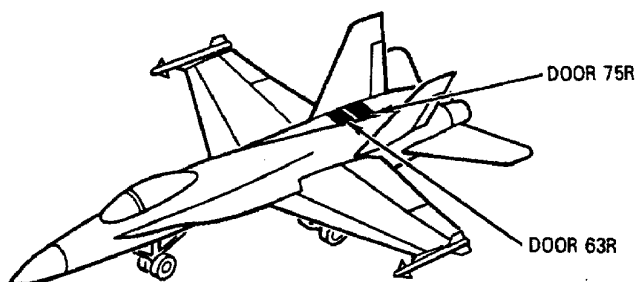


AFT FUSELAGE DOOR 63R AND DOOR 75R

LEGEND

1	161362 AND UP
2	161353 THRU 162477

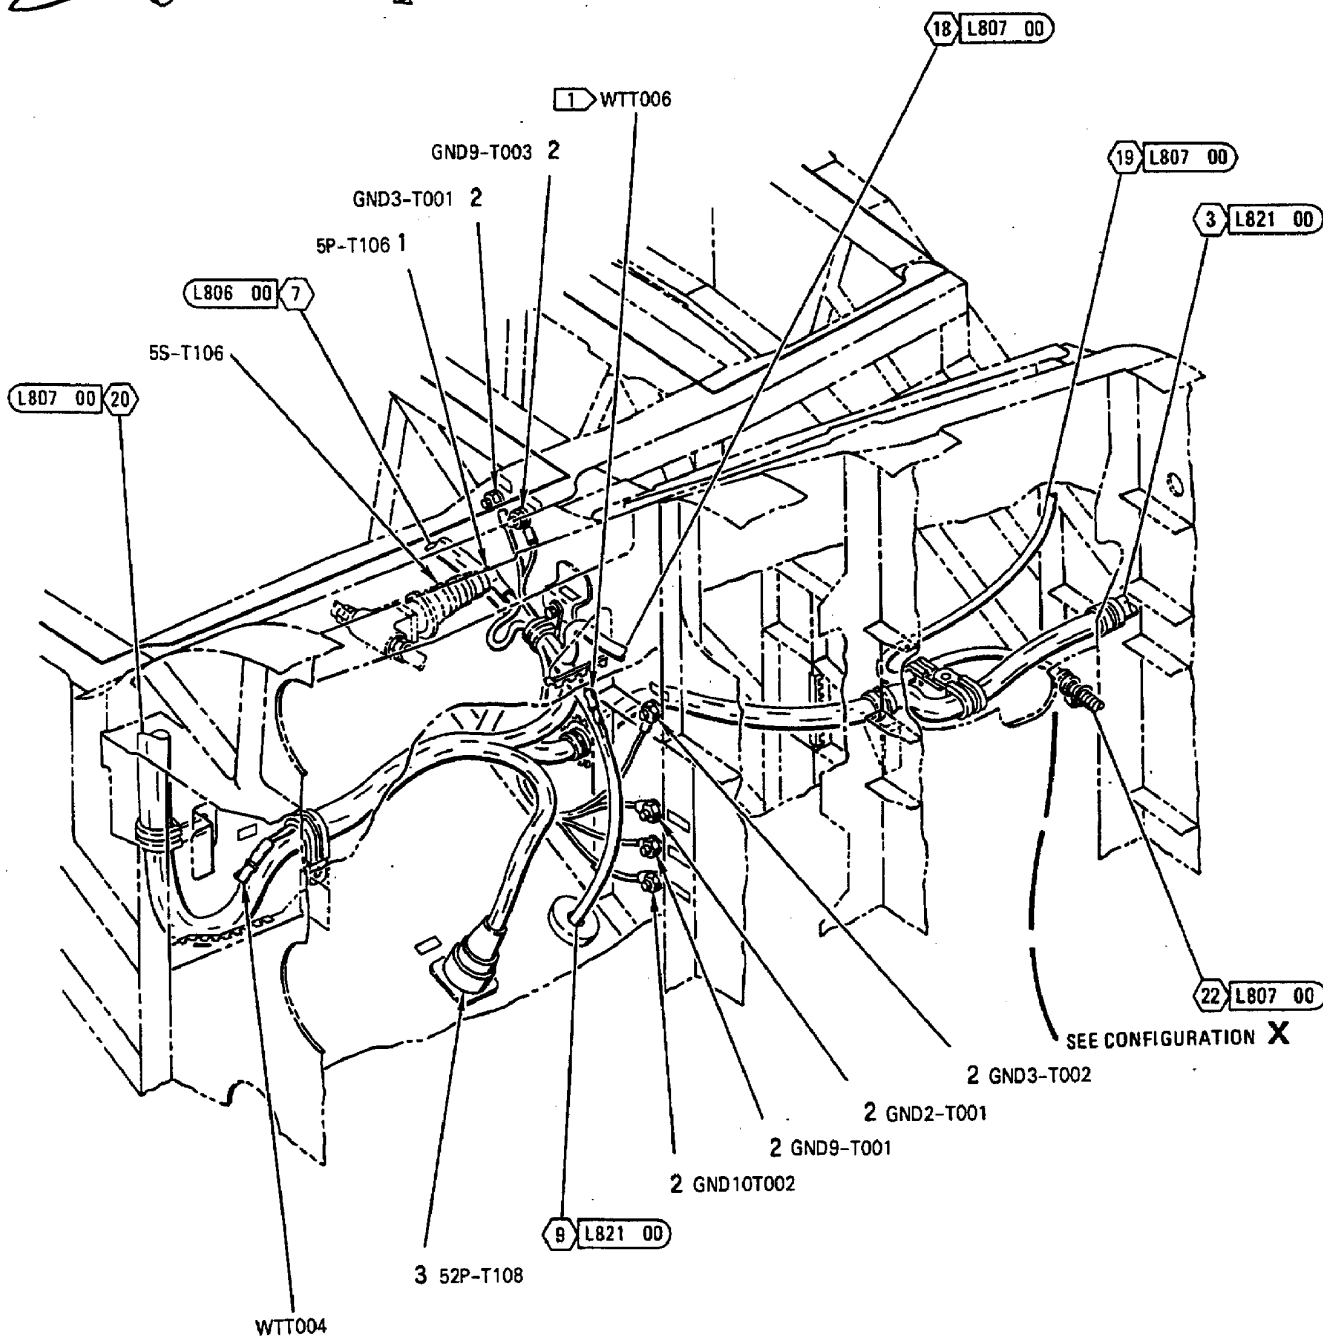

AFT FUSELAGE DOOR 63R AND DOOR 75R

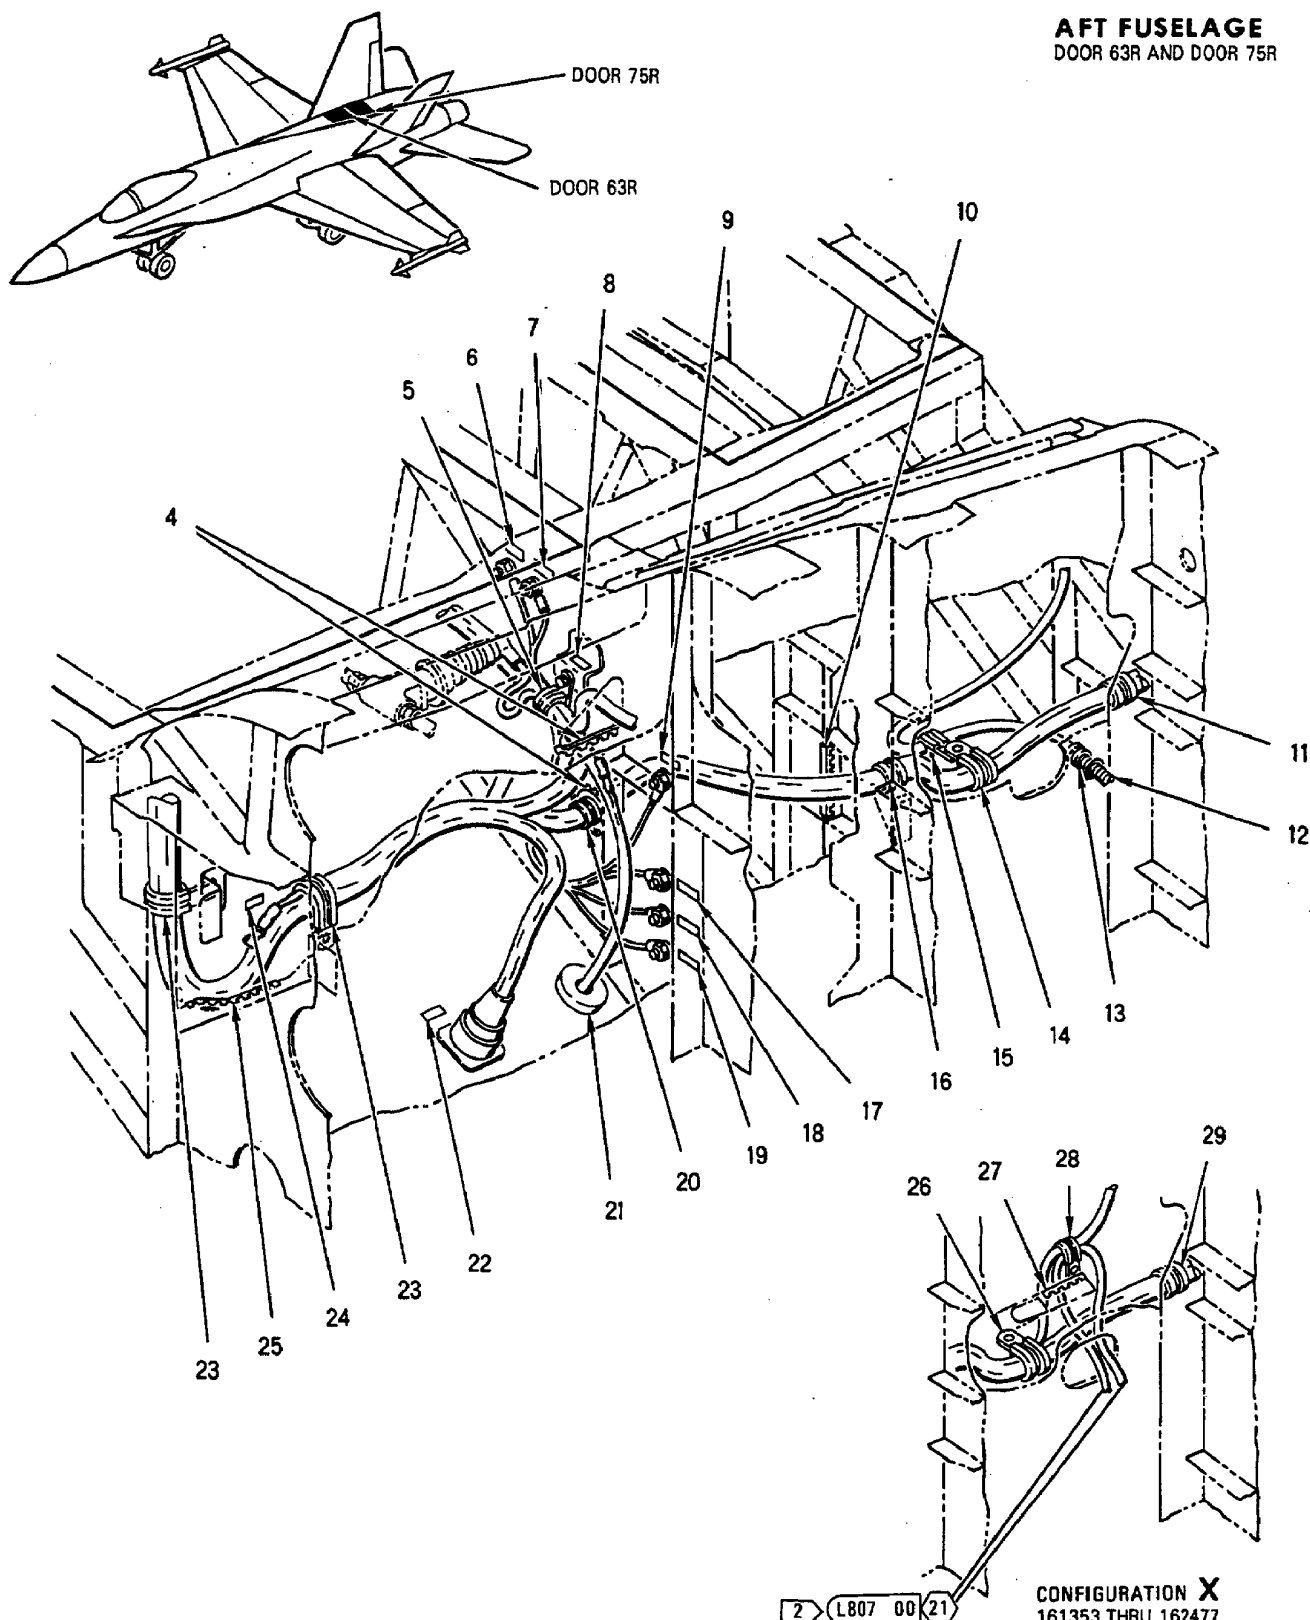


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T11B98S	CONNECTOR, PLUG (5P-T106)	1		PAOZZ
2	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	6		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 2)	6		PAOZZ
3	D38999/26KG35SN	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-21-35SN) (52P-T108)			
	TVS06RK-21-35SN	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(77820) (MCDONNELL SPEC			
		ST5M1586KG35SN) (USE UNTIL			
		EXHAUSTED) (52P-T108)			
4	MS21266-2N	GROMMET	AR		PAOZZ
5	M85052/1-12	CLAMP	1		PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
6	74A885621-2065	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND3-T001)			
7	74A885621-2102	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-T003)			
8	74A885621-2541	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) (FOR REF DES WTT006)			
9	74A885621-2254	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND3-T002)			
10	MS21266-3N	GROMMET	AR	B	PAOZZ
11	M85052/1-12	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10	WASHER (AP)	1	E	PAOZZ
12	74A885630-2031	CONDUIT (76301)	1	E	MGOZZ
13	M85052/3-4	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
14	M85052/1-12	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	E	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
15	M85052/3-2	CLAMP	1	E	PAOZZ
16	M85052/1-12	CLAMP	1		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	E	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
17	74A885621-2054	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-T001)			
18	74A885621-2100	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-T001)			
19	74A885621-2120	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10T002)			
20	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
21	74B878001-147	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
22	74A885621-2232	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 52J-T108)			
23	M85052/1-16	CLAMP	2		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
24	74A885621-2179	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTT004)	1		MDOZZ
25	MS21266-1N	GROMMET	AR	B	PAOZZ
26	M85052/1-12	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
27	MS21266-3N	GROMMET	AR	A	PAOZZ
28	M85052/1-4	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
29	M85052/1-12	CLAMP	1	A	PAOZZ
	NAS673V8	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	A	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162477
B	161523 & UP
C	161353 THRU 161761
D	161362 & UP
E	162826 & UP

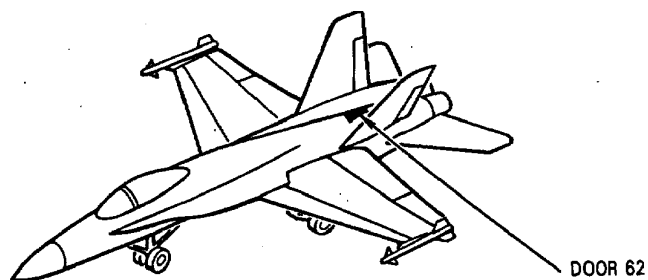


AFT FUSELAGE


DOOR 62

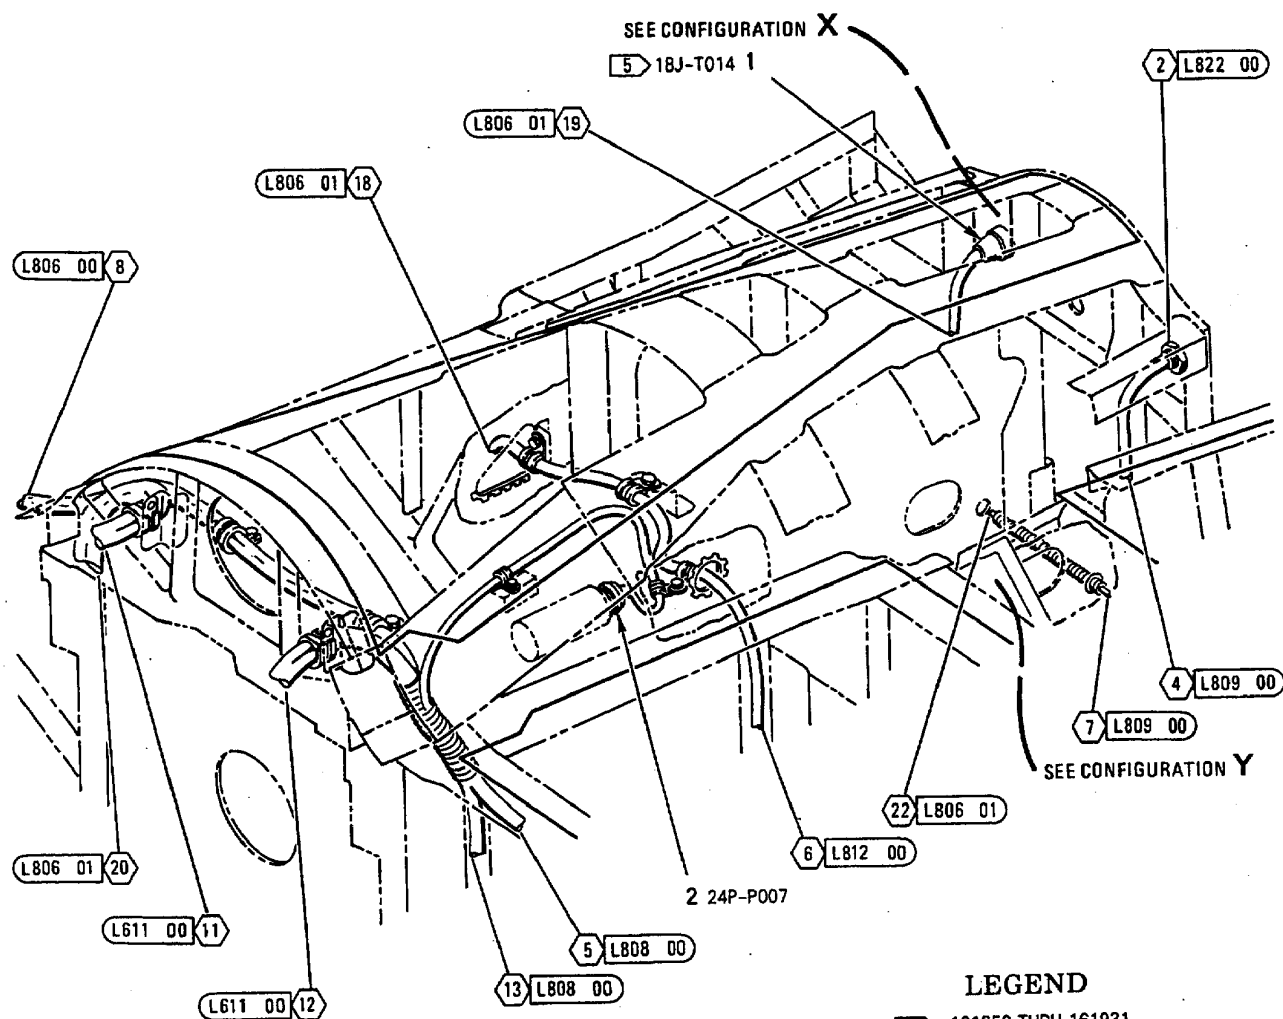


LEGEND

- | | |
|---|--------------------|
| 1 | 161353 THRU 161931 |
| 2 | 161353 THRU 161761 |
| 3 | 161925 THRU 161931 |
| 4 | 161933 THRU 162477 |
| 5 | 162826 AND UP |

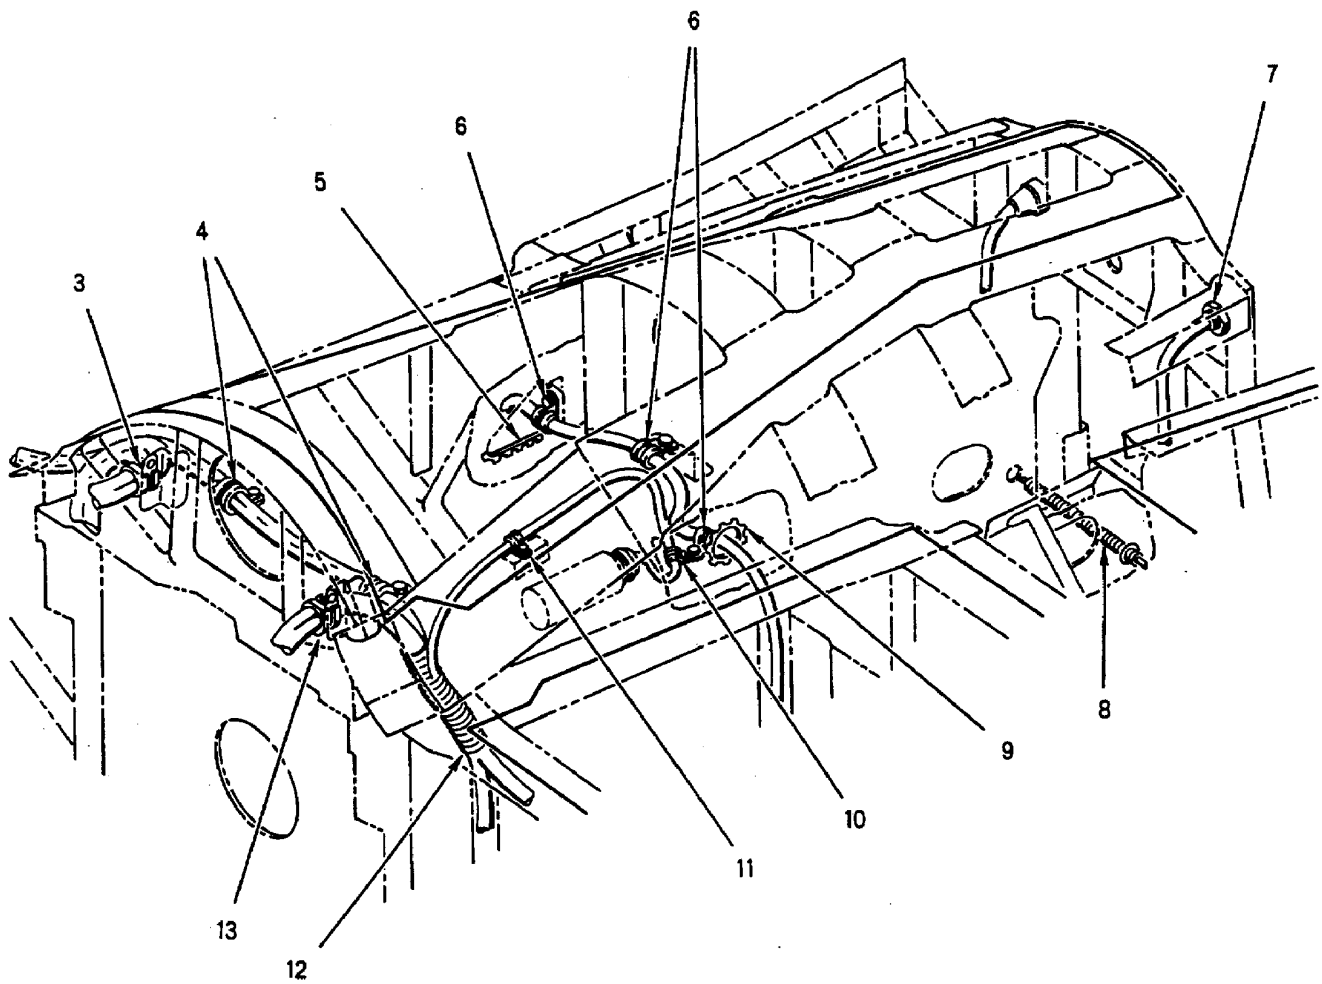


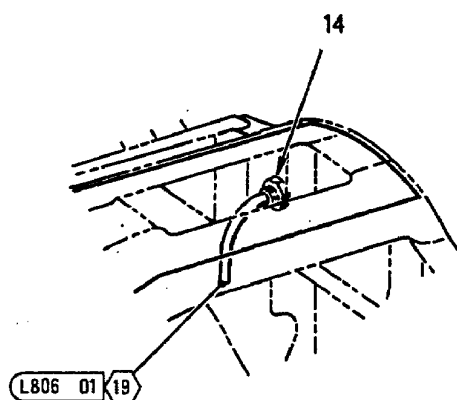

CONFIGURATION X
161353 THRU 162477

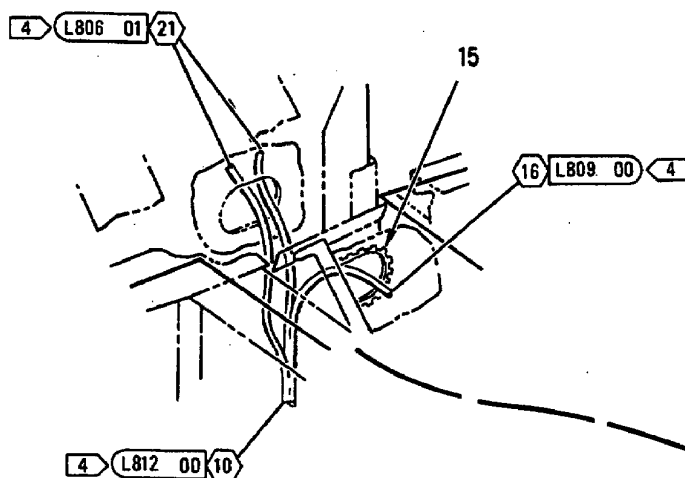

CONFIGURATION Y
161933 THRU 162477

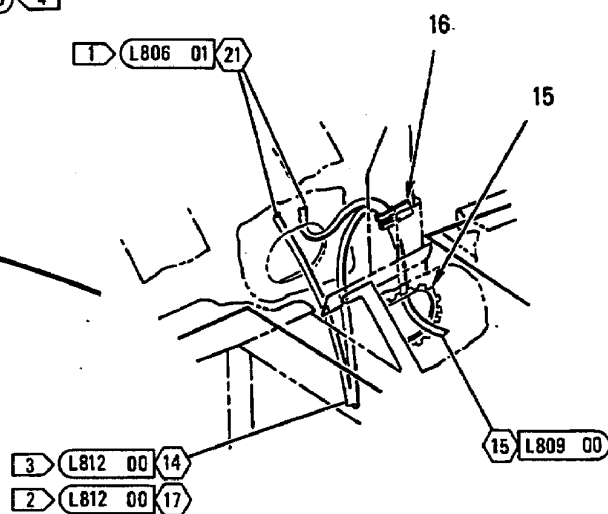

161353 THRU 161931

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27468T9B35S	CONNECTOR, RECEPTACLE (18J-T014)	1	D	PAOZZ
2	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES	1		PAOZZ
	TVS06RK-11-98SA	TVS06RK-11-98SA) (24P-P007) CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-P007)			
3	M85052/3-16	CLAMP	1	E	PAOZZ
	M85052/3-20	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
4	M85052/1-6	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	M85052/1-6	CLAMP	3		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
7	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
8	74A885630-2031	CONDUIT (76301)	1	D	MGOZZ
9	MS21266-1N	GROMMET	AR		PAOZZ
10	M85052/1-4	CLAMP	1	B	PAOZZ
11	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	F*	MGOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	F*	MGOZZ
13	M85052/3-12	CLAMP	1	E	PAOZZ
	NAS1712C10-20S	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	H	PAOZZ
15	MS21266-2N	GROMMET	AR	H	PAOZZ
16	M85052/1-4	CLAMP	1	G	PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	AN960JD10	WASHER (AP)	1	G	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161702 & UP
B	161926 & UP
C	161353 THRU 161761
D	162826 & UP
E	161353 THRU 161528
F	161353 THRU 161726

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		G						161353 THRU 161931			
		H						161353 THRU 162477			


AFT FUSELAGE DOOR 63L


LEGEND

1 161706 AND UP

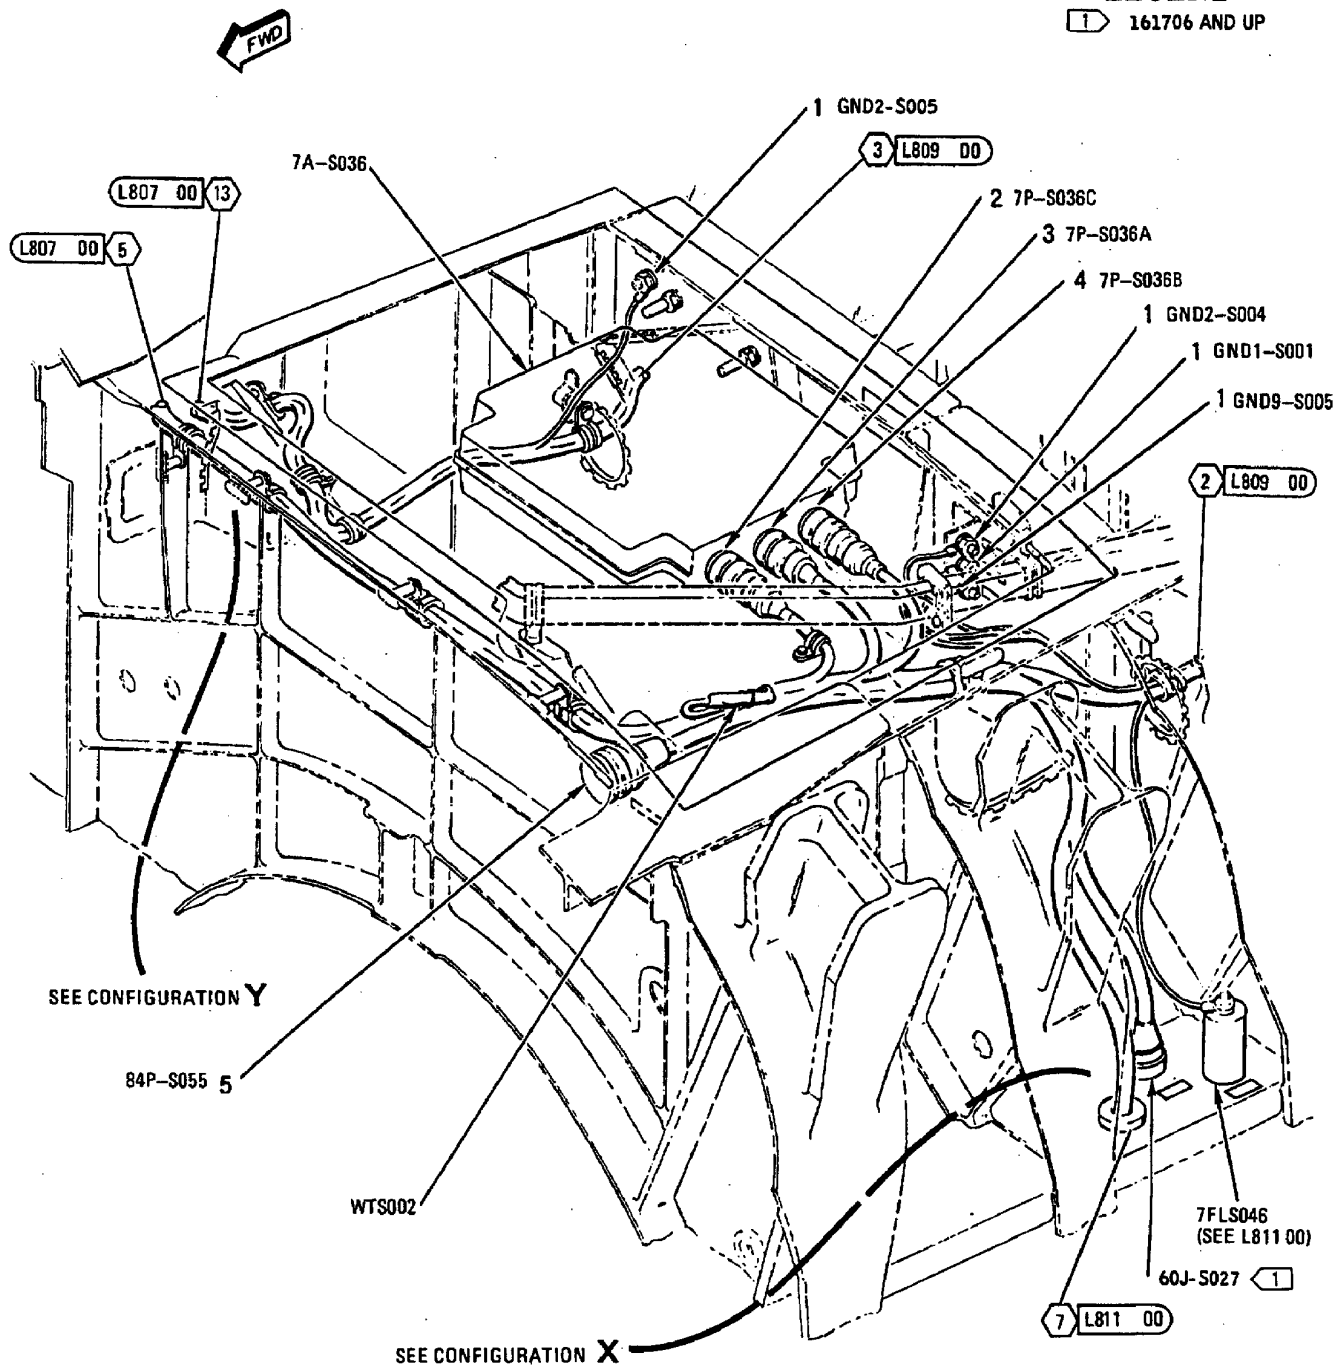


AFT FUSELAGE
DOOR 63L

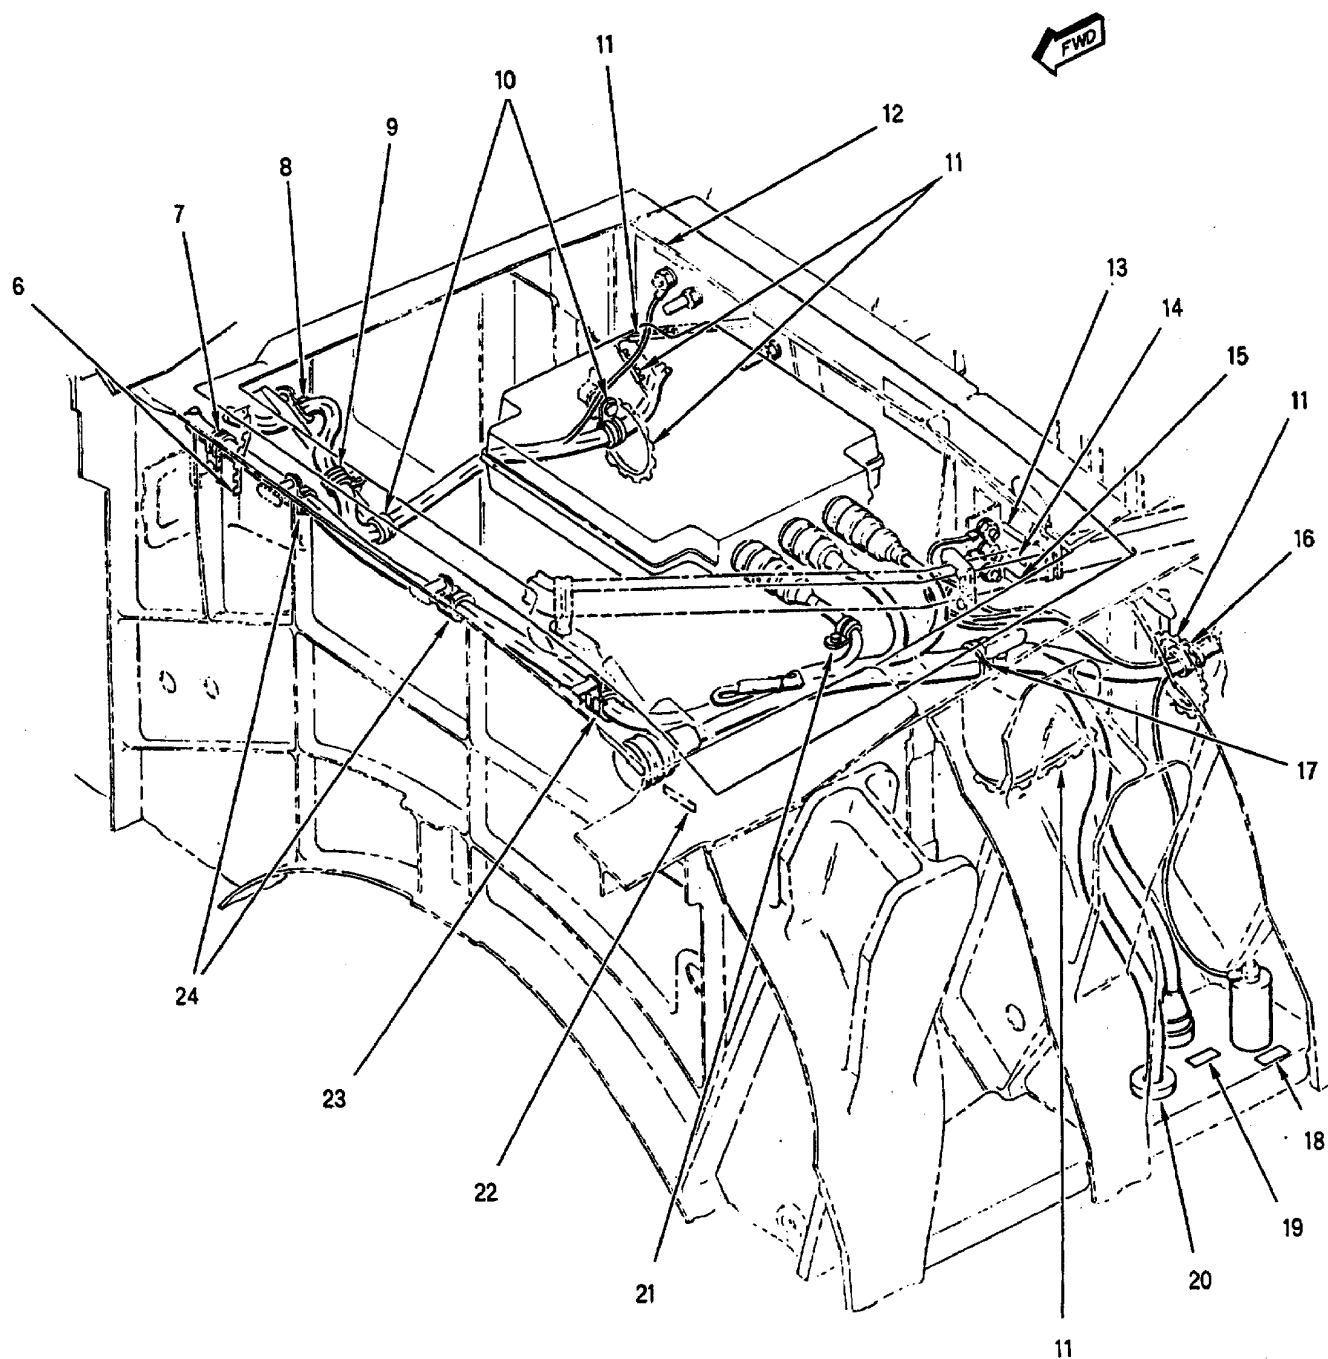

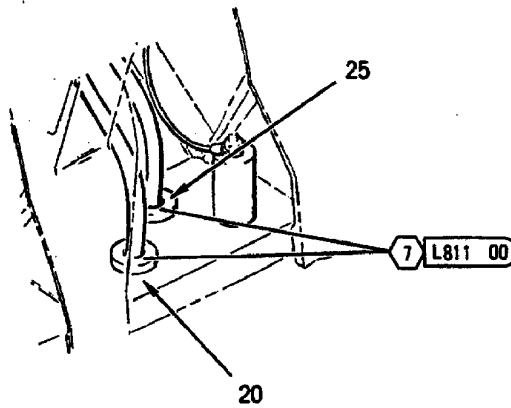

CONFIGURATION X

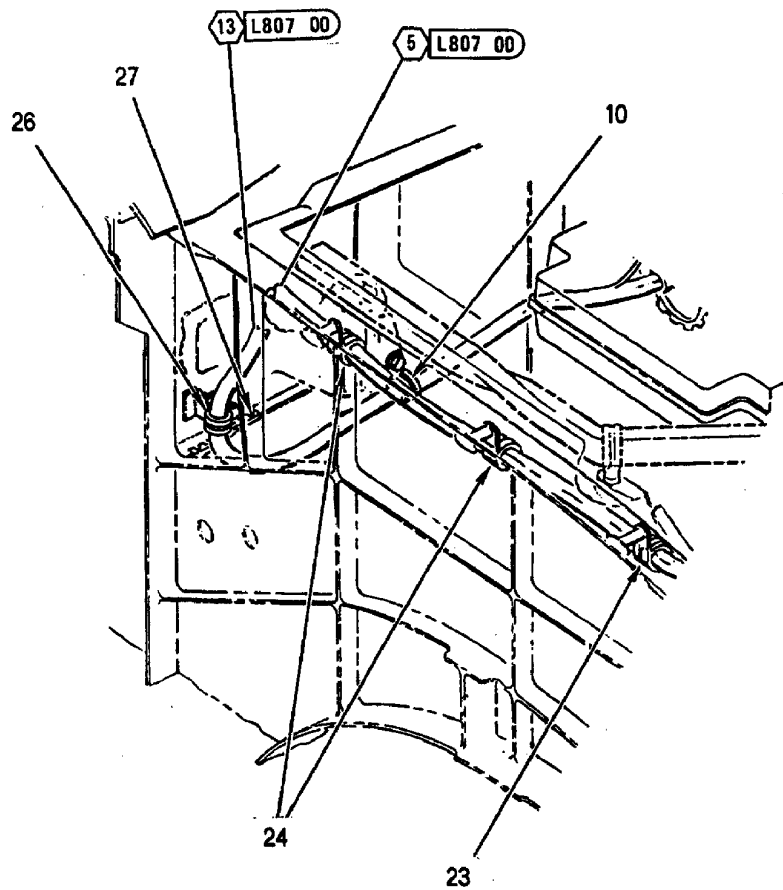

CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	4		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	4		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	4		PAOZZ
2	MS27467T15B97P	CONNECTOR, PLUG (7P-S036C)	1		PAOZZ
3	MS27467T15B35S	CONNECTOR, PLUG (7P-S036A)	1		PAOZZ
4	MS27467T15B97P	CONNECTOR, PLUG (7P-S036B)	1		PAOZZ
5	MS27467T21B35P	CONNECTOR, PLUG (84P-S055)	1		PAOZZ
6	MS21266-2N	GROMMET	AR	E	PAOZZ
7	M85052/1-16	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
8	M85052/1-10	CLAMP	1	E	PAOZZ
	NAS673V5	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	E	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	E*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	E*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
9	M85052/1-10	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
10	M85052/1-8	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
11	MS21266-2N	GROMMET	AR		PAOZZ
12	74A885621-2053	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-S005)			
13	74A885621-2052	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-S004)			
14	74A885621-2010	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND1-S001)			
15	74A885621-2099	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-S005)			
16	M85052/1-10	CLAMP	1	C	PAOZZ
	M85052/1-16	CLAMP	1	F	PAOZZ
	M85052/1-13	CLAMP	1	G	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
17	M85052/1-10	CLAMP	1	C	PAOZZ
	M85052/1-16	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
18	74A885621-2331	MARKER, IDENTIFICATION - AVIONICS	1	L	MDOZZ
		(76301) (FOR REF DES 7FLS046)			
19	74A885621-2611	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES 60J-S027)			
20	74B878001-143	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
21	M85052/1-4	CLAMP	1	K	PAOZZ
	NAS673V2	BOLT (AP)	1	R	PAOZZ
	AN960JD10L	WASHER (AP)	1	R	PAOZZ
22	74A885621-2693	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 84P-S055)			
23	M85052/1-10	CLAMP	1	C	PAOZZ
	M85052/1-16	CLAMP	1	F	PAOZZ
	M85052/1-15	CLAMP	1	G	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10	WASHER (AP)	2		PAOZZ
24	M85052/1-10	CLAMP	2	C	PAOZZ
	M85052/1-16	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
25	74B878001-145	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
26	M85052/1-8	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
27	MS21266-1N	GROMMET	AR	J	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161705
B	161706 & UP
C	161353 THRU 161528
D	161702 & UP
E	161728 & UP
F	161702 THRU 161761
G	161925 & UP
K	161353 THRU 161709
J	161523 THRU 161726
K	161962 & UP
L	162853 & UP


AFT FUSELAGE DOOR 75L

LEGEND


1	161353 THRU 161761
2	161353 THRU 161931
3	161933 THRU 162477
4	161353 THRU 162414
5	162826 AND UP
6	161522 THRU 162414

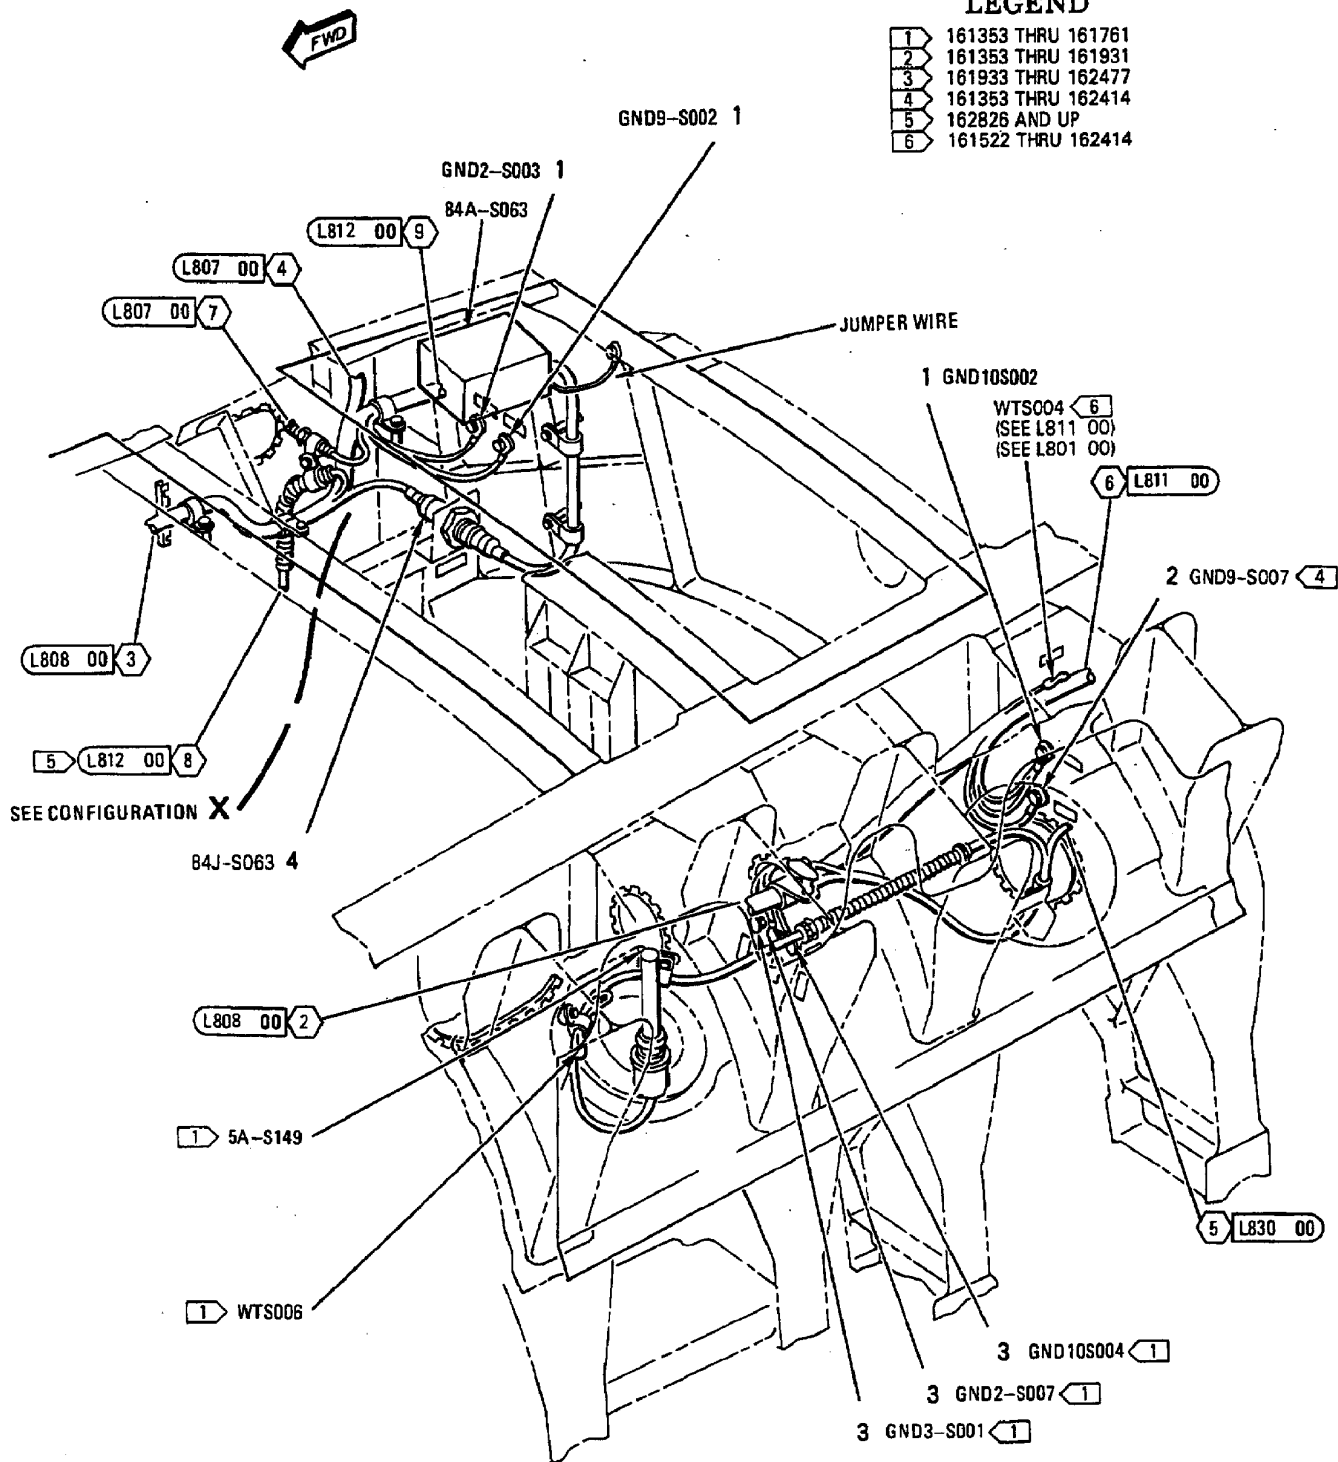

AFT FUSELAGE DOOR 75L

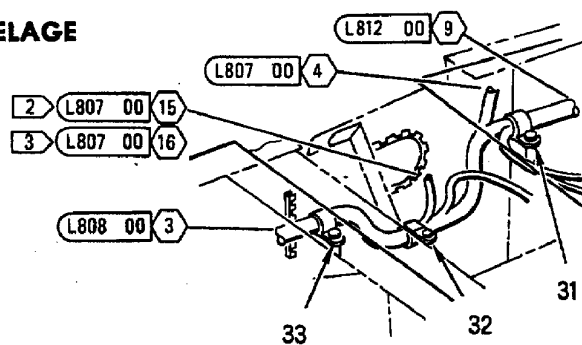

CONFIGURATION X
161353 THRU 162477

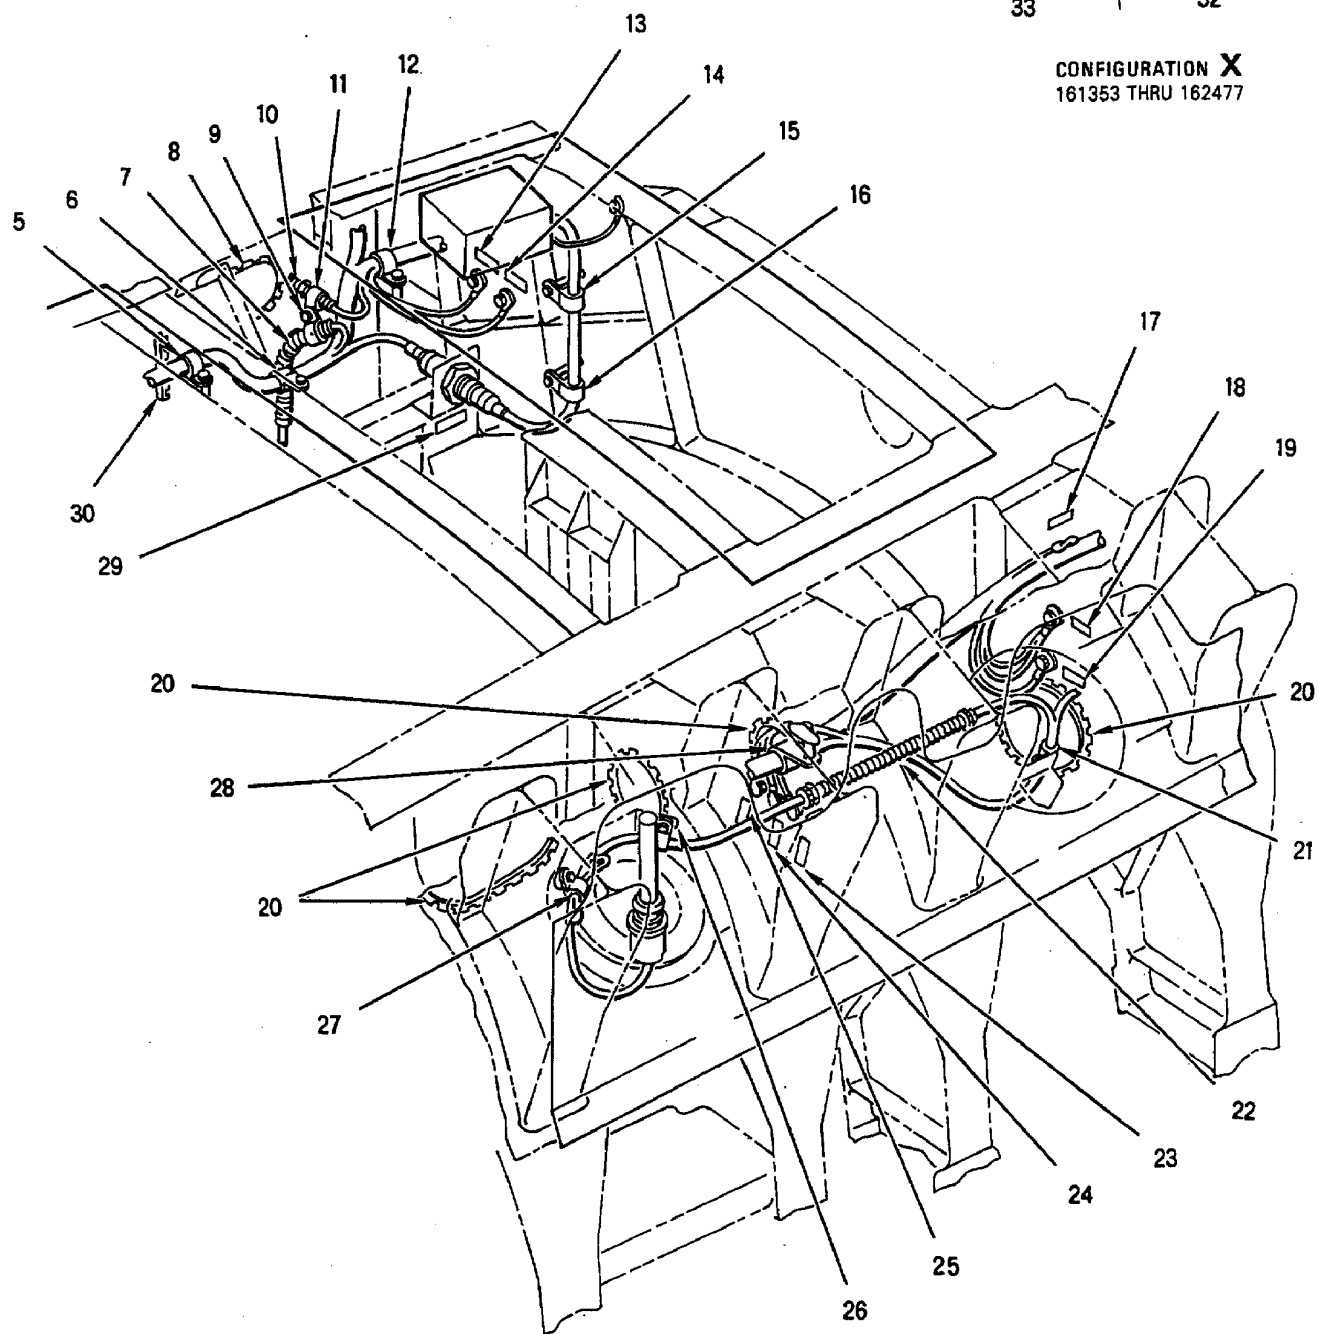

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	3		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	3		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	3		PAOZZ
2	MS21042L3	NUT	1	G	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 2)	1	G	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 2)	1	G	PAOZZ
3	MS21042L3	NUT	3	D	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	3	D	PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 3)	3	D	PAOZZ
4	MS27468T11B35S	CONNECTOR, RECEPTACLE (84J-S063)	1		PAOZZ
5	M85052/1-10	CLAMP	1	J	PAOZZ
	NAS673V8	BOLT (AP)	1	J	PAOZZ
	AN960JD10	WASHER (AP)	2	J	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J	PAOZZ
6	M85052/1-10	CLAMP	1	J	PAOZZ
	NAS673V1	BOLT (AP)	1	J	PAOZZ
	AN960JD10	WASHER (AP)	2	J	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	J	PAOZZ
7	74A885630-1023	CONDUIT - ELECTRICAL (76301)	1	J	AGOOO
	74A885630-2025	CONDUIT (76301) (PART OF 1 INDEX 7)	1	J	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 7)	2	J*	PAOZZ
	CTR6612-003	SEE ABOVE (64590)	2	J*	PAOZZ
8	MS21266-2N	GROMMET	AR	B	PAOZZ
9	M85052/3-8	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	AN960JD10L	WASHER (AP)	1	J	PAOZZ
10	74A885630-2031	CONDUIT (76301)	1	J	MGOZZ
11	M85052/3-4	CLAMP	1	J	PAOZZ
12	M85052/1-10	CLAMP	1	J	PAOZZ
	NAS673V2	BOLT (AP)	1	J	PAOZZ
	AN960JD10	WASHER (AP)	2	J	PAOZZ
13	74A885621-2051	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-S003)	1		MDOZZ
14	74A885621-2096	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-S002)	1		MDOZZ
15	M85052/1-3	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	M85052/1-3	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
17	74A885621-2174	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTS004)	1	K	MDOZZ
18	74A885621-2294	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10S002)	1		MDOZZ
19	74A885621-2281	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-S007)	1		MDOZZ
20	MS21266-2N	GROMMET	AR		PAOZZ
21	M85052/1-4	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
22	74A885630-1019	CONDUIT - ELECTRICAL (76301)	1	D	AOOOO


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	74A885630-2021	CONDUIT (76301) (PART OF INDEX 22)	1	D	MGOZZ
	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	2	D*	PAOZZ
		(MCDONNELL SPEC ST5N1570-002) (PART OF INDEX 22)			
	CTR6612-002	SEE ABOVE (64590)	2	D*	PAOZZ
23	74A885621-2515	MARKER, IDENTIFICATION - AVIONICS (76301)	1	D	MDOZZ
		(FOR REF DES GND10S004)			
24	74A885621-2514	MARKER, IDENTIFICATION - AVIONICS (76301)	1	D	MDOZZ
		(FOR REF DES GND2-S007)			
25	74A885621-2516	MARKER, IDENTIFICATION - AVIONICS (76301)	1	D	MDOZZ
		(FOR REF DES GND3-S001)			
26	M85052/3-4	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
21	M85052/1-6	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
28	M85052/1-10	CLAMP	1	A	PAOZZ
	M85052/1-16	CLAMP	1	E	PAOZZ
	M85052/1-13	CLAMP	1	F	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
29	74A885621-2235	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES 84J-S063)			
30	MS21266-3N	GROMMET	AR	C	PAOZZ
31	M85052/1-10	CLAMP	1	H	PAOZZ
	NAS673V8	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	H	PAOZZ
32	M85052/1-10	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10	WASHER (AP)	1	H	PAOZZ
33	M85052/1-10	CLAMP	1	H	PAOZZ
	NAS673V8	BOLT (AP)	1	H	PAOZZ
	AN960JD10	WASHER (AP)	2	H	PAOZZ
	NAS43DD3-32	SPACER (AP)	1	H	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161528
B	161933 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161523 & UP			
		D						161353 THRU 161761			
		E						161702 THRU 161761			
		F						161925 & UP			
		G						161353 THRU 162414			
		H						161353 THRU 162477			
		J						162826 & UP			
		K						161522 THRU 162414			

AFT FUSELAGE DOOR 64L (SHOWN IN OPEN POSITION)

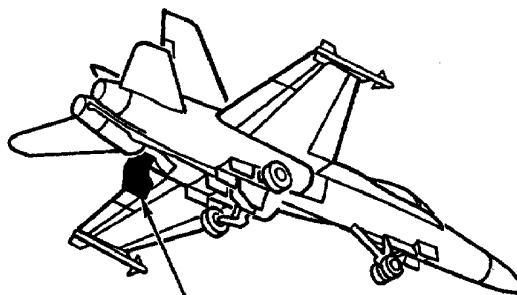

DOOR 64L (SHOWN IN
OPEN POSITION)

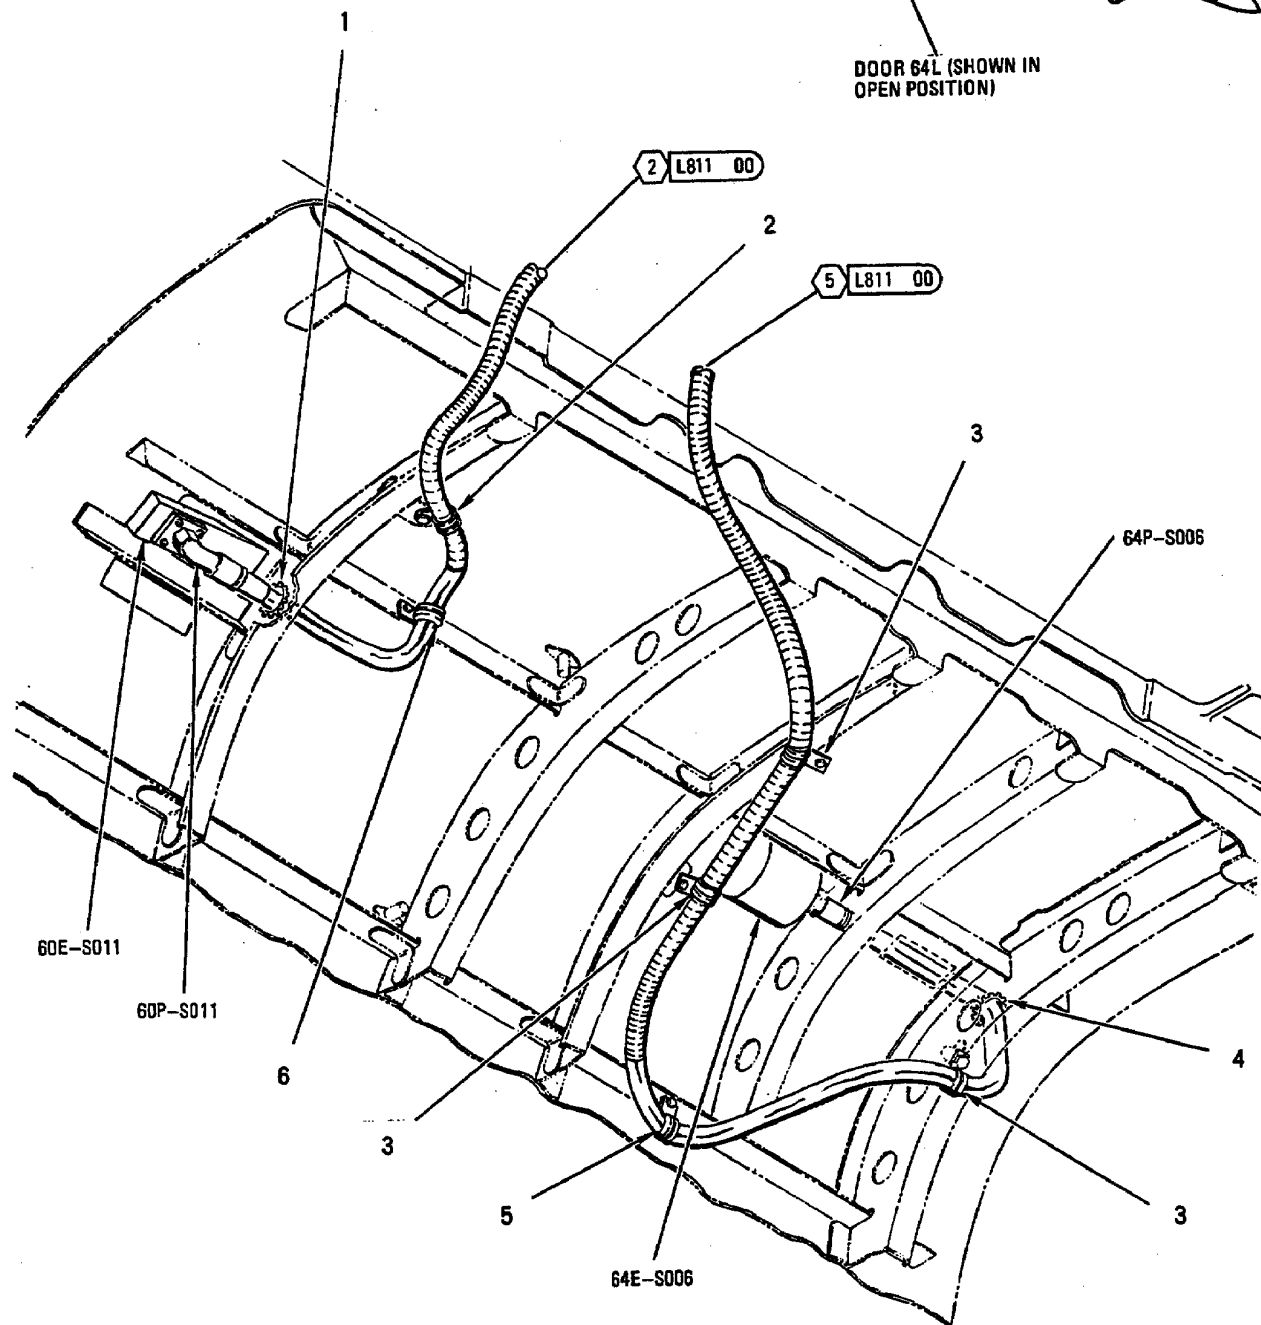



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21266-2N	GROMMET	AR		PAOZZ
2	M85052/3-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
3	M85052/3-6	CLAMP	4		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS21266-3N	GROMMET	AR		PAOZZ
5	M85052/3-6	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
6	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	B	PAOZZ


CODE USABLE ON

A 161524 & UP


B 161528 & UP

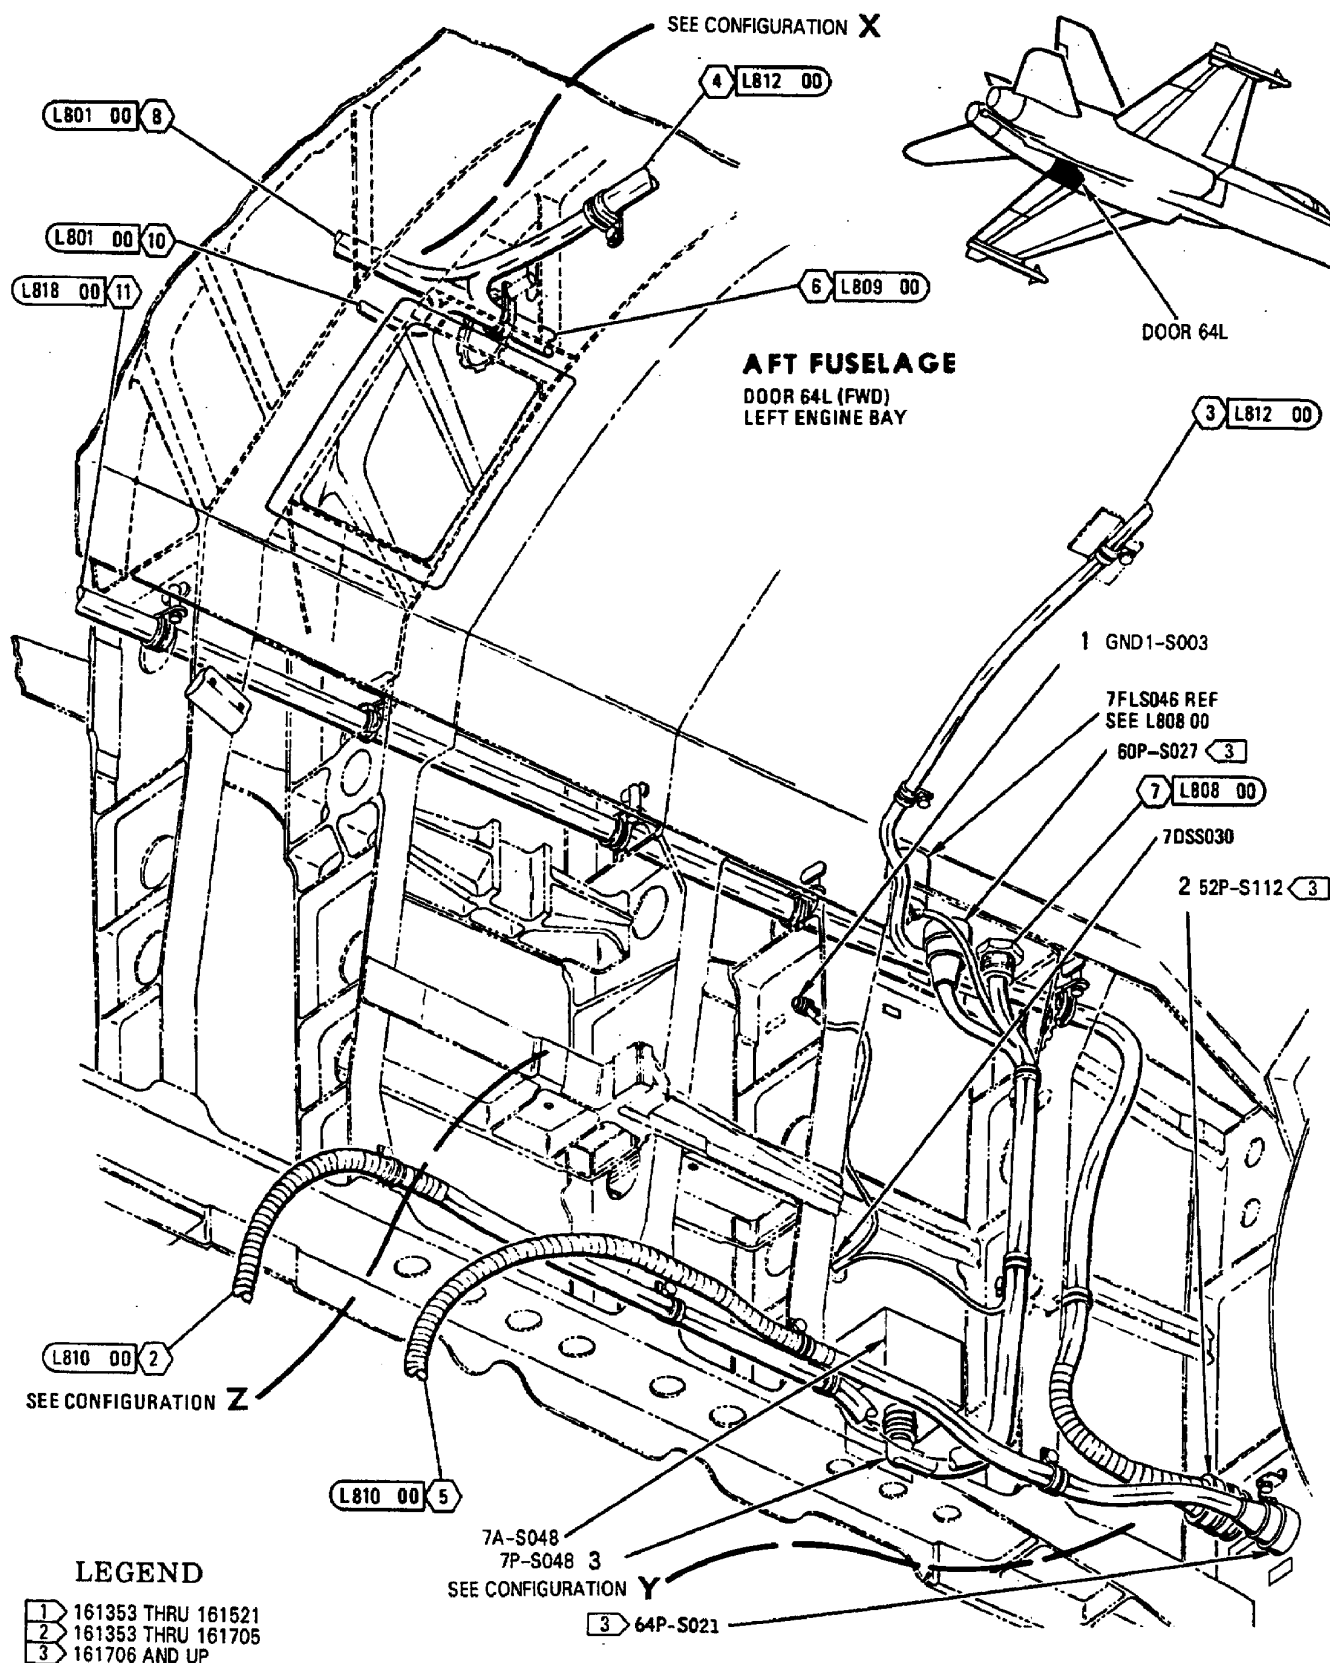

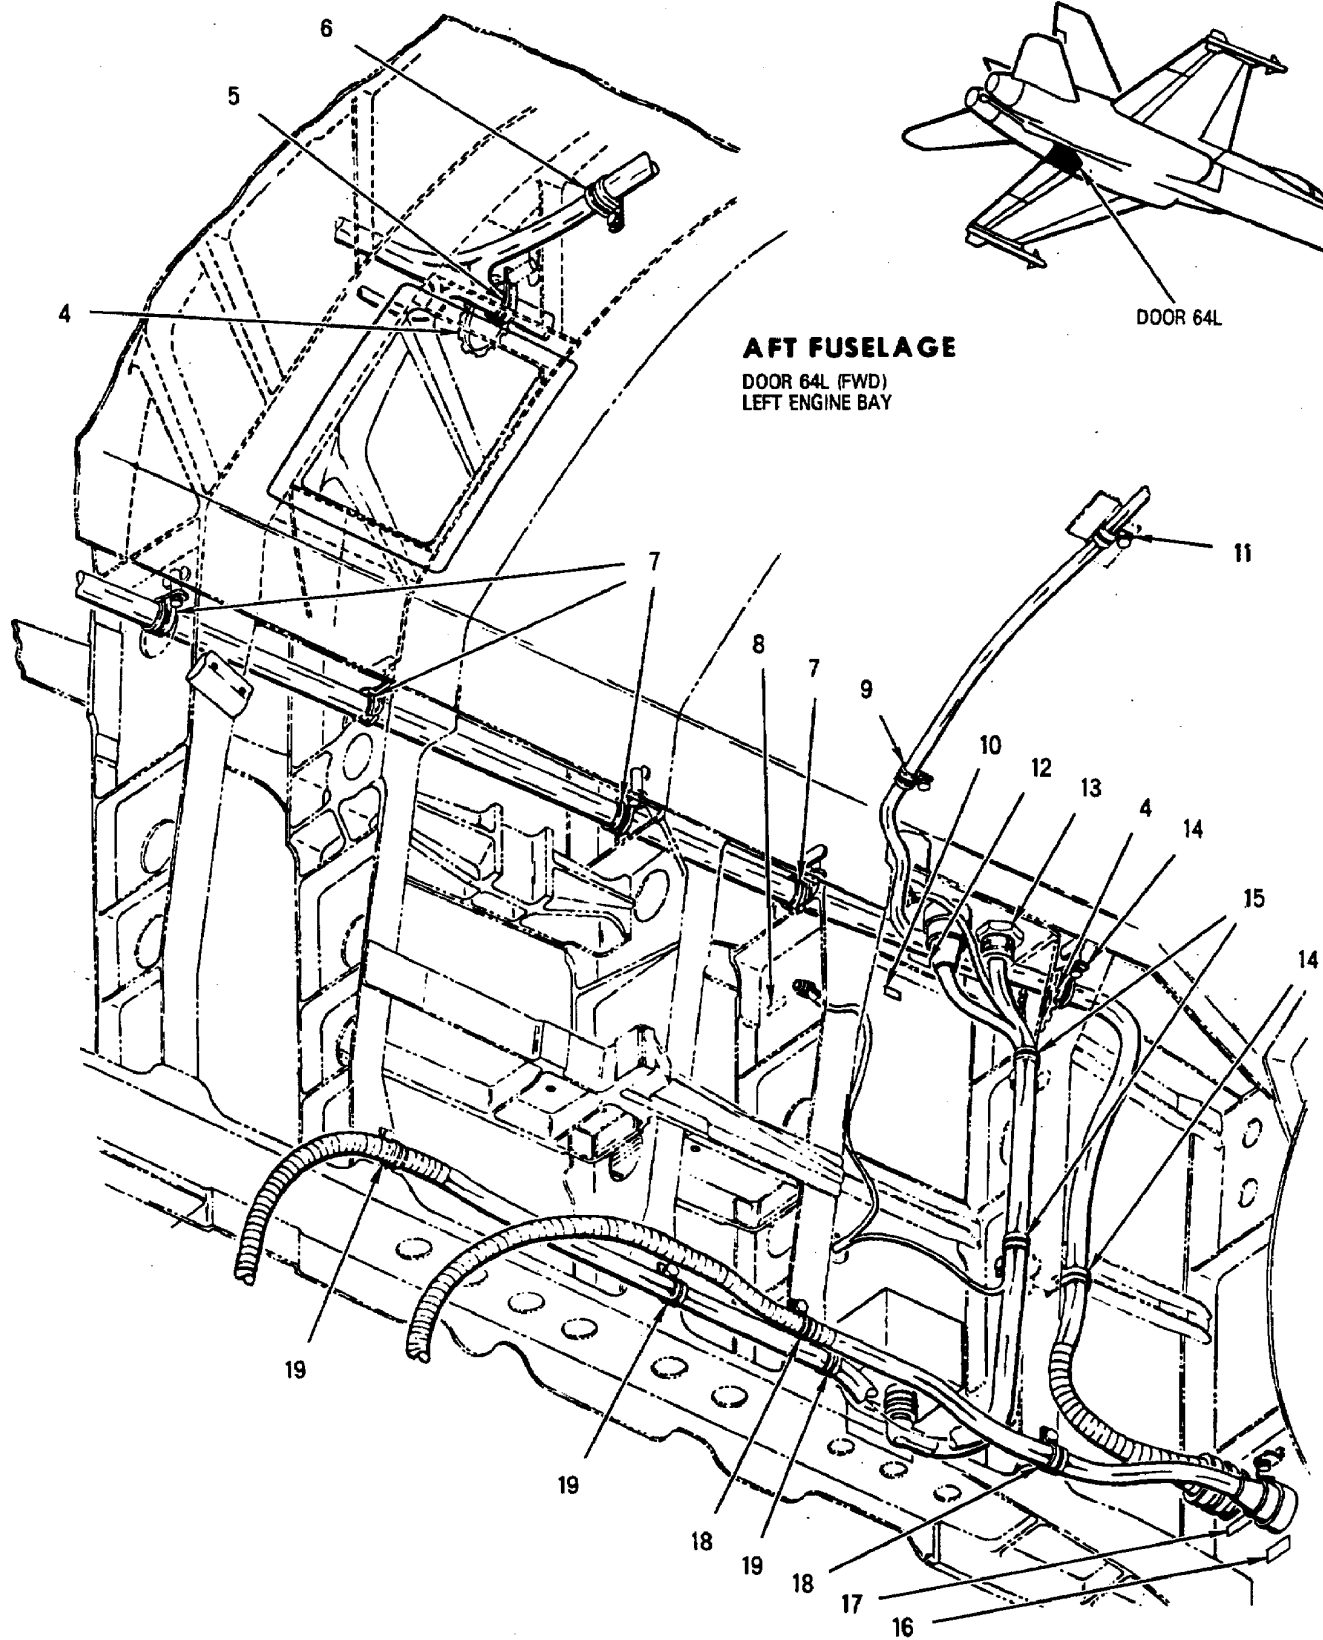


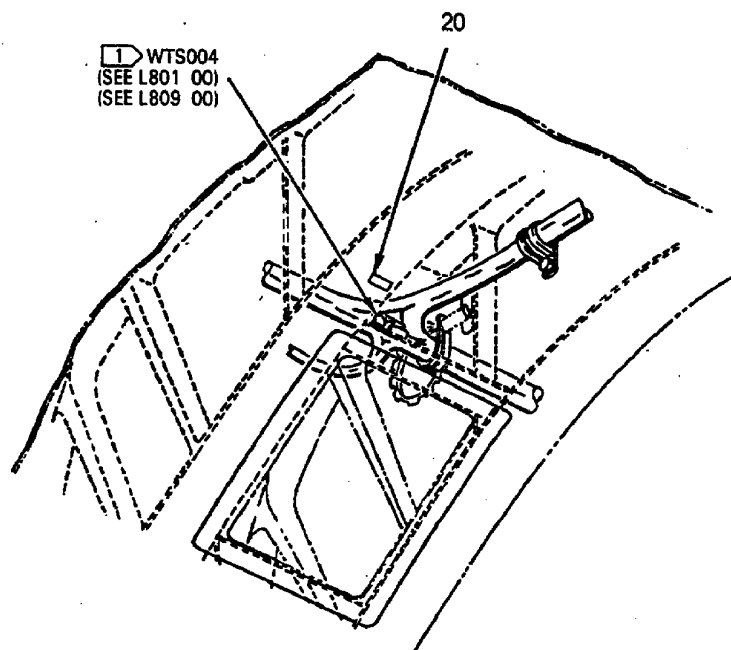

CONFIGURATION X

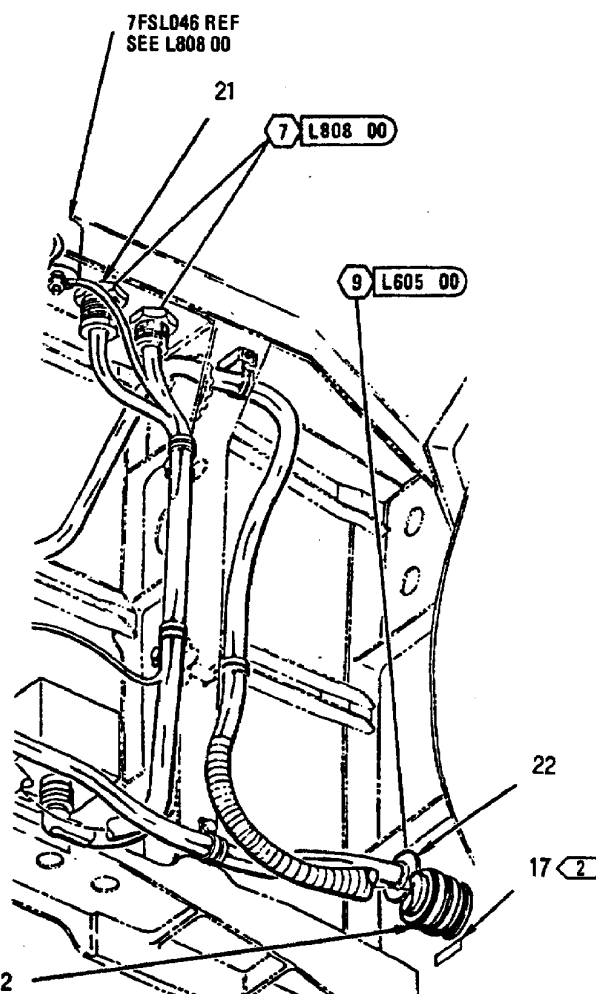

CONFIGURATION Y

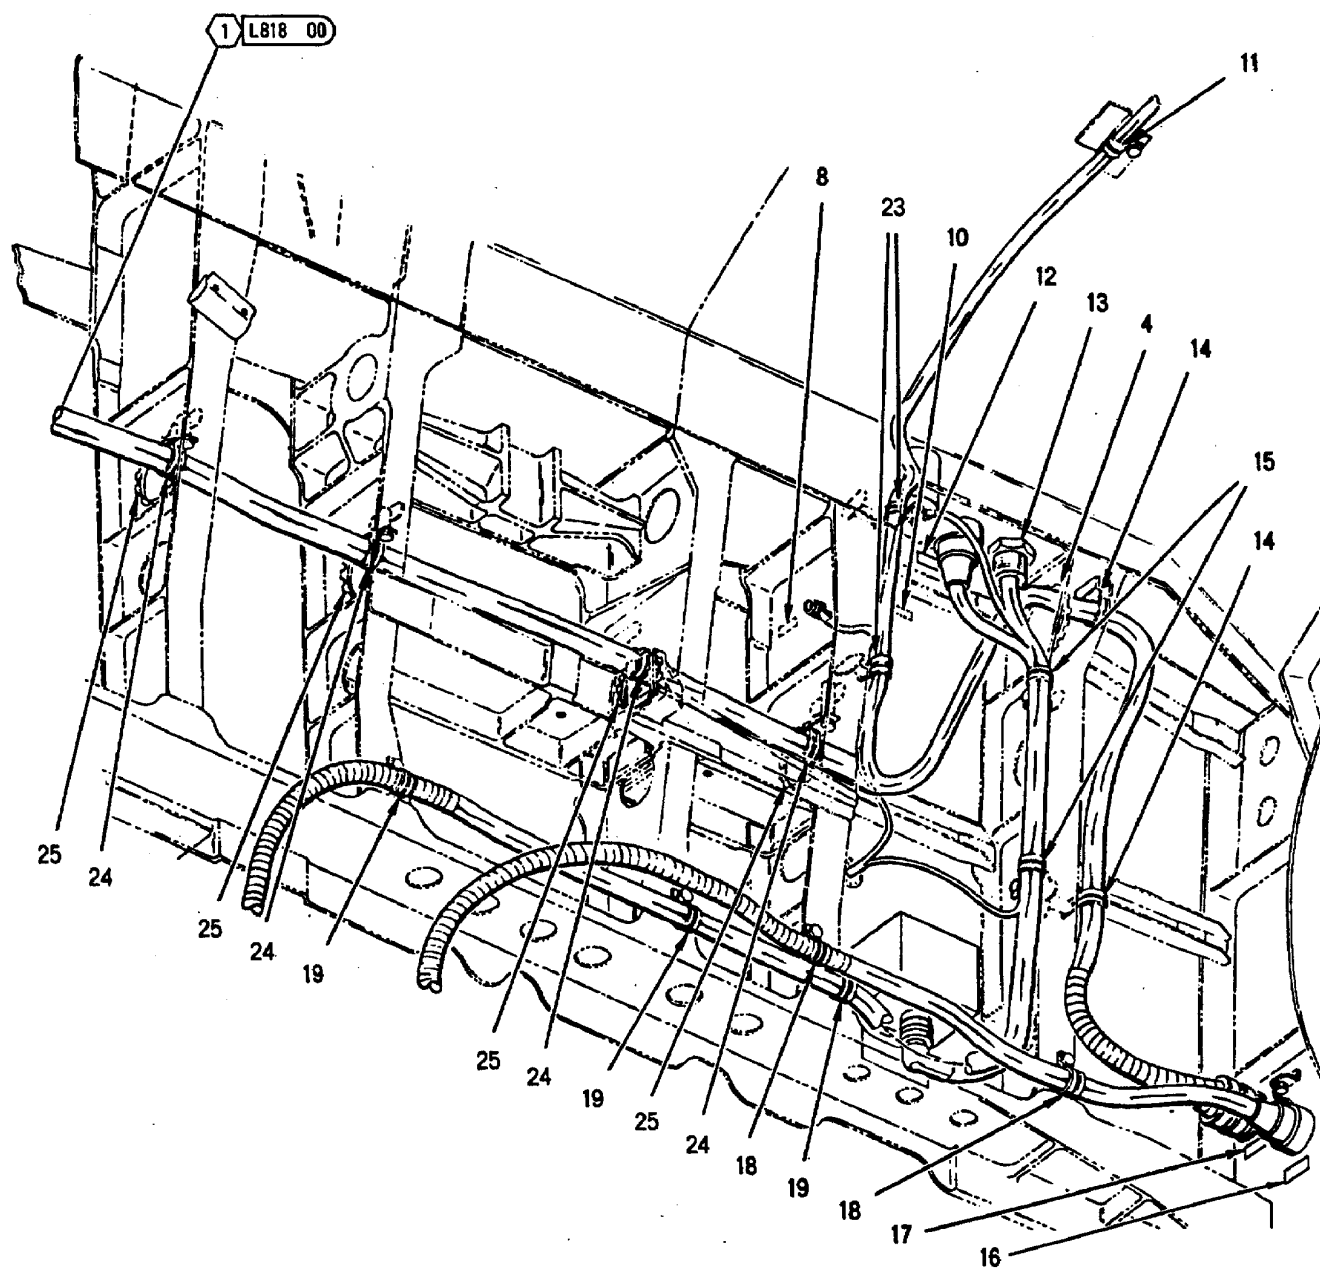


CONFIGURATION Z

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	1		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	1		PAOZZ
2	D38999/26KG35PN	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-21-35PN) (52P-S112)			
	TVS06RK-21-35PN	CONNECTOR, PLUG, ELECTRICAL	1	E	PAOZZ
		(77820) (MCDONNELL SPEC			
		ST5M1586KG35PN) (USE UNTIL			
		EXHAUSTED)			
3	MS27467T9B35S	CONNECTOR, PLUG (7P-S048)	1		PAOZZ
4	MS21266-2N	GROMMET	AR		PAOZZ
5	M85052/1-10	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
6	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
7	M85052/3-9	CLAMP	4	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
8	74A885621-2014	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND1-S003)			
9	M85052/3-4	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10	WASHER (AP)	1	H	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	H	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
10	74A885621-2331	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 7FLS046)			
11	M85052/3-4	CLAMP	1		PAOZZ
	NAS673V2	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
12	74A885621-2611	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES 60J-S027)			
13	74B878001-143	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
14	M85052/3-9	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	M85052/3-8	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
16	74A885621-2587	MARKER, IDENTIFICATION - AVIONICS	1	B	MDOZZ
		(76301) (FOR REF DES 64J-P021)			
17	74A885621-2238	MARKER, IDENTIFICATION - AVIONICS	1	C	MDOZZ
		(76301) (FOR REF DES 52J-S112)			
	74A885621-2591	MARKER, IDENTIFICATION - AVIONICS	1	D	MDOZZ
		(76301) (FOR REF DES 52J-P112)			
18	M85052/3-6	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
19	M85052/3-6	CLAMP	3		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
20	74A885621-2174	MARKER, IDENTIFICATION - AVIONICS	1	F	MDOZZ
		(76301) (FOR REF DES WTS004)			

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
21	74B878001-145	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
22	74B878001-165	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	A	PAOZZ
23	M85052/3-4	CLAMP	2	G	PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	AN960JD10	WASHER (AP)	1	G	PAOZZ
24	M85052/3-9	CLAMP	4	G	PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
25	MS21266-2N	GROMMET	AR	G	PAOZZ


CODE	USABLE ON
A	161353 THRU 161705
B	161706 & UP
C	161353 THRU 161528
D	161702 & UP
E	161353 THRU 161761
F	161353 THRU 162414
G	161353 THRU 162477
H	162826 & UP

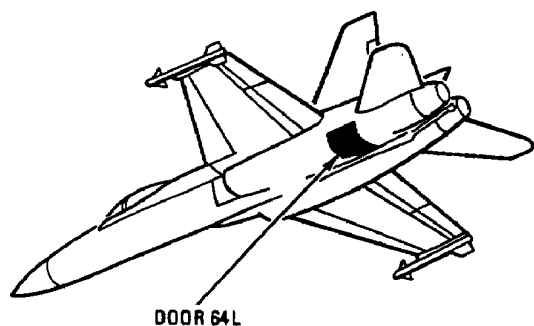


AFT FUSELAGE UPPER CENTER KEEL- DOOR 64L

LEGEND


- | | |
|---|--------------------|
| 1 | 161353 THRU 161761 |
| 2 | 161925 THRU 161931 |
| 3 | 161933 THRU 162477 |
| 4 | 162826 AND UP |

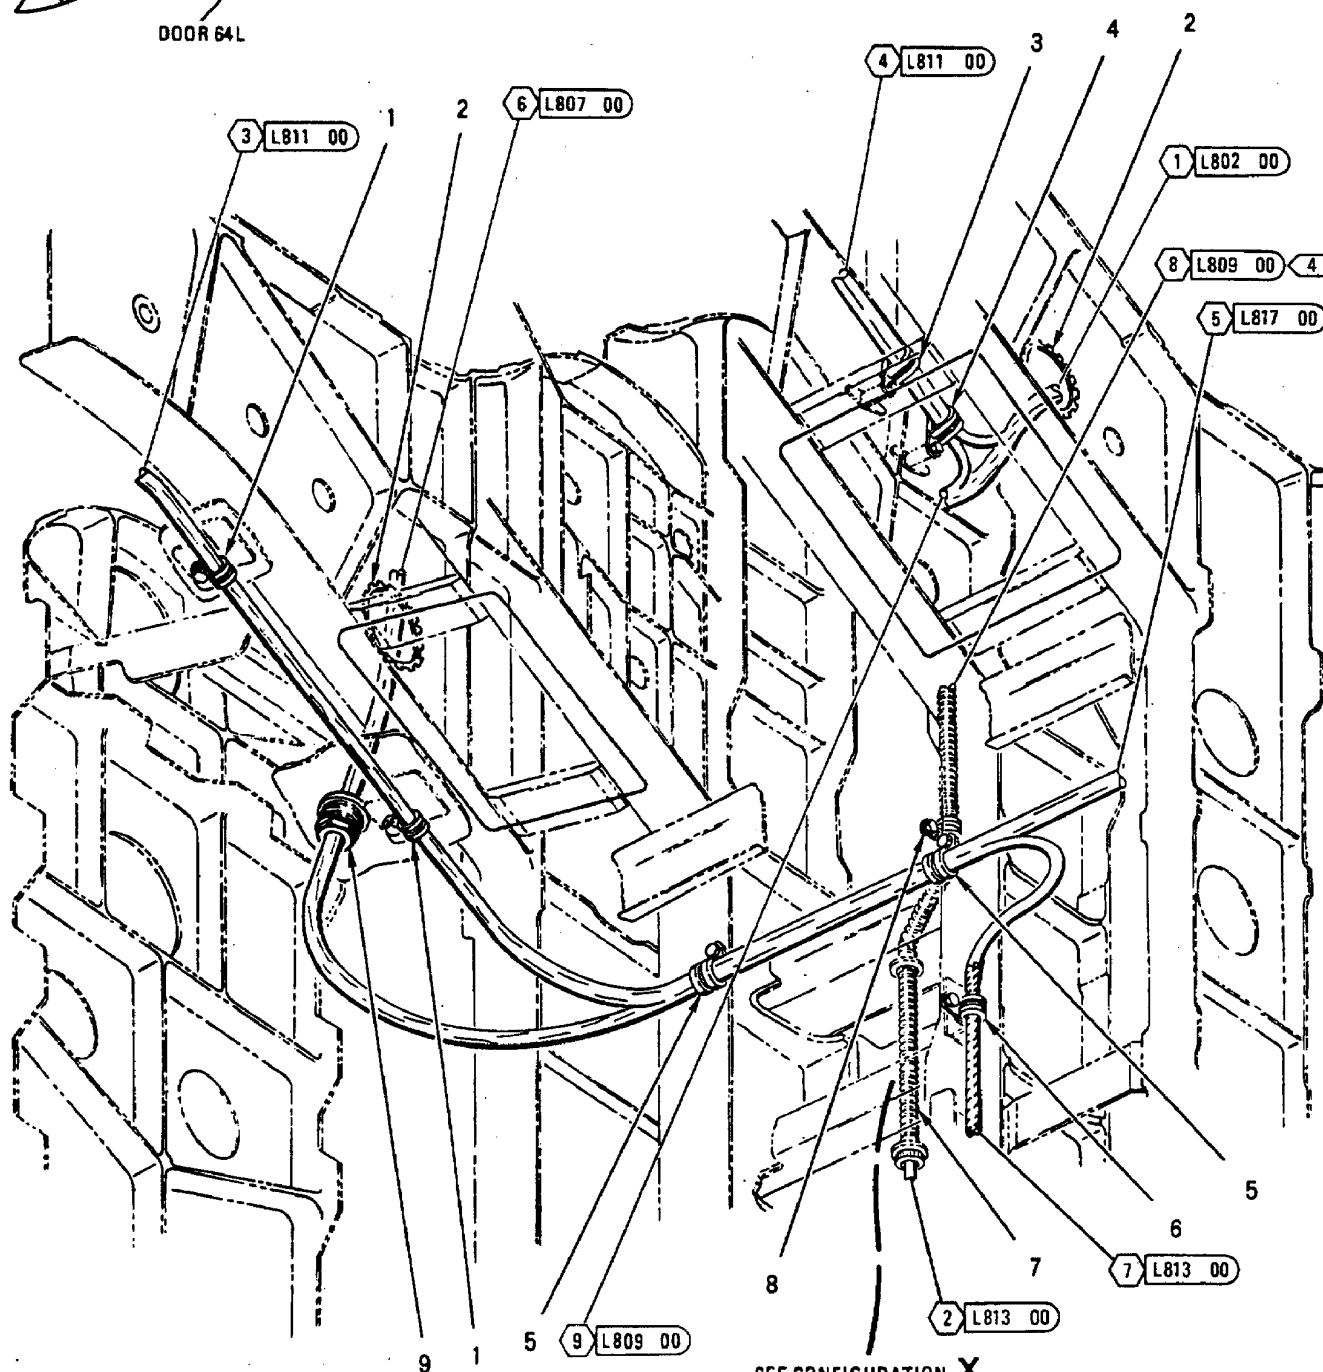

SEE CONFIGURATION X

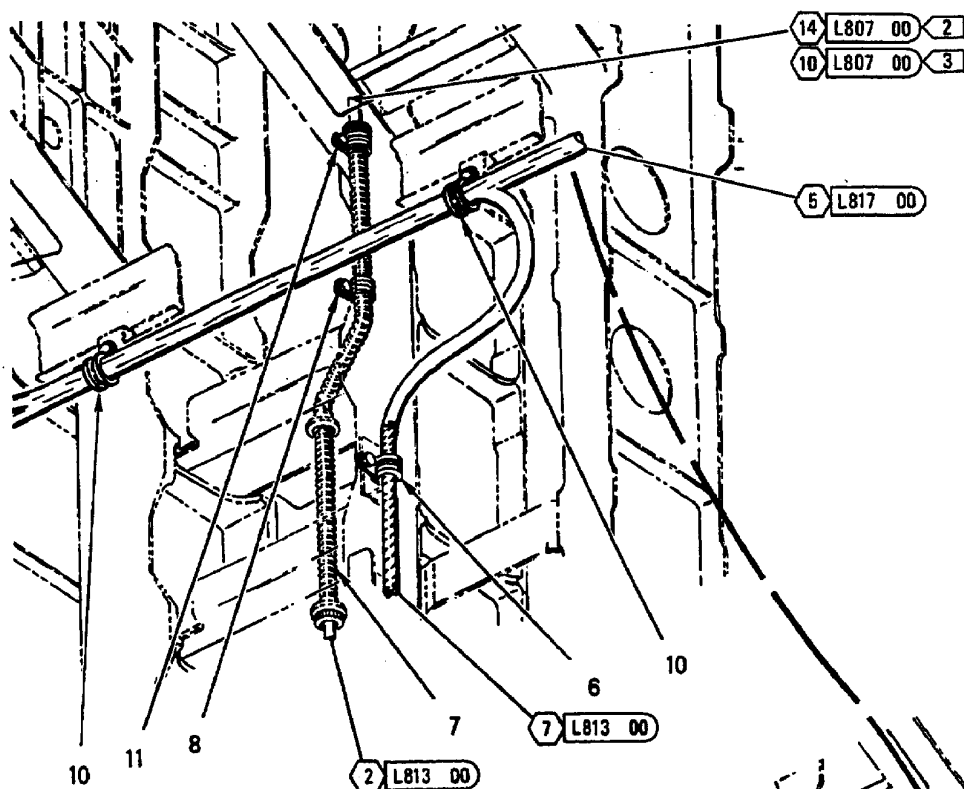

CONFIGURATION X
161925 THRU 162477

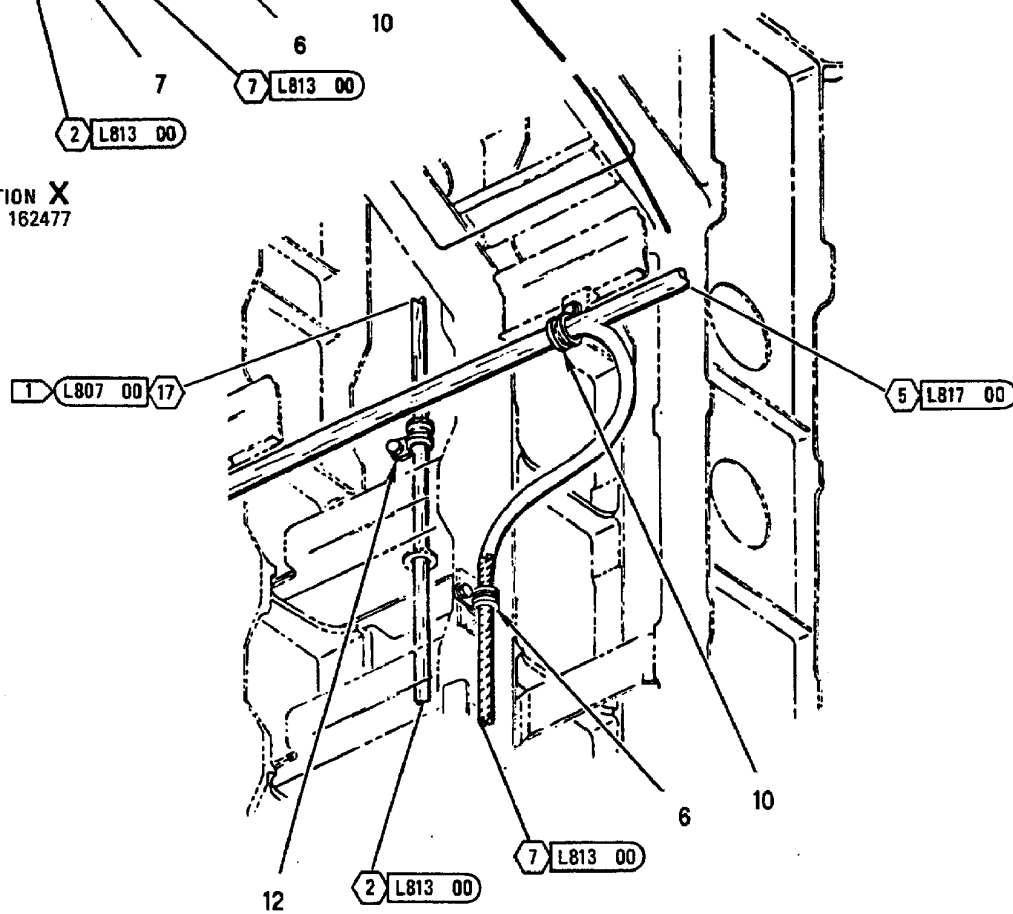

161353 THRU 161761

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-4	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
4	M85052/1-8	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	E	PAOZZ
	AN960JD10	WASHER (AP)	1	E	PAOZZ
5	M85052/3-9	CLAMP	2	G	PAOZZ
	NAS673V2	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
6	M85052/3-7	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (76530) (AP) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
7	74A885630-1023	CONDUIT - ELECTRICAL (76301)	1	D	AGOOO
	74A885630-2025	CONDUIT (76301) (PART OF INDEX 7)	1	D	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	2	D*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003 (PART OF INDEX 7))			
	CRT6612-003	SEE ABOVE (64590)	2	D*	PAOZZ
8	M85052/3-8	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
9	74B878001-147	CLAMP - CABLE, BULKHEAD EMI (76301)	1		PAOZZ
10	M85052/3-6	CLAMP	2	A	PAOZZ
	M85052/3-9	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
11	M85052/3-8	CLAMP	1	F	PAOZZ
	NAS673V9	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	NAS42DD6-32	SPACER (AP)	1	F	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
12	M85052/3-4	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(WP002 00)


CODE	USABLE ON
A	161353 THRU 161705
B	161706 THRU 162477
C	161353 THRU 161761
D	161925 & UP
E	161732 & UP

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		F						161925 THRU 162477			
		G						162826 & UP			
		H						161353 THRU 162477			

AFT FUSELAGE


LOWER CENTER KEEL
DOOR 64L, DOOR 64R
AND DOOR 66

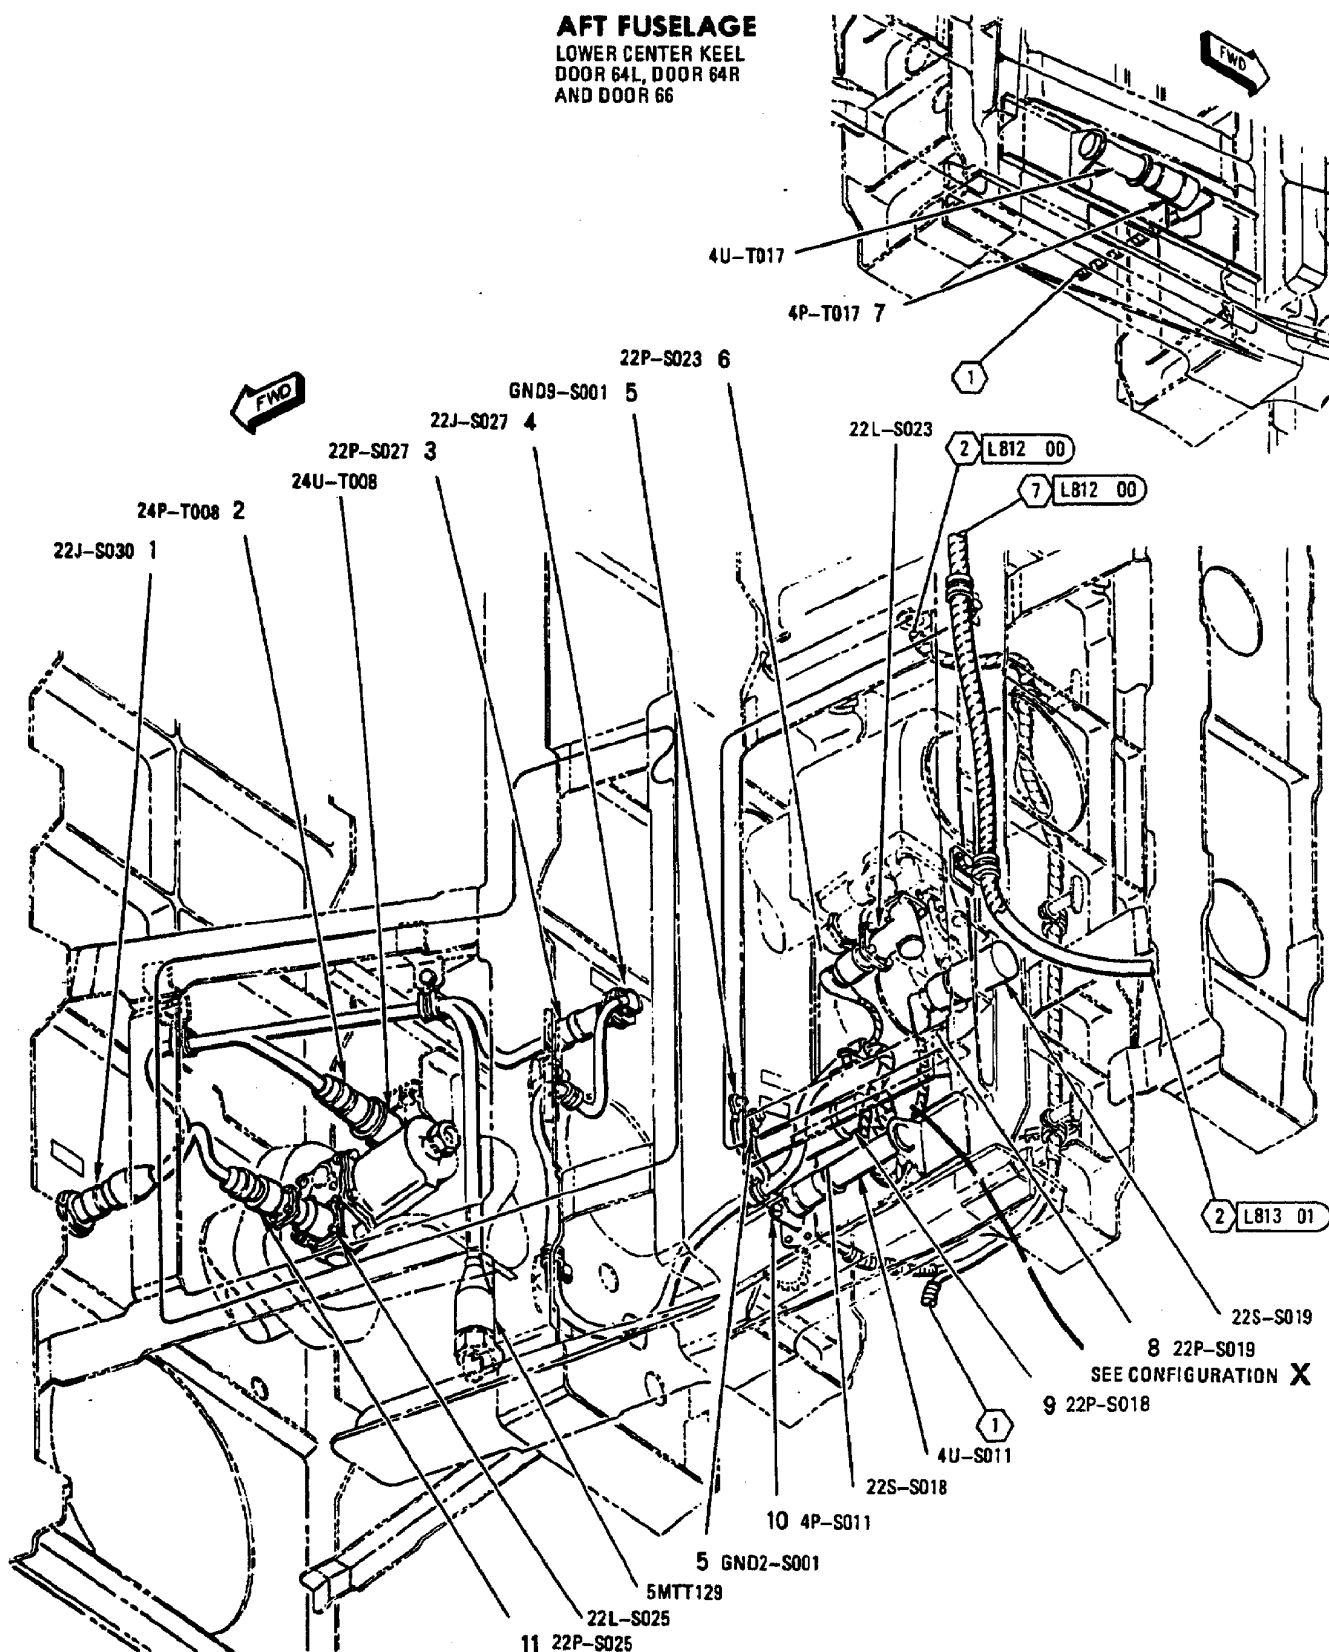

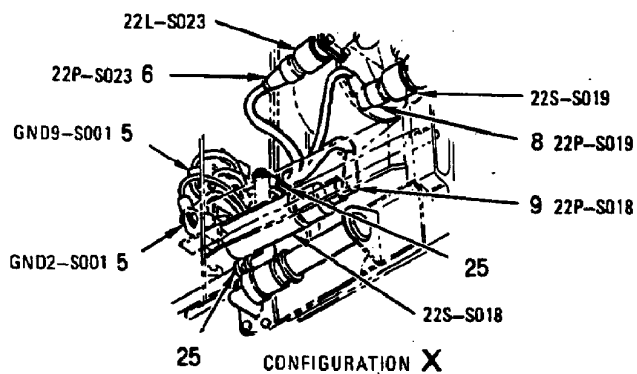

AFT FUSELAGE

LOWER CENTER KEEL
DOOR 64L, DOOR 64R
AND DOOR 66

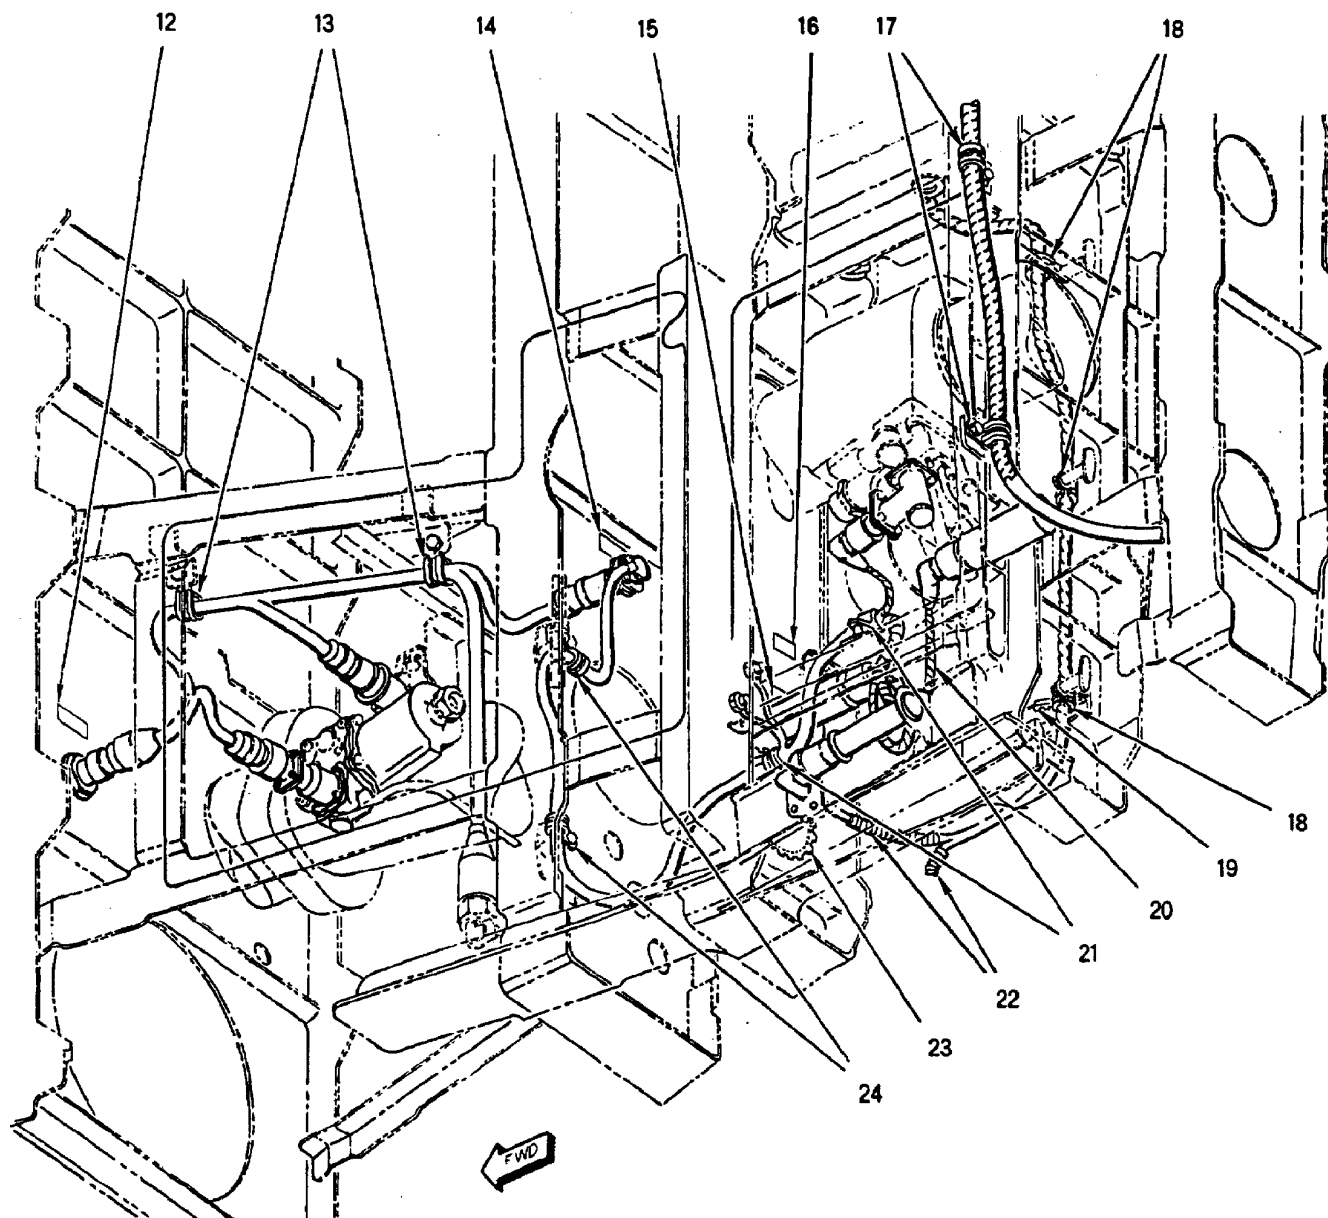


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	D38999/24KC35PN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-13-35PN) (22J-S030)	1		PAOZZ
	TVS07RK-13-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KC35PN) (USE UNTIL EXHAUSTED) (22J-S030)	1	A	PAOZZ
2	D38999/26KB98SA	CONNECTOR, RECEPTACLE (REPLACES TVS06RK-11-98SA) (24P-T008)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL(77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-T008)	1	A	PAOZZ
3	D38999/26KA35SN	CONNECTOR, RECEPTACLE (REPLACES TVS06RK-9-35SN) (22P-S027)	1		PAOZZ
	TVS06RK-9-35SN	CONNECTOR, PLUG, ELECTRICAL(77820) (MCDONNELL SPEC ST5M1586KA35SN) (USE UNTIL EXHAUSTED) (22P-S027)	1	A	PAOZZ
4	D38999/24KA35PN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-9-35PN) (22J-S027)	1		PAOZZ
	TVS07RK-9-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KA35PN) (USE UNTIL EXHAUSTED) (22J-S027)	1	A	PAOZZ
5	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 5)	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 5)	2		PAOZZ
6	MS27467T9B98S	CONNECTOR, PLUG (22P-S023)	1		PAOZZ
7	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-T017)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL(77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-T017)	1	A	PAOZZ
8	MS27467T9B35SA	CONNECTOR, PLUG (22P-S019)	1		PAOZZ
9	MS27467T9B35S	CONNECTOR, PLUG (22P-S018)	1		PAOZZ
10	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-S011)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL(77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-S011)	1	A	PAOZZ
11	MS27467T11B98S	CONNECTOR, PLUG (22P-S025)	1		PAOZZ
12	74A885621-2236	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 22J-S030)	1		MDOZZ
13	M85052/3-6	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
14	74A885621-2237	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 22J-S027)	2		MDOZZ
15	74A885621-2049	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND2-S001)	1		MDOZZ
16	74A885621-2095	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-S001)	1		MDOZZ
17	M85052/3-7	CLAMP	2	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M1)	1	C	PAOZZ
18	M85052/3-6	CLAMP	3		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10L	WASHER (AP)	1		PAOZZ
19	MS21266-2N	GROMMET	AR		PAOZZ
20	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	E	MGOZZ
	T25T	SEE ABOVE (06383)	AR	E	MGOZZ
21	M85052/1-3	CLAMP	2	E	PAOZZ
	NAS673V8	BOLT (AP)	1	E	PAOZZ
	NAS43DD3-24	SPACER (AP)	1	E	PAOZZ
22	SF6151-3-4	SLEEVING, INSULATION (16357)	AR	B	MGOZZ
23	MS21266-2N	GROMMET	AR		PAOZZ
24	M85052/1-3	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
25	M85052/1-3	CLAMP	2	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ


CODE	USABLE ON
A	161353 THRU 161761
B	161523 & UP
C	161706 & UP
D	161353 THRU 162851
E	162852 & UP

AFT FUSELAGE LOWER CENTER KEEL DOOR 64L AND DOOR 68L

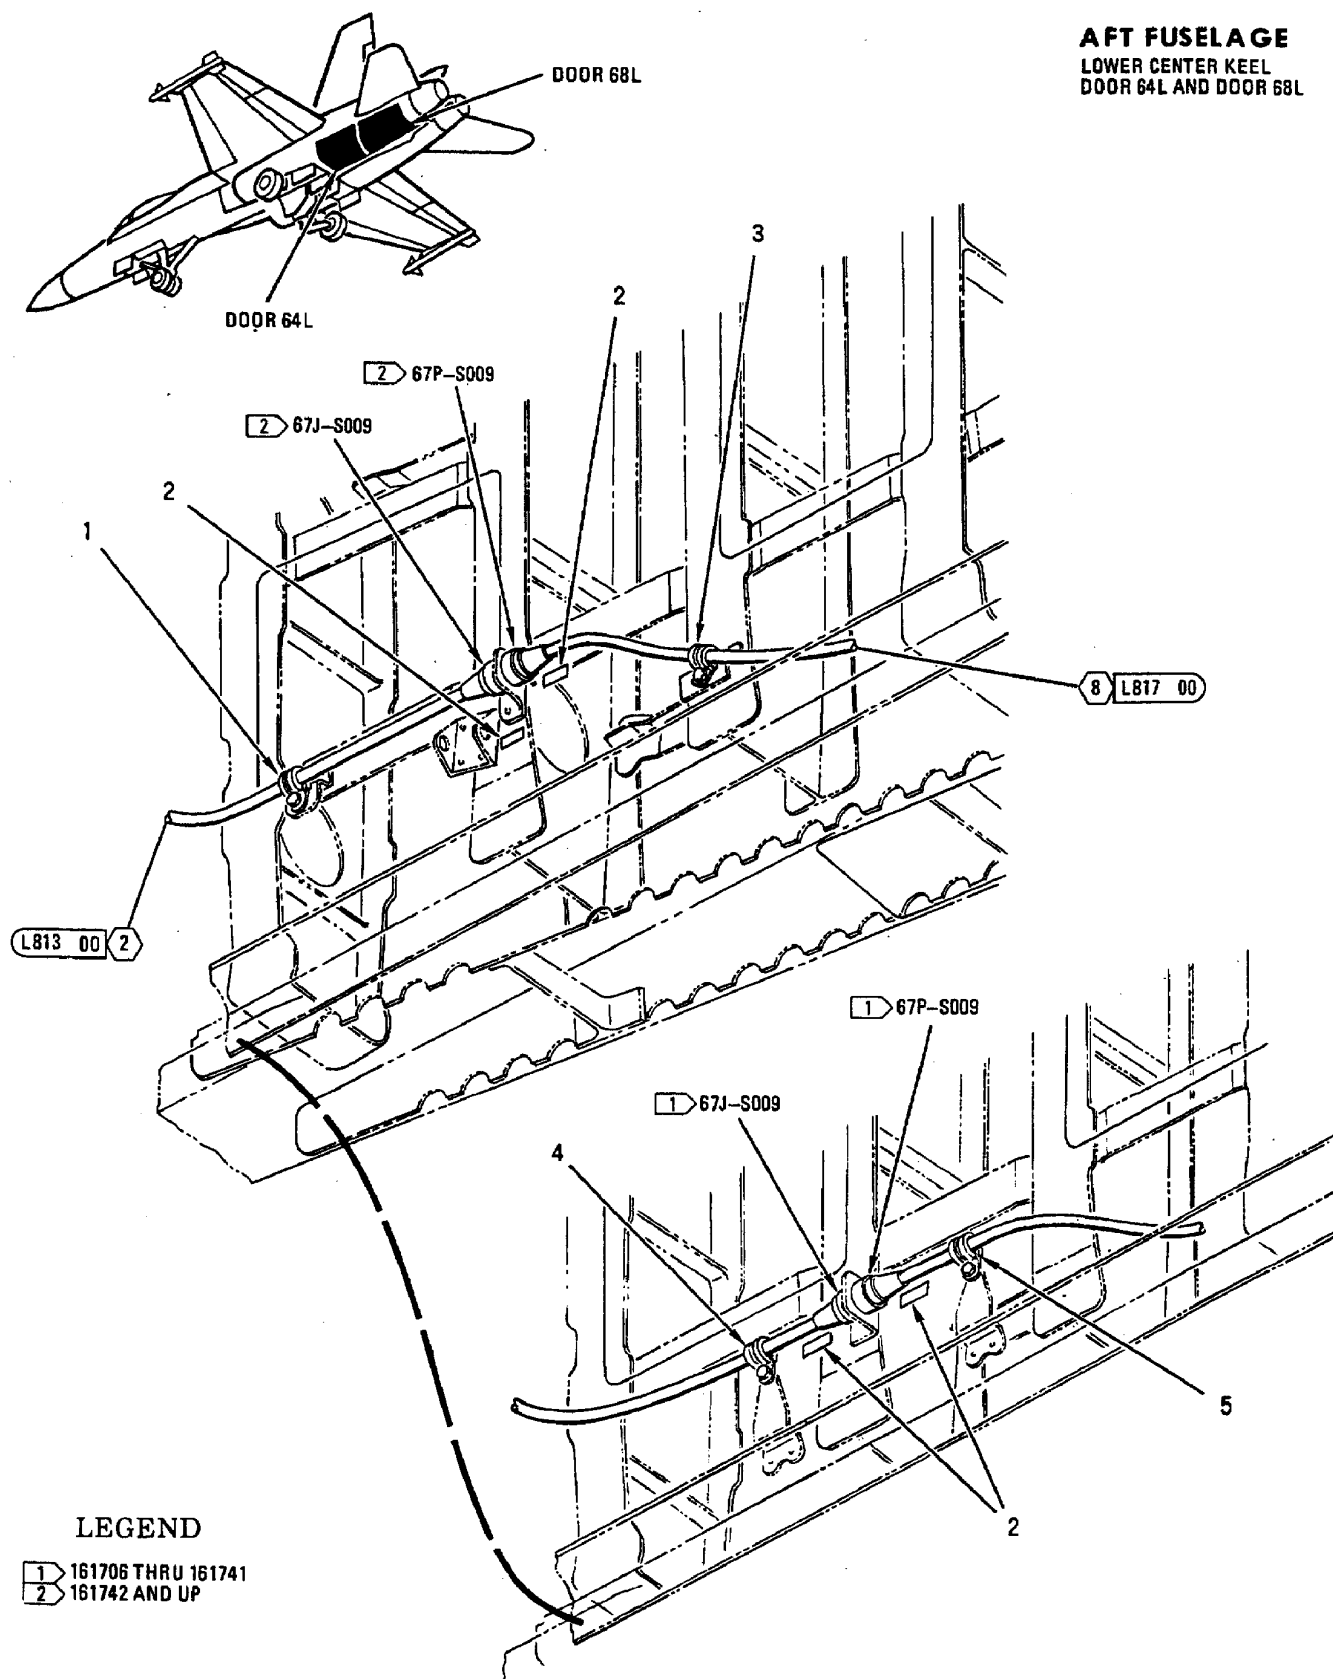

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-7	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	B	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
2	74A885621-2584	MARKER, IDENTIFICATION - AVIONICS	2	C	MDOZZ
		(76301) (FOR REF DES 67J-S009)			
3	M85052/3-3	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
4	M85052/3-7	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	A	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
5	M85052/3-3	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

CODE	USABLE ON
A	161706 THRU 161741
B	161742 & UP
C	161706 & UP

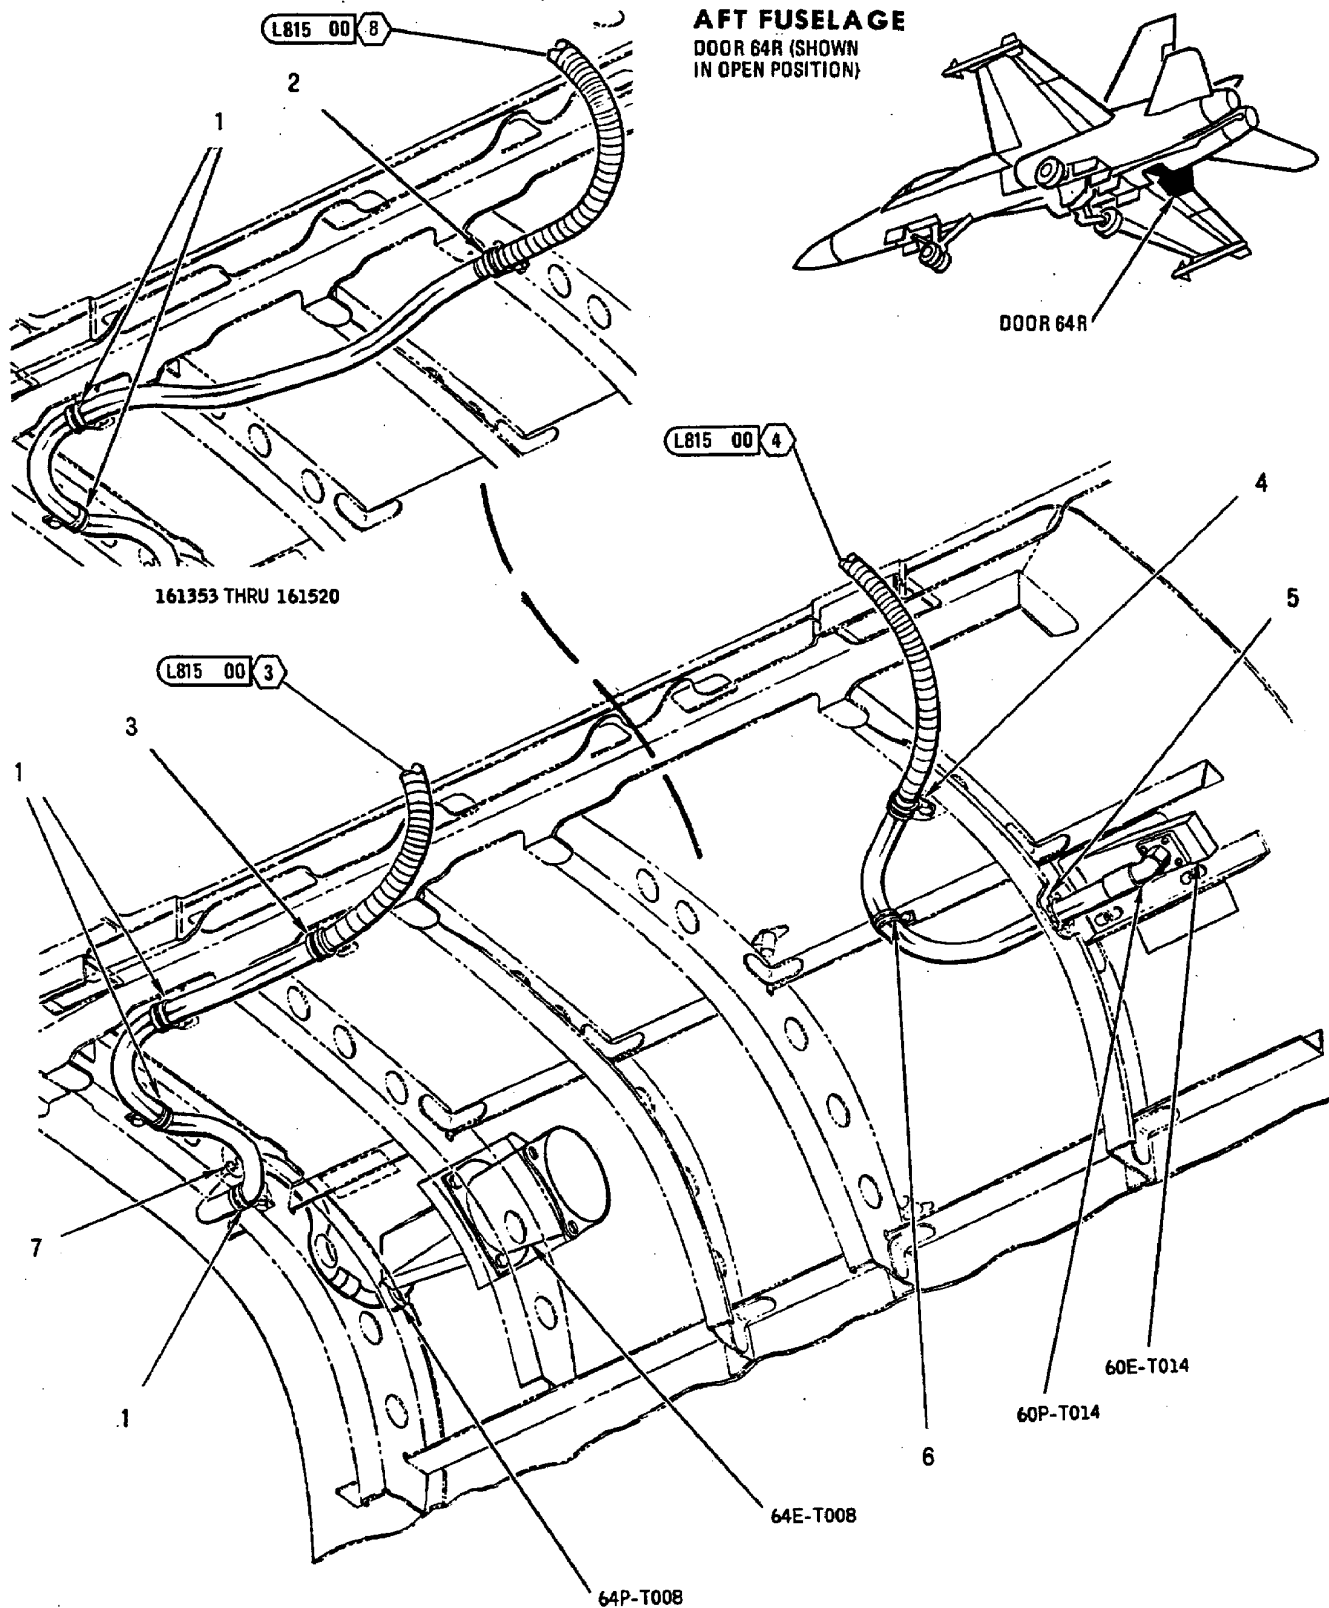


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-6	CLAMP	3		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
2	M85052/3-6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
3	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
4	M85052/3-6	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
5	MS21266-2N	GROMMET	AR		PAOZZ
6	M85052/3-6	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	AN960JD10	WASHER (AP)	1	C	PAOZZ
7	MS21266-3N	GROMMET	AR		PAOZZ

CODE	USABLE ON
A	161353 THRU 161520
B	161521 & UP
C	161702 & UP


AFT FUSELAGE


DOOR 64R (FWD)
RIGHT ENGINE BAY

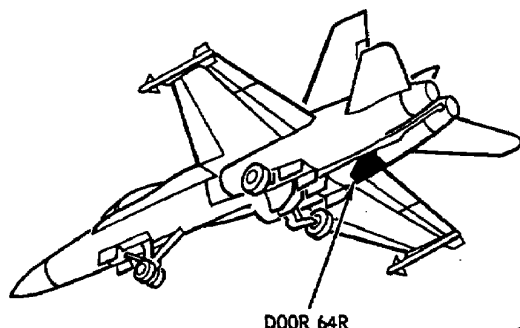


LEGEND


- 1 161353 THRU 161521
- 2 161706 AND UP

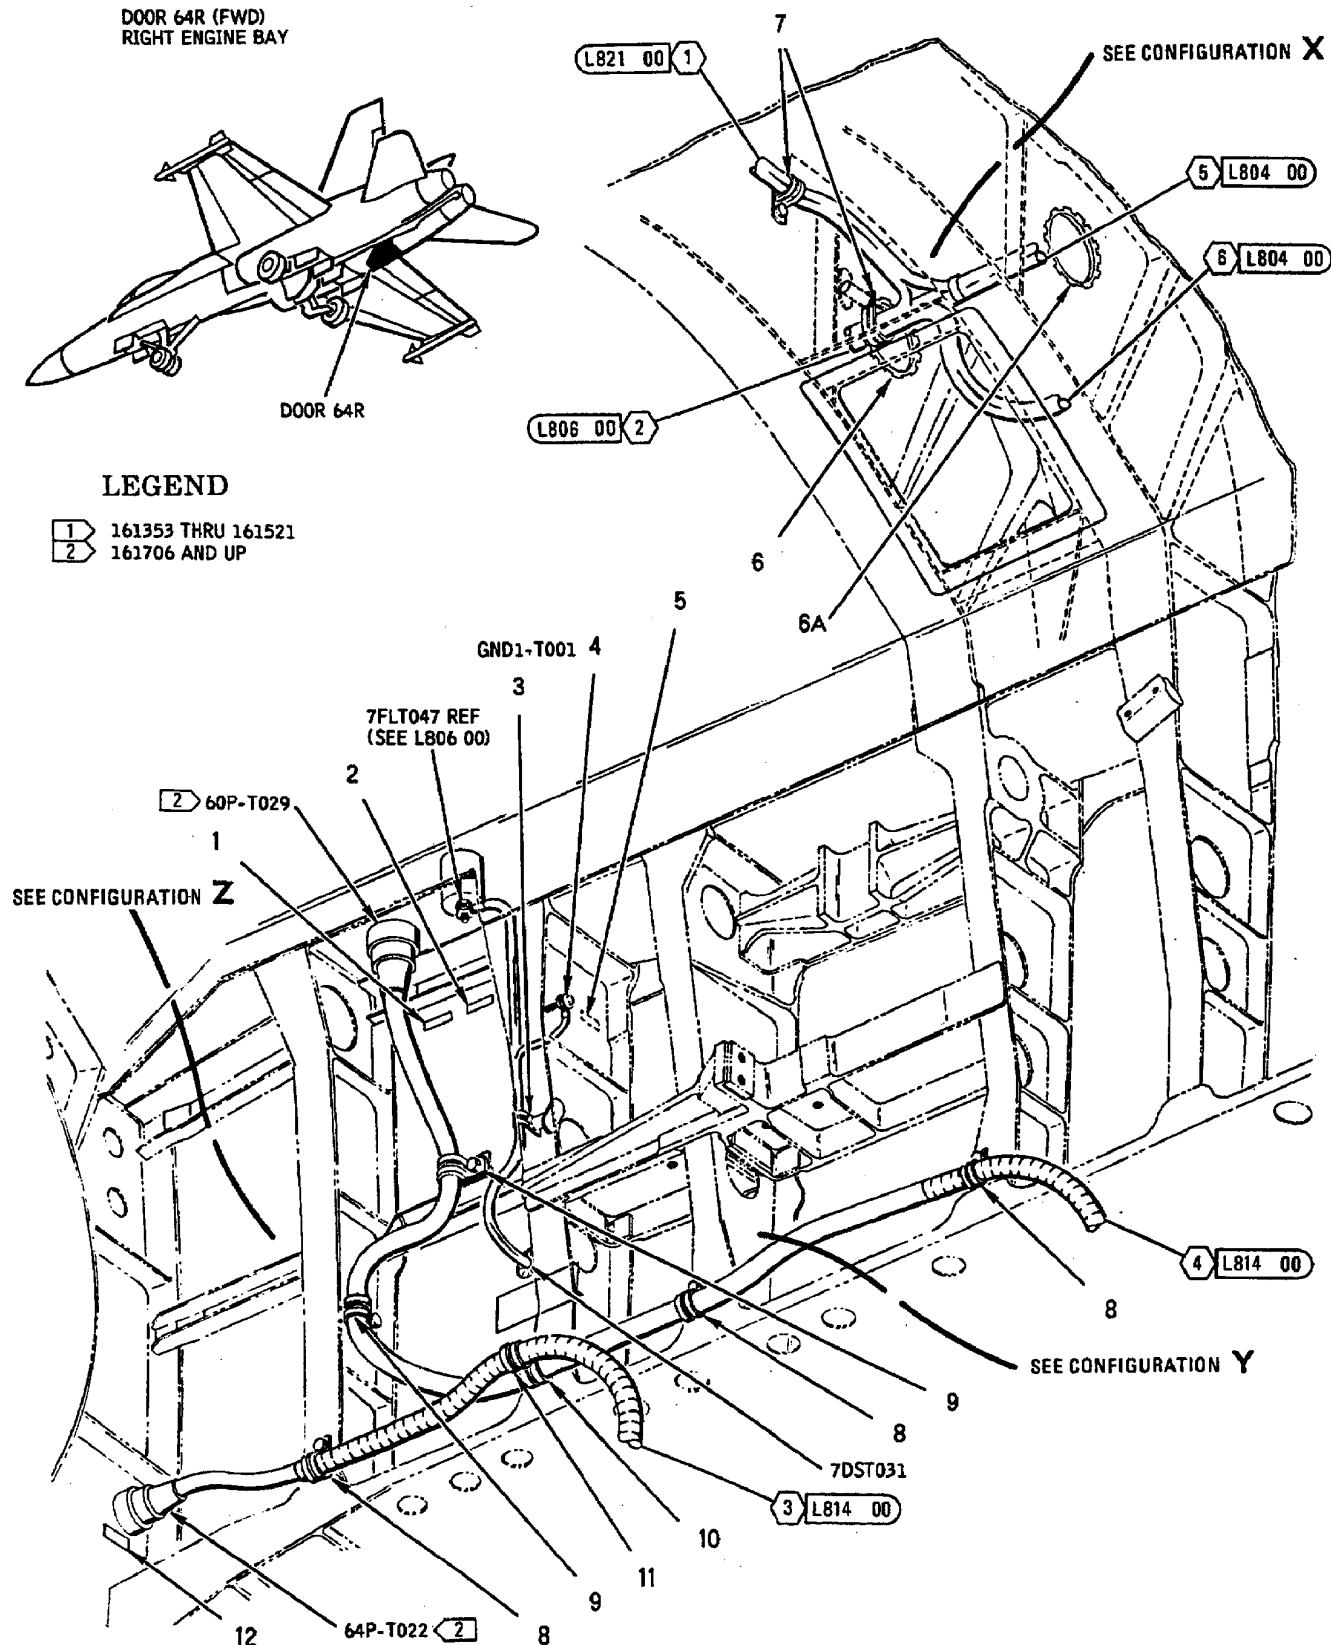

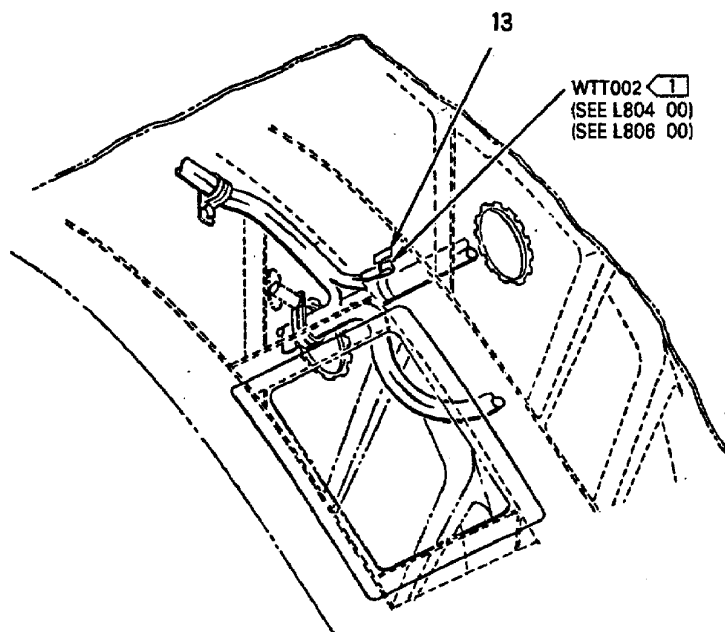

CONFIGURATION X

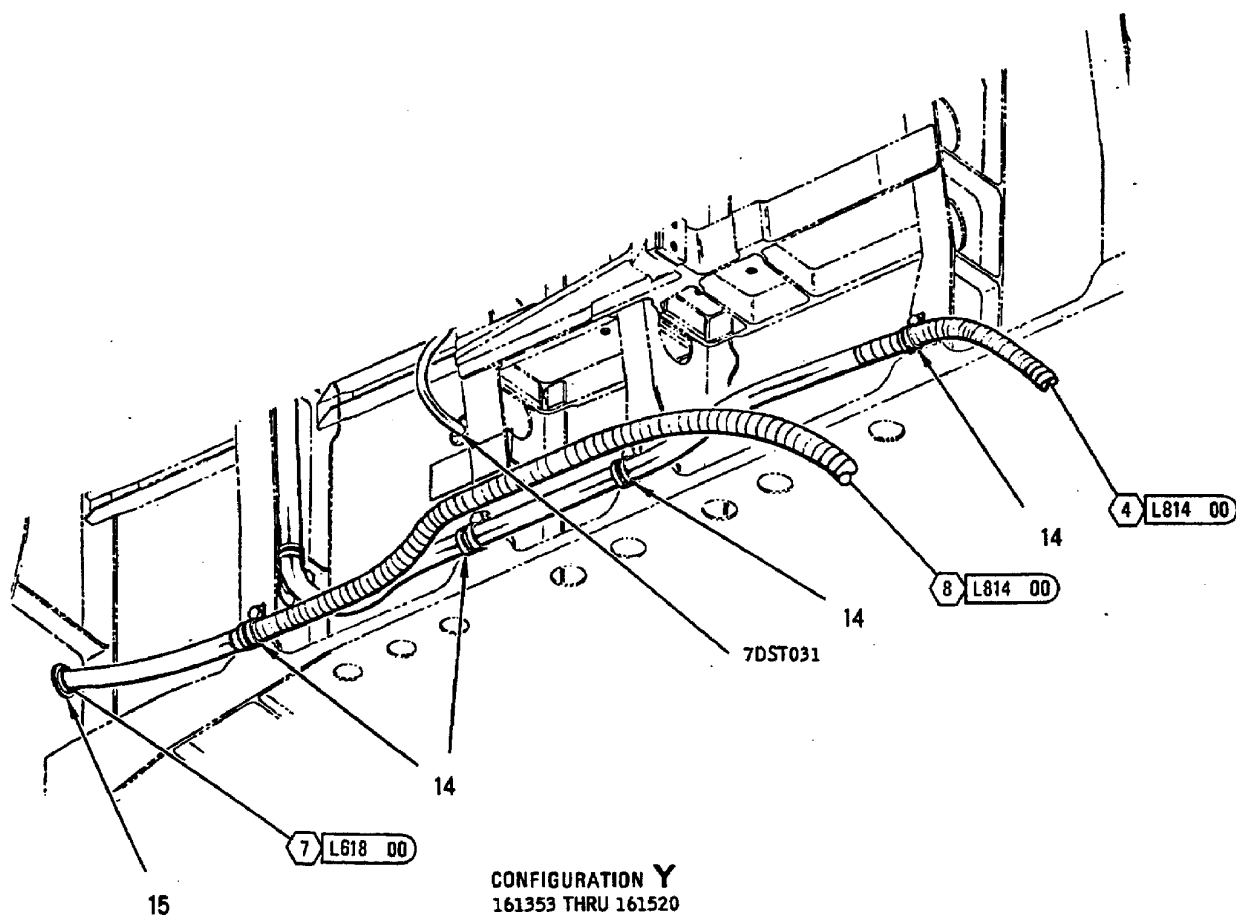

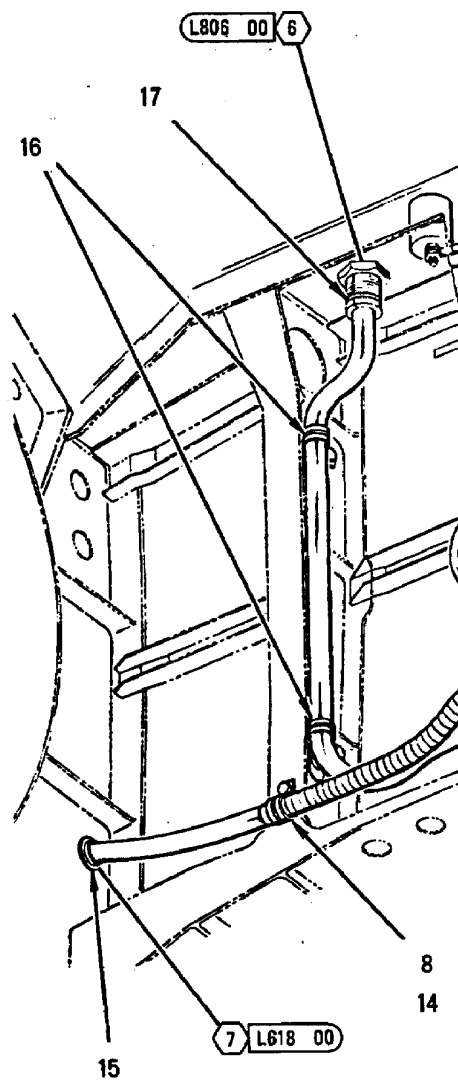


CONFIGURATION Z
161353 THRU 161705

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885621-2612	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 60J-T029)	1	F	MDOZZ
2	74A885621-2332	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 7FLT047)	1		MDOZZ
3	M85052/3-2	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	MS21042L3	NUT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	1		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 4)	1		PAOZZ
5	74A885621-2016	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-T001)	1		MDOZZ
6	MS21266-2N	GROMMET	AR		PAOZZ
6A	MS21266-4N	GROMMET	AR		PAOZZ
7	M85052/1-8	CLAMP	2	C	PAOZZ
	M85052/1-17	CLAMP	2	D	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
8	M85052/3-6	CLAMP	3	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	M85052/3-6	CLAMP	2	F	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	M85052/3-6	CLAMP	1	B	PAOZZ
11	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V10	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS43DD3-32	SPACER (AP)	1		PAOZZ
12	74A885621-2586	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 64J-R022)	1	F	MDOZZ
13	74A885621-2177	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES WTT002)	1	J	MDOZZ
14	M85052/3-6	CLAMP	4	A	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
15	74B878001-165	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	E	PAOZZ
16	M85052/3-6	CLAMP	2	E	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
17	74B878001-145	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	E	PAOZZ


CODE	USABLE ON
A	161353 THRU 161520
B	161521 & UP
C	161353 THRU 161528
D	161702 & UP
E	161353 THRU 161705

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		F						161706 & UP			
		G						DELETED			
		H						DELETED			
		J						161353 THRU 162414			

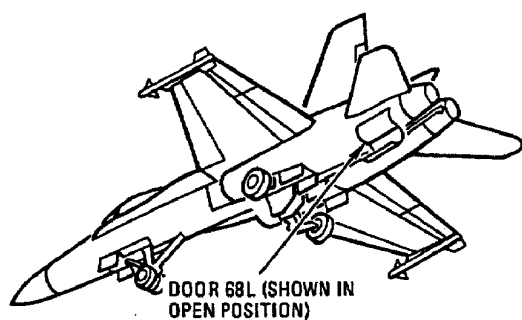

AFT FUSELAGE

DOOR 68L (SHOWN IN OPEN POSITION)

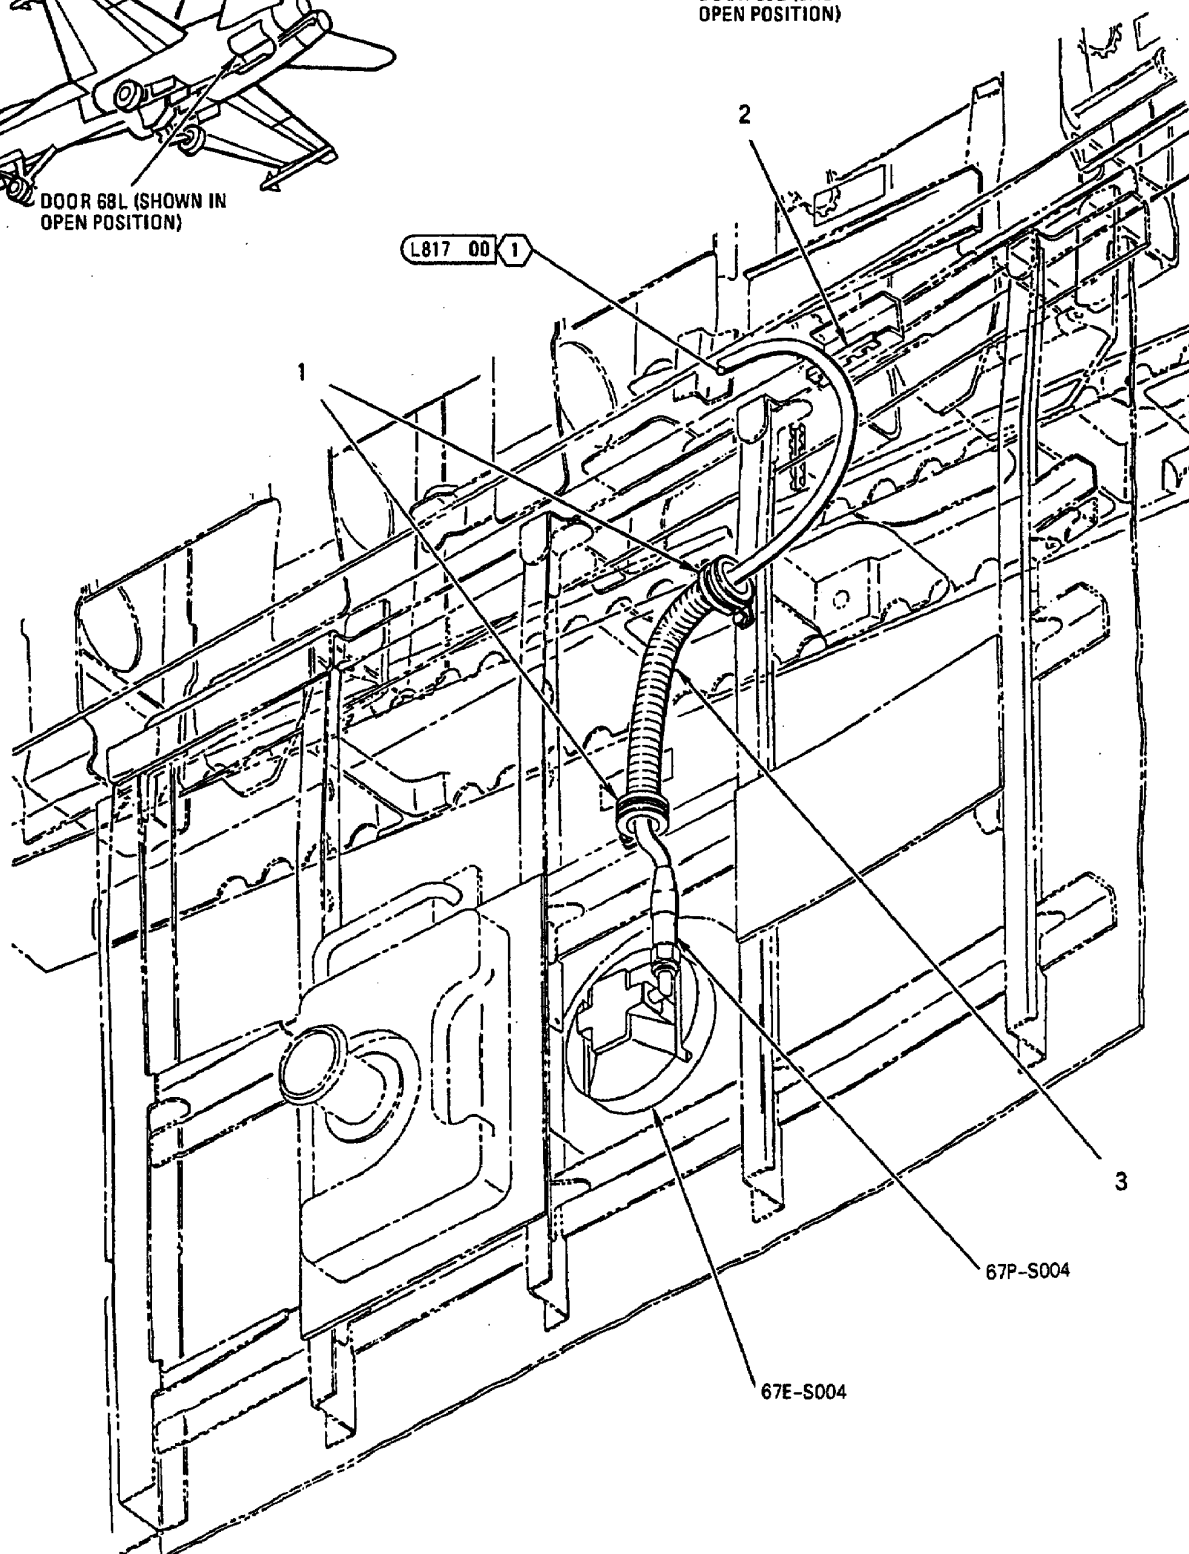


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-19	CLAMP	2	A	PAOZZ
	M85052/3-19	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS21266-2N	GROMMET	AR		PAOZZ
3	74A885630-1017	CONDUIT - ELECTRICAL (76301)	1		AOOOO
	74A885630-2019	CONDUIT (76301) (PART OF INDEX 3)	1		MGOZZ
	CRN1137-7	CONVOLUTE REINFORCEMENT (05593)	2		PAOZZ
		(MCDONNELL SPEC ST5N1570-007) (PART OF INDEX 3)			
	CRT6612-007	SEE ABOVE (64590)	2		PAOZZ


CODE	USABLE ON
A	161353 THRU 161987
B	162394 & UP


AFT FUSELAGE

LEFT ENGINE BAY,
AFT DOOR 68L

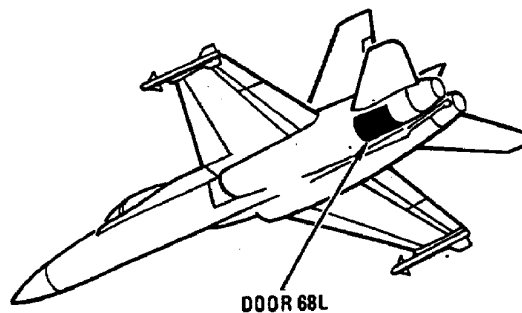

DOOR 68L

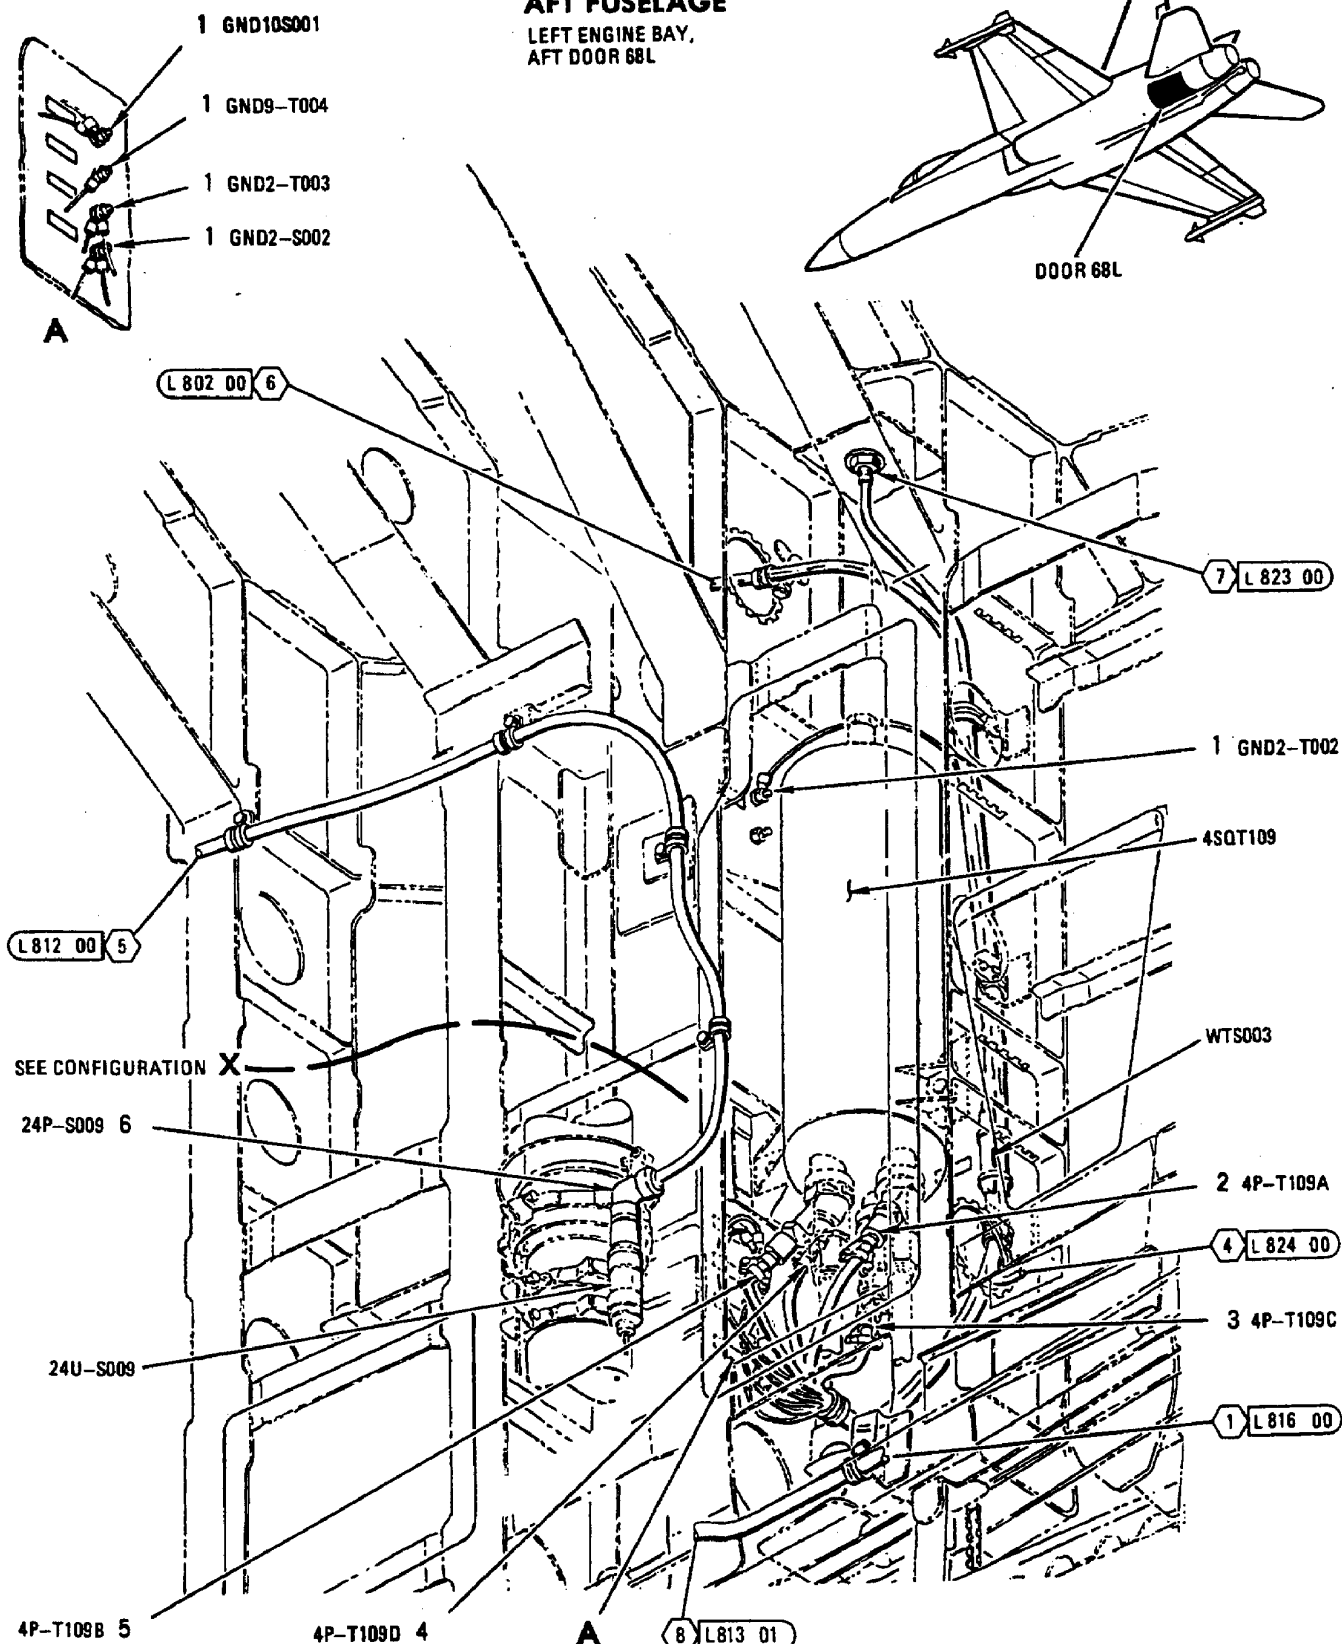

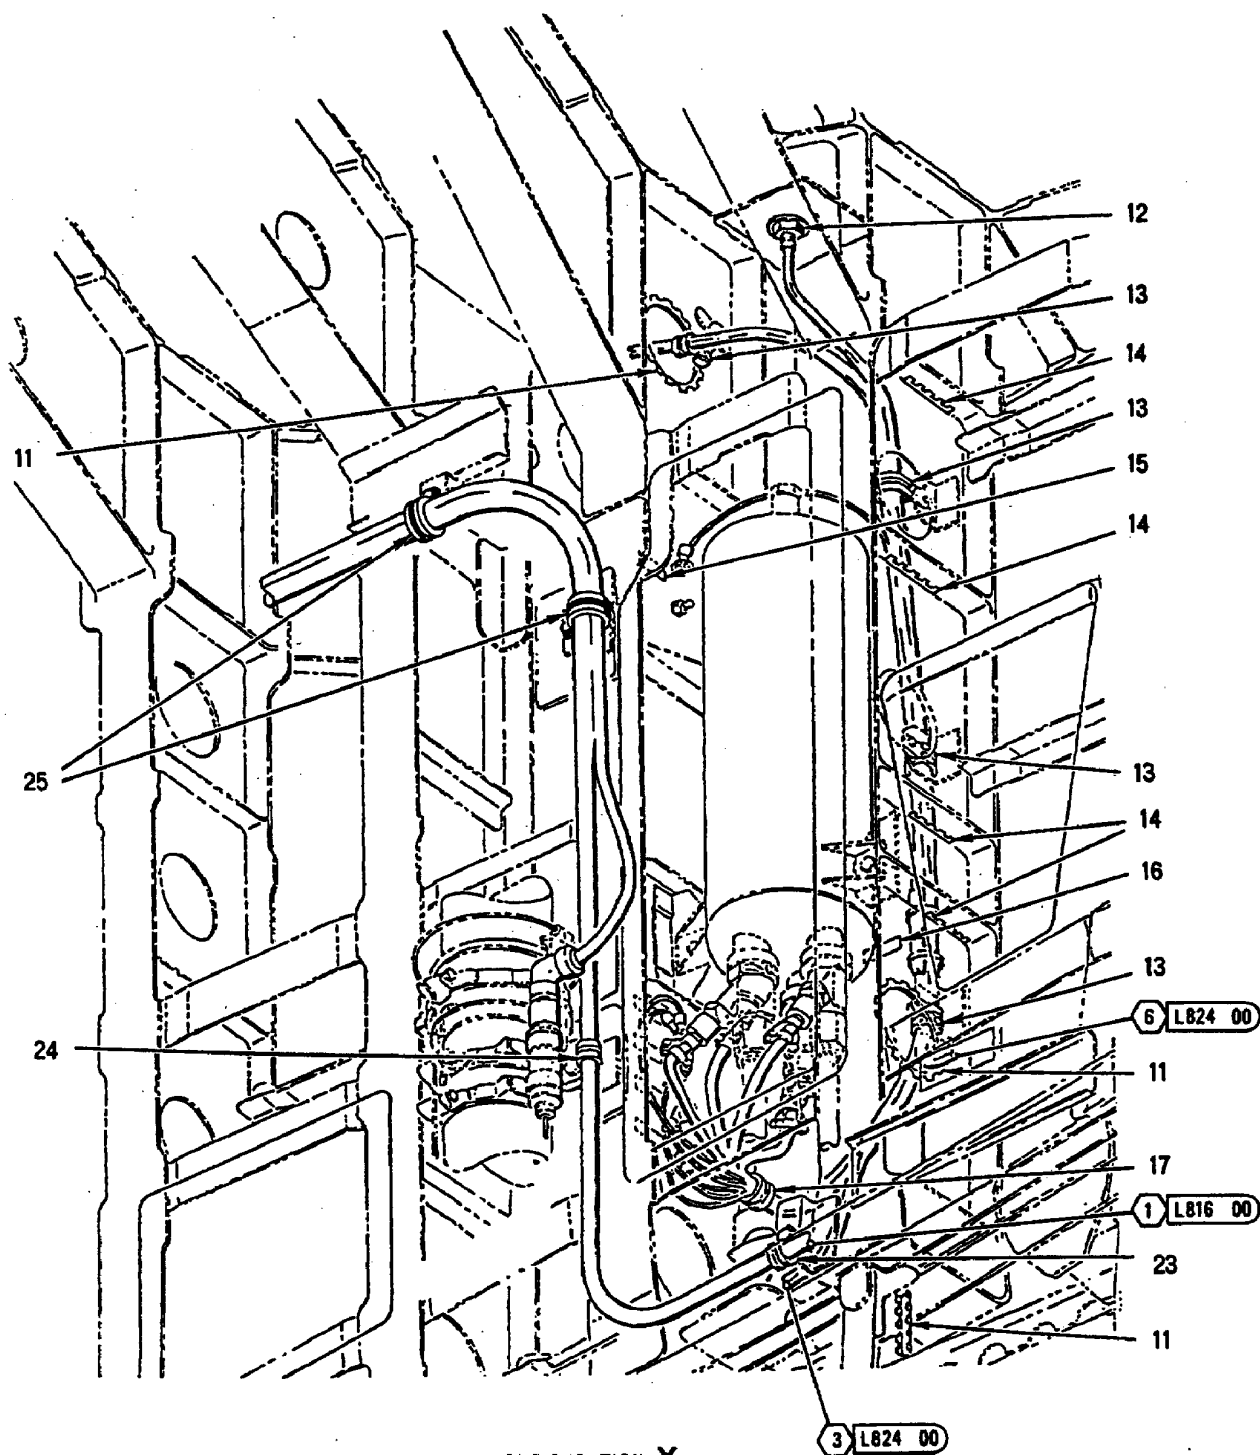

CONFIGURATION X

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21042L3	NUT	5		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	5		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 1)	5		PAOZZ
2	KJL6T9E98SN	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC 5M1749-9E98SN) (4P-T109A)			
	LJT06RT9-98S(155)	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(77820) (MCDONNELL SPEC 5M1749-9E98SN) (4P-T109A)			
	MB918T9E98S	SEE ABOVE (14283)	1	*	PAOZZ
3	KJL6T9E98SD	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC 5M1749-9E98SD) (4P-T109C)			
	LJT06RT9-98SD(155)	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(77820) (MCDONNELL SPEC 5M1749-9E98SD) (4P-T109C)			
	MB918T9E98SD	SEE ABOVE (14283)	1	*	PAOZZ
4	KJL6T9E35SN	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC 5M1749-9E35SN) (4P-T109D)			
	LJT06RT9-35S(155)	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(77820) (MCDONNELL SPEC 5M1749-9E35SN) (4P-T109D)			
	MB918T9E35S	SEE ABOVE (14283)	1	*	PAOZZ
5	KJL6T9E98SA	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(71468) (MCDONNELL SPEC 5M1749-9E98SA) (4P-T109B)			
	LJT06RT9-98SA(155)	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(77820) (MCDONNELL SPEC 5M1749-9E98SA) (4P-T109B)			
	MB918T9E98SA	SEE ABOVE (14283)	1	*	PAOZZ
6	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES	1		PAOZZ
		TVS06RK-11-98SA) (24P-S009)			
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(77820) (MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-S009)			
7	74A885621-2122	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND10S001)			
8	74A885621-2103	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND9-T004)			
9	74A885621-2056	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-T003)			
10	74A885621-2050	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-S002)			
11	MS21266-2N	GROMMET	AR		PAOZZ
12	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
13	M85052/3-8	CLAMP	4		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
14	MS21266-1N	GROMMET	AR		PAOZZ
15	74A885621-2055	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES GND2-T002)			
16	74A885621-2173	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES WTS003)			
17	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
18	M85052/1-8	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
19	M85052/3-6	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962)	1	D	PAOZZ
		(MCDONNELL SPEC ST3M523C3M1)			
20	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
21	M85052/3-6	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ
	NAS1291C3M	NUT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
22	M85052/3-6	CLAMP	1	F	PAOZZ
	NAS1291C3M	NUT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
23	M85052/3-6	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ
24	M85052/3-6	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
25	M85052/3-9	CLAMP	2	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161705
B	161706 & UP
C	161353 THRU 161761
D	161925 & UP
E	161706 THRU 162477
F	162826 & UP

AFT FUSELAGE

LEFT ENGINE BAY
AFT DOOR 68L




SEE CONFIGURATION X
SHEET 2

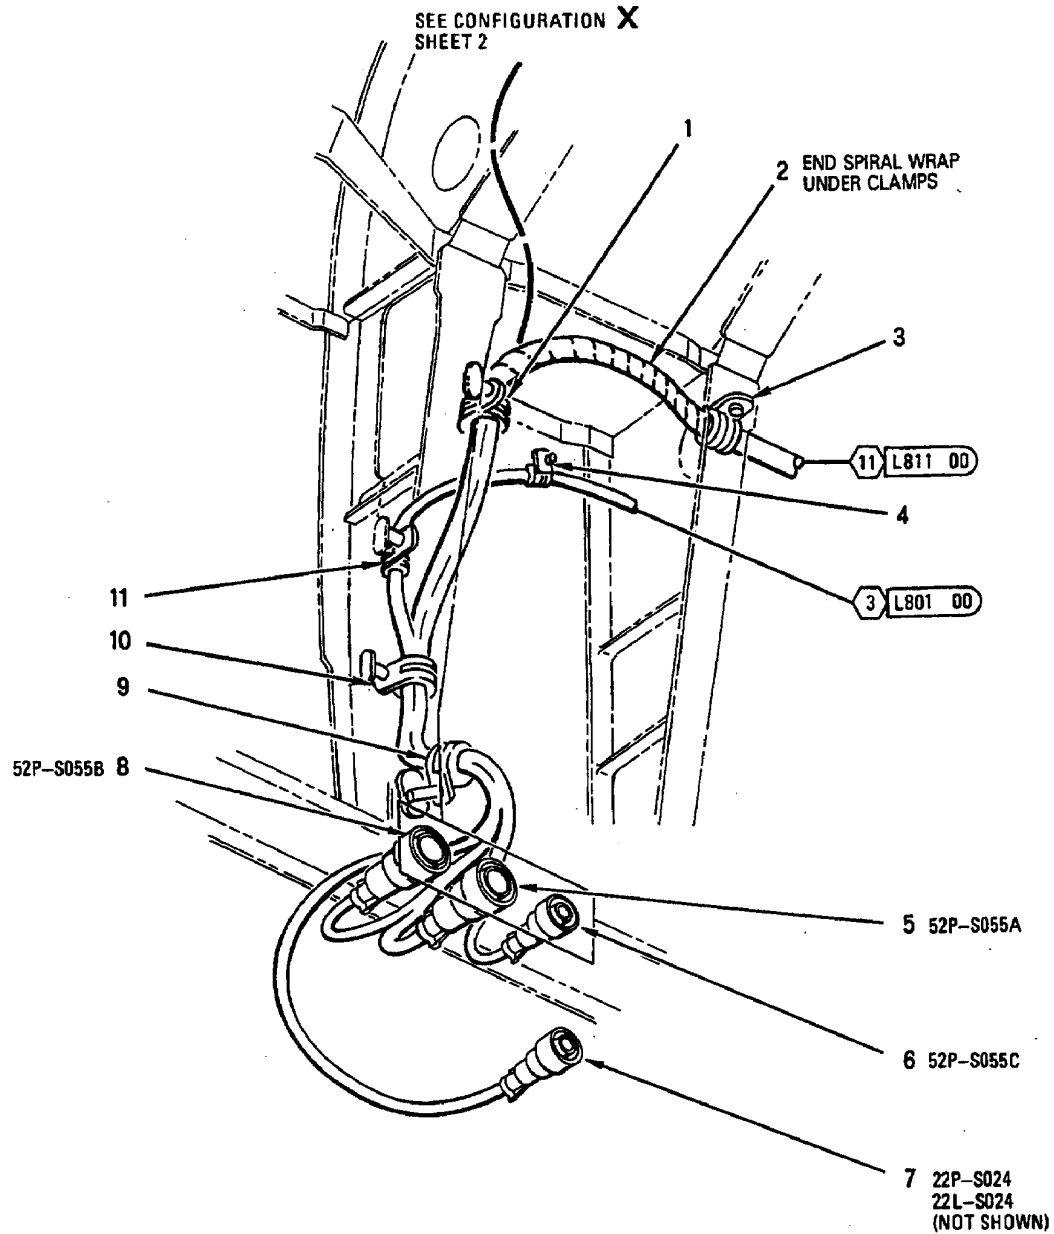

AFT FUSELAGE

LEFT ENGINE BAY
AFT DOOR 68L

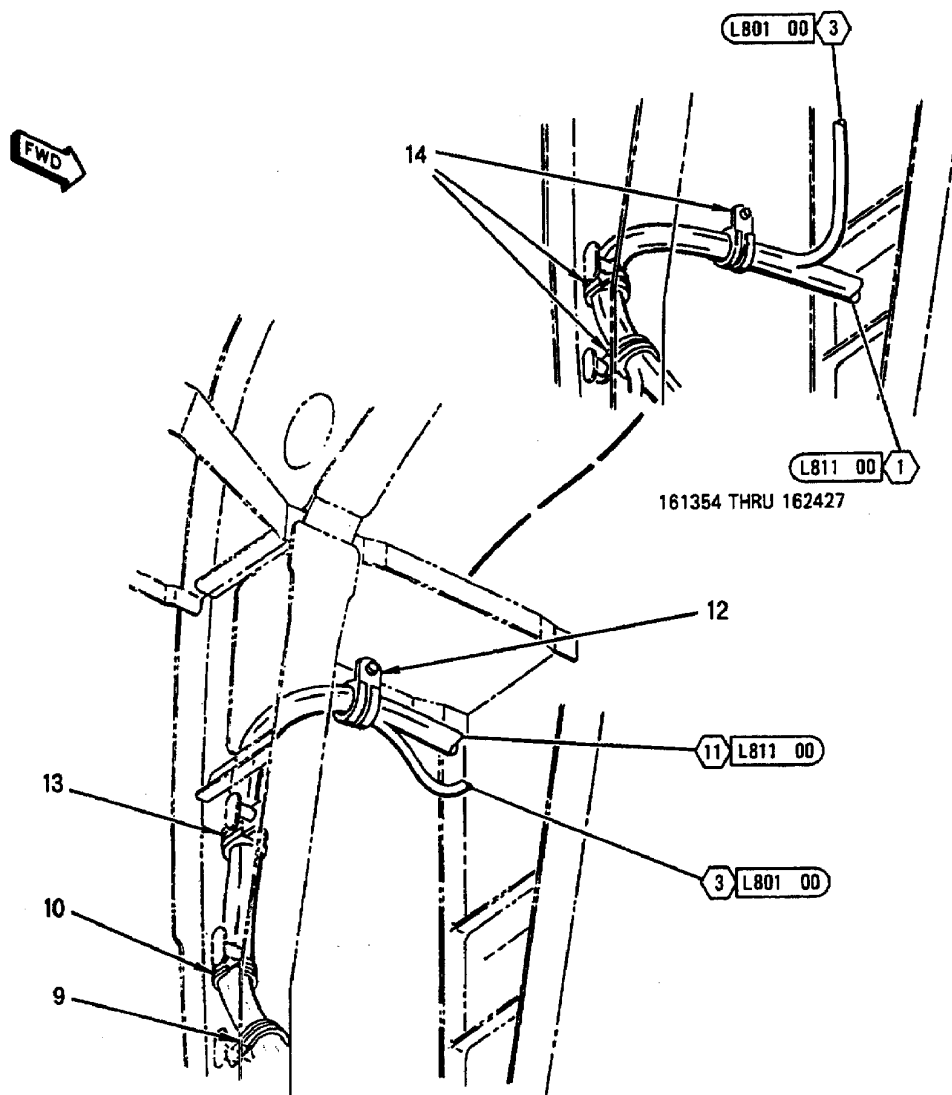

CONFIGURATION X



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-12	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1	D	PAOZZ
2	500024-1	TUBING, PLASTIC, SPIRAL WRAP (13577)	AR	D	MGOZZ
		(MCDONNELL SPEC 14M912TN4)			
3	M85052-3-9	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	M85052/3-7	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (72962) (MCDONNELL SPEC	1	D	PAOZZ
		ST3M523C3M1)			
5	BJ8-12E18-31SD	CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-18-31SN)			
		(52P-S055A)			
	BF8-12C18-31SV-Y70	SEE ABOVE (49367)	1	*	PAOZZ
6	BJ8-12E12-12SD	CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-12-12SN)			
		(52P-S055C)			
	BF8-12C12-12SV-Y70	SEE ABOVE (49367)	1	*	PAOZZ
7	MS27467T9B98S	CONNECTOR, PLUG (22P-S024)	1		PAOZZ
8	BJ8-12E18-31SD06	CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-18-31-S06)			
		(52P-S055B)			
	BF8-12C18-31SV06-Y70	SEE ABOVE (49367)	1	*	PAOZZ
9	M85052/3-7	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
10	M85052/3-12	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	E	PAOZZ
	AN960JD10	WASHER (AP)	1	E	PAOZZ
11	M85052/3-12	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	C	PAOZZ
		ST3M523C3M)			
12	M85052/3-12	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	B	PAOZZ
		ST3M523C3M1)			
13	M85052/3-7	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
14	M85052/3-12	CLAMP	3	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(WP002 00)

CODE	USABLE ON
A	161353 THRU 162477
B	162826 THRU 163120

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						163121 & UP			
		D						163151 & UP			
		E						162826 & UP			

AFT FUSELAGE DOOR 68R (SHOWN IN OPEN POSITION)

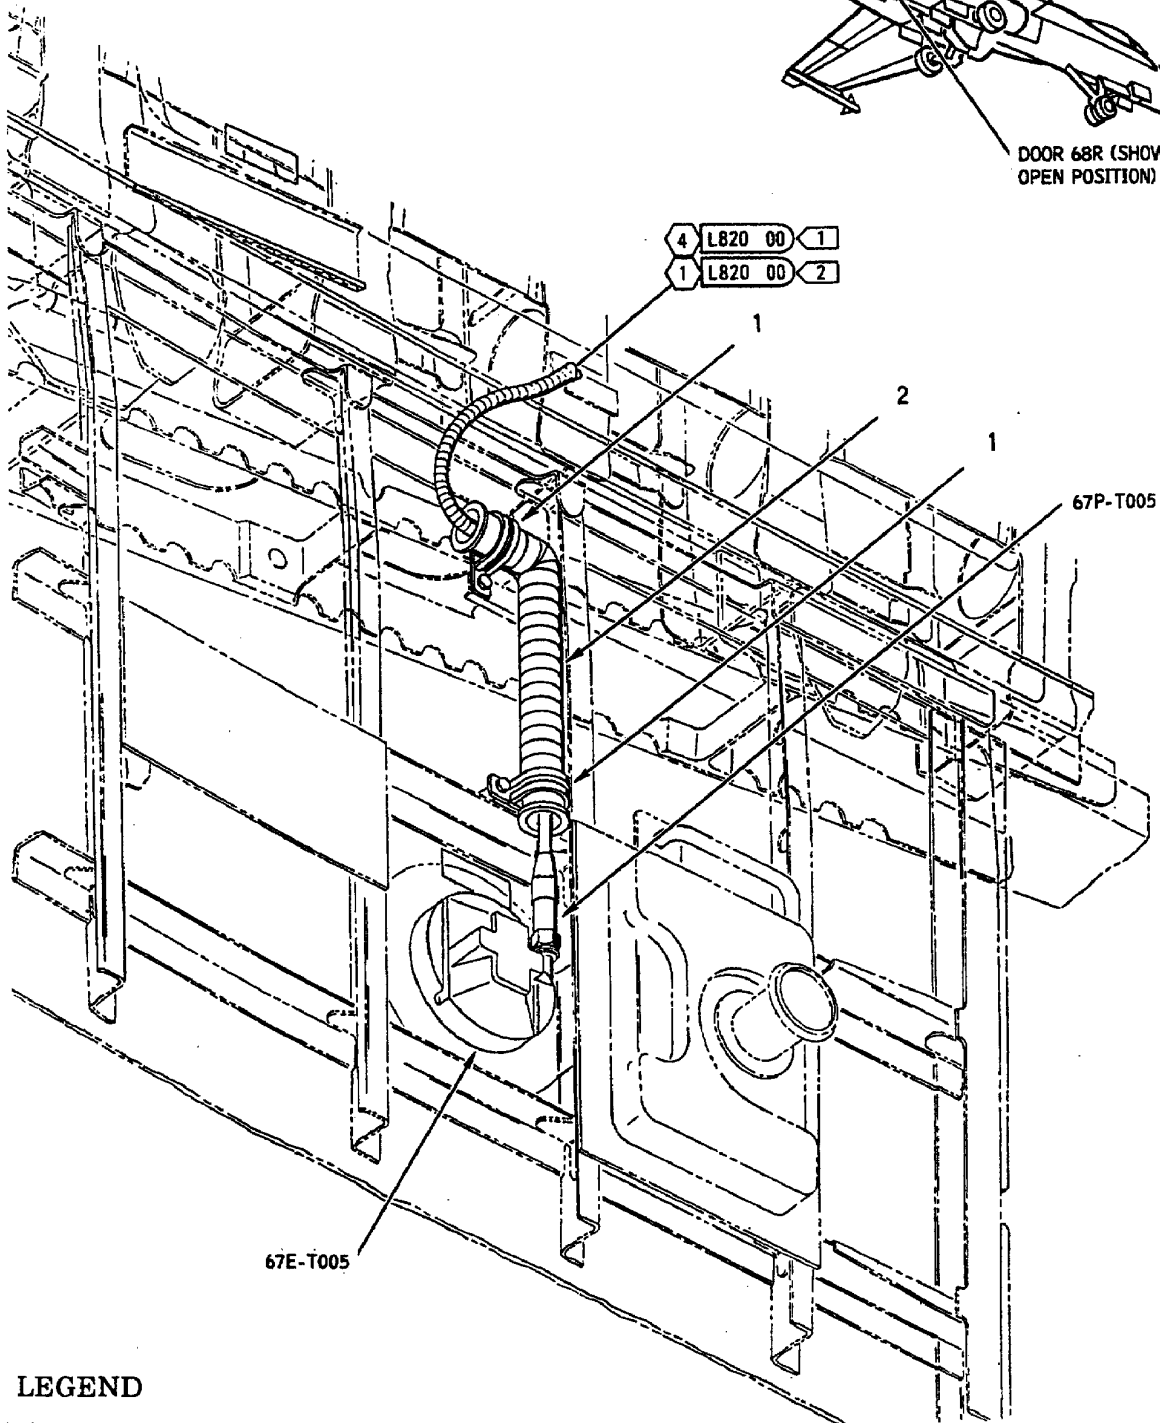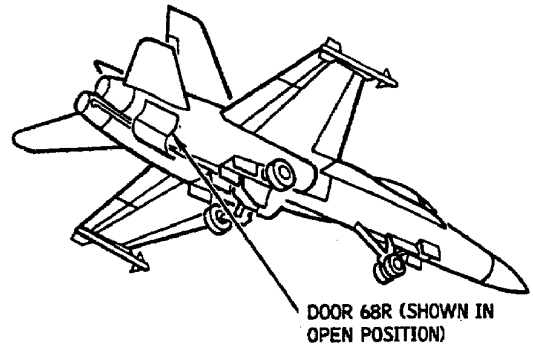

LEGEND

1	161706 THRU 161741
2	161742 AND UP

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/1-19	CLAMP	2	A	PAOZZ
	M85052/3-19	CLAMP	2	B	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
2	74A885630-1019	CONDUIT - ELECTRICAL (76301)	1		AOOOO
	74A885630-2021	CONDUIT (76301) (PART OF INDEX 2)	1		MGOZZ
	CRN1137-2	CONVOLUTE REINFORCEMENT (05593)	2	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-002) (PART OF INDEX 2)			
	CTR6612-002	SEE ABOVE (64590)	2	*	PAOZZ



* ALTERNATE OR EQUIVALENT PARTS
(INTRO)


CODE	USABLE ON
A	161353 THRU 161987
B	162394 & UP

AFT FUSELAGE RIGHT ENGINE BAY, AFT DOOR 68R


LEGEND

- | | |
|---|--------------------|
| 1 | 161706 THRU 161741 |
| 2 | 161742 AND UP |

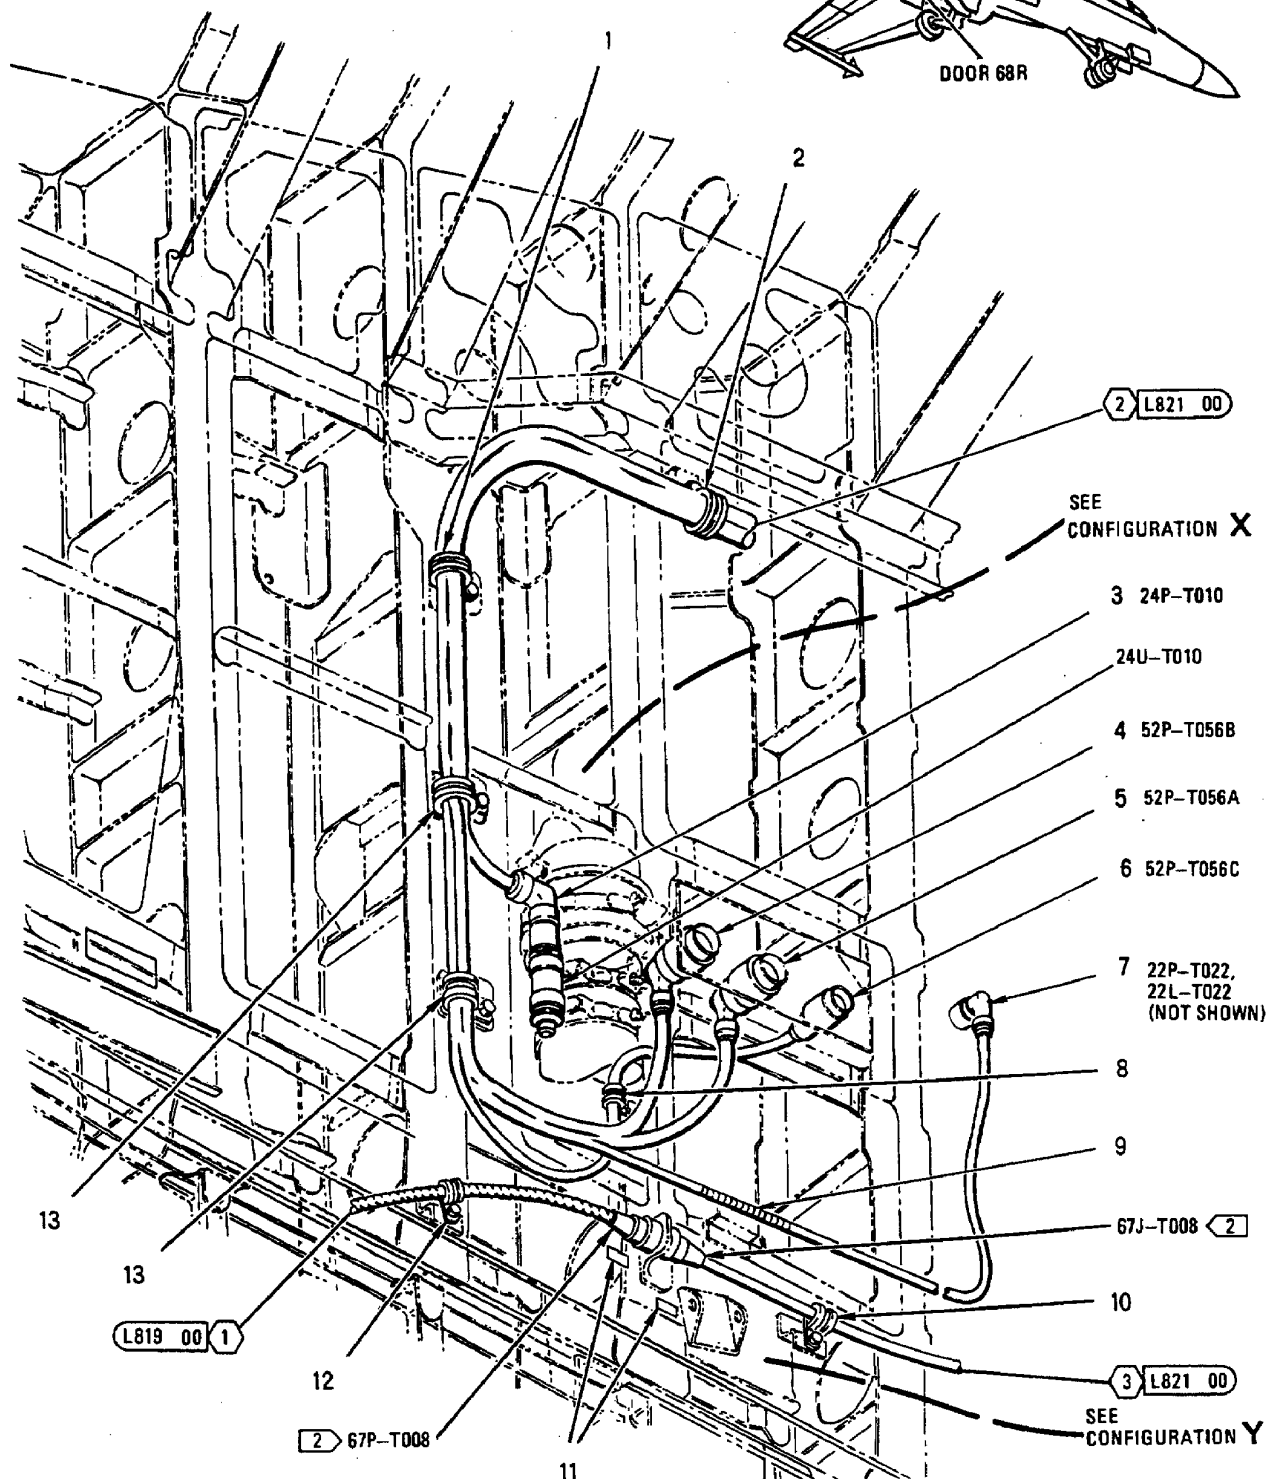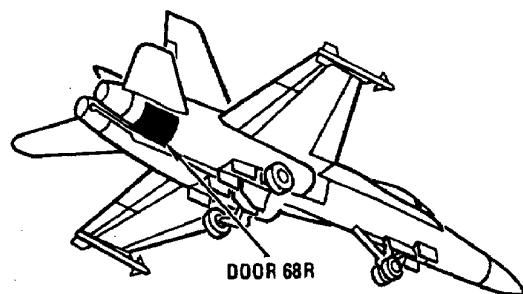

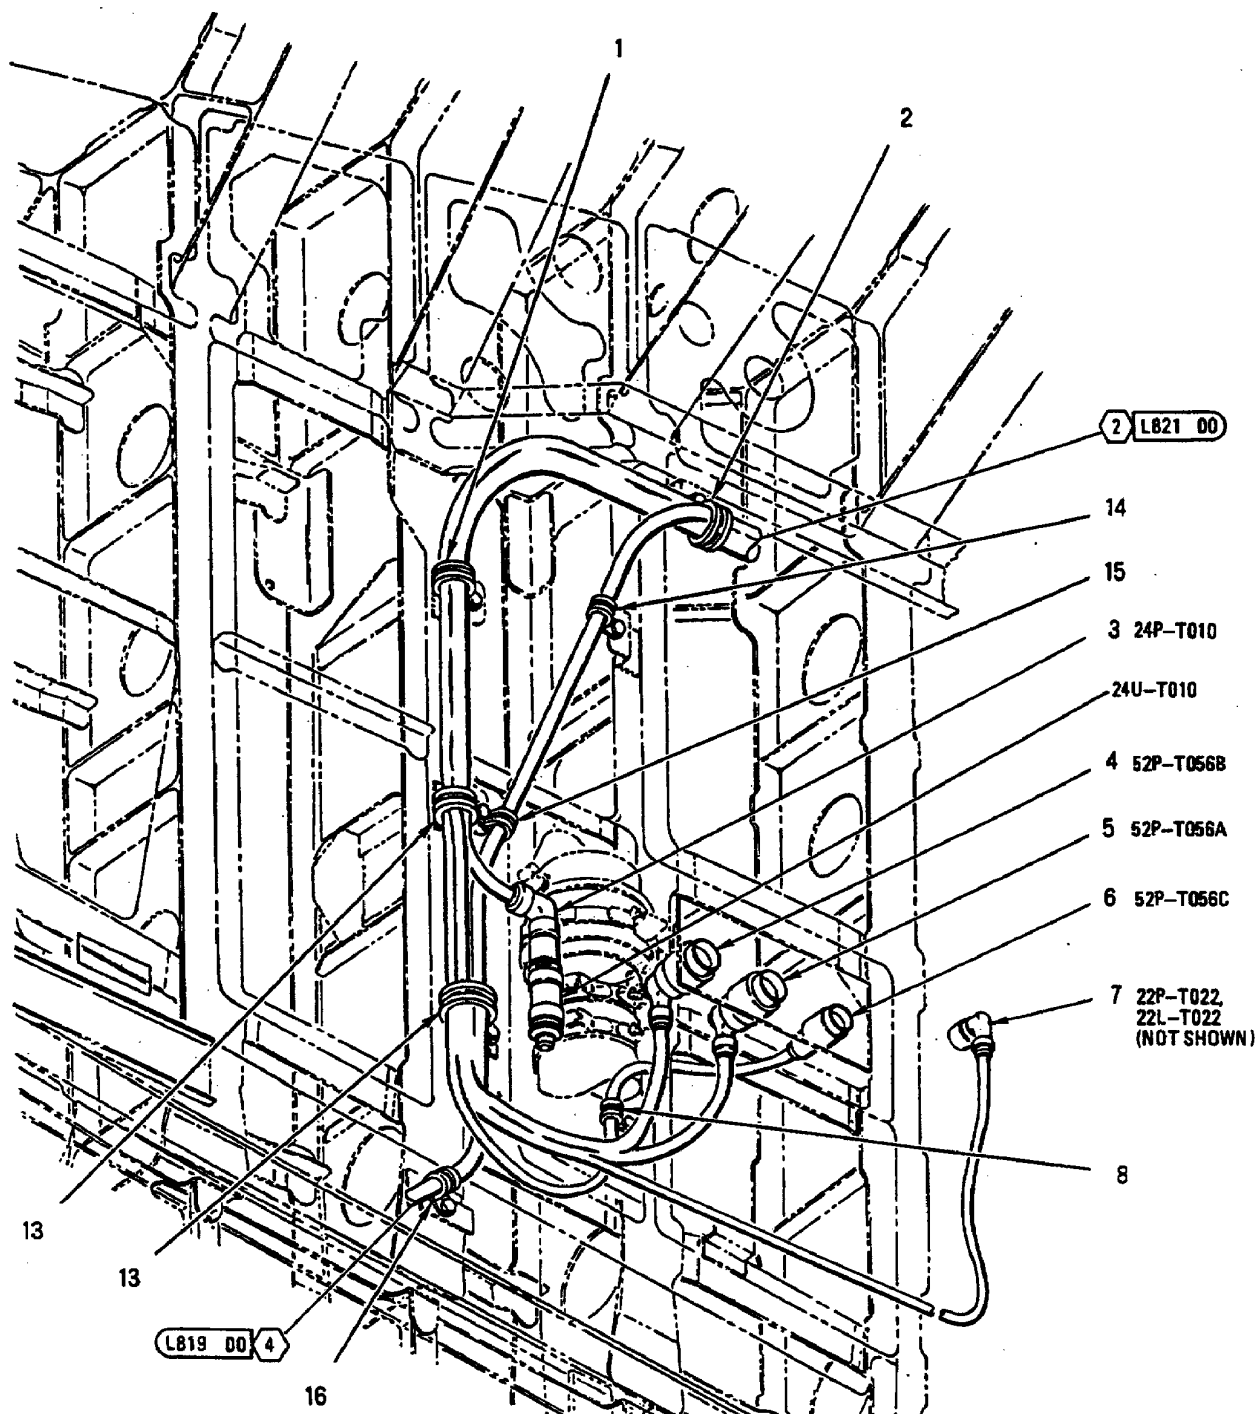

CONFIGURATION X

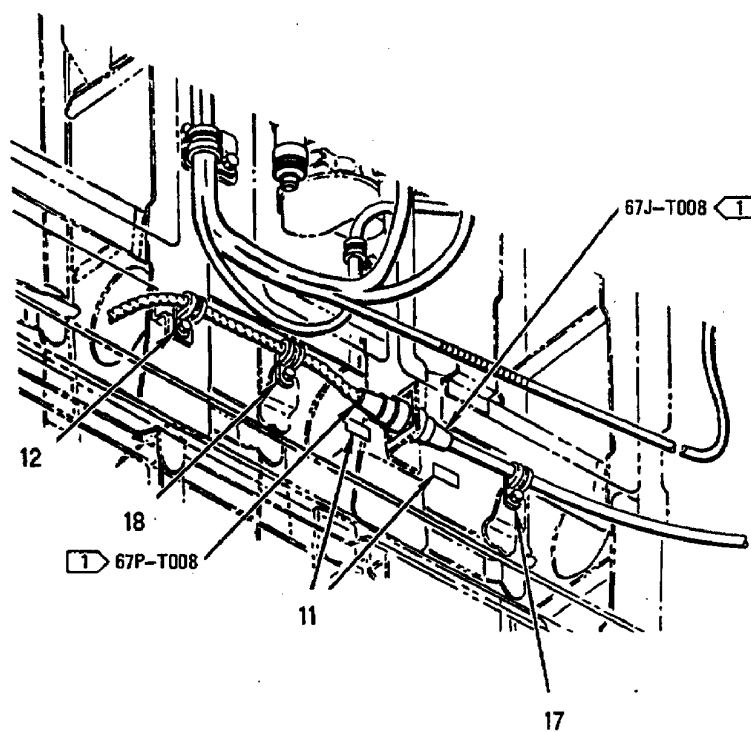

CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	M85052/3-12	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
2	M85052/3-12	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	NAS1291C3M	NUT (AP)	1	H	PAOZZ
3	AN960JD10	WASHER (AP)	1		PAOZZ
	D38999/26KB98SA	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SA) (24P-T010)	1		PAOZZ
	TVS06RK-11-98SA	CONNECTOR, PLUG, ELECTRICAL (77820)	1	C	PAOZZ
4	BJ8-12E18-31SD06	(MCDONNELL SPEC ST5M1586KB98SA) (USE UNTIL EXHAUSTED) (24P-T010)			
		CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-18-31-S06) (52P-T056B)			
5	BF8-12C18-31SV06-Y70	SEE ABOVE (49367)	1	*	PAOZZ
	BJ8-12E18-31SD	CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-18-31SN) (52P-T056A)			
6	BF8-12C18-31SV-Y70	SEE ABOVE (49367)	1	*	PAOZZ
	BJ8-12E12-12SD	CONNECTOR, PLUG, ELECTRICAL (49367)	1		PAOZZ
		(MCDONNELL SPEC 5M1817-12-12SN) (52P-T056C)			
7	BF8-12C12-12SV-Y70	SEE ABOVE (49367)	1	*	PAOZZ
	MS27467T9B98S	CONNECTOR, PLUG (22P-T022)	1		PAOZZ
			1		PAOZZ
8	M85052/3-4	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1		PAOZZ
9	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	D*	MGOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	D*	MGOZZ
10	M85052/3-7	CLAMP	1	F	PAOZZ
	NAS673V2	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
11	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
	74A885621-2585	MARKER, IDENTIFICATION - AVIONICS (76301)	2	B	MDOZZ
		(FOR REF DES 67J-T008)			
12	M85052/3-4	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
13	AN960JD10	WASHER (AP)	1	B	PAOZZ
	M85052/3-15	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
14	AN960JD10	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP) (USE WITH INDEX 15)	1	A	PAOZZ
	M85052/3-6	CLAMP	1	A	PAOZZ
15	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
16	M85052/3-6	CLAMP (USE WITH INDEX 13)	1	A	PAOZZ
	M85052/3-4	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
17	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	M85052/3-7	CLAMP	1	E	PAOZZ
18	NAS673V2	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLAMP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ
18	M85052/3-3	CLAMP	1	E	PAOZZ
	NAS673V2	BOLT (AP)	1	E	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE

AN960JD10L	WASHER (AP)	1	E	PAOZZ
A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161705
B	161706 & UP
C	161353 THRU 161761
D	161523 & UP
E	161706 THRU 161741
F	161742 & UP
G	161353 THRU 162477
H	162826 & UP


AFT FUSELAGE RIGHT ENGINE BAY, AFT DOOR 68R

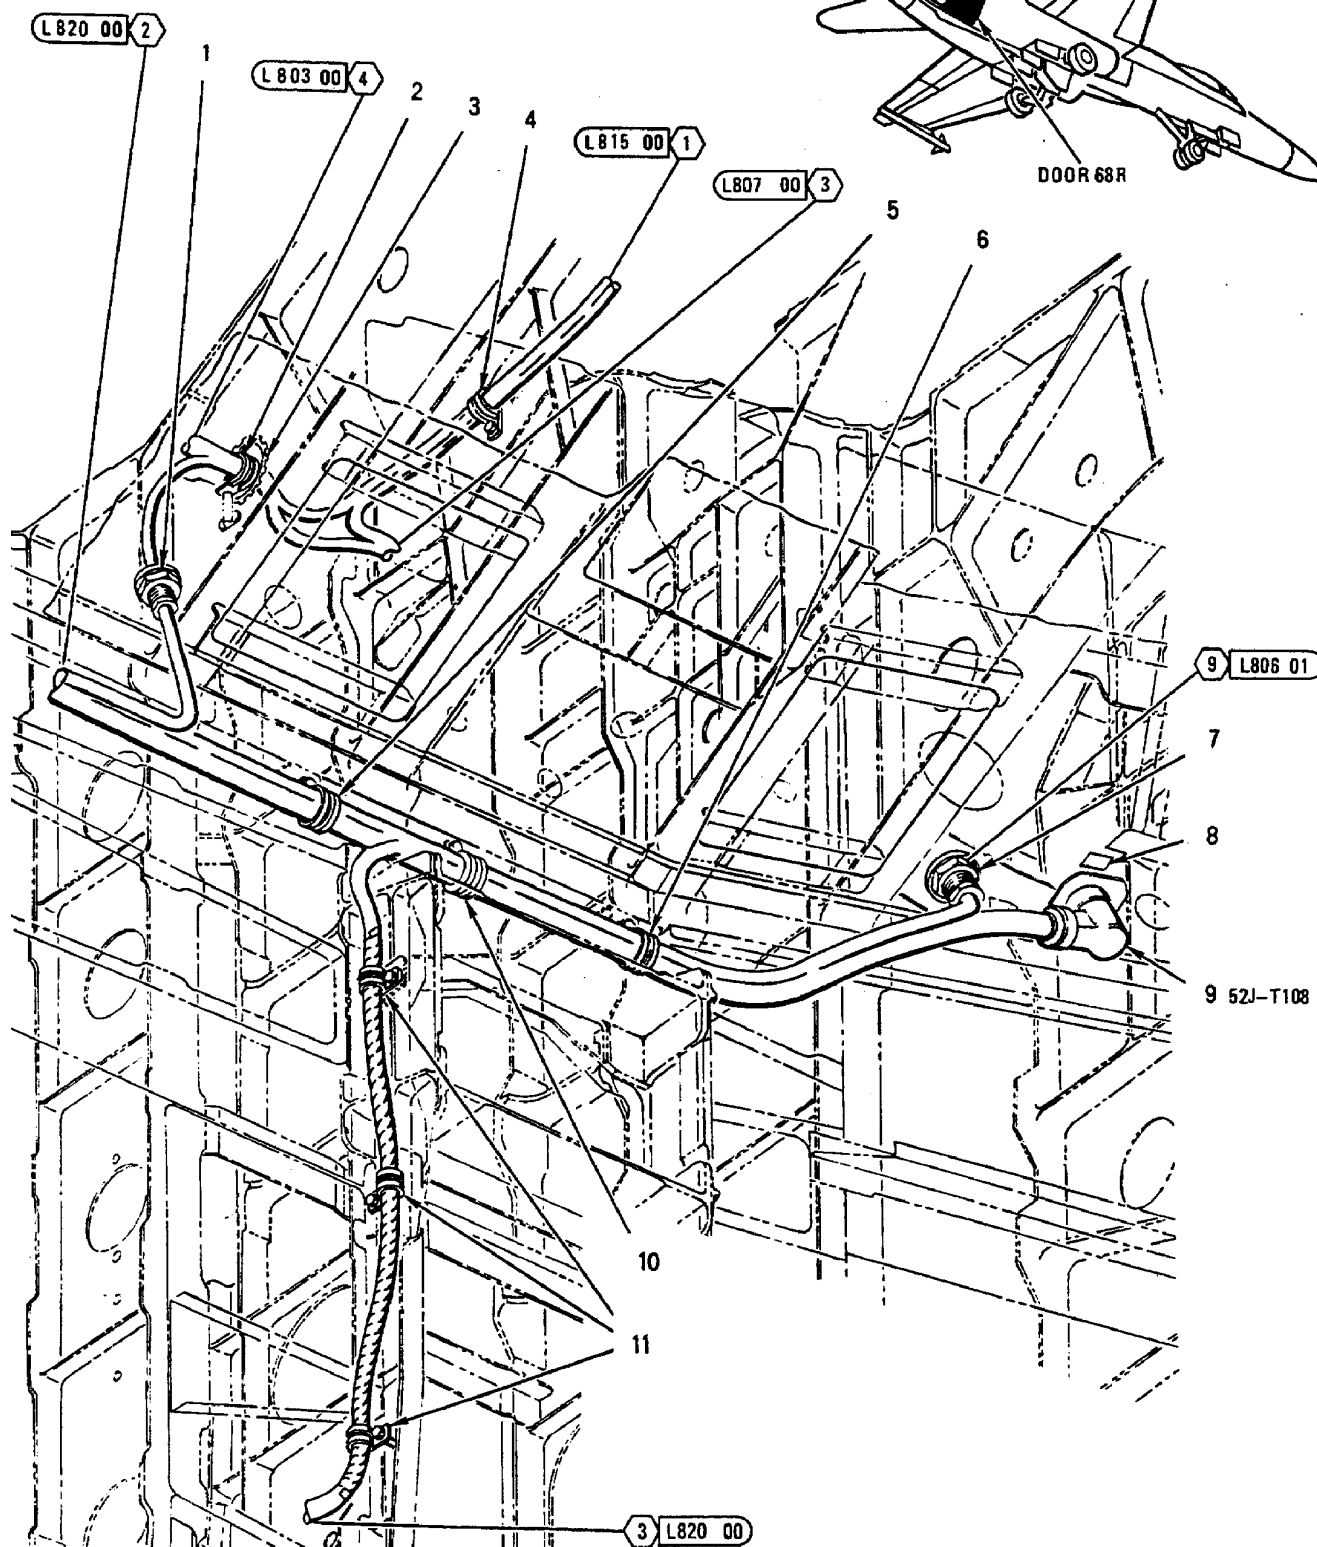

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74B878001-143	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
2	M85052/1-10	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
3	MS21266-2N	GROMMET	AR		PAOZZ
4	M85052/1-8	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
5	M85052/3-12	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1	C	PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
6	M85052/3-12	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
7	74B878001-147	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
8	74A885621-2232	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-T108)	2		MDOZZ
9	D38999/24KG35PN	CONNECTOR, RECEPTACLE (REPLACES TVS07RK-21-35PN) (52J-T108)	1		PAOZZ
	TVS07RK-21-35PN	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1614KG35PN) (USE UNTIL EXHAUSTED) (52J-T108)	1	B	PAOZZ
10	M85052/3-12	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10	WASHER (AP)	1	D	PAOZZ
11	M85052/3-7	CLAMP	3	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M1)	1	A	PAOZZ

CODE USABLE ON


A	161706 & UP
B	161353 THRU 161761
C	161353 THRU 162477
D	162826 & UP

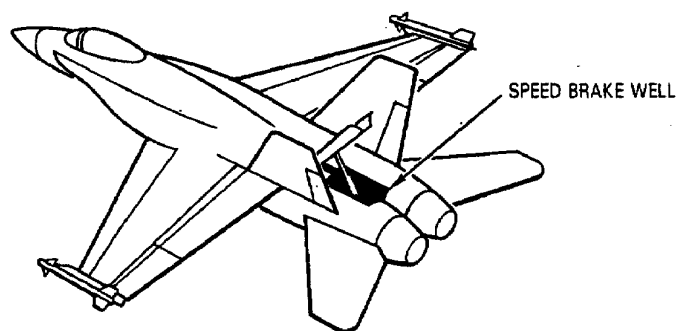

AFT FUSELAGE SPEED BRAKE WELL


LEGEND

1 162826 AND UP

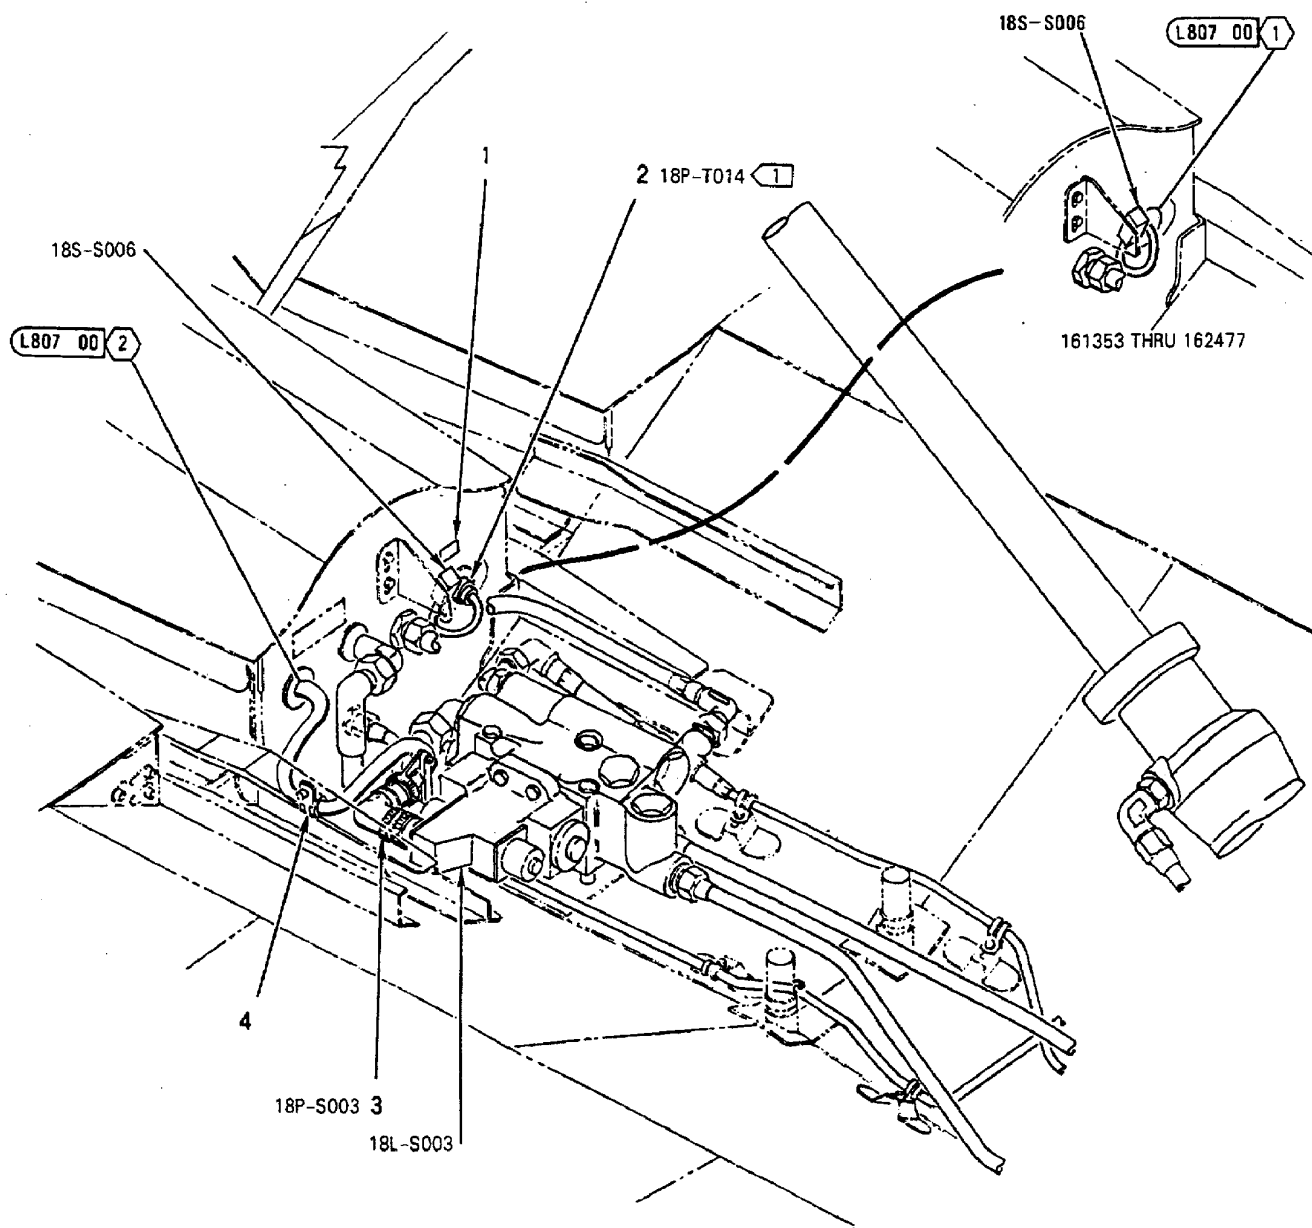


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885621-2653	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 18J-T014)	1	C	MGOZZ
2	MS27467T9B35P	CONNECTOR, PLUG (18P-T014)	1	C	PAOZZ
3	MS27467T11B98S	CONNECTOR, PLUG (18P-S003)	1		PAOZZ
4	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V8	BOLT (AP)	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	NAS43DD3-16	SPACER (AP)	1	A	PAOZZ
	MS21042L3	NUT (AP)	1	A	PAOZZ

CODE	USABLE ON
A	161353 THRU 161365
B	161366 & UP
C	162826 & UP


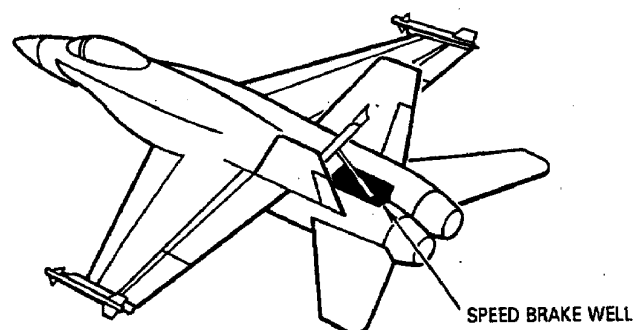


AFT FUSELAGE SPEED BRAKE WELL

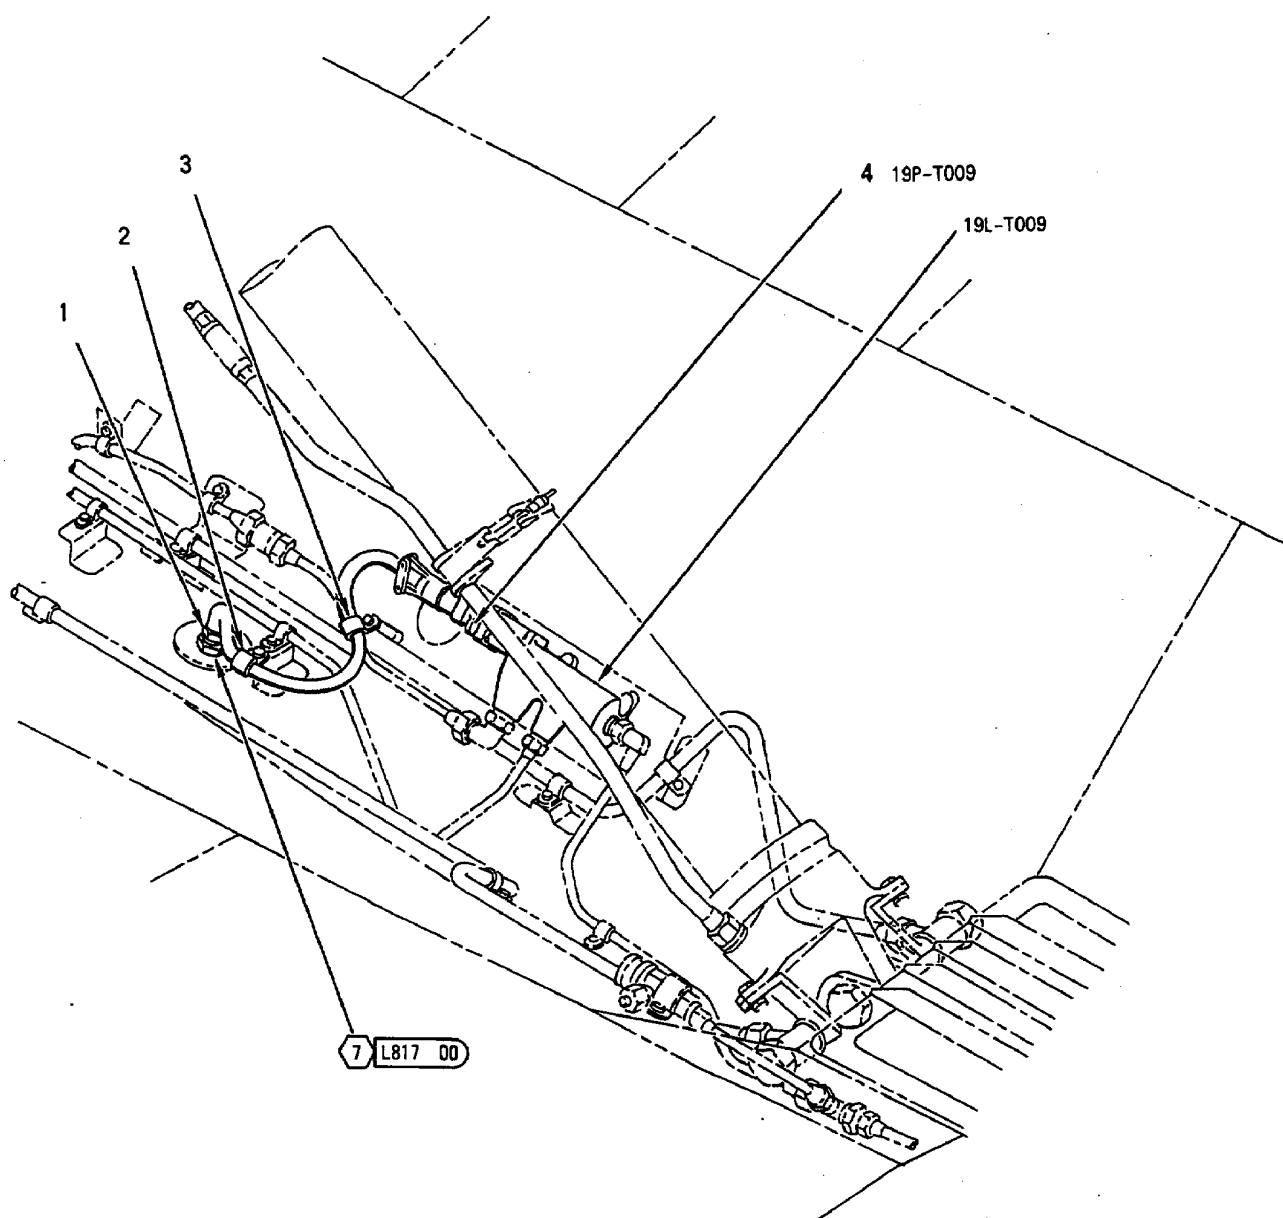

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
2	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
3	M85052/1-4	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
4	MS27467T9B98S	CONNECTOR, PLUG (19P-T009)	1		PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

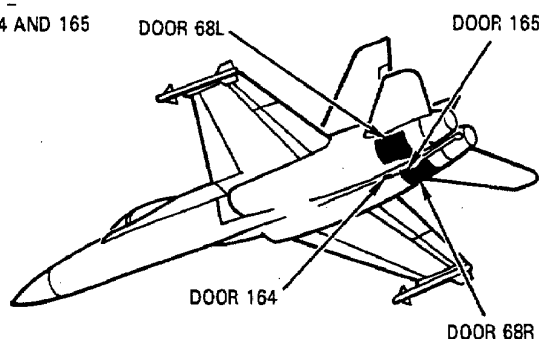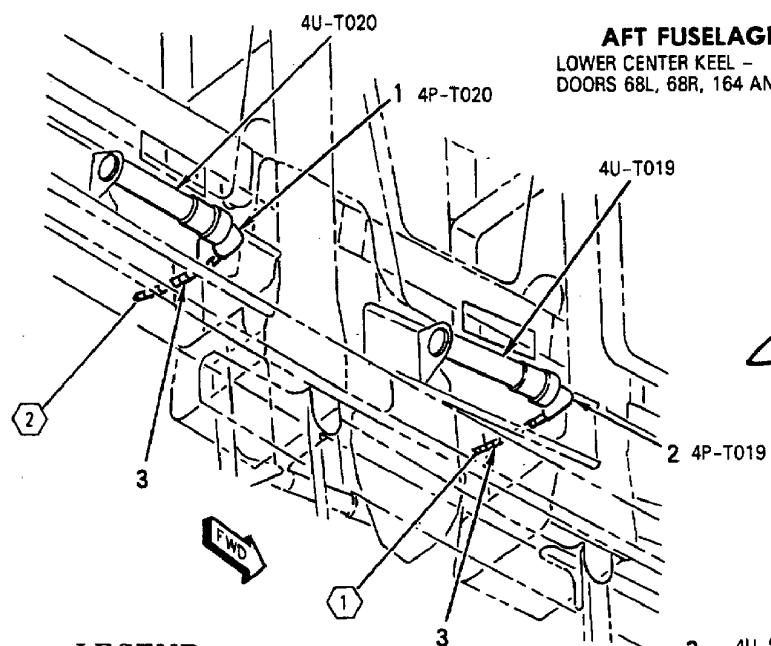


SEE CONFIGURATION X

LEGEND


- 1 161353 THRU 161521
- 2 161522 AND UP
- 3 161522 THRU 161744
- 4 161745 AND UP

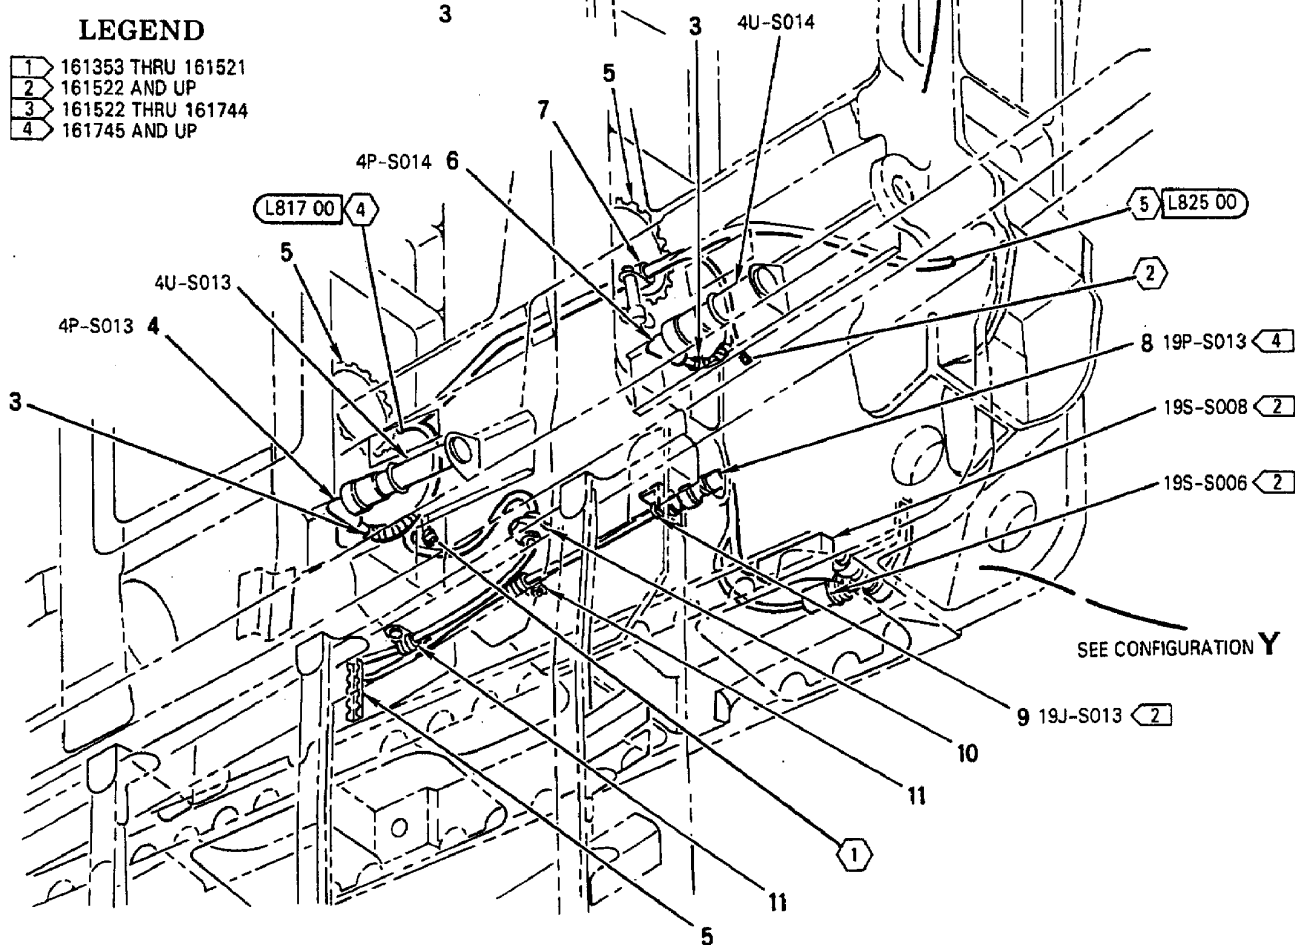

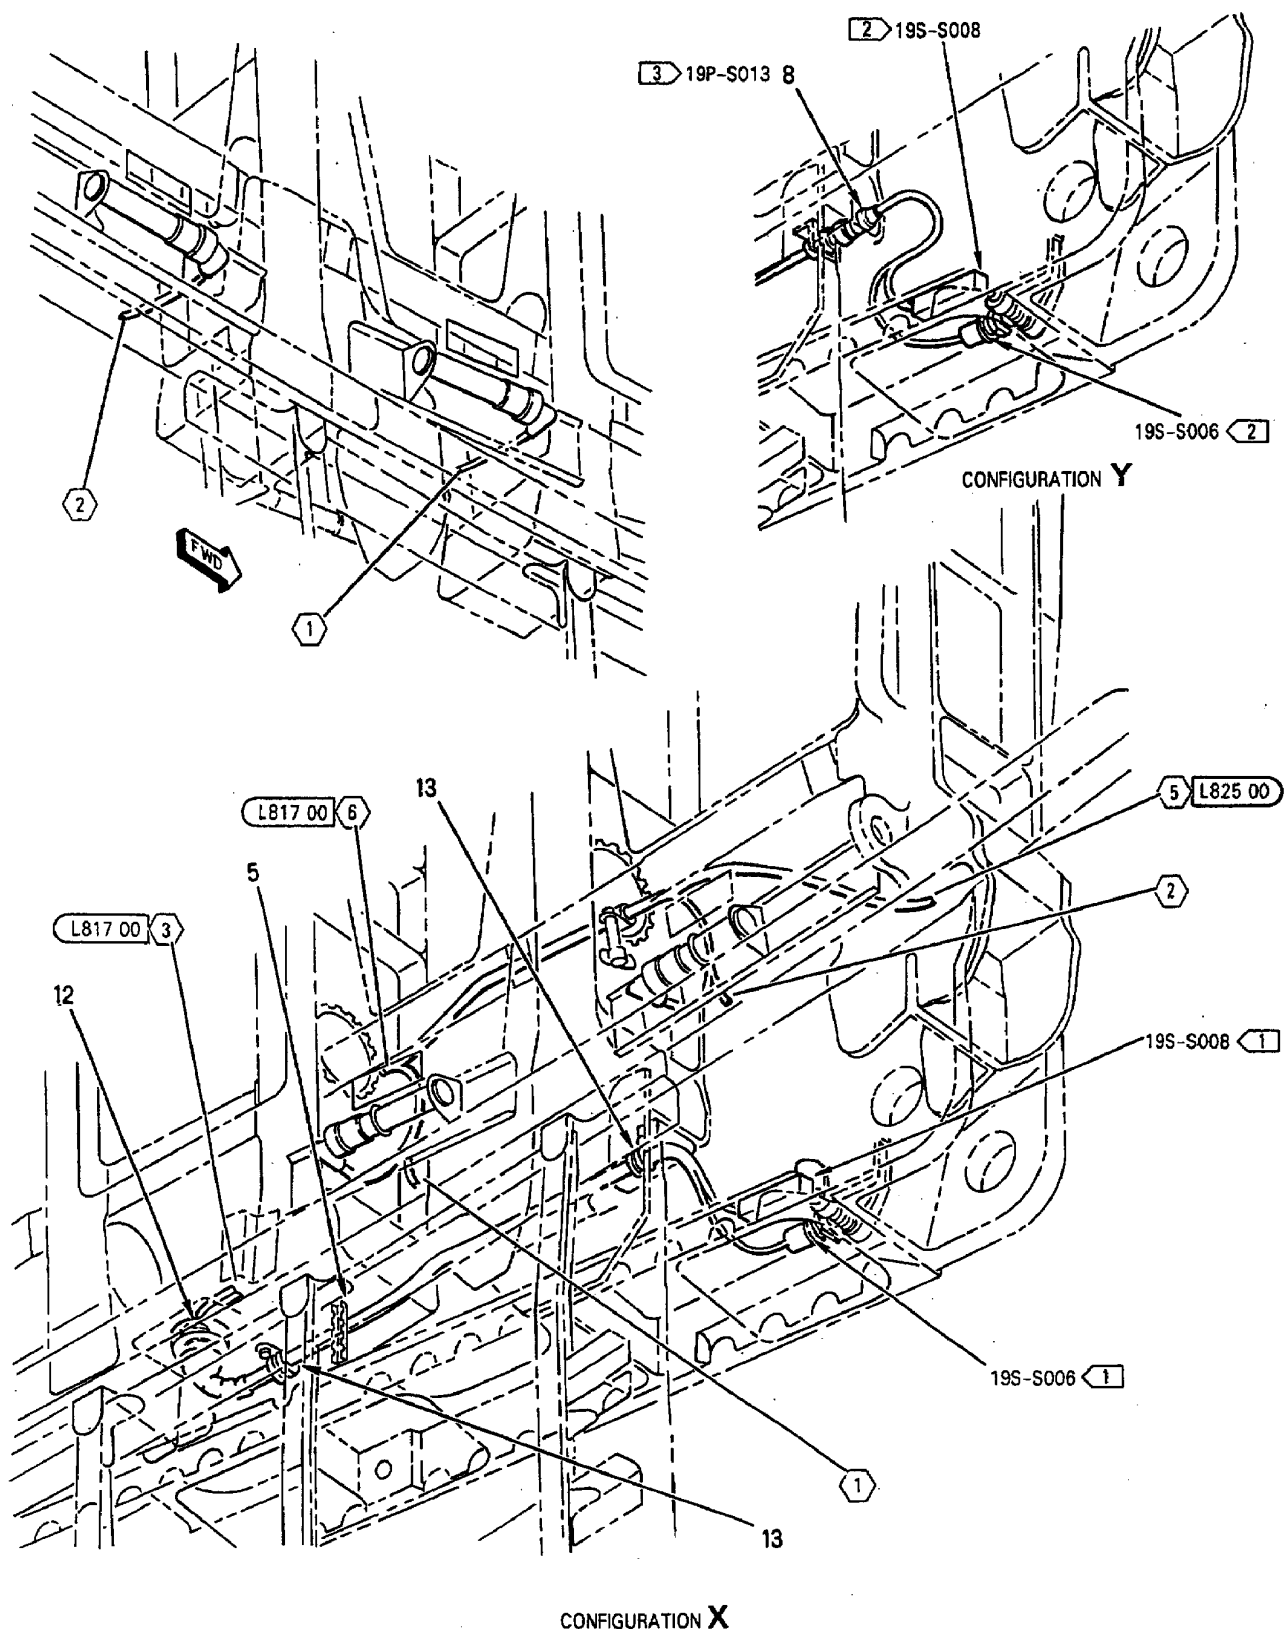

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-T020)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-T020)	1	D	PAOZZ
2	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-T019)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-T019)	1	D	PAOZZ
3	SF6151-3-4	SLEEVING, INSULATION (16357)	1	C	MGOZZ
4	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-S013)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-S013)	1	D	PAOZZ
5	MS21266-3N	GROMMET	AR		PAOZZ
6	D38999/26KB98SN	CONNECTOR, PLUG (REPLACES TVS06RK-11-98SN) (4P-S014)	1		PAOZZ
	TVS06RK-11-98SN	CONNECTOR, PLUG, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1586KB98SN) (USE UNTIL EXHAUSTED) (4P-S014)	1	D	PAOZZ
7	M85052/3-8	CLAMP	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
8	MS27467T11B35P	CONNECTOR, PLUG (19P-S013)	1	B	PAOZZ
9	MS27468T11B35S	CONNECTOR, RECEPTACLE (19J-S013)	1	B	PAOZZ
10	74B878001-127	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1	B	PAOZZ
11	M85052/3-6	CLAMP	2	B	PAOZZ
	NAS653V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
12	AN735D9	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ
13	M85052/1-5	CLAMP	2	A	PAOZZ
	NAS653V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	2	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	A	PAOZZ


CODE	USABLE ON
A	161353 THRU 161521
B	161522 & UP
C	161523 & UP
D	161353 THRU 161761

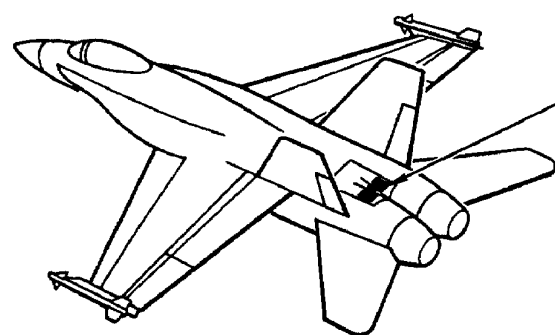

DOOR 103
UNDER SPEED BRAKE

AFT FUSELAGE


DOOR 103 AND
DOOR 165

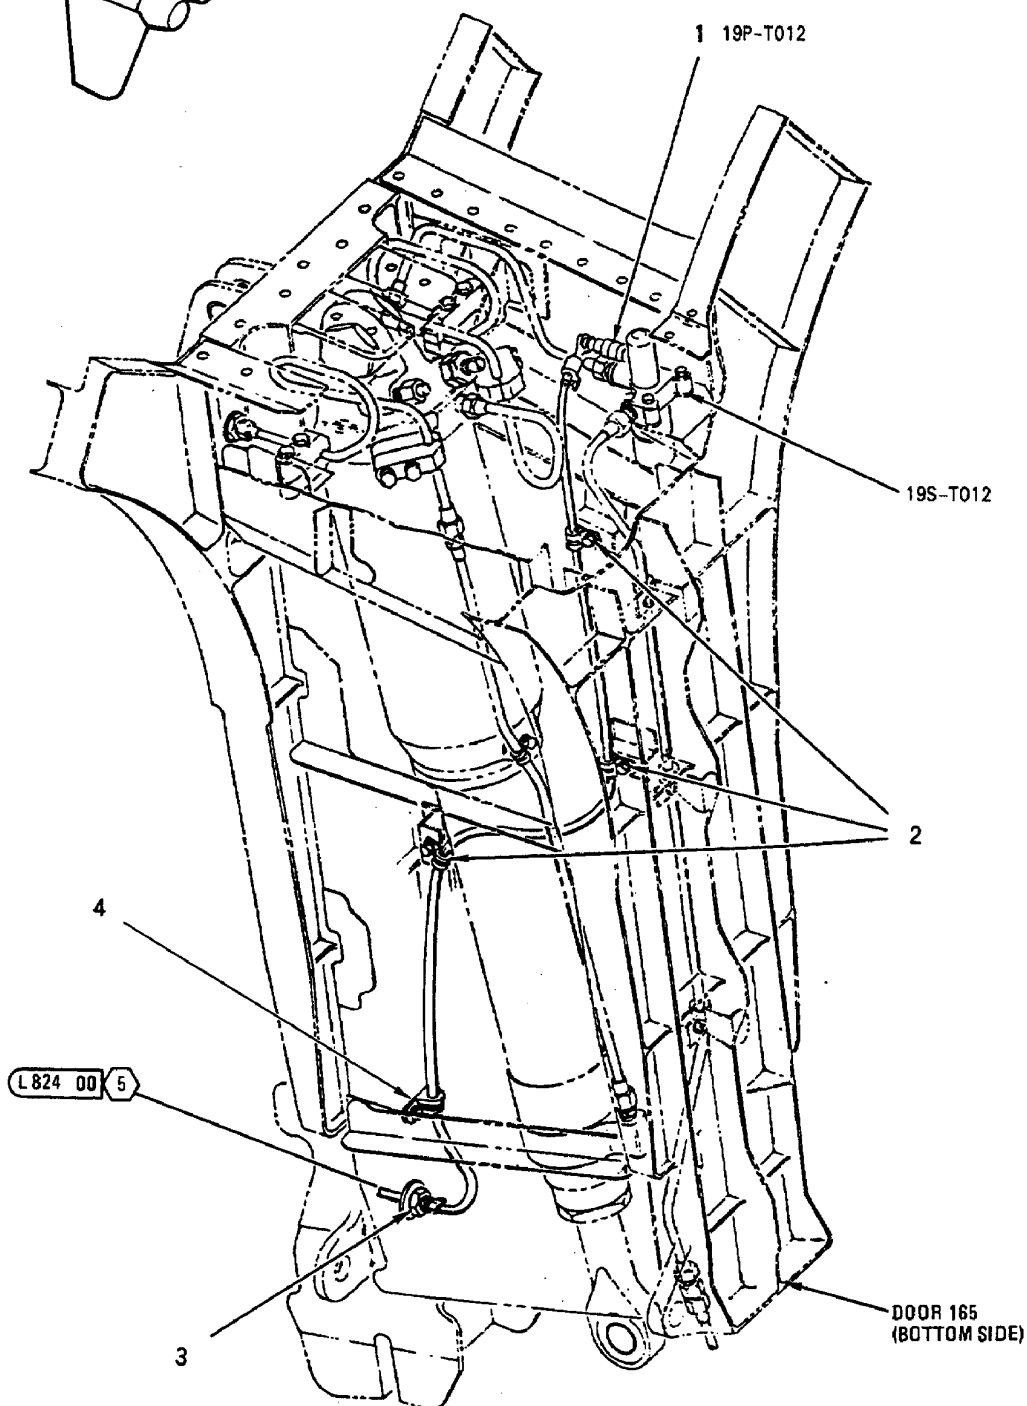


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T9B35S	CONNECTOR, PLUG (19P-T012)	1		PAOZZ
2	M85052/1-3	CLAMP	3		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
3	74B878001-123	CLAMP - CABLE, BULKHEAD, EMI (76301) ...	1		PAOZZ
4	M85052/1-3	CLAMP	1	A	PAOZZ
	NAS673V1	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ

CODE USABLE ON

A 161928 & UP

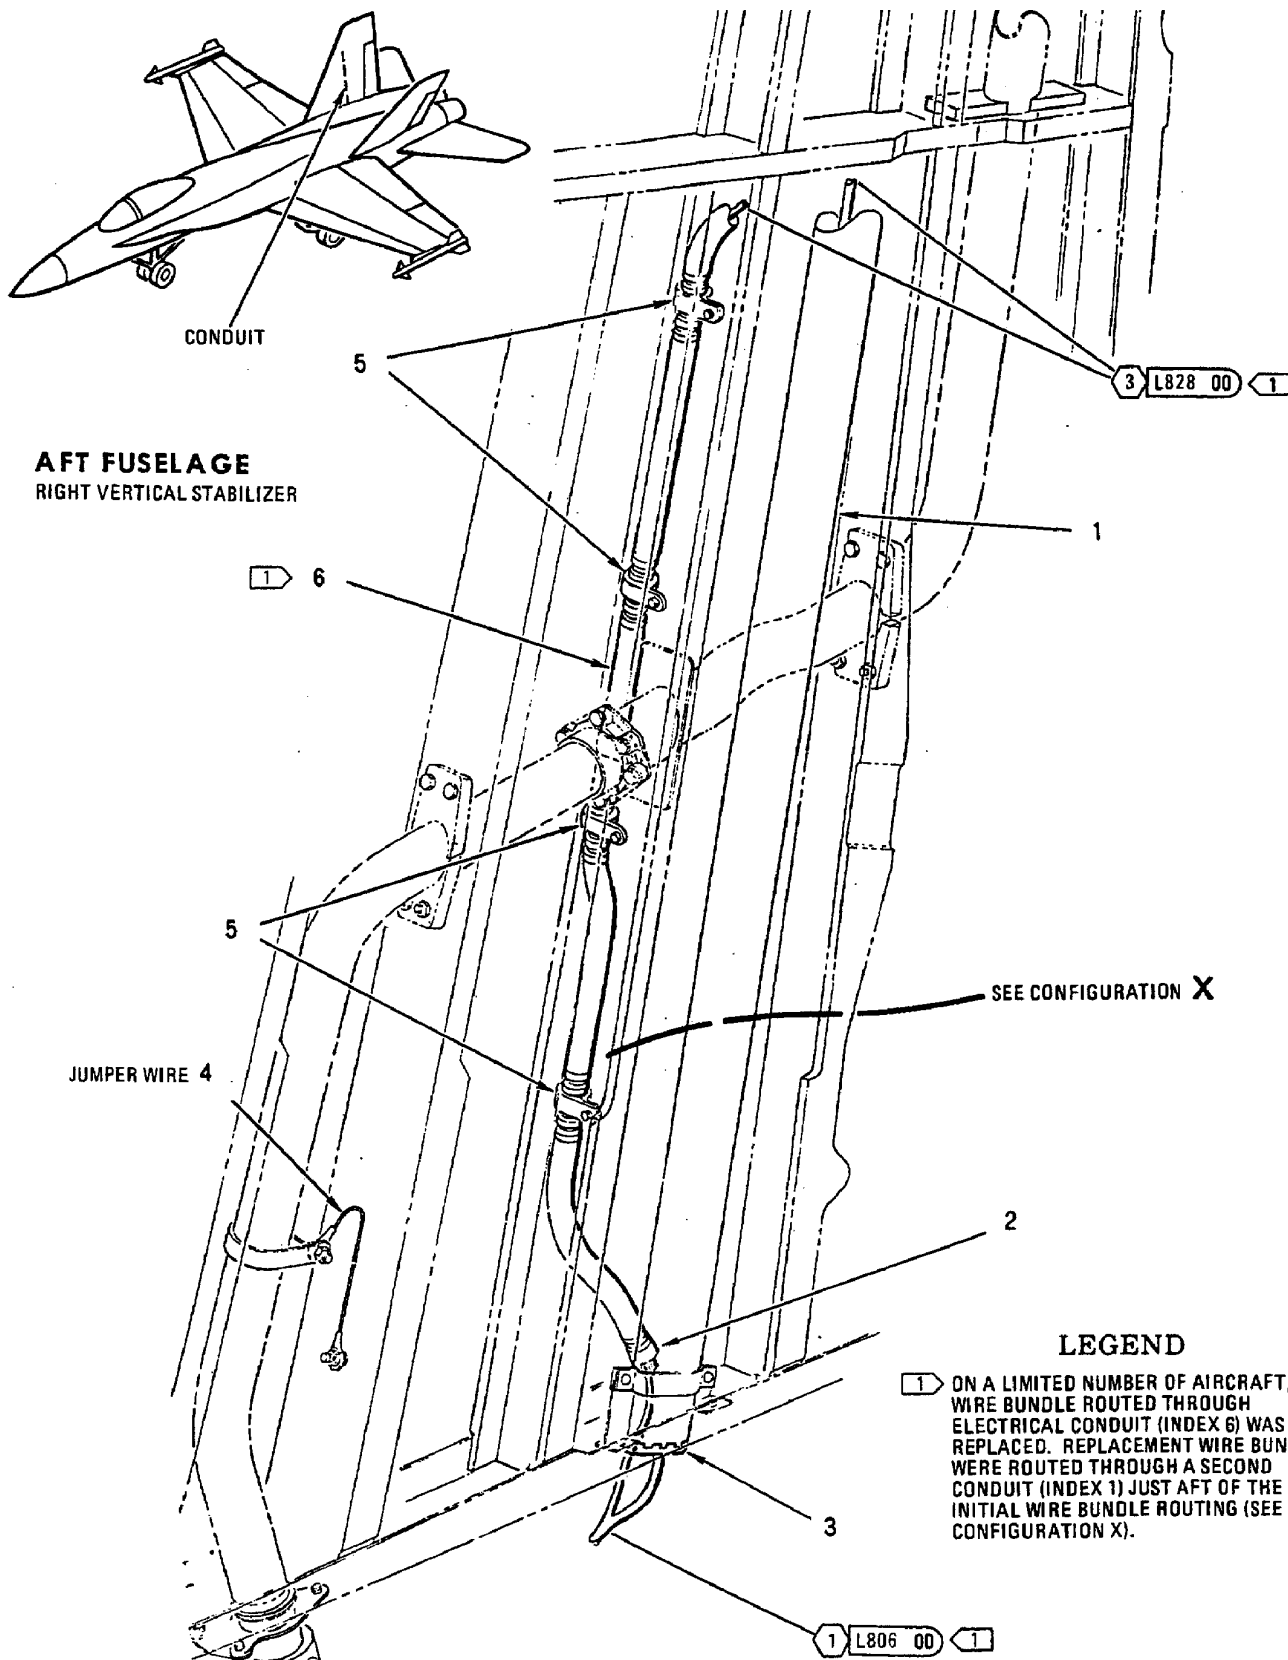


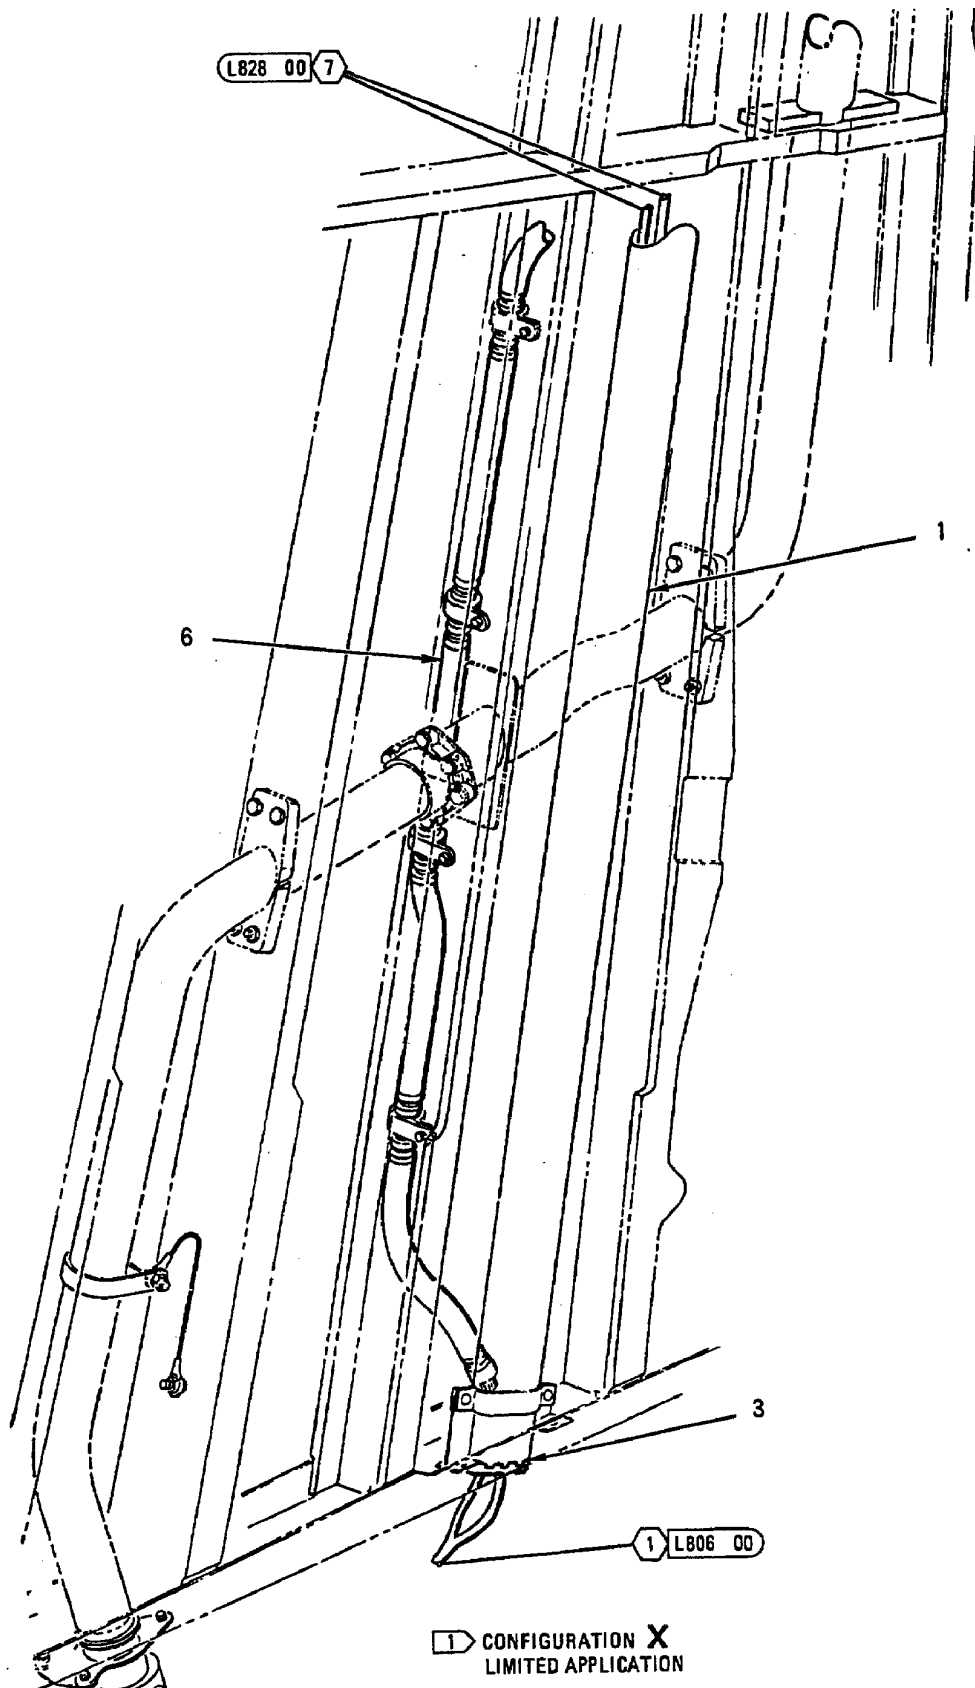



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE (76301) (SUPERSEDES 74A885632-2003)	1		XBDZZ
2	AN742D8	CLAMP	1	A	PAOZZ
	MS25281-12	CLAMP	1	B	PAOZZ
	NAS1801-3-7	SCREW (AP)	1	A	PAOZZ
	NAS1801-3-9	SCREW (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
3	MS21266-1N	GROMMET	AR		PAOZZ
4	MS25083-5BB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1801-3-5	SCREW (AP)	1		PAOZZ
	MS35338-138	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	MS21042L3	NUT (AP)	2		PAOZZ
5	AN742D8	CLAMP	4	A	PAOZZ
	MS25281-12	CLAMP	4	B	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M525N3ME)	1		PAOZZ
6	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	AOOOO
	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	AOOOO
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 6)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 6)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 6)	2	A*	PAOZZ
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-005) (PART OF INDEX 6)	2	B*	PAOZZ
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP

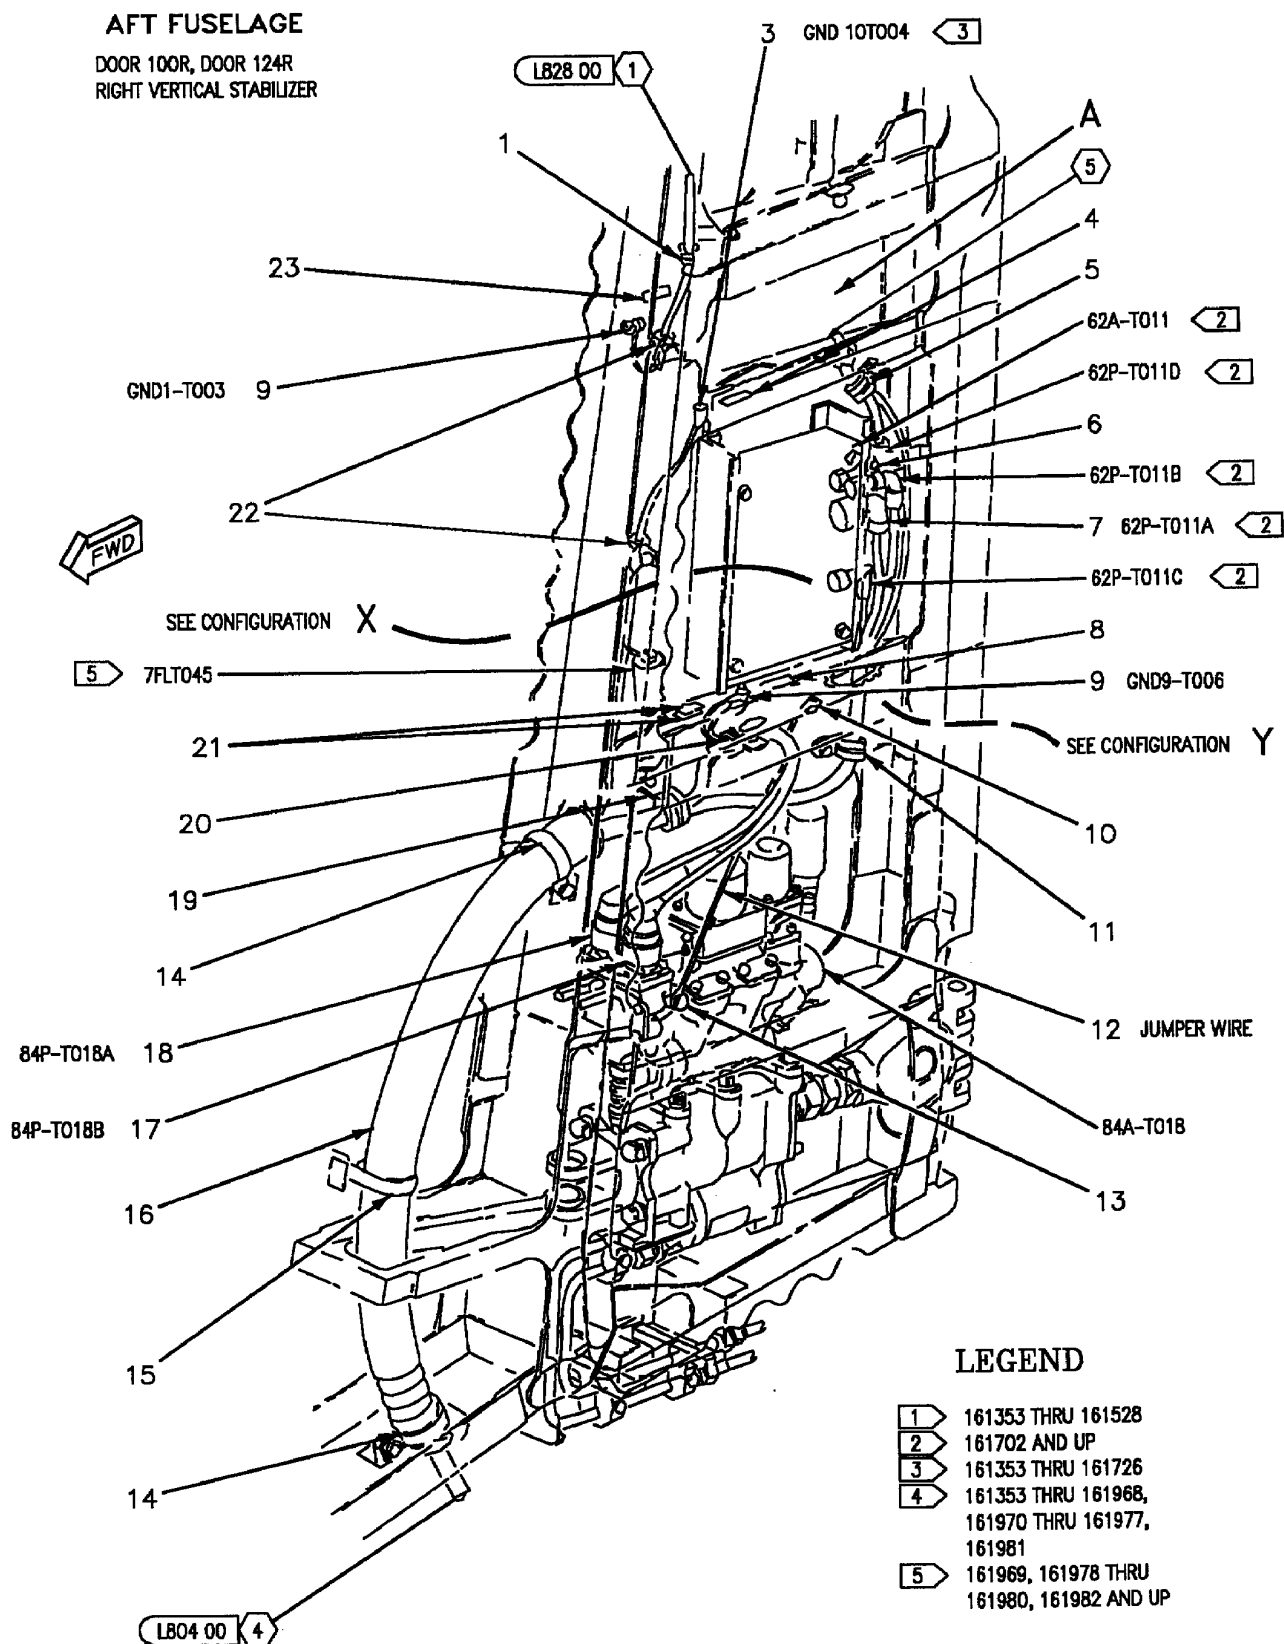

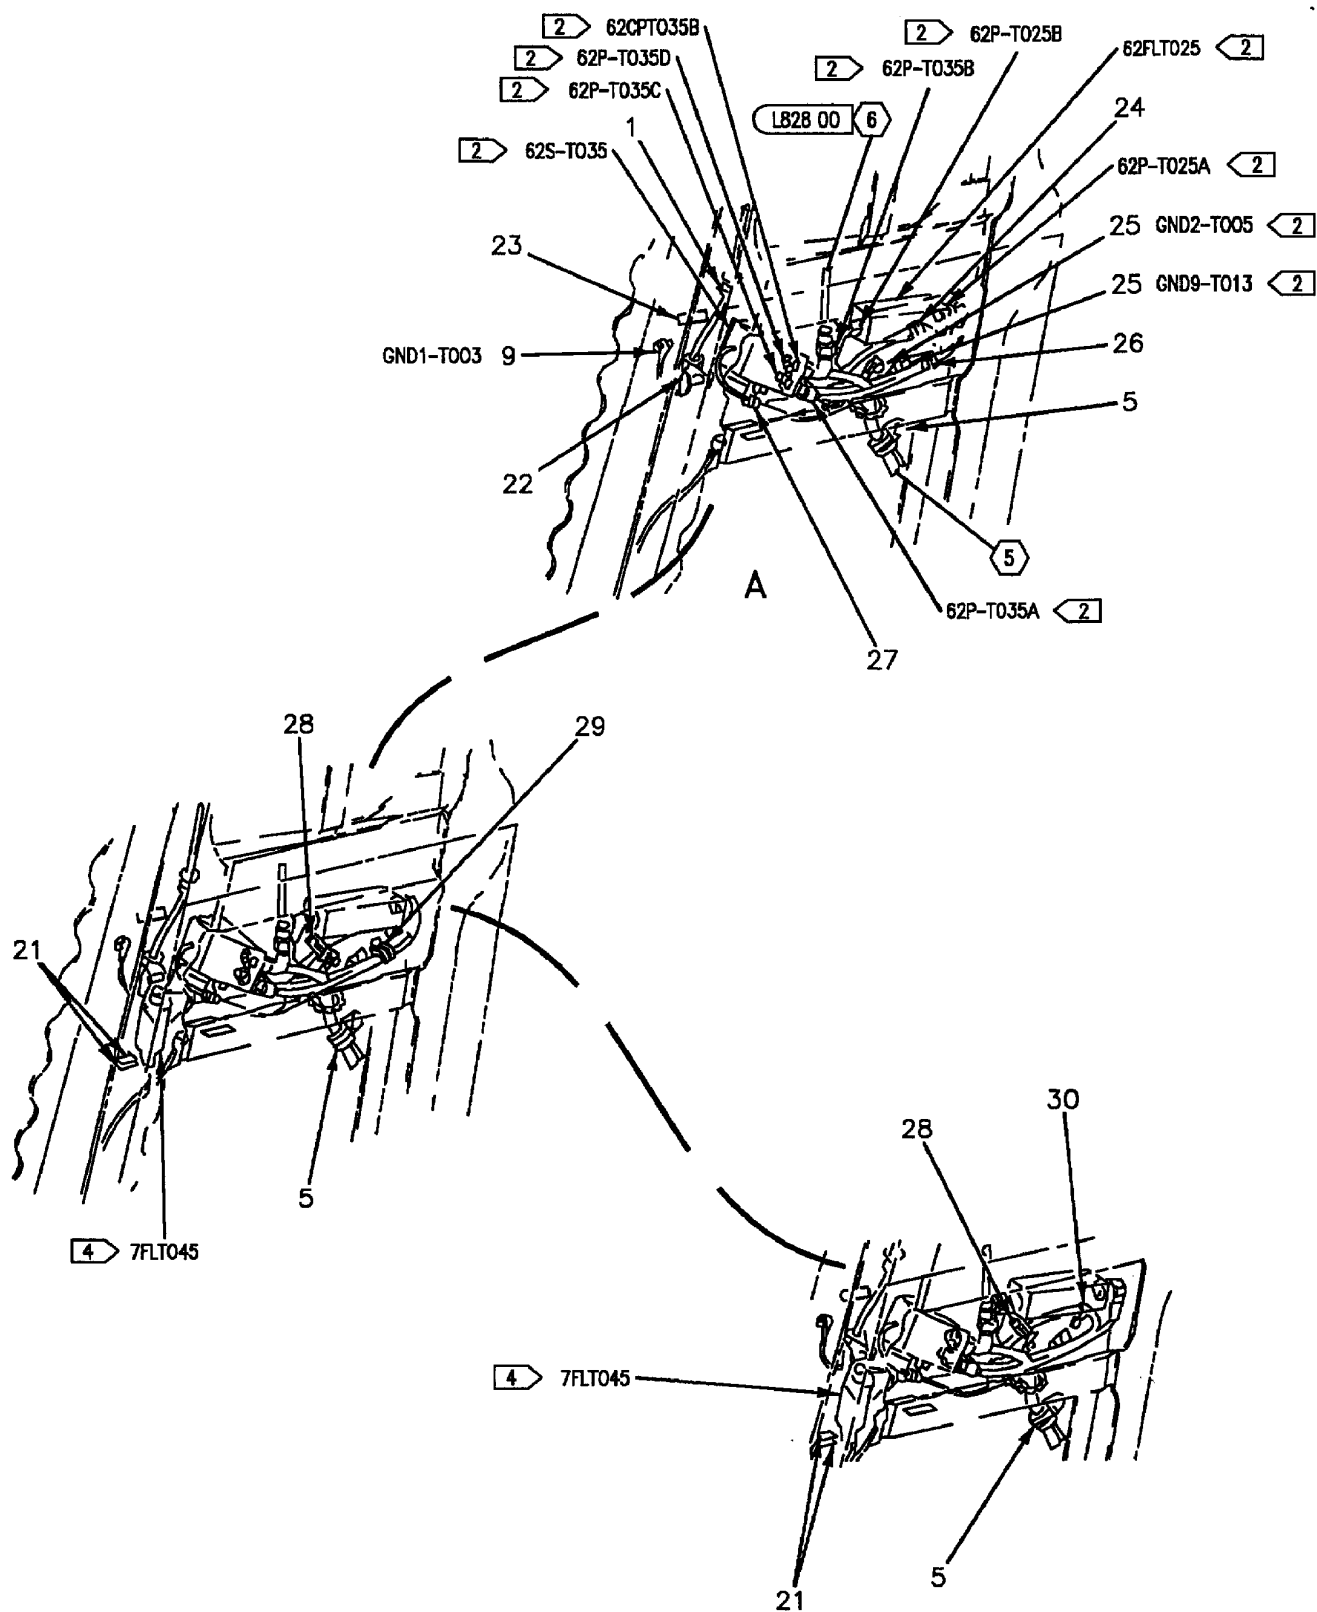

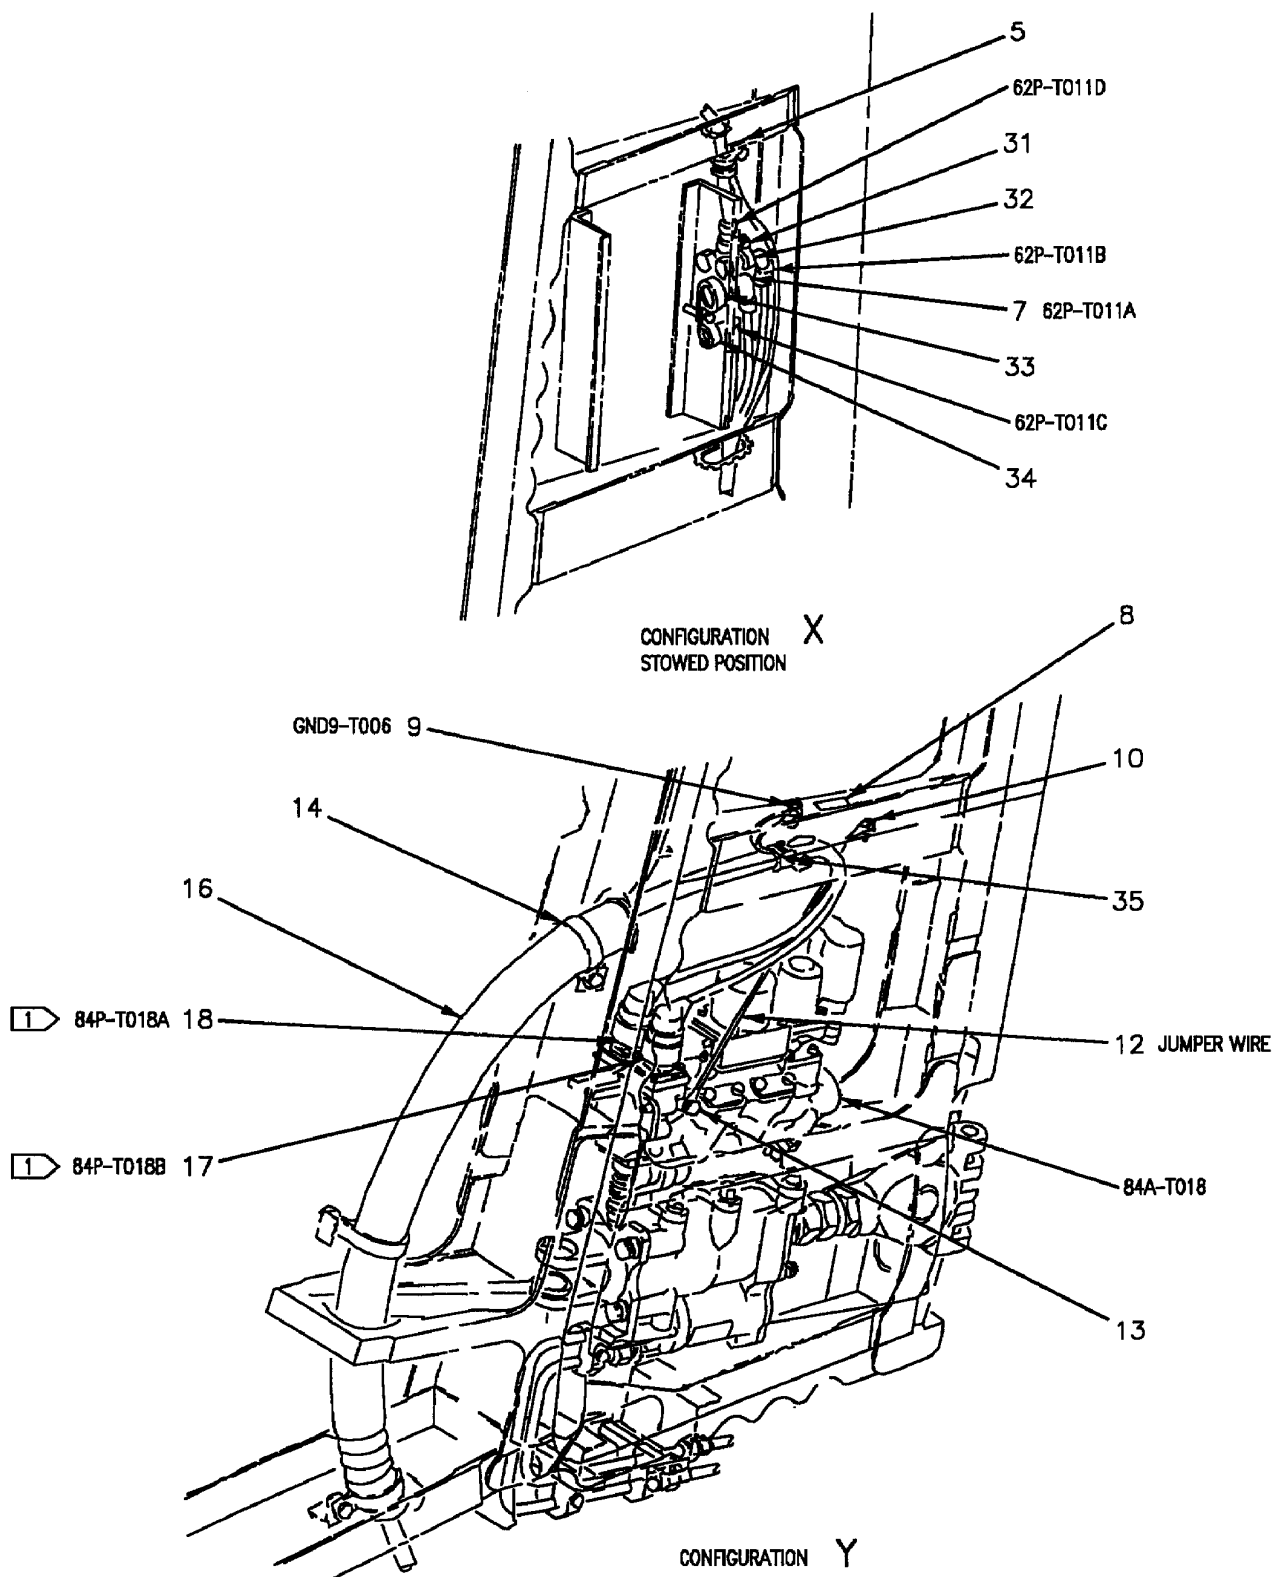

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG5 NAS1801-3-7 AN960JD10	CLAMP SCREW (AP) WASHER (AP)	1 1 1		PAOZZ PAOZZ PAOZZ
2		DELETED			
3	MS21042L3 MS35338-43 AN960JD10L	NUT WASHER (USE WITH INDEX 3) WASHER (USE WITH INDEX 3)	1 1 2	C C C	PAOZZ PAOZZ PAOZZ
4	74A885621-2297	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND10T004)	1	C	MDOZZ
5	M85052/3-5 NAS673V1 AN960JD10L	CLAMP BOLT (AP) WASHER (AP)	1 1 1	B B B	PAOZZ PAOZZ PAOZZ
6	AN742-9 NAS1801-3-8 AN960JD10L A11144-7-3	CLAMP SCREW (AP) WASHER (AP) NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1 1 1 1	E E E E*	PAOZZ PAOZZ PAOZZ PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
7	MS27467T13B35S	CONNECTOR, PLUG (62P-T011A)	1	B	PAOZZ
8	74A885621-2105	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-T006)	1		MDOZZ
9	MS21042L3 MS35338-43 AN960JD10L	NUT WASHER (USE WITH INDEX 9) WASHER (USE WITH INDEX 9)	2 2 2		PAOZZ PAOZZ PAOZZ
10	NAS1291C3M AN960JD10L	NUT WASHER (USE WITH INDEX 10)	1 1		PAOZZ PAOZZ
11	M85052/3-11 NAS673V1 AN960JD10L	CLAMP BOLT (AP) WASHER (AP)	1 1 1	B B B	PAOZZ PAOZZ PAOZZ
12	MS25083-2BB10	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
13	NAS673V3 MS35338-43	BOLT WASHER (USE WITH INDEX 13)	1 1		PAOZZ PAOZZ
14	AN735D28 NAS1801-3-8 AN960JD10	CLAMP SCREW (AP) WASHER (AP)	2 1 1		PAOZZ PAOZZ PAOZZ
15	MS21042L3 AN742D28 NAS1801-3-8 AN960JD10	NUT (AP) CLAMP SCREW (AP) WASHER (AP)	1 1 1 1		PAOZZ PAOZZ PAOZZ PAOZZ
16	74A885630-1009 74A885630-2011 CRN1137-9	CONDUIT - ELECTRICAL (76301) CONDUIT (76301) (PART OF INDEX 16) CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-009) (PART OF INDEX 16)	1 1 2		AOOOO MGOZZ PAOZZ
	CTR6612-009	SEE ABOVE (64590)	2	*	PAOZZ
17	MS27467T13B35S	CONNECTOR, PLUG (84P-T018B)	1		PAOZZ
18	MS27467T13B35SB	CONNECTOR, PLUG (84P-T018A)	1		PAOZZ
19	M85052/3-13 NAS673V2 AN960JD10	CLAMP BOLT (AP) WASHER (AP)	1 1 1	B B B	PAOZZ PAOZZ PAOZZ
20	M85052/3-11 NAS673V2 AN960JD10	CLAMP BOLT (AP) WASHER (AP)	1 1 2	B B B	PAOZZ PAOZZ PAOZZ
21	74A885621-2538	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 7FLT045)	2		MDOZZ
22	M85052/3-2 NAS673V1 AN960JD10L	CLAMP BOLT (AP) WASHER (AP)	2 1 1		PAOZZ PAOZZ PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
23	74A885621-2020	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-T003)	1		MDOZZ
24	MS21919WDG5	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	SEE ABOVE (76530)	1	D*	PAOZZ
25	MS21042L3	NUT	2	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 25)	2	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 25)	2	B	PAOZZ
26	MS21919WDG7	CLAMP	1	D	PAOZZ
	NAS673V1	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	D	PAOZZ
27	M85052/3-3	CLAMP	1	B	PAOZZ
28	MS21919WDG5	CLAMP	1	F	PAOZZ
	NAS673V1	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
29	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	G*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	G*	PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	G	PAOZZ
30	MS21919WDG5	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	H	PAOZZ
31	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
32	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
33	JM44LC33WD21	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D21)	1	*	PAOZZ
	830WD21G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-40	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
34	JM44LC33WD13	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D13)	1	*	PAOZZ
	830WD13G	SEE ABOVE (83930)	1	*	PAOZZ
35	M85052/3-11	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161353 THRU 161726
D	162826 & UP
E	161945 & UP
F	161702 THRU 162477
G	161738 THRU 162477
H	161702 THRU 161737


LEGEND

- 1 ON A LIMITED NUMBER OF AIRCRAFT, WIRE BUNDLE ROUTED THROUGH ELECTRICAL CONDUIT (INDEX 8) WAS REPLACED. REPLACEMENT WIRE BUNDLES WERE ROUTED THROUGH A SECOND CONDUIT (INDEX 6) JUST AFT OF THE INITIAL WIRE BUNDLE ROUTING (SEE CONFIGURATION X).

AFT FUSELAGE

RIGHT VERTICAL STABILIZER
FORMATION LIGHT

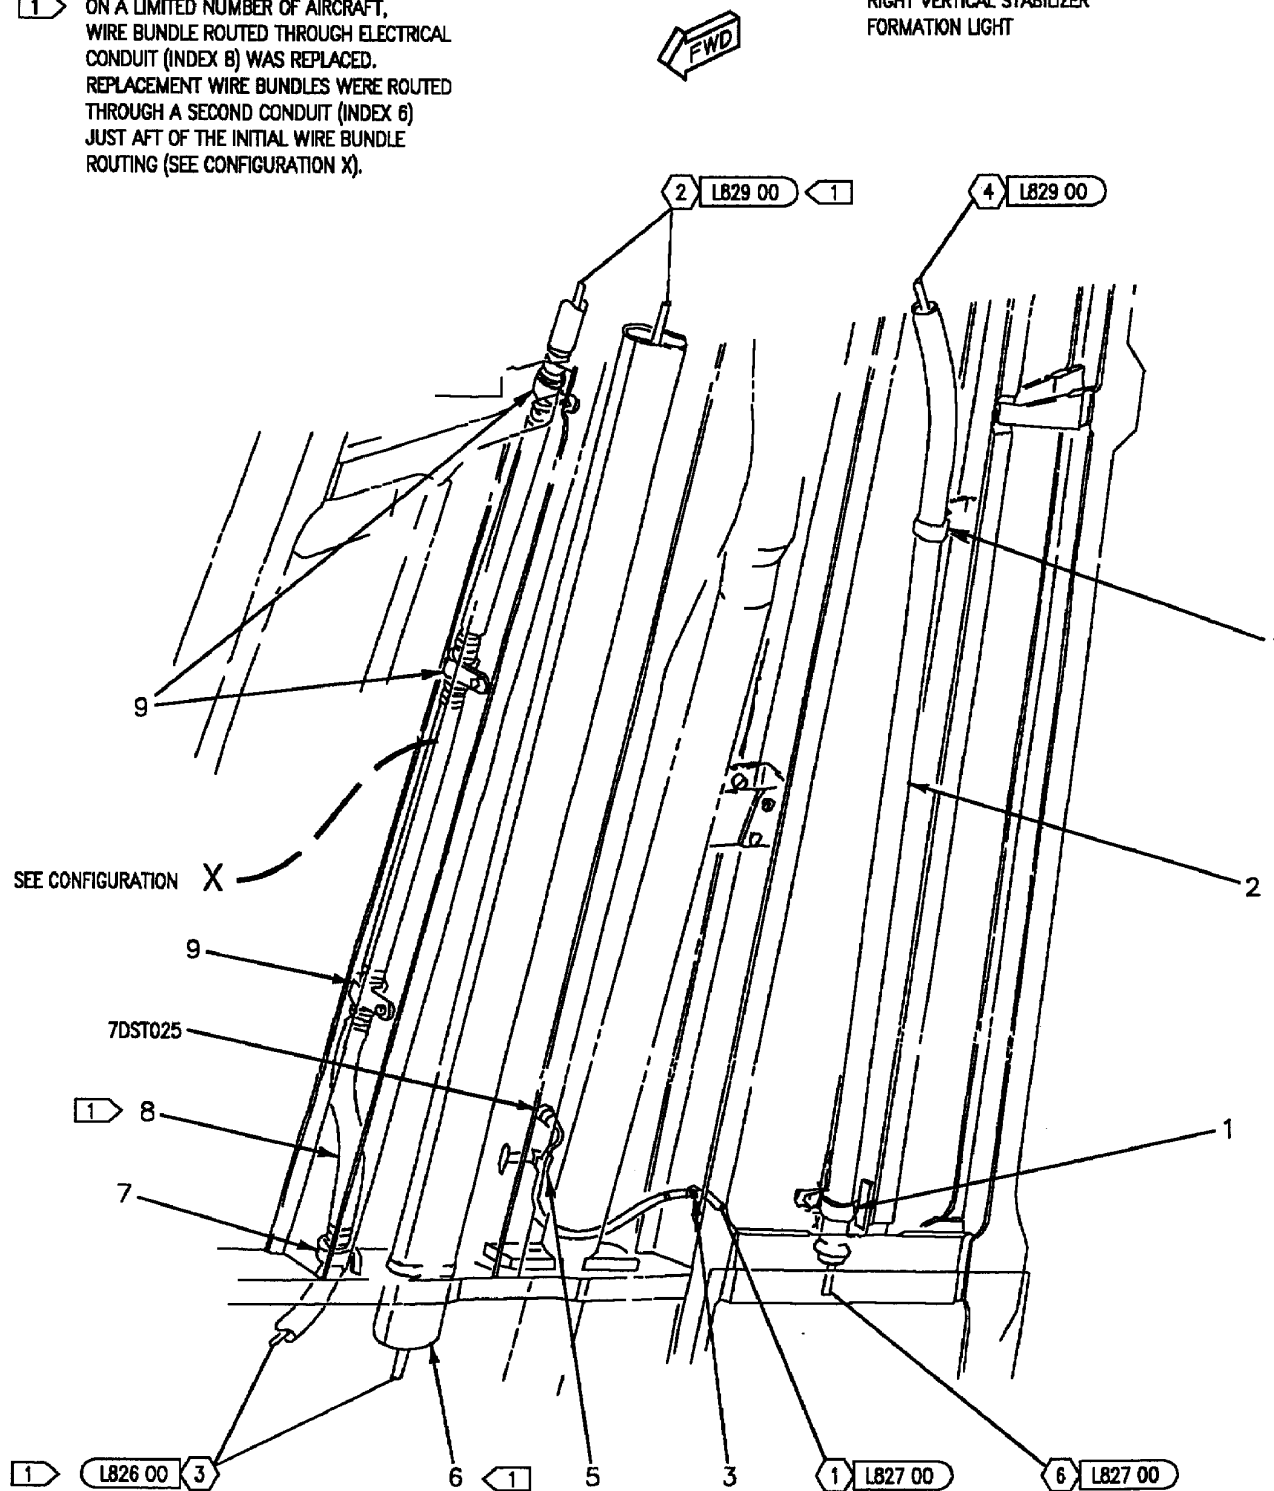

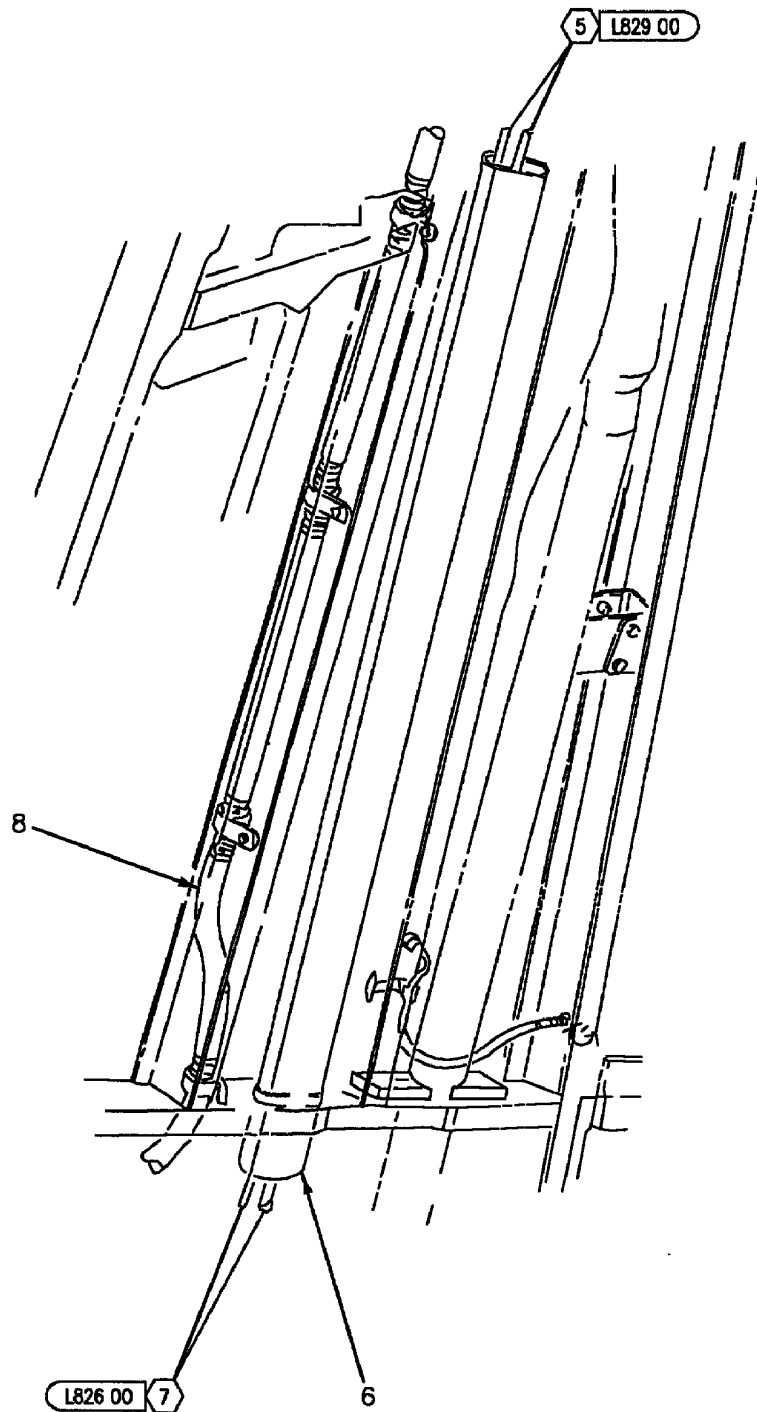


1 CONFIGURATION X
LIMITED APPLICATION

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN742D12	CLAMP	2		PAOZZ
	NAS1801-3-6	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
2	74A885637-2003	CONDUIT, METALLIC RIGID (76301)	1	C	XBDZZ
	74A885637-2009	CONDUIT, METALLIC RIGID (76301)	1	D	XBDZZ
	74A885637-2011	CONDUIT, METALLIC RIGID (76301)	1	E	XBDZZ
3	NAS557-6C	GROMMET	AR		PAOZZ
4		DELETED			
5	MS21919WDG5	CLAMP	1		PAOZZ
	NAS1801-3-7	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
6	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE (76301) (SUPERSEDES 74A885632-2003)	1		XBDZZ
7	AN742D8	CLAMP	1	A	PAOZZ
	MS25281R12	CLAMP (SUPERSEDES MS25281-12)	1	B	PAOZZ
	NAS1801-3-7	SCREW (AP)	1	A	PAOZZ
	NAS1801-3-9	SCREW (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
8	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	A0000
	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	A0000
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 8)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 8)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 8)	2	A*	PAOZZ
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-005) (PART OF INDEX 8)	2	B*	PAOZZ
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ
9	AN742D8	CLAMP	3	A	PAOZZ
	MS25281-12	CLAMP	3	B	PAOZZ
	AI10V6-2	PIN-RIVET, THREADED (AP) (06725) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M525N3ME)	1		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161353 THRU 162477			
		D						162826 THRU 162865			
		E						162866 & UP			

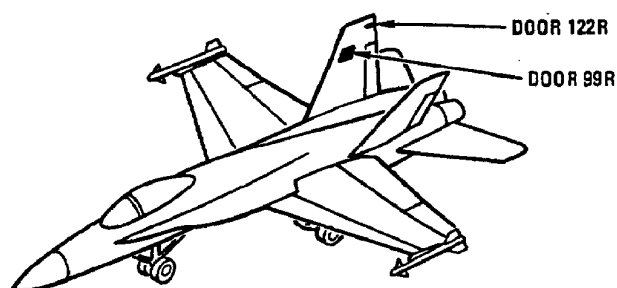

AFT FUSELAGE

DOOR 99R AND DOOR 122R
RIGHT VERTICAL STABILIZER

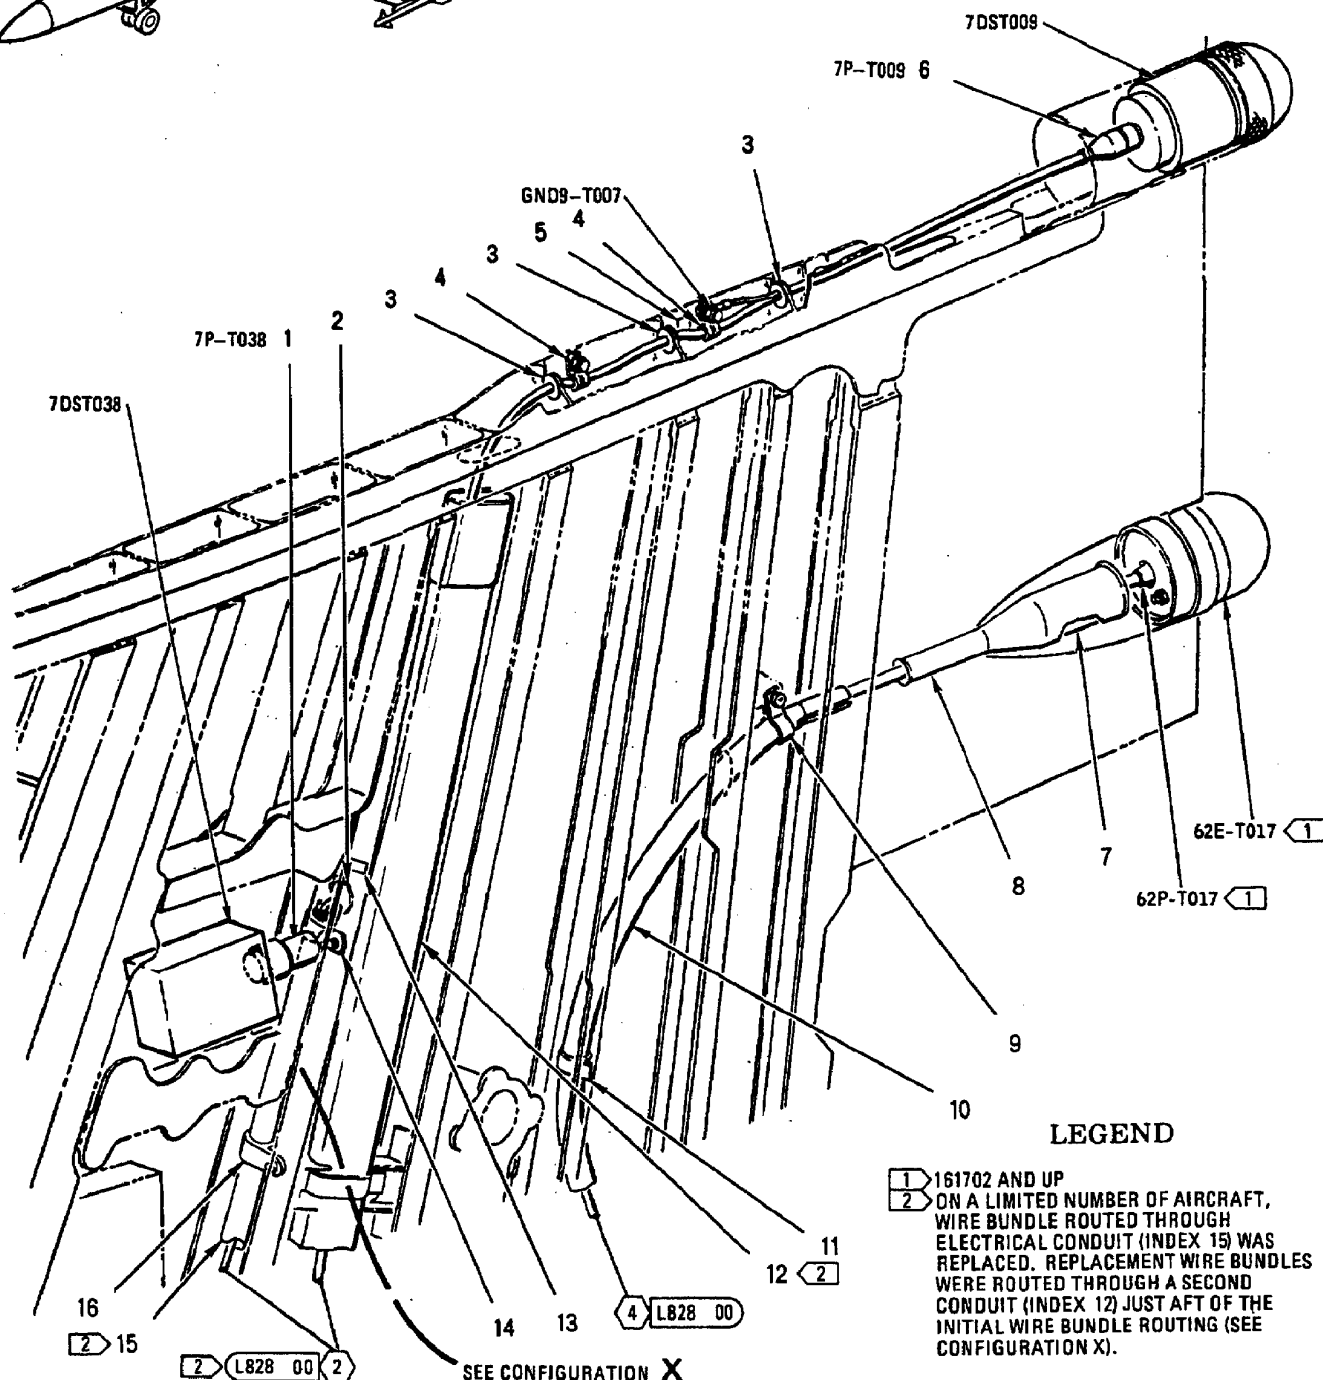

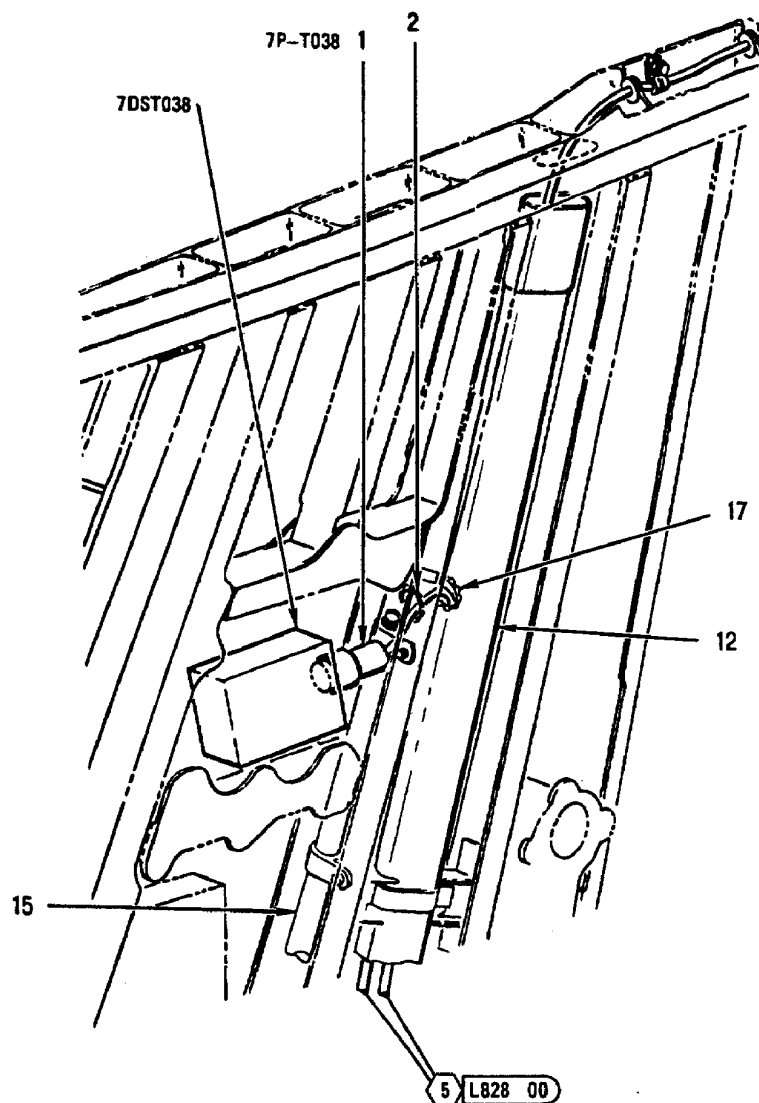


2 CONFIGURATION X
LIMITED APPLICATION


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B97S	CONNECTOR, PLUG (7P-T038)	1		PAOZZ
2	NAS557-16A	GROMMET	1		PAOZZ
3	MS35489-6S	GROMMET	3		PAOZZ
4	M85052/3-2	CLAMP	2		PAOZZ
	MS24693-C50	SCREW (AP)	1		PAOZZ
	AN960JD8	WASHER (AP)	1		PAOZZ
	MS21042L08	NUT (AP)	1		PAOZZ
5	74A885621-2260	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND9-T007)	1		MDOZZ
6	MS27467T11B98S	CONNECTOR, PLUG (7P-T009)	1		PAOZZ
7	74A885657-2005	FILLER, ELASTOMERIC - CENTER FUSELAGE (76301)	1	E	MGOZZ
8	74A230797-1001	TUBE ASSEMBLY, ANTENNA - REAR WARNING RADAR (76301)	1	C	XBOZZ
	74A230797-2009	TUBE ASSEMBLY, ANTENNA - REAR WARNING RADAR (76301)	1	D	XAOZZ
9	AN735D12	CLAMP	1		PAOZZ
	NAS1801-3-6	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
10	74A885637-2003	CONDUIT, METALLIC RIGID (76301)	1	F	XBDZZ
	74A885637-2009	CONDUIT, METALLIC RIGID (76301)	1	G	XBDZZ
	74A885637-2011	CONDUIT, METALLIC RIGID (76301)	1	H	XBDZZ
11	AN742D12	CLAMP	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
12	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE (76301) (SUPERSEDES 74A885632-2003)	1		XBDZZ
13	74A885621-2555	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES 7DST038)	1		MGOZZ
14	AN742D8	CLAMP	1	A	PAOZZ
	MS25281-12	CLAMP	1	B	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M416V3-2)	1	*	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M525N3ME)	1		PAOZZ
15	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	AOOOO
	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	AOOOO
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 15)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 15)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 15)	2	A*	PAOZZ
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593) (MCDONNELL SPEC ST5M1570-005) (PART OF INDEX 15)	2	B*	PAOZZ
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ
16	AN742D8	CLAMP	1	A	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725) (MCDONNELL SPEC ST3M416V3-2)	1	A*	PAOZZ
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M416V3-2)	1	A*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP) (73197) (MCDONNELL SPEC ST3M525N3ME)	1	A	PAOZZ
17	MS21266-1N	GROMMET	AR		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP
C	161702 THRU 161708
D	161709 & UP
E	161925 & UP
F	161353 THRU 162477
G	162826 THRU 162865
H	162866 & UP

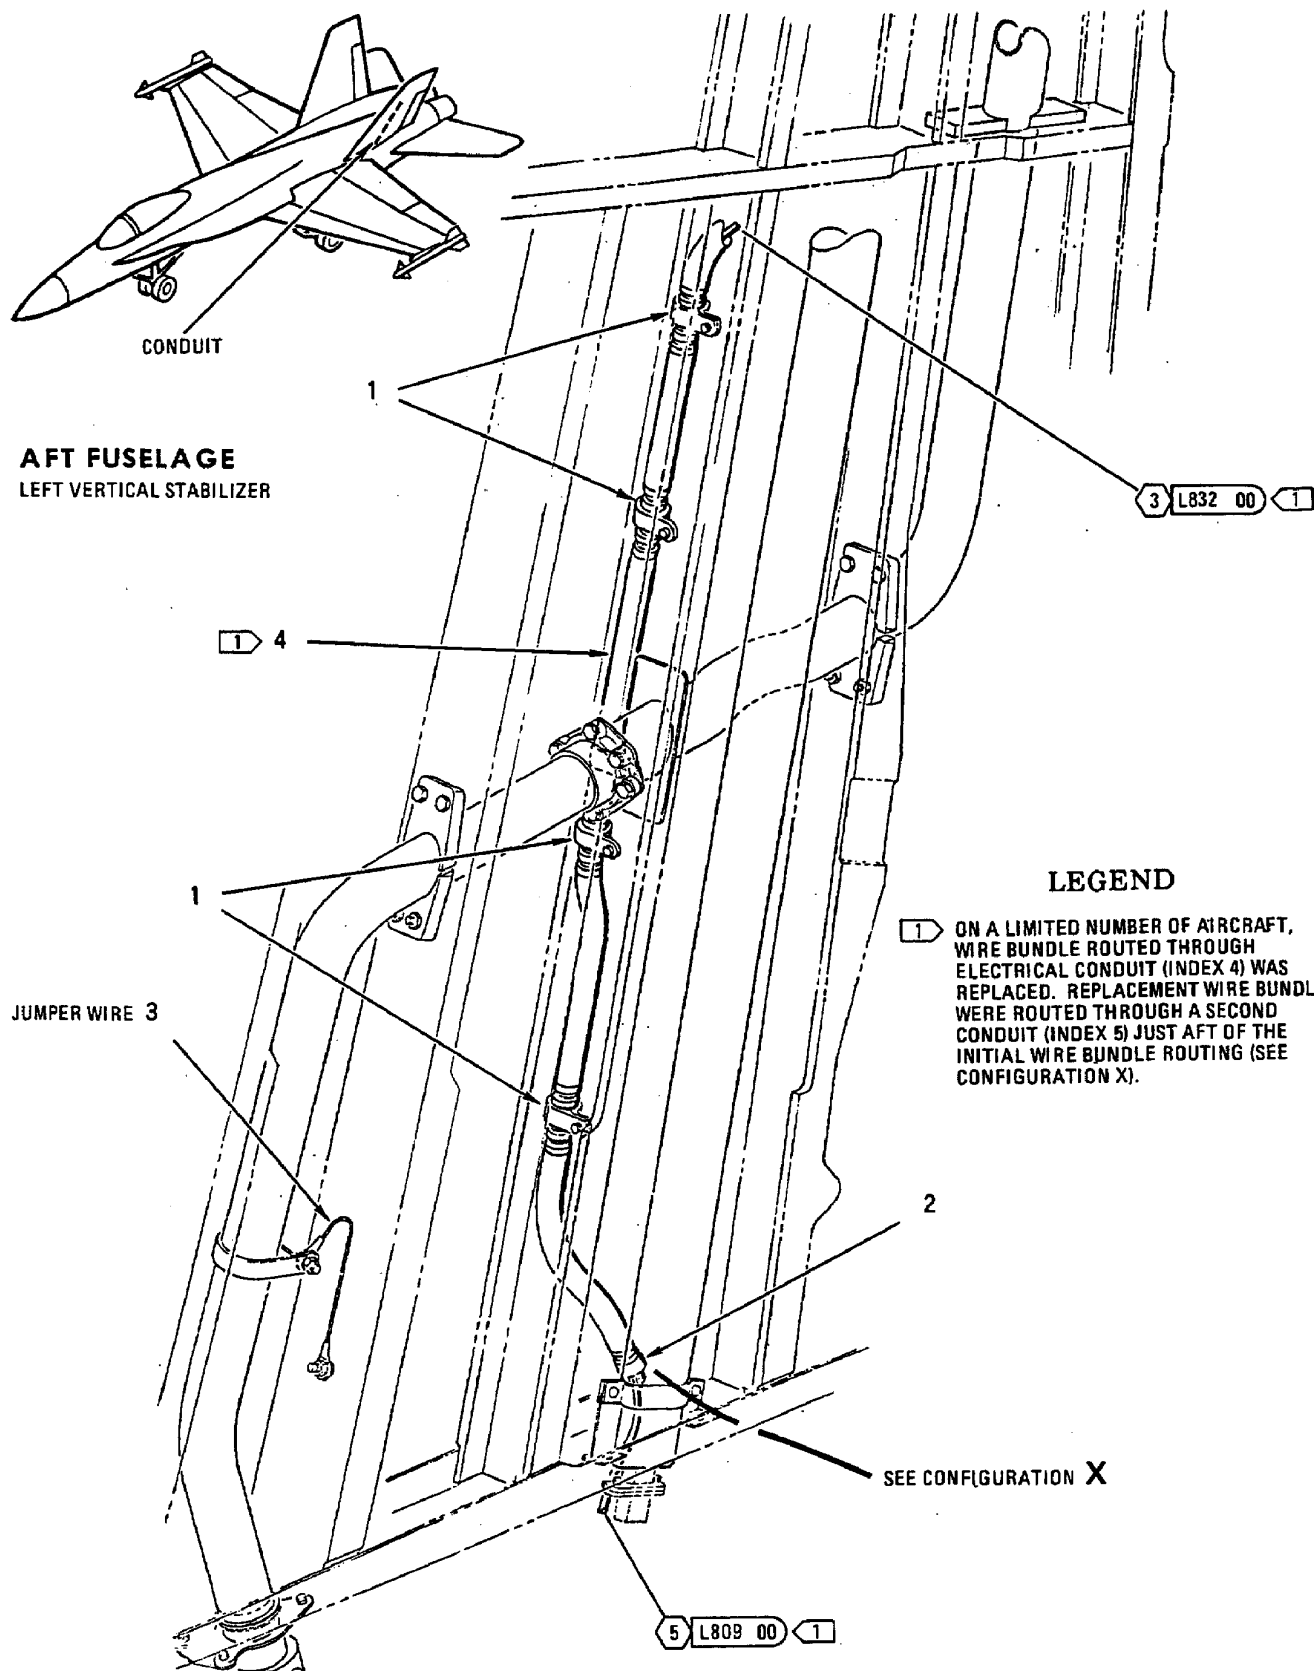

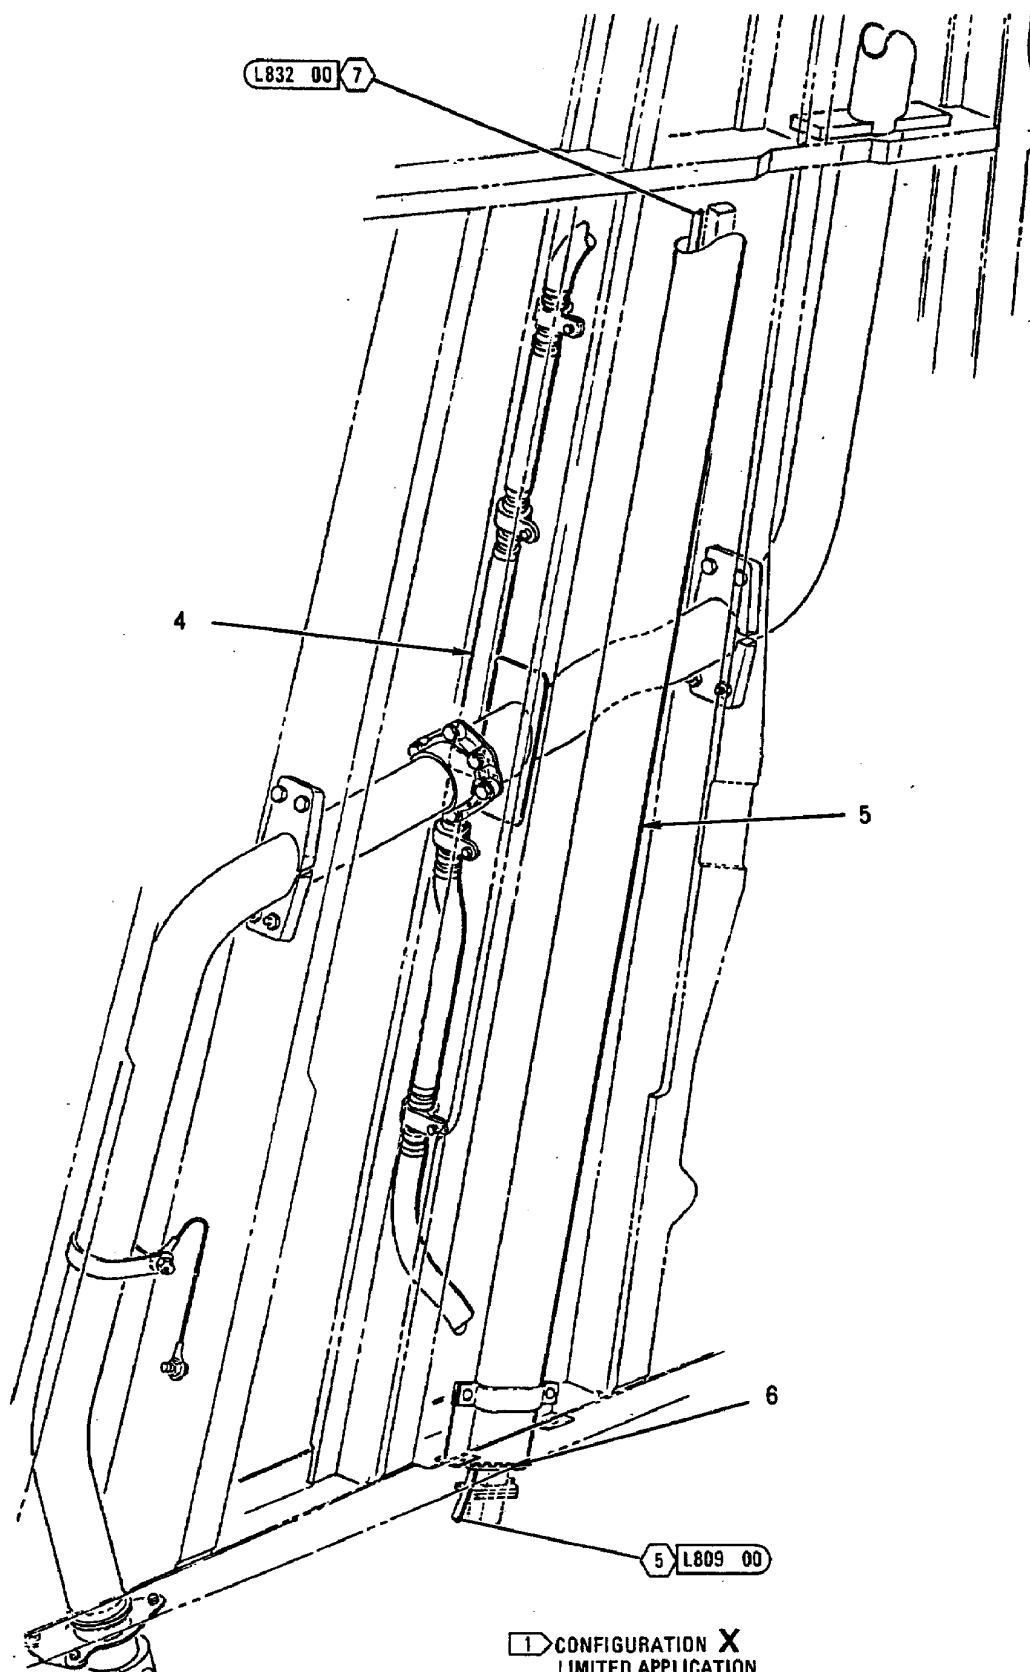

1 CONFIGURATION X
LIMITED APPLICATION


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN742D8	CLAMP	4	A	PAOZZ
	MS25281-12	CLAMP	4	B	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	AN960JD10	WASHER (AP)	1	A	PAOZZ
2	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP)	1		PAOZZ
		(73197) (MCDONNELL SPEC ST3M525N3ME)			
	AN742D8	CLAMP	1	A	PAOZZ
	MS25281-12	CLAMP	1	B	PAOZZ
	NAS1801-3-6	SCREW (AP)	1	A	PAOZZ
	NAS1801-3-9	SCREW (AP)	1	B	PAOZZ
3	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	MS25083-5BB6	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1801-3-5	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
	MS21042L3	NUT (AP)	2		PAOZZ
	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	AOOOO
4	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	AOOOO
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 4)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 4)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	2	A*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003 (PART OF INDEX 4)			
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593)	2	B*	PAOZZ
5		(MCDONNELL SPEC ST5M1570-005 (PART OF INDEX 4)			
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ
	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE	1		XBDZZ
		(76301) (SUPERSEDES 74A885632-2003			
	MS21266-1N	GROMMET	AR		PAOZZ


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP

AFT FUSELAGE


LEFT VERTICAL STABILIZER
DOOR 100L AND DOOR 124L

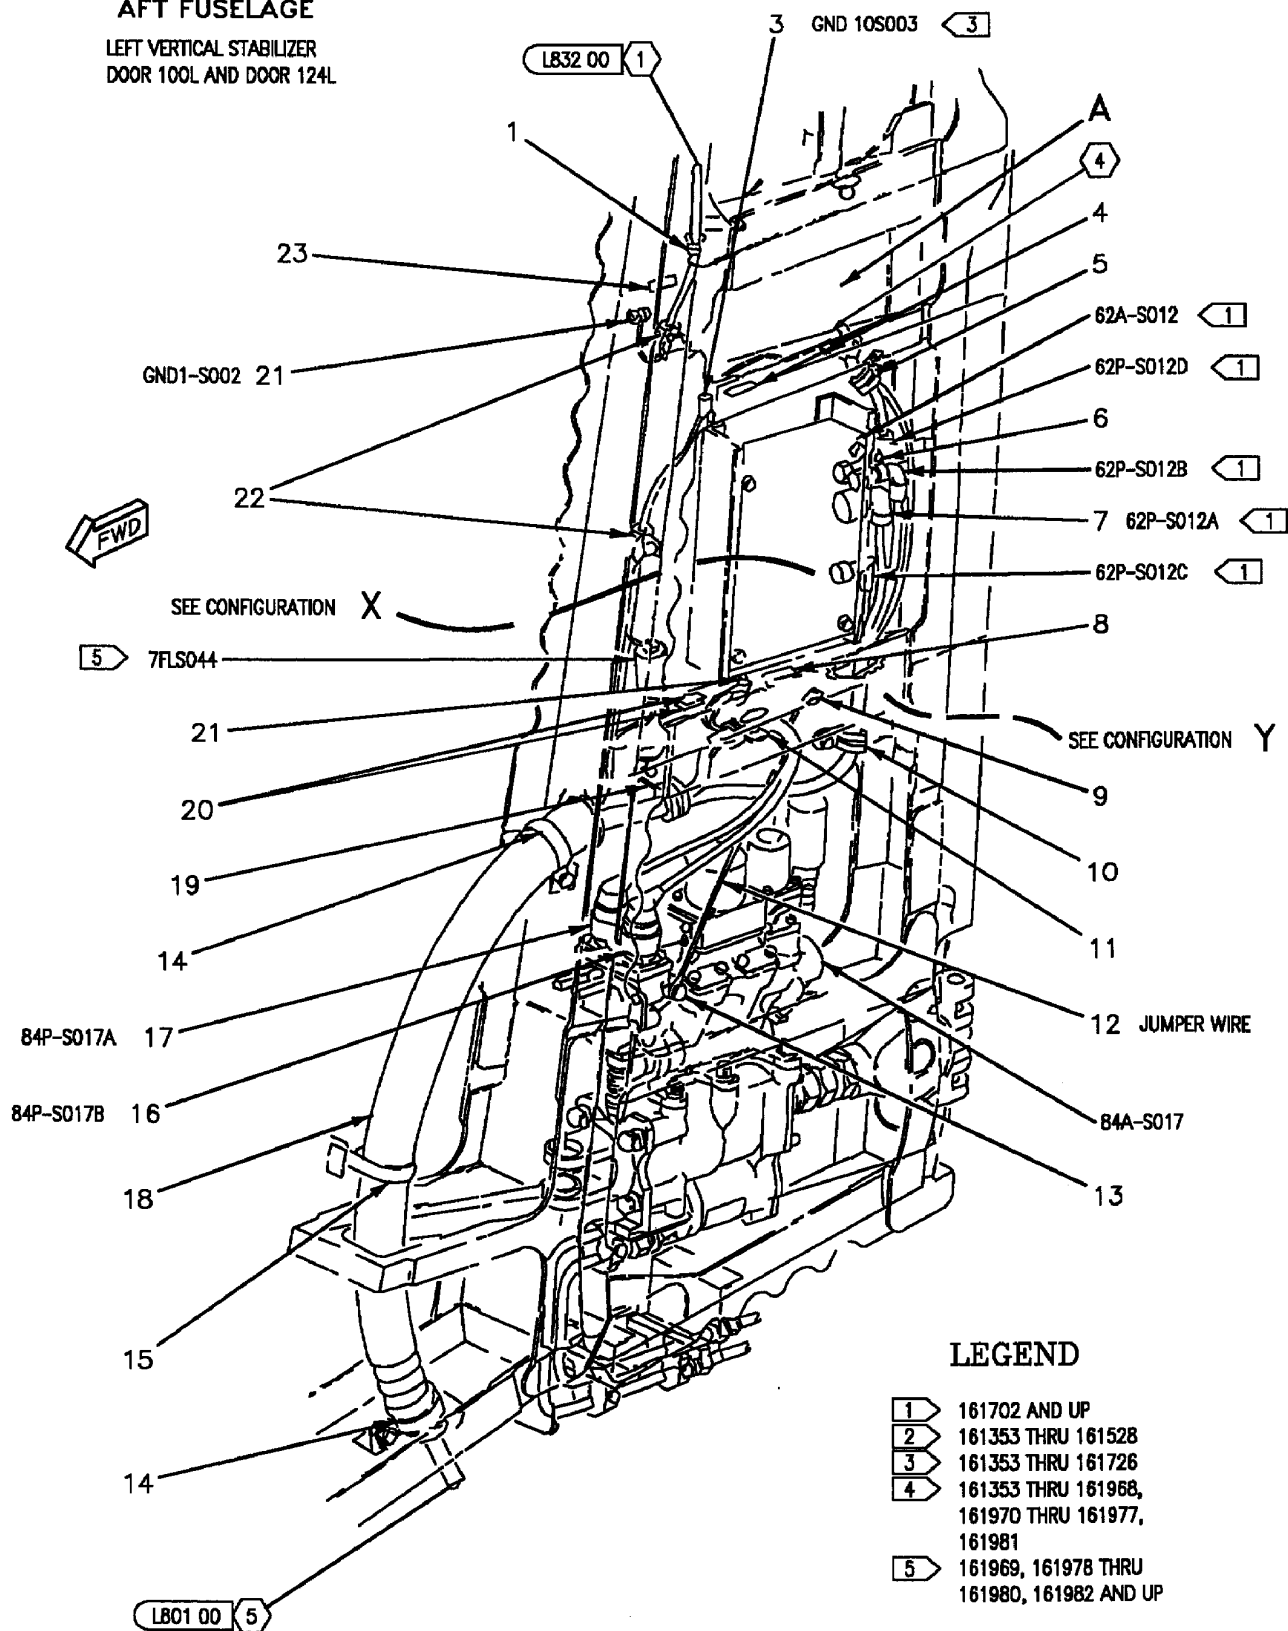

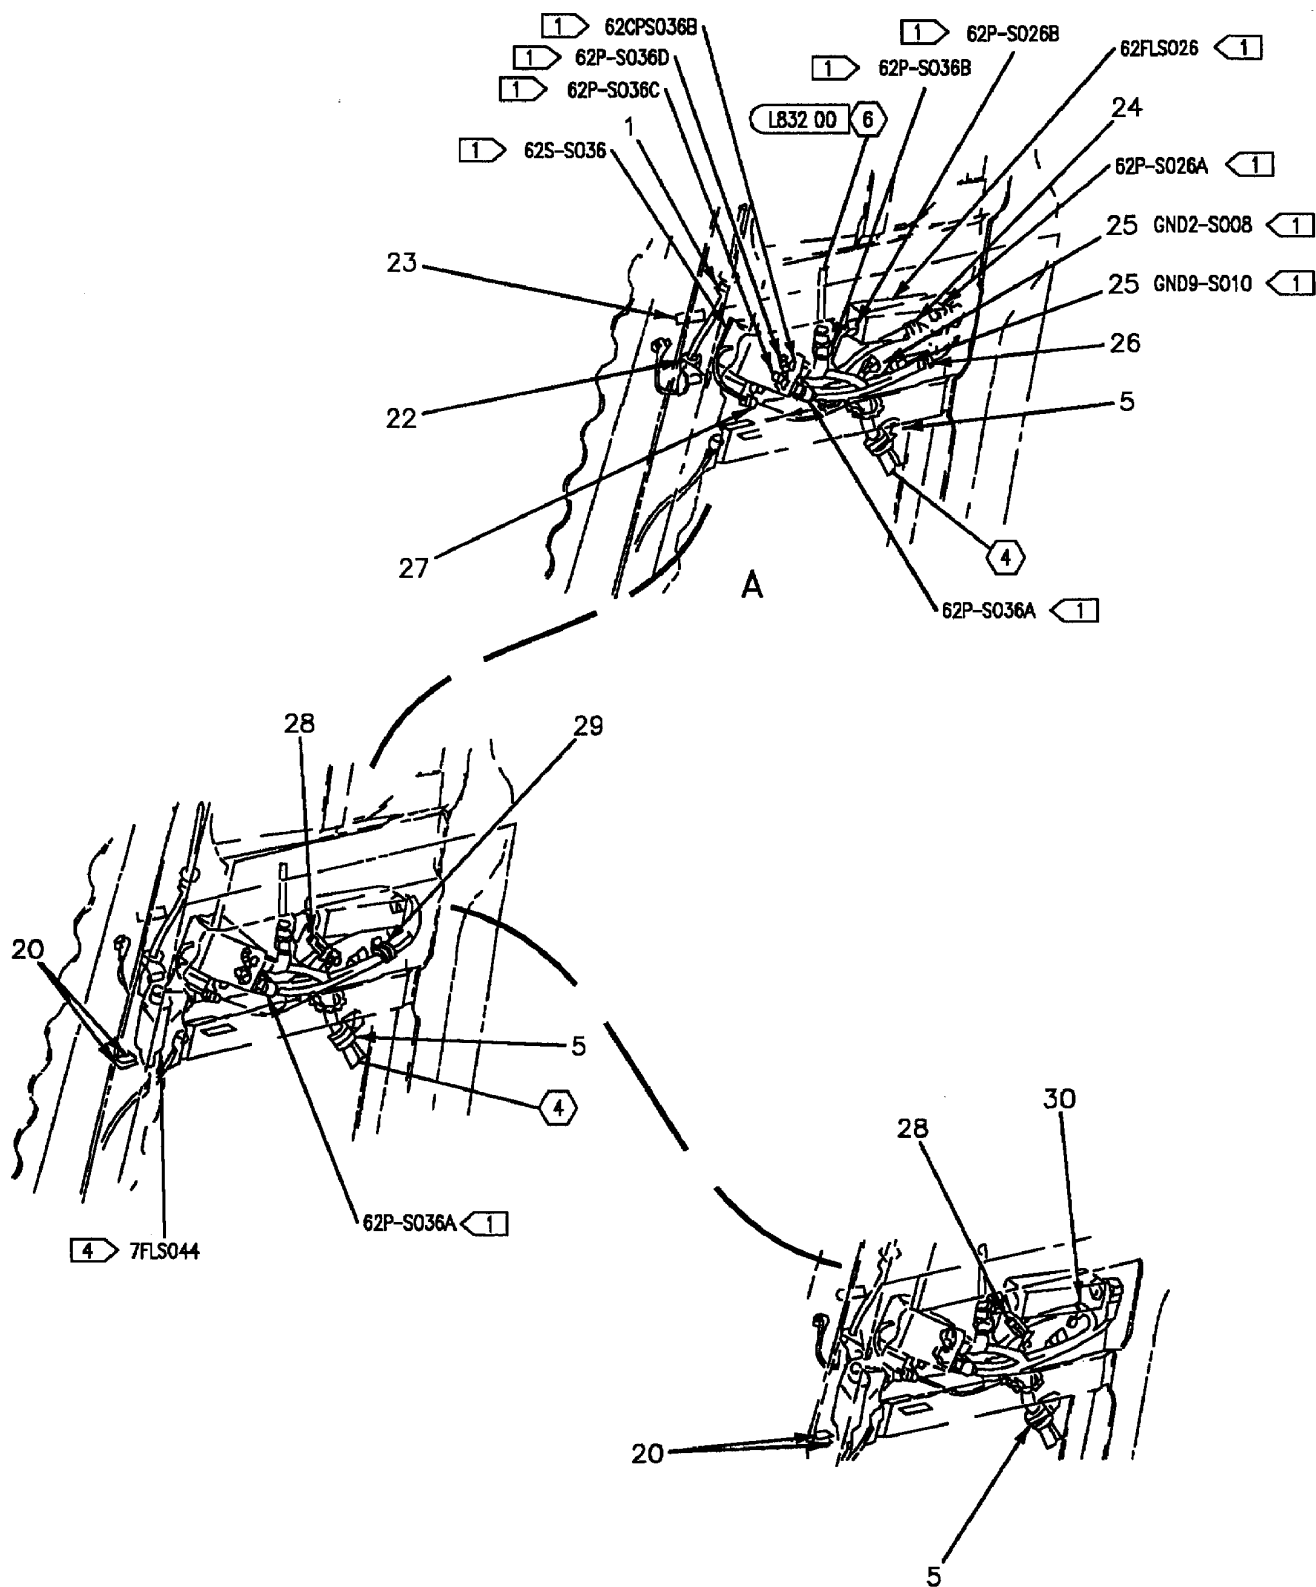

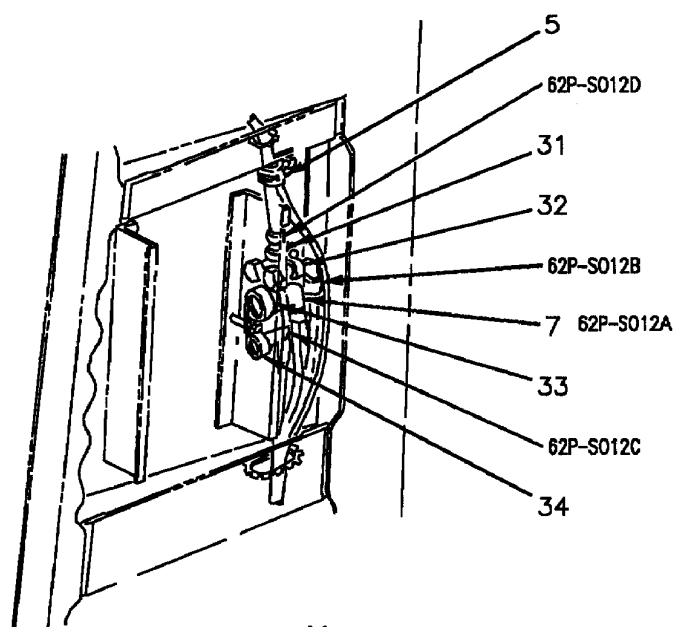

CONFIGURATION X
STOWED POSITION

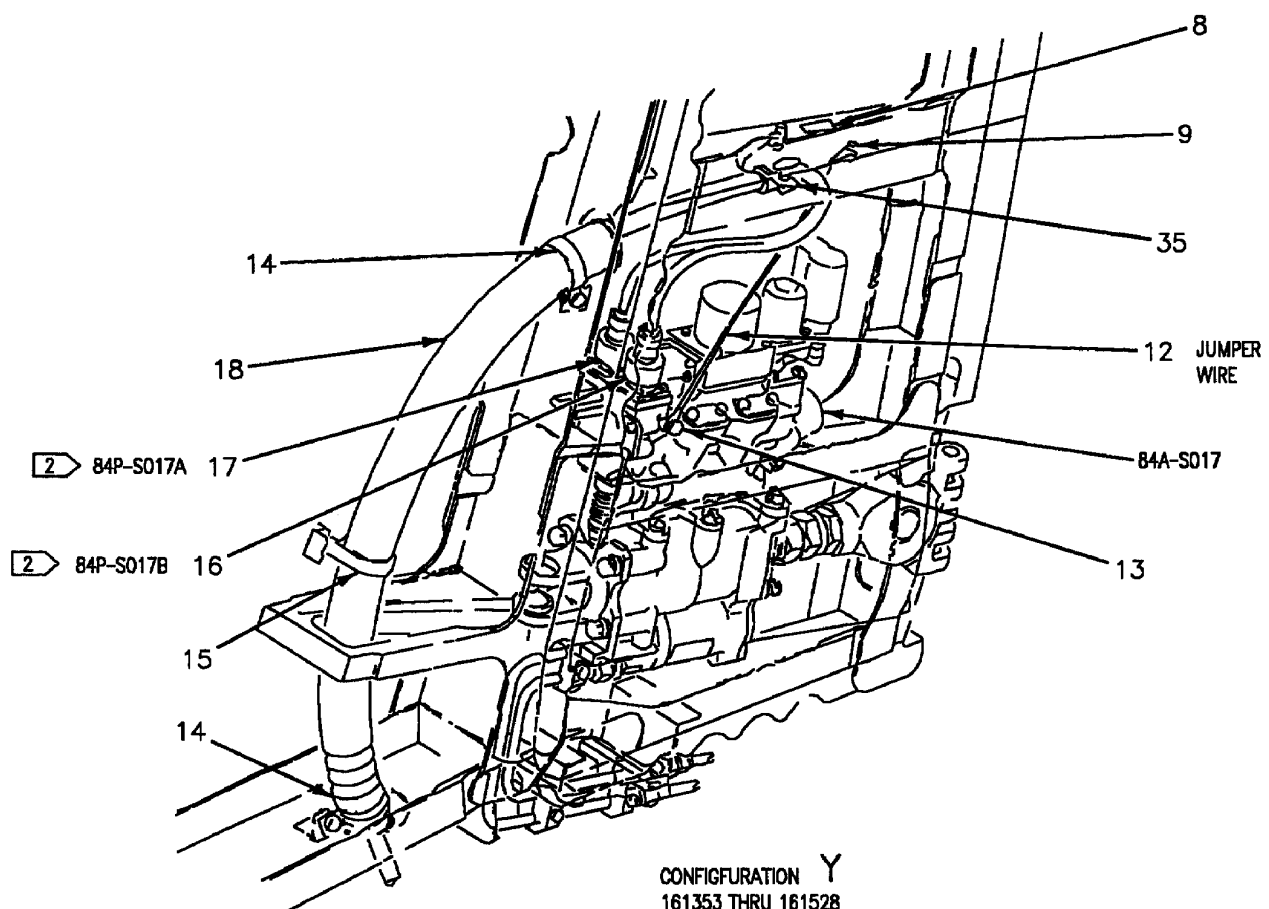

CONFIGURATION Y
161353 THRU 161528

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG5	CLAMP	1		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
2		DELETED			
3	MS21042L3	NUT	1	C	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	1	C	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	2	C	PAOZZ
4	74A885621-2295	MARKER, IDENTIFICATION - AVIONICS (76301)	1	C	MDOZZ
		(FOR REF DES GND10S003)			
5	M85052/3-5	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
6	AN742-9	CLAMP	1	D	PAOZZ
	NAS1801-3-8	SCREW (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	D*	PAOZZ
		ST3M523C3M)			
7	MS27467T13B35S	CONNECTOR, PLUG (62P-S012A)	1	B	PAOZZ
8	74A885621-2098	MARKER, IDENTIFICATION - AVIONICS (76301)	1		MDOZZ
		(FOR REF DES GND9-S004)			
9	NAS1291C3M	NUT	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 9)	1		PAOZZ
10	M85052/3-11	CLAMP	1	B	PAOZZ
	NAS673V1	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2	B	PAOZZ
11	M85052/3-11	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
12	MS25083-2BB10	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
13	NAS673V3	BOLT	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 13)	1		PAOZZ
14	AN735D28	CLAMP	2		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
15	AN742D28	CLAMP	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
16	MS27467T13B35S	CONNECTOR, PLUG (84P-S017B)	1		PAOZZ
17	MS27467T13B35SB	CONNECTOR, PLUG (84P-S017A)	1		PAOZZ
18	74A885630-1009	CONDUIT - ELECTRICAL (76301)	1		A0000
	74A885630-2011	CONDUIT (76301) (PART OF INDEX 18)	1		MGOZZ
	CRN1137-9	CONVOLUTE REINFORCEMENT (05593)	2	*	PAOZZ
		(MCDONNELL SPEC ST5M1570-009) (PART OF INDEX 18)			
	CTR6612-009	SEE ABOVE (64590)	2	*	PAOZZ
19	M85052/3-13	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	B	PAOZZ
20	74A885621-2329	MARKER, IDENTIFICATION - AVIONICS (76301)	2		MDOZZ
		(FOR REF DES 7FLS044)			
21	MS21042L3	NUT	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 21)	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 21)	2		PAOZZ
22	M85052/3-2	CLAMP	2		PAOZZ
	NAS673V1	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
23	74A885621-2012	MARKER, IDENTIFICATION - AVIONICS (76301) (FOR REF DES GND1-S002)	1		MDOZZ
24	MS21919WDG5	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	H*	PAOZZ
	130091	SEE ABOVE (72962)	1	H*	PAOZZ
25	MS21042L3	NUT	2	B	PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 25)	2	B	PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 25)	2	B	PAOZZ
26	MS21919WDG7	CLAMP	1	H	PAOZZ
	NAS673V1	BOLT (AP)	1	H	PAOZZ
	AN960JD10L	WASHER (AP)	1	H	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	H	PAOZZ
27	M85052/3-3	CLAMP	1	B	PAOZZ
28	MS21919WDG5	CLAMP	1	G	PAOZZ
	NAS673V1	BOLT (AP)	1	G	PAOZZ
	AN960JD10L	WASHER (AP)	1	G	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	G	PAOZZ
29	JM44LC44WD9	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D9)	1	F*	PAOZZ
	830WD9G	SEE ABOVE (83930)	1	F*	PAOZZ
	NAS673V1	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1	F	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	F	PAOZZ
30	MS21919WDG5	CLAMP	1	E	PAOZZ
	NAS673V1	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
	A11144-4-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M1)	1	E	PAOZZ
31	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
32	JM44LC44WD11	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD11G	SEE ABOVE (83930)	1	*	PAOZZ
33	JM44LC33WD21	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D11)	1	*	PAOZZ
	830WD21G	SEE ABOVE (83930)	1	*	PAOZZ
	NAS673V13	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS42DD6-40	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (76530)	1	*	PAOZZ
34	JM44LC33WD13	CLAMP, LOOP (22175) (MCDONNELL SPEC ST9M630D13)	1	*	PAOZZ
	830WD13G	SEE ABOVE (83930)	1	*	PAOZZ
35	M85052/3-11	CLAMP	1	A	PAOZZ
	NAS673V2	BOLT (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	A	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)


CODE	USABLE ON
A	161353 THRU 161528
B	161702 & UP
C	161353 THRU 161726
D	161945 & UP
E	161353 THRU 161737
F	161738 THRU 162477
G	161702 THRU 162477
H	162826 & UP

AFT FUSELAGE LEFT VERTICAL STABILIZER FORMATION LIGHT

LEGEND

- 1 ON A LIMITED NUMBER OF AIRCRAFT, WIRE BUNDLE ROUTED THROUGH ELECTRICAL CONDUIT (INDEX 7) WAS REPLACED. REPLACEMENT WIRE BUNDLES WERE ROUTED THROUGH A SECOND CONDUIT (INDEX 9) JUST AFT OF THE INITIAL WIRE BUNDLE ROUTING (SEE CONFIGURATION X).

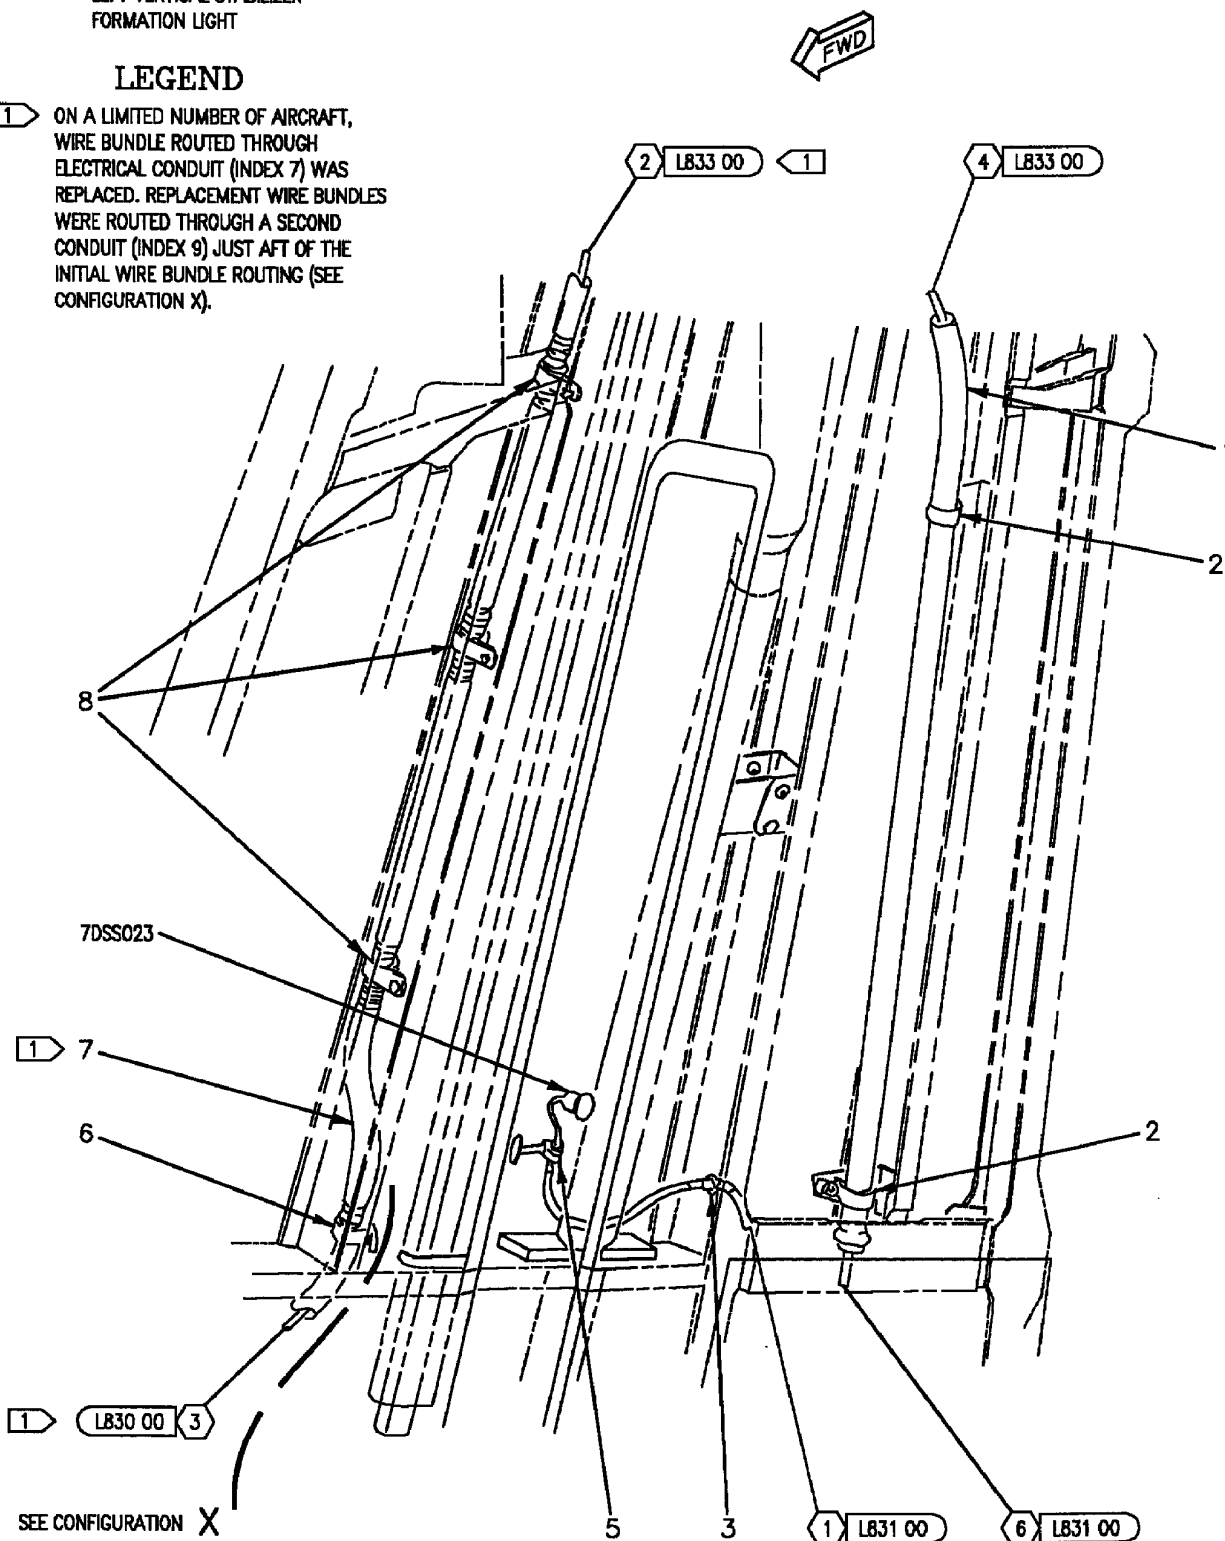

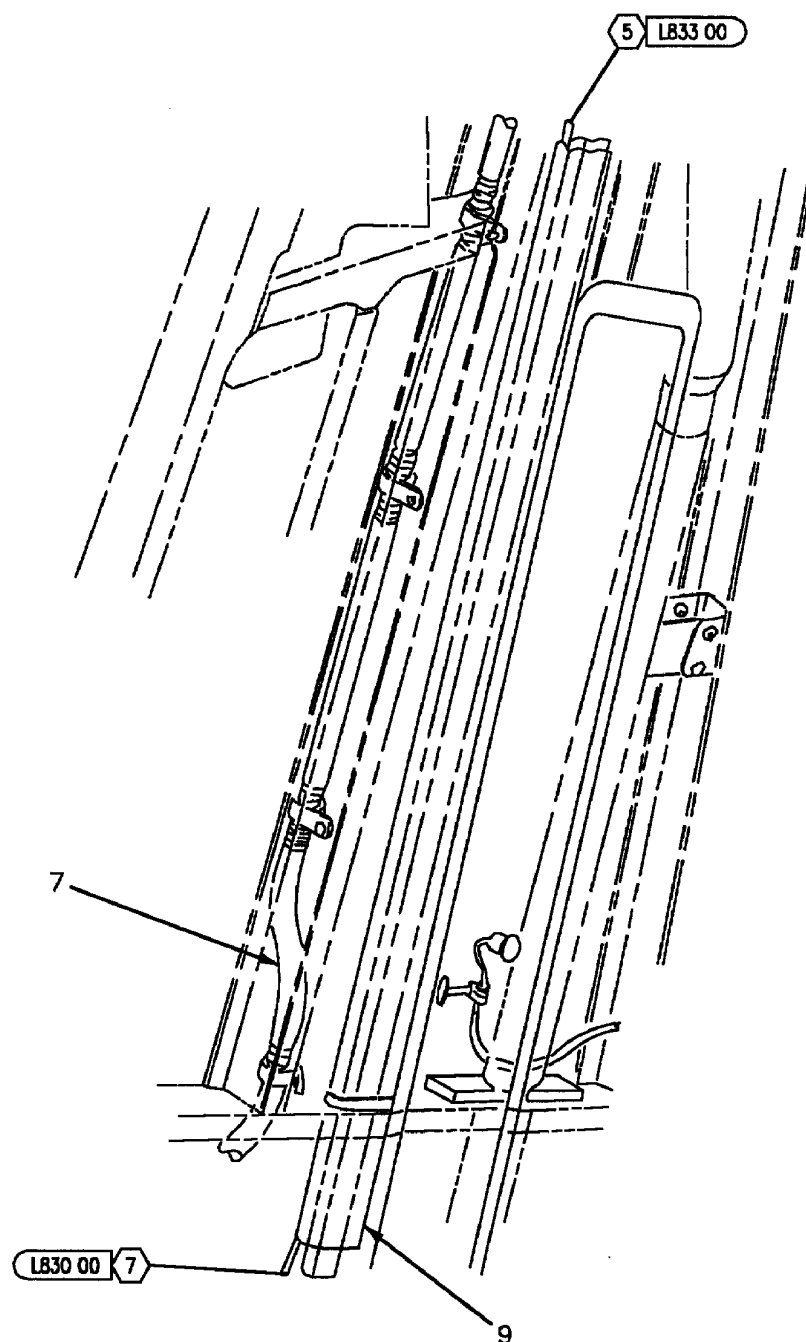

1 CONFIGURATION X
LIMITED APPLICATION

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A885637-2003	CONDUIT, METALLIC RIGID (76301)	1	C	XBDZZ
	74A885637-2009	CONDUIT, METALLIC RIGID (76301)	1	D	XBDZZ
	74A885637-2011	CONDUIT, METALLIC RIGID (76301)	1	E	XBDZZ
2	AN742D12	CLAMP	2		PAOZZ
	NAS1801-3-6	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
	NAS557-6C	GROMMET	1		PAOZZ
4		DELETED			
5	MS21919WDG5	CLAMP	1		PAOZZ
	NAS1801-3-7	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
6	AN742D8	CLAMP	1	A	PAOZZ
	MS25281-12	CLAMP	1	B	PAOZZ
	NAS1801-3-7	SCREW (AP)	1	A	PAOZZ
	NAS1801-3-9	SCREW (AP)	1	B	PAOZZ
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
7	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	AOOOO
	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	AOOOO
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 7)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 7)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	2	A*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 7)			
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593)	2	B*	PAOZZ
		(MCDONNELL SPEC ST5M1570-005) (PART OF INDEX 7)			
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ
8	AN742D8	CLAMP	3	A	PAOZZ
	MS25281-12	CLAMP	3	B	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP)	1		PAOZZ
		(73197) (MCDONNELL SPEC ST3M525N3ME)			
9	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE	1		XBDZZ
		(76301) (SUPERSEDES 74A885632-2003)			


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP
C	161353 THRU 162477

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
--------------	----------------	------------------------------	----------------------	-------------------	--------------


D 162826 THRU 162865


E 162866 & UP

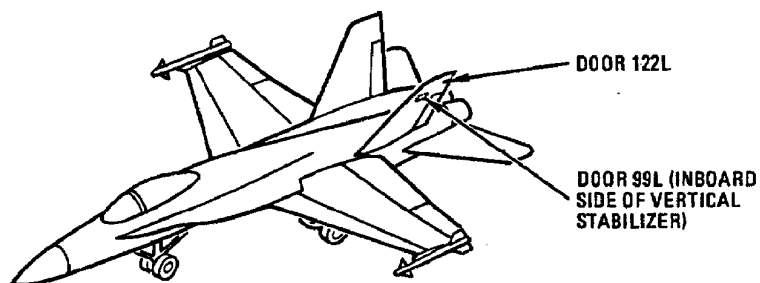

AFT FUSELAGE

DOOR 99L AND DOOR 122L
LEFT VERTICAL STABILIZER

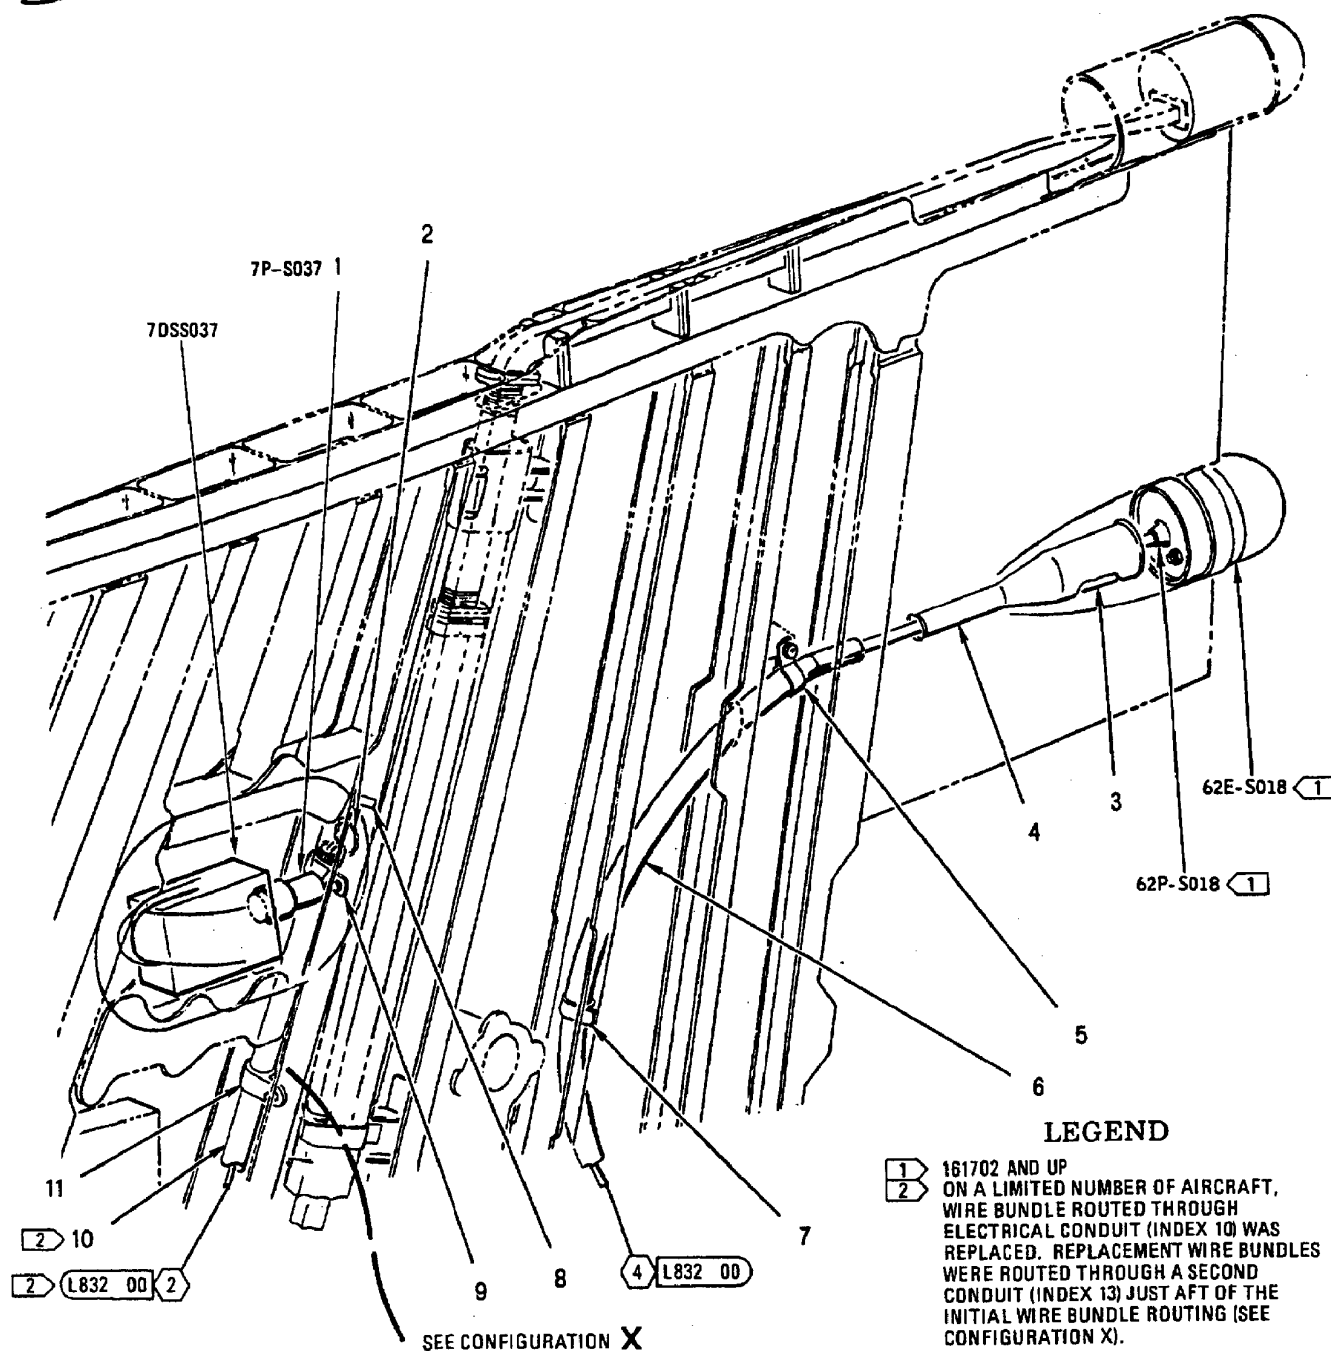

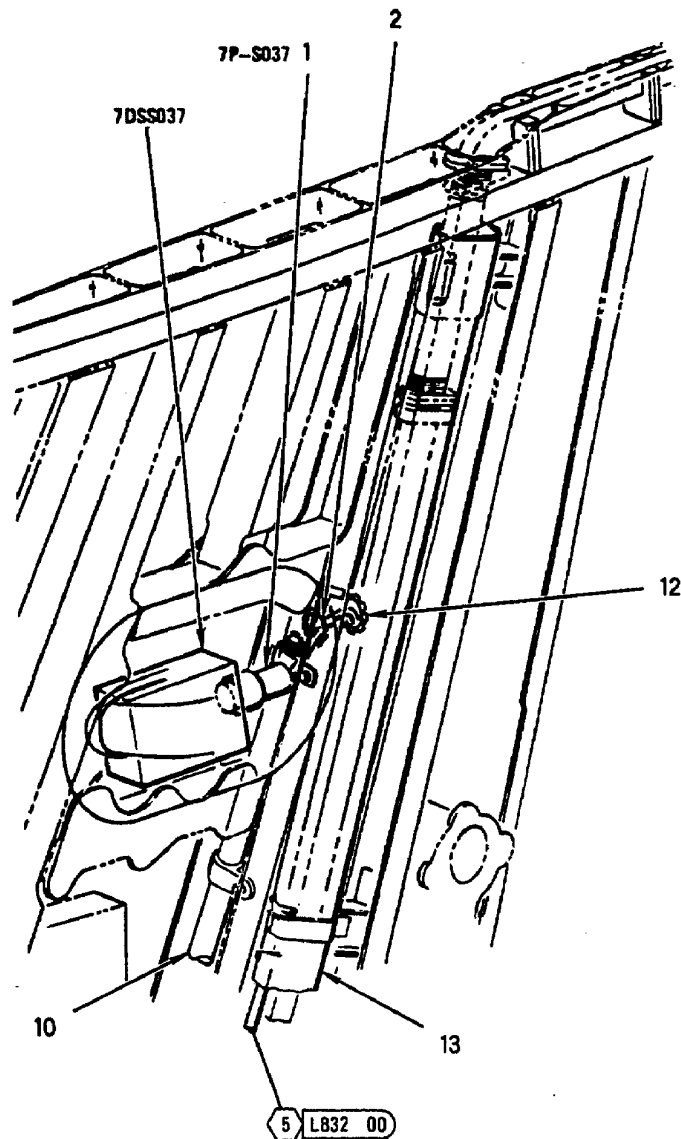

2 CONFIGURATION X
LIMITED APPLICATION



INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T15B97S	CONNECTOR, PLUG (7P-S037)	1		PAOZZ
2	NAS557-16A	GROMMET	1		PAOZZ
3	74A885657-2005	FILLER, ELASTOMERIC - CENTER	1	C	MGOZZ
		FUSELAGE (76301)			
4	74A230797-1001	TUBE ASSEMBLY, ANTENNA - REAR	1	D	XBOZZ
		WARNING RADAR (76301)			
	74A230797-2009	TUBE ASSEMBLY, ANTENNA - REAR	1	E	XAOZZ
		WARNING RADAR (76301)			
5	AN735D12	CLAMP	1		PAOZZ
	NAS1801-3-6	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
6	74A885637-2003	CONDUIT, METALLIC RIGID (76301)	1	F	XBDZZ
	74A885637-2009	CONDUIT, METALLIC RIGID (76301)	1	G	XBDZZ
	74A885637-2011	CONDUIT, METALLIC RIGID (76301)	1	H	XBDZZ
7	AN742D12	CLAMP	1		PAOZZ
	NAS1801-3-8	SCREW (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
8	74A885621-2554	MARKER, IDENTIFICATION - AVIONICS	1		MDOZZ
		(76301) (FOR REF DES 7DSS037)			
9	AN742D8	CLAMP	1	A	PAOZZ
	MS25281-R12	CLAMP (SUPERSEDES MS25281-12)	1	B	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	AN960JD10	WASHER (AP)	2	B	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP)	1		PAOZZ
		(73197) (MCDONNELL SPEC ST3M525N3ME)			
10	74A885630-1011	CONDUIT - ELECTRICAL (76301)	1	A	AOOOO
	74A885630-1021	CONDUIT - ELECTRICAL (76301)	1	B	AOOOO
	74A885630-2013	CONDUIT (76301) (PART OF INDEX 10)	1	A	MGOZZ
	74A885630-2023	CONDUIT (76301) (PART OF INDEX 10)	1	B	MGOZZ
	CRN1137-3	CONVOLUTE REINFORCEMENT (05593)	2	A*	PAOZZ
		(MCDONNELL SPEC ST5M1570-003) (PART OF INDEX 10)			
	CTR6612-003	SEE ABOVE (64590)	2	A*	PAOZZ
	CRN1137-5	CONVOLUTE REINFORCEMENT (05593)	2	B*	PAOZZ
		(MCDONNELL SPEC ST5M1570-005) (PART OF INDEX 10)			
	CTR6612-005	SEE ABOVE (64590)	2	B*	PAOZZ
11	AN742D8	CLAMP	1	A	PAOZZ
	AICL10V6-2	PIN-RIVET, THREADED (AP) (06725)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	HL10V6-2	PIN-RIVET, THREADED (AP) (73197)	1	A*	PAOZZ
		(MCDONNELL SPEC ST3M416V3-2)			
	AN960JD10	WASHER (AP)	1	A	PAOZZ
	HL570-6MC	COLLAR, PIN-RIVET, THREADED (AP)	1	A	PAOZZ
		(73197) (MCDONNELL SPEC ST3M525N3ME)			
12	MS21266-1N	GROMMET	AR		PAOZZ
13	74A885632-2005	CONDUIT, METAL, RIGID - WAVEGUIDE	1		XBDZZ
		(76301) (SUPERSEDES 74A885632-2003)			

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161361
B	161362 & UP
C	161925 & UP
D	161702 THRU 161708
E	161709 & UP
F	161353 THRU 162477
G	162826 THRU 162865
H	162866 & UP

LEFT INNER WING DOOR 192L AND DOOR 193L

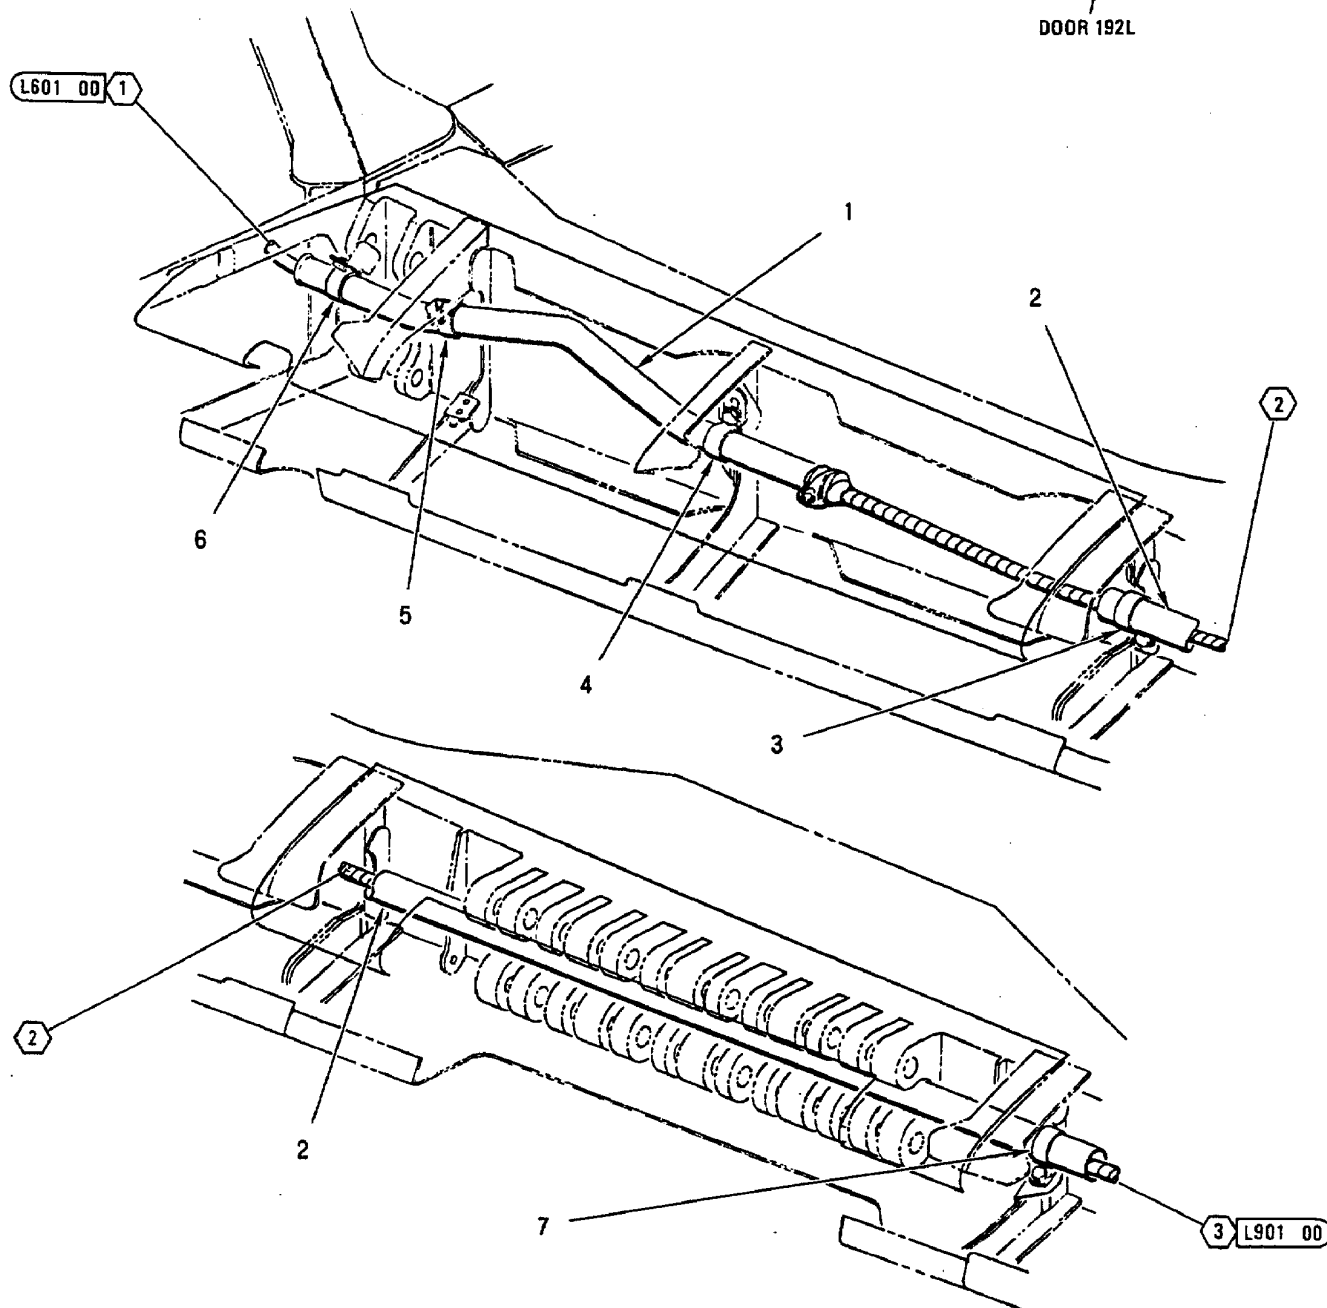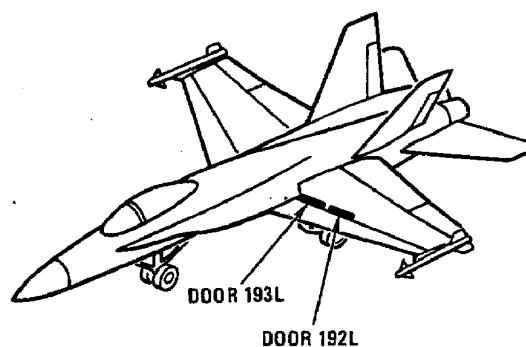

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A782467-2005	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	A	MGOZZ
	74A782465-1005	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	B	MGOZZ
	74A782465-1007	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	C	MGOZZ
2	5M388T35	INSULATION SLEEVING, ELECTRICAL (76301)	AR		MGOZZ
3	MS21919WDG16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	AN742D10	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	MS21919WDG10	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	AN742D14	CLAMP	1		PAOZZ
	NAS653V7	BOLT (AP)	1		PAOZZ
	MS35338-138	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	MS21919WDG16	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ



CODE USABLE ON

A 161353

B 161358 THRU 161949

C 161950 & UP


LEFT INNER WING DOOR 119L, DOOR 191L AND DOOR 195L

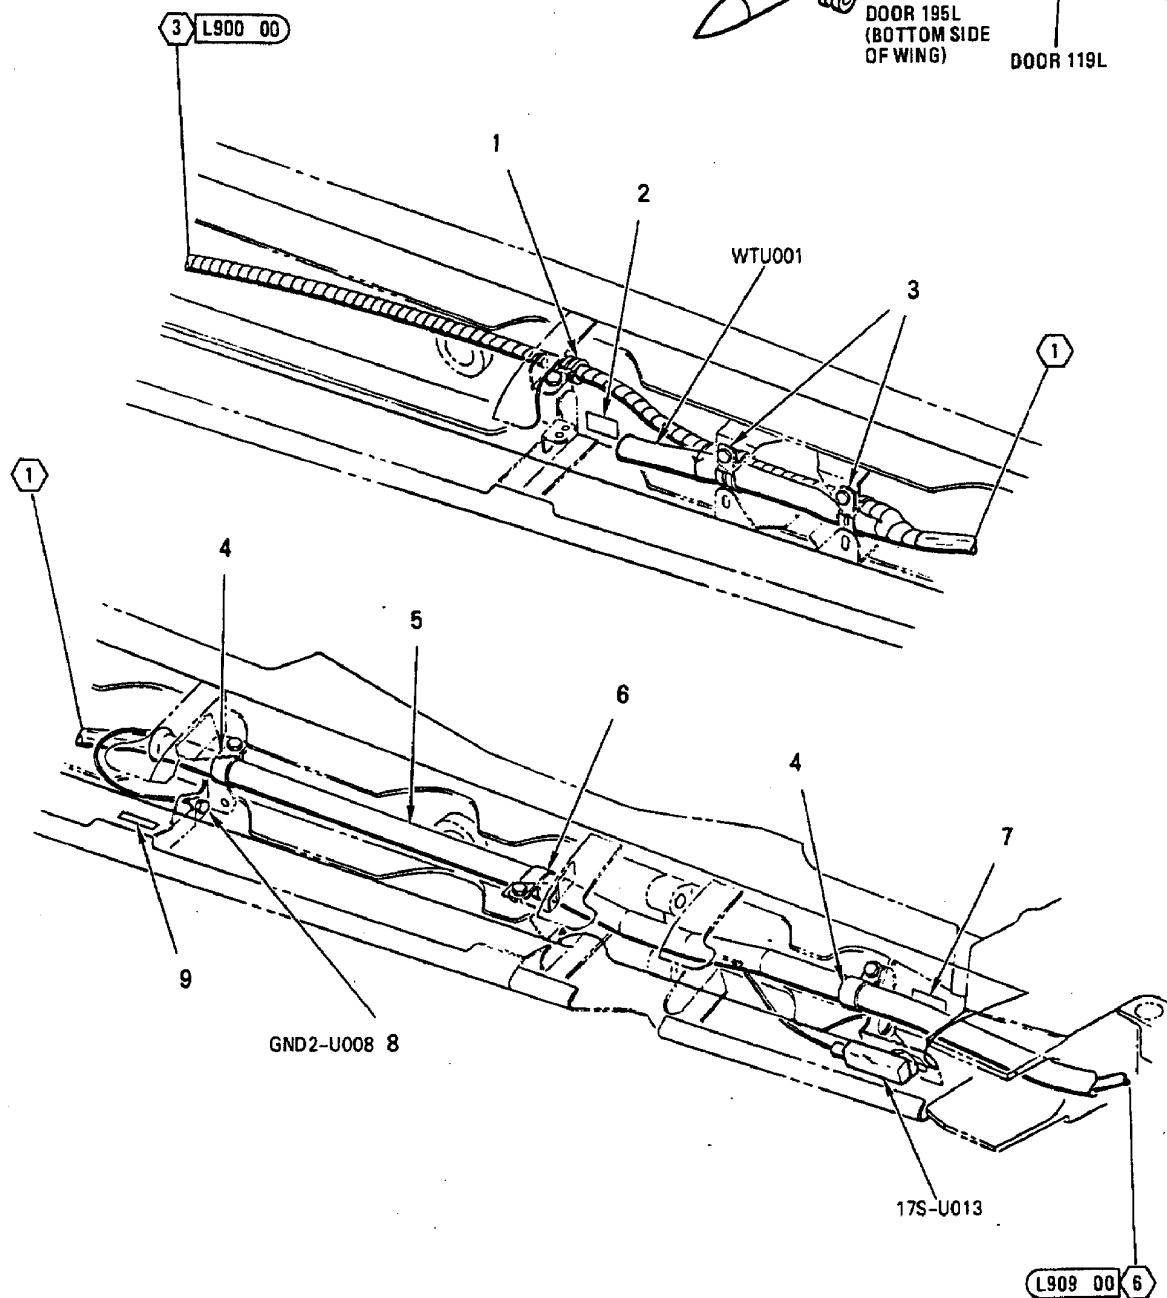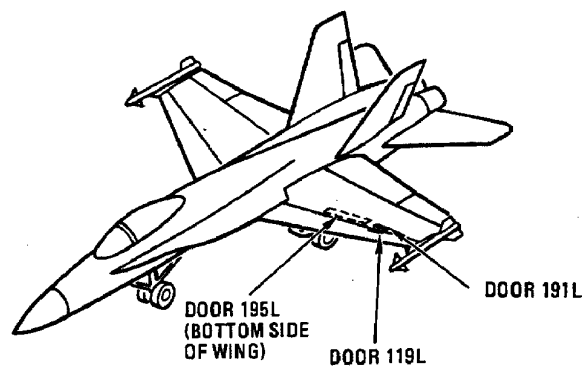

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	74A890601-2028	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTU001)	1		MDOZZ
3	MS21919WDG16	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	AN742D12	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	74A782460-2001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	A	MGOZZ
	74A782460-1001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	B	MGOZZ
6	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	74A890601-2176	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 17S-U013)	1		MDOZZ
8	NAS673V4	BOLT	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 8)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 8)	1		PAOZZ
9	74A890601-2526	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-U008)	1		MDOZZ

CODE USABLE ON


A 161353 THRU 162476,
162829B 162477 THRU 162828,
162830 & UP

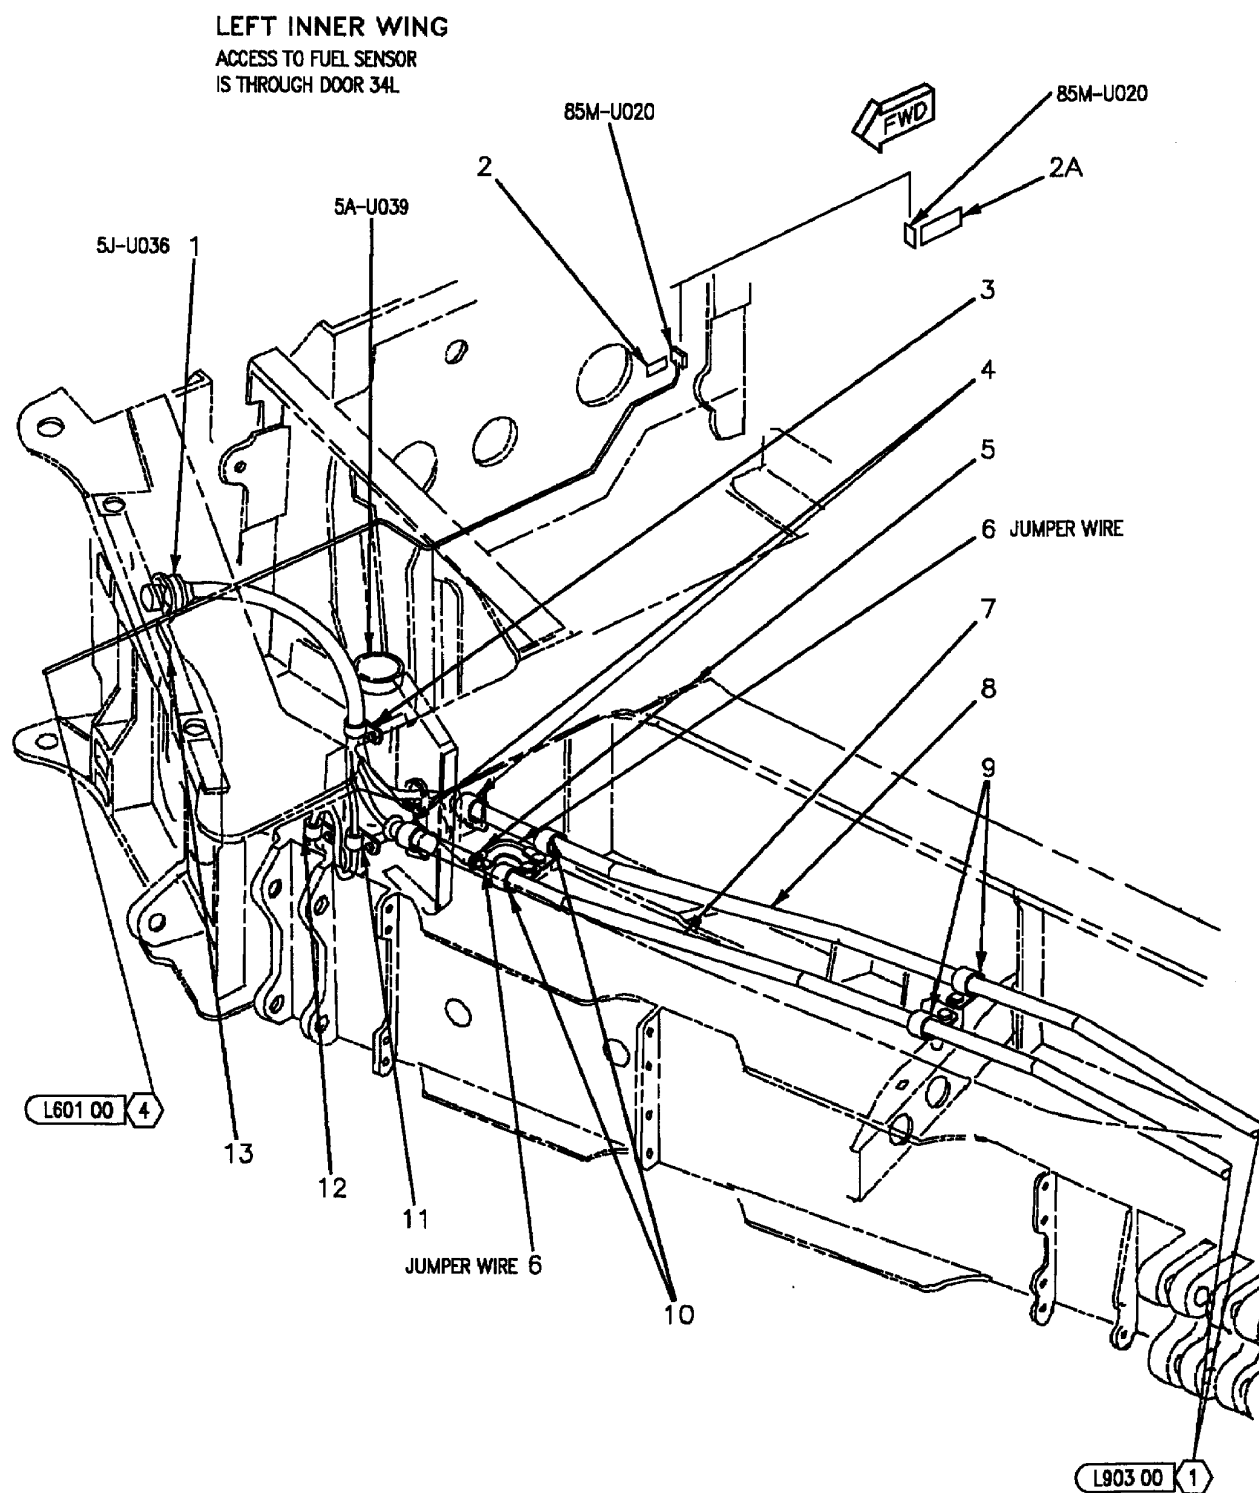

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	10-550598-35P	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1473-11-35P) (5J-U036)	1	*	PAOZZ
	18530	CONNECTOR, RECEPTACLE, ELECTRICAL (97814) (MCDONNELL SPEC ST5M1473-11-35P) (5J-U036)	1	*	PAOZZ
	S8202H11B35P	CONNECTOR, RECEPTACLE, ELECTRICAL (12349) (MCDONNELL SPEC ST5M1473-11-35P) (5J-U036)	1	*	PAOZZ
2	74A890601-2841	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES 85M-U020)	1		MDOZZ
2A	74A890601-2844	MARKER, IDENTIFICATION ELECTRI- CAL (76301) (FOR REF DES 85M-U020)	1		MGOZZ
3	MS25281-R4	CLAMP (SUPERSEDES MS25281-4)	1		PAOZZ
	80860C3-23	SCREW, CAP, SOCKET HEAD (AP) (50394) (MCDONNELL SPEC 3M965C3-23) (SUPERSEDES 3M881V3-23)	1	*	PAOZZ
	SC2818C3-23	SEE ABOVE (06950)	1	*	PAOZZ
	D16174C3-23	SEE ABOVE (08524)	1	*	PAOZZ
	CS3046C3-23	SEE ABOVE (58998)	1	*	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
4	NMC-ST9M529-6	CLAMP, LOOP (03296)	2		PAOZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
5	NAS673V4	BOLT (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 5)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 5)	1		PAOZZ
6	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	2		PADZZ
7	74A782426-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
8	74A782429-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
9	NMC-ST9M529-8	CLAMP, LOOP (03296)	2		PAOZZ
	NAS673V13	BOLT (AP) (SUPERSEDES 3M881V3-13)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-13) ...	1		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PAOZZ
10	AN735D8	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
11	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	80860C3-23	SCREW, CAP, SOCKET HEAD (AP) (50394) (MCDONNELL SPEC 3M965C3-23) (SUPERSEDES 3M881V3-23)	1	*	PAOZZ
	SC2818C3-23	SEE ABOVE (06950)	1	*	PAOZZ
	D16174C3-23	SEE ABOVE (08524)	1	*	PAOZZ
	CS3046C3-23	SEE ABOVE (58998)	1	*	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
12	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
13	74A890601-2038	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 5J-U036)							1		MDOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

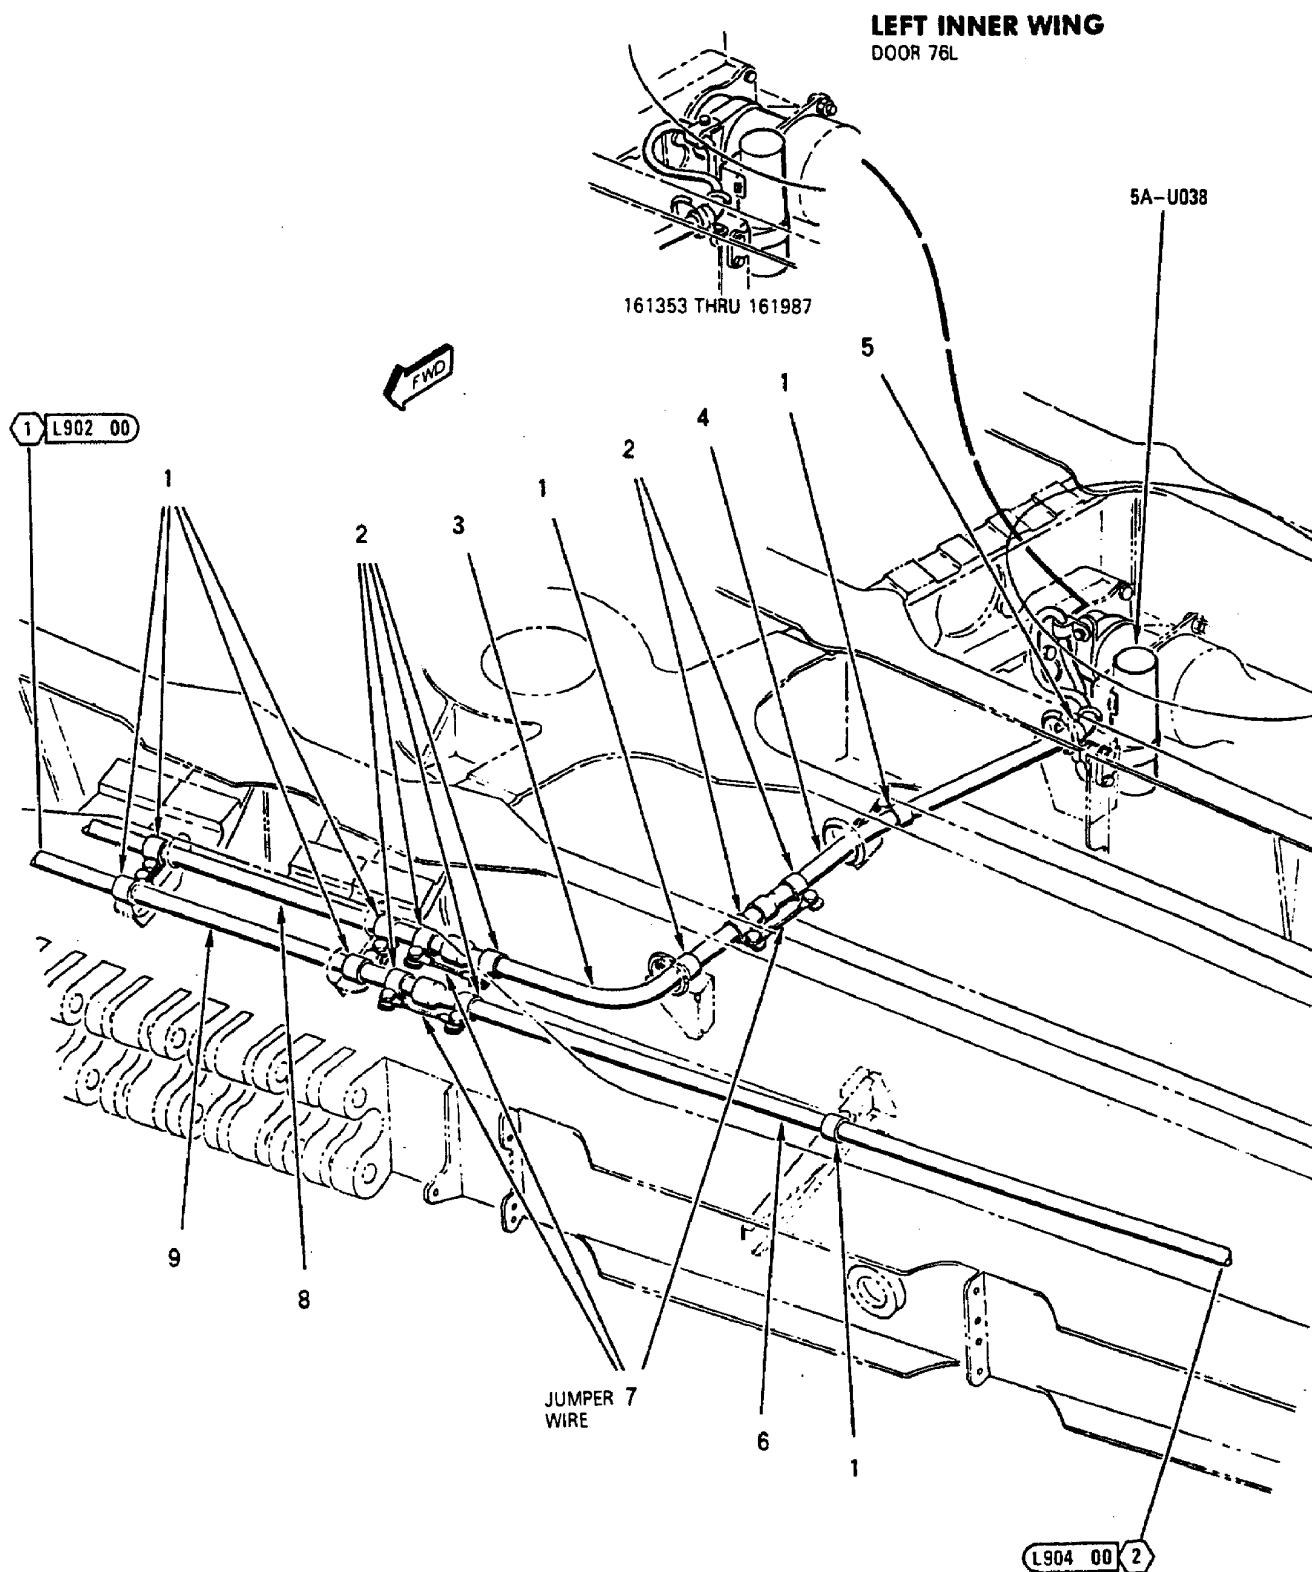


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NMC-ST9M529-8	CLAMP, LOOP (03296) (MCDONNELL SPEC ST9M529-8)	7		PADZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
2	AN735D8	CLAMP	6		PADZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
3	74A782424-1001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
4	74A782425-1005	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
5	AN742D8	CLAMP	1		PADZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
6	74A782427-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
7	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	3		PADZZ
8	74A782429-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
9	74A782426-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ

LEFT INNER WING DOOR 77L

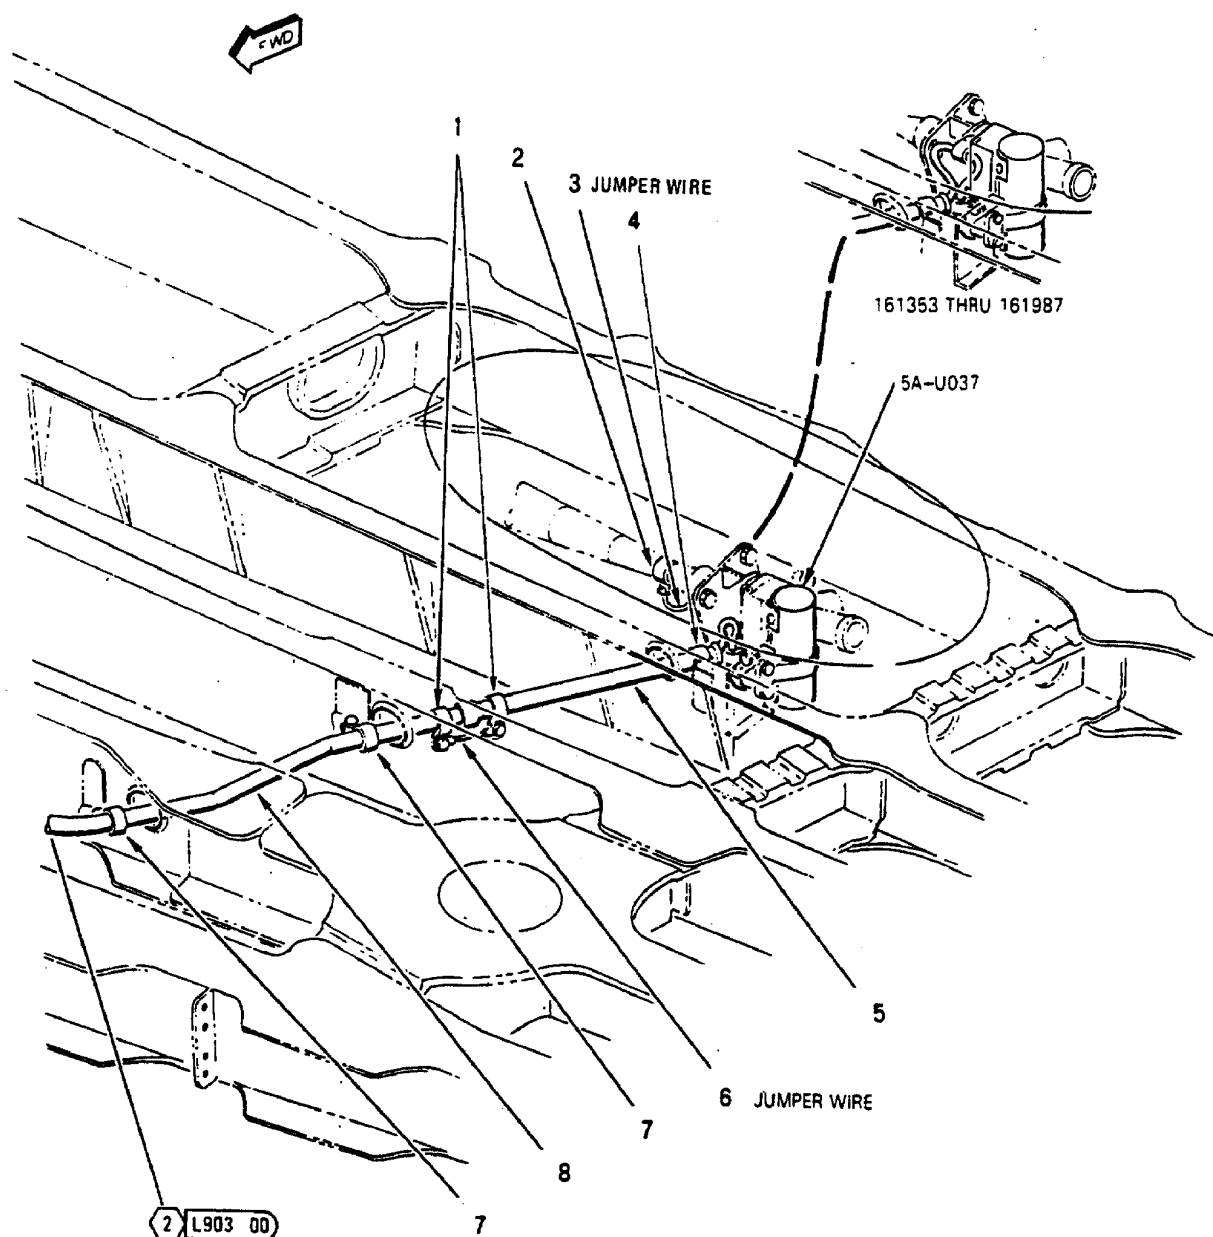


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN735D8	CLAMP	2		PADZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
2	AN735D12	CLAMP	1		PADZZ
	NAS673V2	BOLT (AP) (SUPERSEDES 3M881V3-2)	1		PADZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-2)	1		PADZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
3	MS25083-7BC5	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	VDP0001-2	BOLT, ASSEMBLED WASHER (AP) (06710) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
	111026-4-2	BOLT, ASSEMBLED WASHER (AP) (80539) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
	T981-4-2	BOLT, ASSEMBLED WASHER (AP) (97928) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
	SC2670-4-2	BOLT, ASSEMBLED WASHER (AP) (06950) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
	D16175-12-2	BOLT, ASSEMBLED WASHER (AP) (08524) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
4	AN742D8	CLAMP	1		PADZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
5	74A782428-1001	TUBE, METALLIC - ELECTRICAL	1		MDDZZ
		CONDUIT (76301)			
6	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	1		PADZZ
7	NMC-ST9M529-8	CLAMP, LOOP (03296)	2		PADZZ
		(MCDONNELL SPEC ST9M529-8)			
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
8	74A782427-1003	TUBE, BENT, METALLIC - ELECTRICAL	1		MDDZZ
		CONDUIT (76301)			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

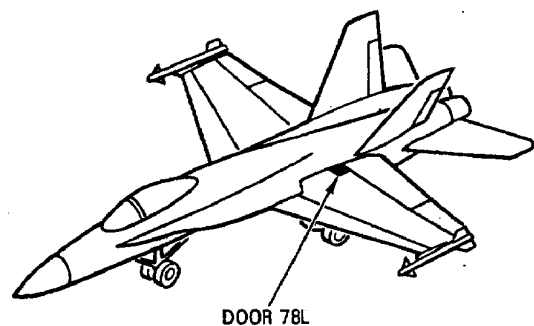



LEFT INNER WING DOOR 78L TRAILING EDGE

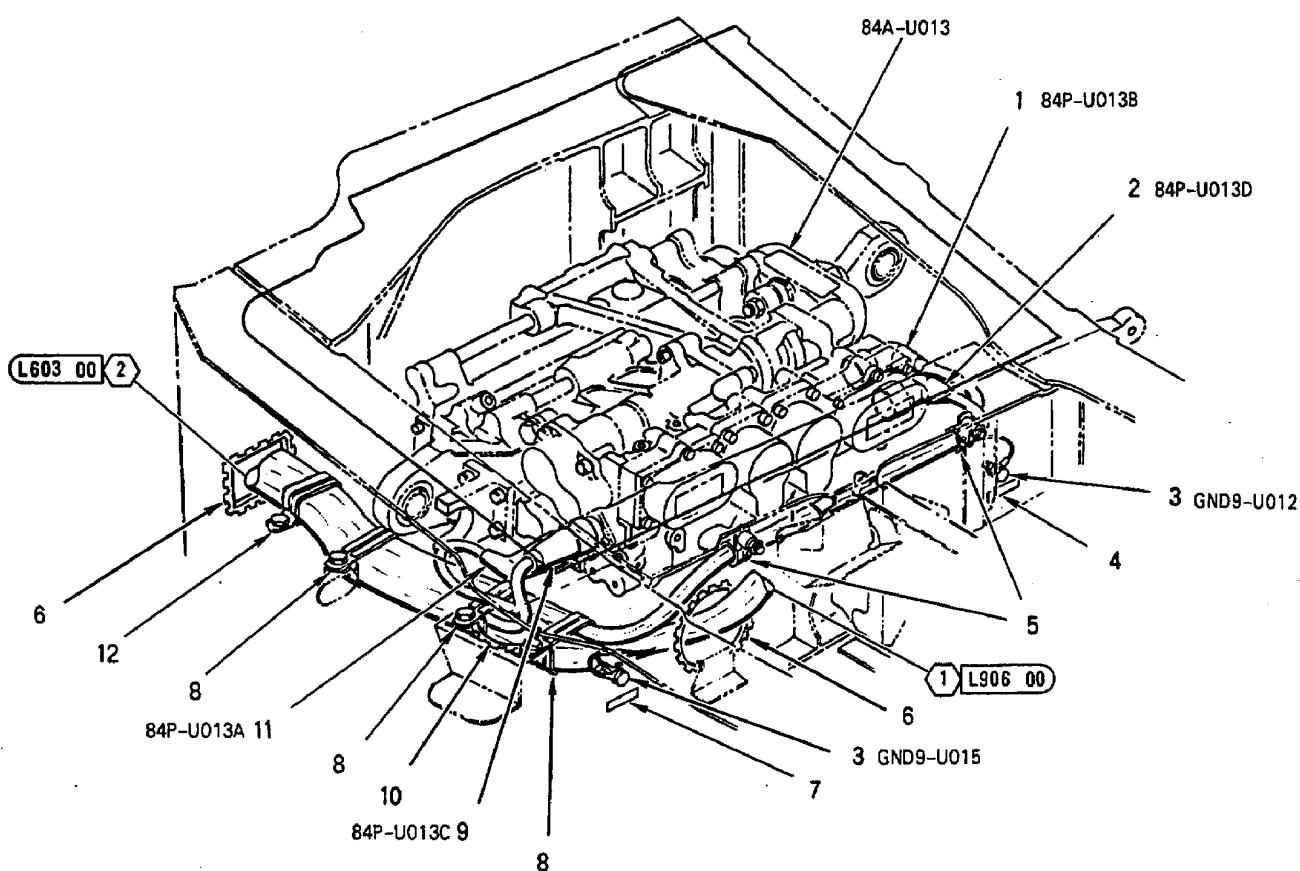


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35SB	CONNECTOR, PLUG (84P-U013B)	1		PAOZZ
2	MS27467T13B35SD	CONNECTOR, PLUG (84P-U013D)	1		PAOZZ
3	NAS673V2	BOLT	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 3)	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 3)	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 3)	2		PAOZZ
	MS21042L3	NUT (USE WITH INDEX 3)	2		PAOZZ
4	74A890601-2610	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-U012)			
5	MS21919WDG10	CLAMP	2		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
6	MS21266-5N	GROMMET	AR		PAOZZ
7	74A890601-2709	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-U015)			
8	NAS1712D12-24N	CLAMP	3	A	PAOZZ
	NAS1712D12-22N	CLAMP	3	B	PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS27467T13B35SC	CONNECTOR, PLUG (84P-U013C)	1		PAOZZ
10	MS21266-2N	GROMMET	AR		PAOZZ
11	MS27467T13B35SA	CONNECTOR, PLUG (84P-U013A)	1		PAOZZ
12	NAS1677D8-30N	STRAP	1		PAOZZ
	NAS673V6	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ

CODE	USABLE ON
A	161353 THRU 161982
B	161983 & UP

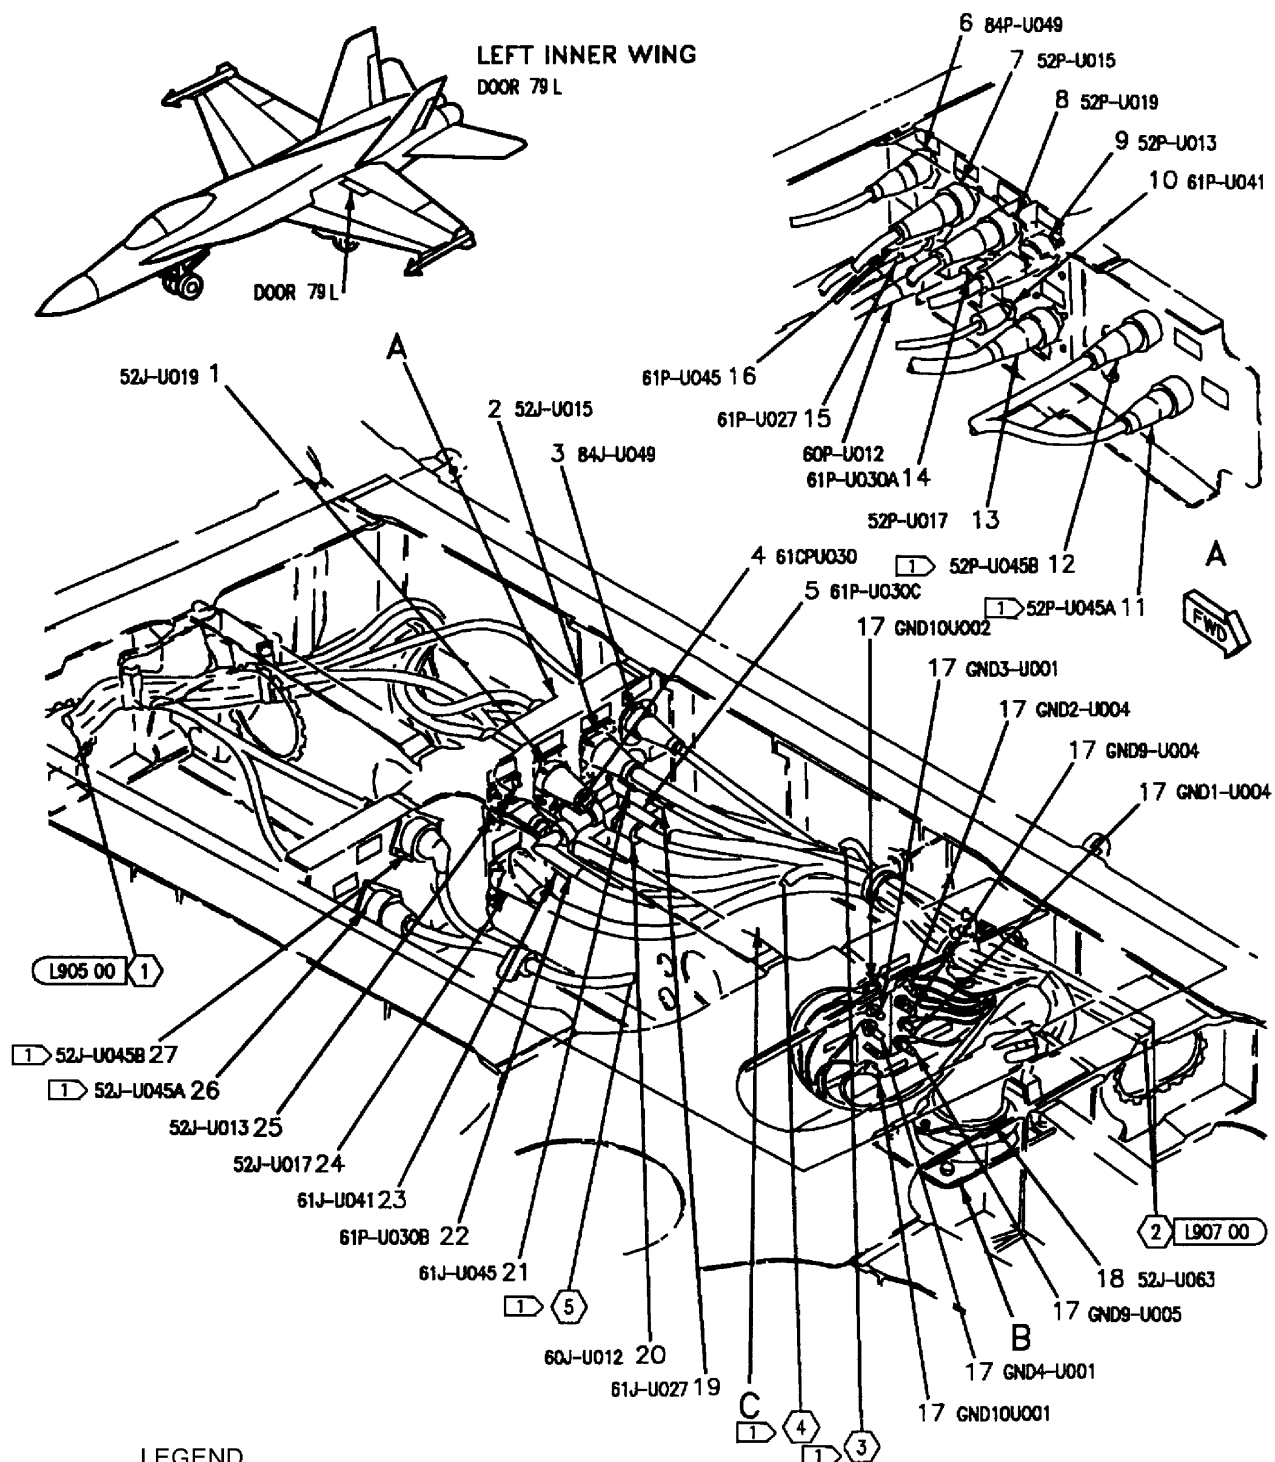

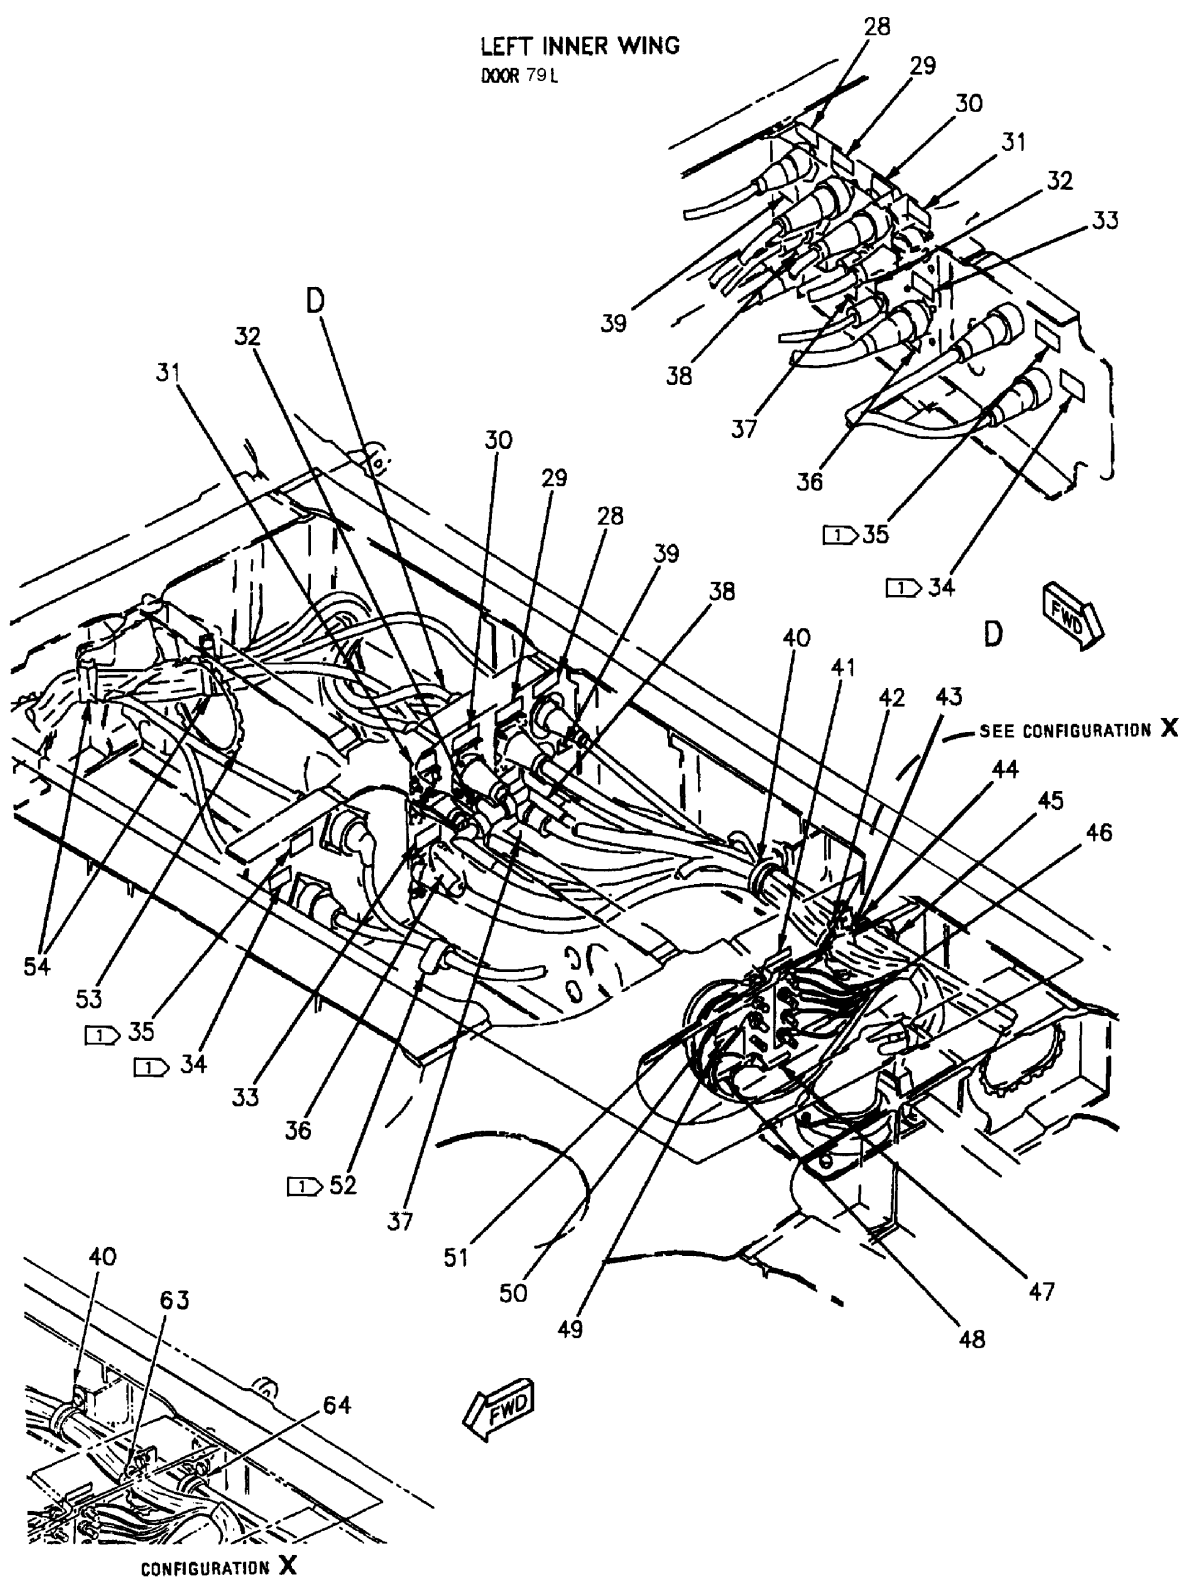

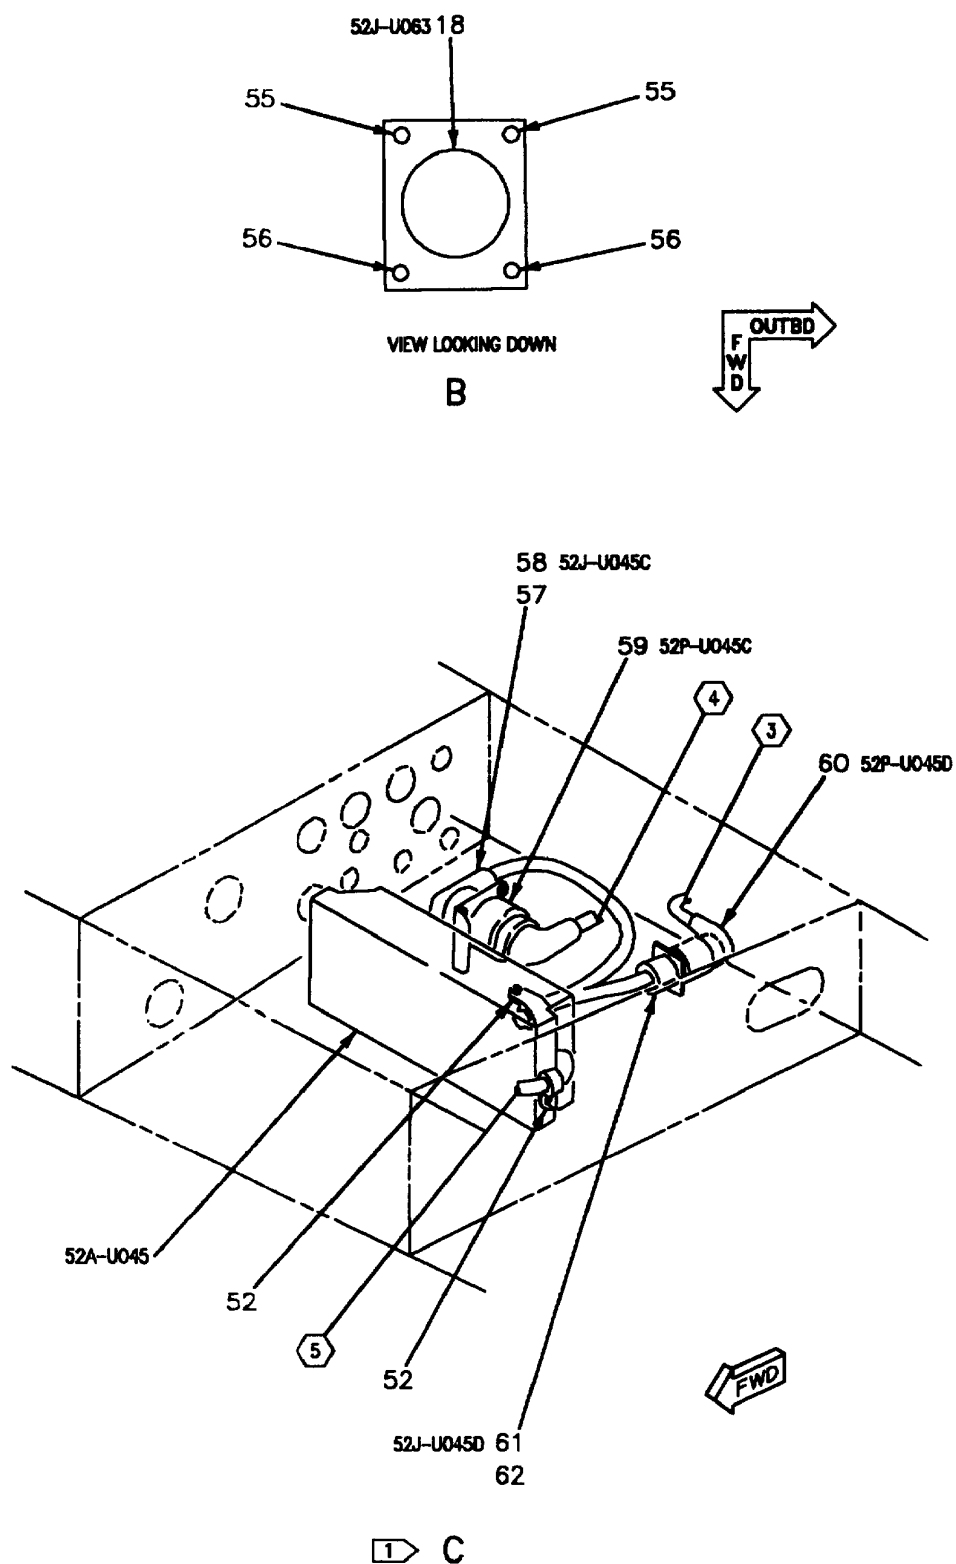

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T19B35P	CONNECTOR, RECEPTACLE (52J-U019)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
2	MS27656T19B11PA	CONNECTOR, RECEPTACLE (52J-U015)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
3	MS27468T15B35PA	CONNECTOR, RECEPTACLE (84J-U049)	1		PAOZZ
4	M55339-50-00001	ADAPTER (61CPU030)	1		PAOZZ
5	M39012/30-0503	CONNECTOR, PLUG (61P-U030C)	1		PAOZZ
6	MS27467T15B35SA	CONNECTOR, PLUG (84P-U049)	1		PAOZZ
7	MS27467T19B11SA	CONNECTOR, PLUG (52P-U015)	1		PAOZZ
8	MS27467T19B35S	CONNECTOR, PLUG (52P-U019)	1		PAOZZ
9	MS27467T19B35SB	CONNECTOR, PLUG (52P-U013)	1		PAOZZ
10	82-5773-3	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2497S31)			
		(61P-U041)			
	31-33449-3	CONNECTOR, PLUG, ELECTRICAL	1	D	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1425-01S)			
		(61P-U041)			
	5801-0901	SEE ABOVE (95077)	1	D	PAOZZ
11	MS27467T25B29S	CONNECTOR, PLUG (52P-U045A)	1	C	PAOZZ
12	MS27467T25B4S	CONNECTOR, PLUG (52P-U045B)	1	C	PAOZZ
13	MS27467T19B11SC	CONNECTOR, PLUG (52P-U017)	1		PAOZZ
14	M39012/26-0503	CONNECTOR, PLUG (61P-U030A)	1		PAOZZ
15	82-5773-5	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2497S51)			
		(61P-U027)			
	31-33449-4	CONNECTOR, PLUG, ELECTRICAL	1	D	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1425-02S)			
		(61P-U027)			
	5801-0902	SEE ABOVE (95077)	1	D	PAOZZ
16	MS27467T11B35S	CONNECTOR, PLUG (61P-U045)	1		PAOZZ
17	MS21042L3	NUT	8		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 17)	8		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 17)	8	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 17)	8	*	PAOZZ
	ST5M1379 #	TERMINAL STRIP (76301)	2		-
18	885-200-003	CONNECTOR, RECEPTACLE, ELECTRICAL	1		PAOZZ
		(99447) (MCDONNELL SPEC ST5M1487-002)			
		(52J-U063)			
	885-200-002	CONNECTOR, RECEPTACLE, ELECTRICAL	1	D	PAOZZ
		(99447) (MCDONNELL SPEC ST5M1487-002)			
		(USE UNTIL EXHAUSTED)			
19	82-5770	CONNECTOR, RECEPTACLE, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2496-001)			
		(61J-U027)			
	31-33819-12	CONNECTOR, RECEPTACLE, ELECTRICAL	1	D	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1426A002)			
		(61J-U027)			
	5841-0905	SEE ABOVE (95077)			
20	M39012/03-0501	CONNECTOR, RECEPTACLE (60J-U012)	1		PAOZZ
21	MS27468T11B35P	CONNECTOR, RECEPTACLE (61J-U045)	1		PAOZZ
22	M39012/30-0503	CONNECTOR, PLUG (61P-U030B)	1		PAOZZ
23	82-5780	CONNECTOR, RECEPTACLE, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2496-003)			
		(61J-U041)			
	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL	1	D	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1426A001)			
		(61J-U041)			
	5841-0904	SEE ABOVE (95077)			
24	MS27656T19B11PC	CONNECTOR, RECEPTACLE (52J-U017)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
25	AN960JD4L	WASHER (AP)	4	*	PAOZZ
	MS27656T19B35PB	CONNECTOR, RECEPTACLE (52J-U013)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
26	AN960JD4L	WASHER (AP)	4	*	PAOZZ
	MS27656T25B29P	CONNECTOR, RECEPTACLE (52JU045A)	1	C	PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
27	AN960JD6L	WASHER (AP)	4	*	PAOZZ
	MS27656T25B4P	CONNECTOR, RECEPTACLE (52J-U045B)	1	C	PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
28	AN960JD6L	WASHER (AP)	4	*	PAOZZ
	74A890601-2152	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
29		(76301) (FOR REF DES 84J-U049)			
	74A890601-2057	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
30		(76301) (FOR REF DES 52J-U015)			
	74A890601-2060	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
31		(76301) (FOR REF DES 52J-U019)			
	74A890601-2055	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
32		(76301) (FOR REF DES 52J-U013)			
	74A890601-2333	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
33		(76301) (FOR REF DES 61CPU030)			
	74A890601-2059	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
34		(76301) (FOR REF DES 52J-U017)			
	74A890601-2970	MARKER, IDENTIFICATION - ELECTRICAL	2	D,C	MDOZZ
35		(76301) (FOR REF DES 52J-U045A)			
	74A890601-2971	MARKER, IDENTIFICATION - ELECTRICAL	2	D,C	MGOZZ
36		(76301) (FOR REF DES 52J-U045B)			
	74A890601-2112	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
37		(76301) (FOR REF DES 61J-U041)			
	74A890601-2094	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
38		(76301) (FOR REF DES 60J-U012)			
	74A890601-2103	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
39		(76301) (FOR REF DES 61J-U027)			
	74A890601-2114	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
40		(76301) (FOR REF DES 61J-U045)			
	MS21919WDG #	CLAMP	1		-
41	NAS673V5	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	A11144A7-3	NUT, CLIP-ON (AP) (56878) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
42	130091	SEE ABOVE (60119)	1	*	PAOZZ
	74A890601-2403	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
43		(76301) (FOR REF DES GND2-U004)			
	MS21919WDG11	CLAMP	1		PAOZZ
44	NAS673V5	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
45	74A890601-2402	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-U004)			
46	MS21919WDG16	CLAMP	1	D	PAOZZ
	MS21919WDG18	CLAMP	1	C	PAOZZ
47	MS21266-5N	GROMMET	AR		PAOZZ
	74A890601-2571	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
48		(76301) (FOR REF DES GND1-U004)			
	74A890601-2401	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
49		(76301) (FOR REF DES GND9-U005)			
	74A890601-2578	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
50		(76301) (FOR REF DES GND10U001)			
	74A890601-2594	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
51		(76301) (FOR REF DES GND4-U001)			


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
50	74A890601-2587	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-U001)	1		MDOZZ
51	74A890601-2487	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10U002)	1		MDOZZ
52	MS21919WDG10	CLAMP	3	C	PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
53	MS21266-2N	GROMMET	AR		PAOZZ
54	MS21919WDG16	CLAMP	2		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
	A11144A7-3	NUT, CLIP-ON (AP) (56878) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (60119)	1	*	PAOZZ
55	NAS663V11HT	SCREW	2		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 55)	2	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 55)	2	*	PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 55)	2		PAOZZ
56	NAS663V12HT	SCREW	2		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 56)	2	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 56)	2	*	PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 56)	2		PAOZZ
57	MS27656T25B29S	CONNECTOR, RECEPTACLE (52J-U045C)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
58	74A890601-2978	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-U045C)	1		MDOZZ
59	MS27467T25B29P	CONNECTOR, PLUG (52P-U045C)	1		PAOZZ
60	MS27467T17B26P	CONNECTOR, PLUG (52P-U045D)	1		PAOZZ
61	MS27656T17B26S	CONNECTOR, RECEPTACLE (52J-U045D)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
62	74A890601-2979	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-U045D)	1		MDOZZ
63	MS21919WDG11	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	SEE ABOVE (76530)	1	B*	PAOZZ
64	MS21919WDG16	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	B*	PAOZZ
	130091	SEE ABOVE (76530)	1	B*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162443
B	161353 THRU 161987
C	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292
D	161353 AND UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292

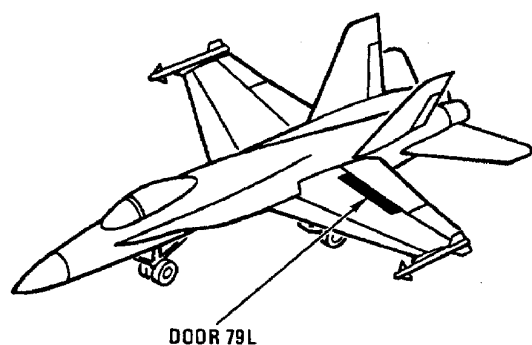

LEFT INNER WING DOOR 79L

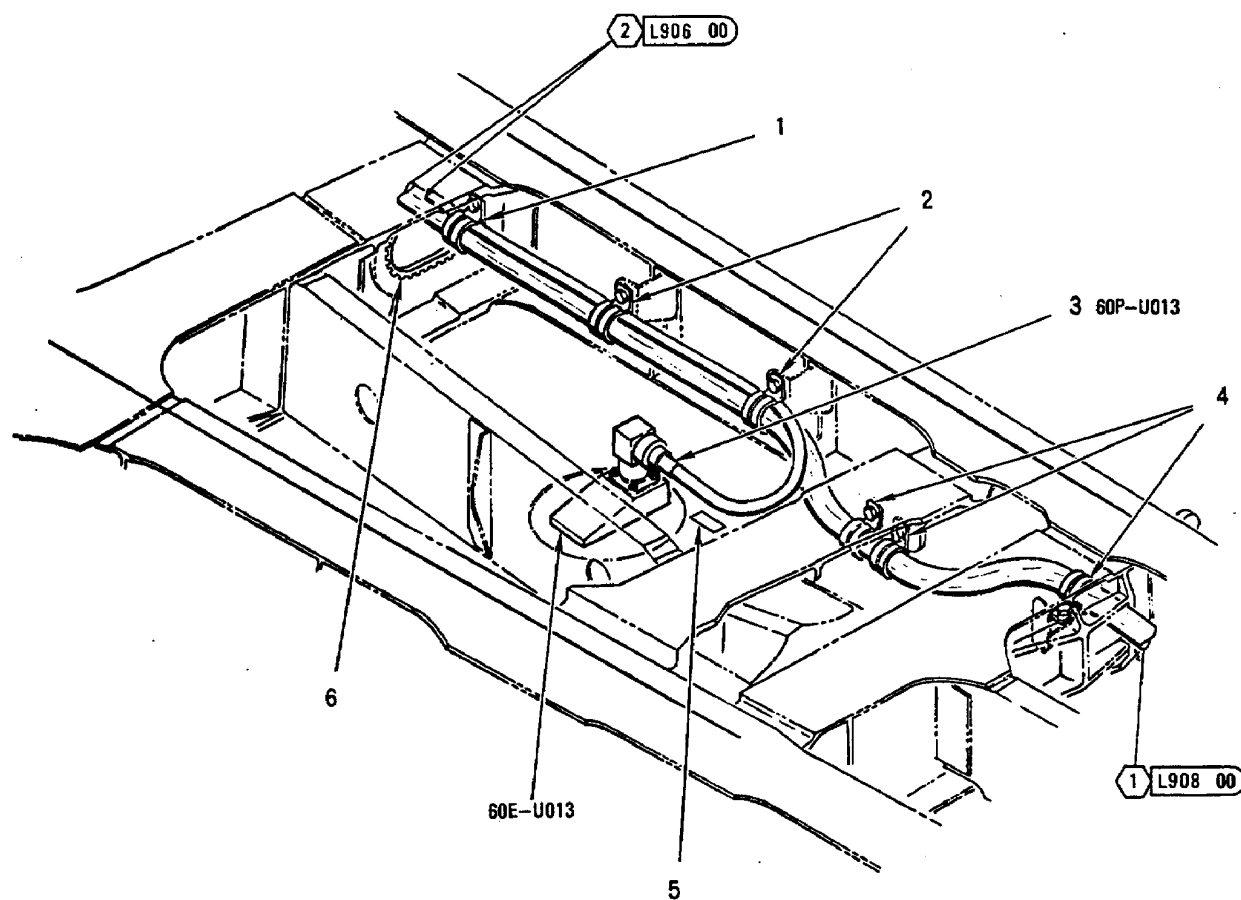


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG16	CLAMP	1	A	PAOZZ
	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
2	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	MS21919WDG16	CLAMP	2	A	PAOZZ
	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	M39012/05-0501	CONNECTOR, PLUG (60P-U013)	1		PAOZZ
	MS21919WDG13	CLAMP	3	A	PAOZZ
4	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ
		(MCDONNELL SPEC ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ
5		(MCDONNELL SPEC ST3M523C3M)			
	74A890068-2047	PLATE, IDENTIFICATION - UPPER EQUIP	2		MDOZZ
6		BAY, ZONE 12 (76301)			
	MS21266-5N	GROMMET	AR		PAOZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON


A 161353 AND UP; ALSO 162394
THRU 163175 BEFORE F/A-18
AFC 253 OR F/A-18 AFC 292

B 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18
AFC 292

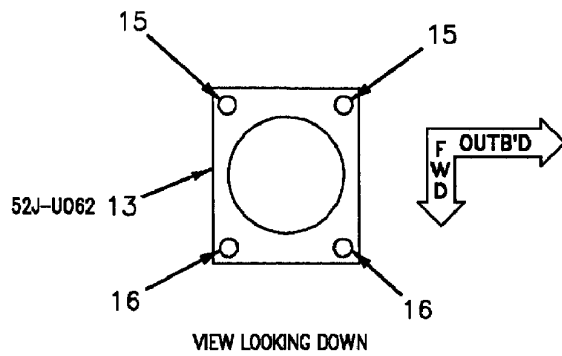


VIEW LOOKING DOWN


A

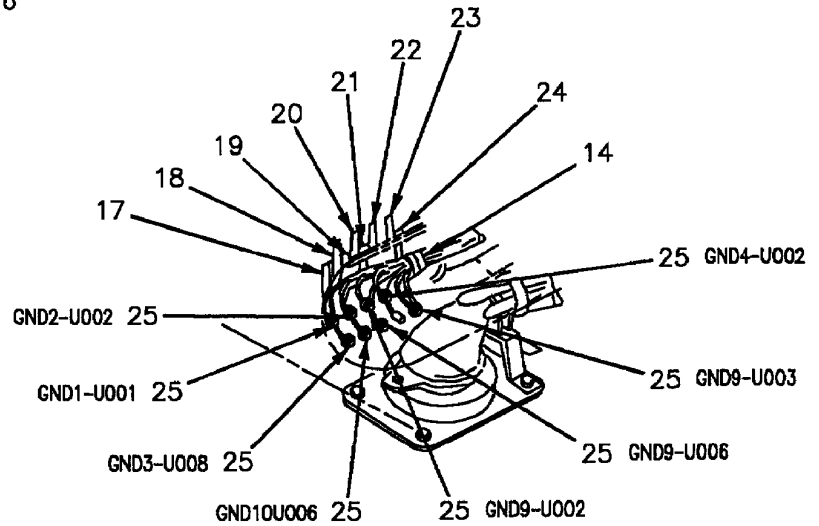

B

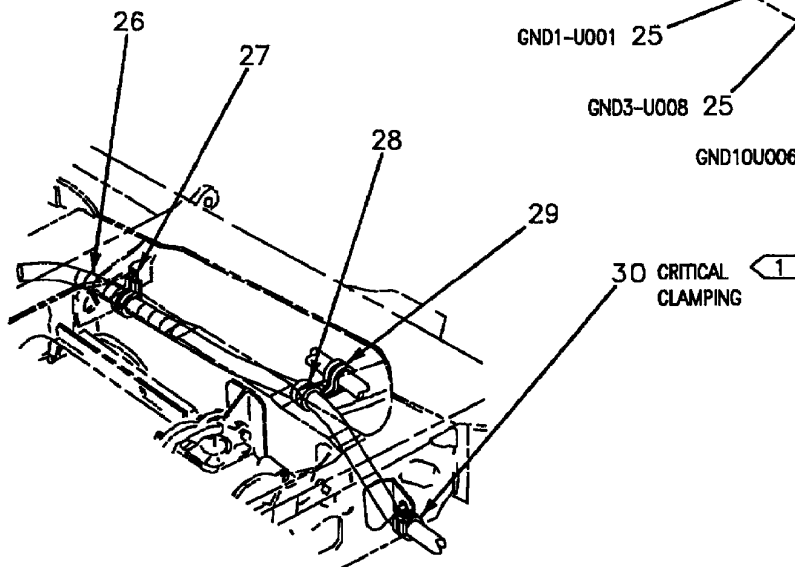

CONFIGURATION X

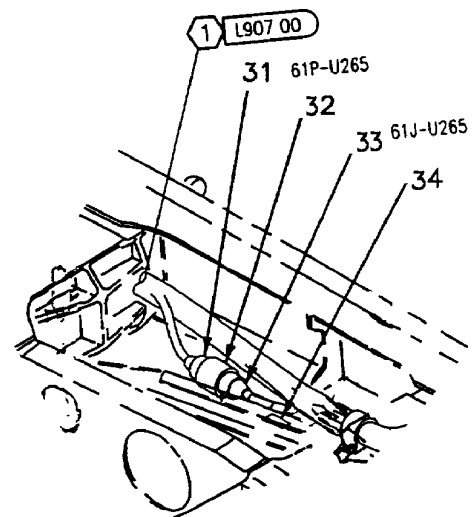

2 CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE	
1	MS21919WDG13	CLAMP	2		PAOZZ	
	MS21919WDG15	CLAMP	2	G	PAOZZ	■
	NAS673V5	BOLT (AP)	1		PAOZZ	
	AN960JD10L	WASHER (AP)	1		PAOZZ	
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
2	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
	74A890601-2082	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ	
		CAL (76301) (FOR REF DES 52J-U062)				
	3	MS21919WDG5	CLAMP	1		PAOZZ
	MS21919WDG15	CLAMP	1	G	PAOZZ	■
3	NAS673V5	BOLT (AP)	1		PAOZZ	
	AN960JD10L	WASHER (AP)	1		PAOZZ	
	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
4	MS21919WDG12	CLAMP	1		PAOZZ	
	MS21919WDG15	CLAMP	1	G	PAOZZ	■
	NAS673V6	BOLT (AP)	1	E	PAOZZ	
	NAS673V14	BOLT (AP)	1	F	PAOZZ	
	AN960JD10L	WASHER (AP)	1		PAOZZ	
	NAS42DD6-32	SPACER (AP)	1	F	PAOZZ	
5	A11144-7-3	NUT, CLIP (AP) (72962)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
	130091	NUT, CLIP (AP) (76530)	1	*	PAOZZ	
		(MCDONNELL SPEC ST3M523C3M)				
	5	MS21919WDG5	CLAMP	1		PAOZZ
	MS21919WDG15	CLAMP	1	G	PAOZZ	■
6	NAS673V5	BOLT (AP)	1		PAOZZ	
	AN960JD10L	WASHER (AP)	1		PAOZZ	
	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	PAOZZ	
		(MCDONNELL SPEC 14M912TN4)				
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ	
	7	MS21919WDG5	CLAMP	2	B	PAOZZ
7	NAS673V3	BOLT (AP)	1	B	PAOZZ	
	AN960JD10L	WASHER (AP)	1	B	PAOZZ	
	8	AN735D9	CLAMP	1	B	PAOZZ
	NAS673V2	BOLT (AP)	1	B	PAOZZ	
	AN960JD10L	WASHER (AP)	1	B	PAOZZ	
	NAS1291C3M	NUT (AP)	1	B	PAOZZ	
9	MS27656T11B35S	CONNECTOR, RECEPTACLE (17J-U017)	1		PAOZZ	
	NAS600-6P	SCREW (AP)	4		PAOZZ	
	AN960JD4L	WASHER (AP)	4		PAOZZ	
	10	74A890601-2336	MARKER, IDENTIFICATION - ELECTRI-	2		MDOZZ
		CAL (76301) (FOR REF DES 17J-U017)				
	11	74A890601-2031	MARKER, IDENTIFICATION - ELECTRI-	1		MDOZZ
11A		CAL (76301) (FOR REF DES WTU005)				
	74A890601-2178	MARKER, IDENTIFICATION - ELECTRON- ...	1		MDOZZ	
		ICS (76301) (FOR REF DES 17S-U015)				
	12	MS21919WDG12	CLAMP	1	E	PAOZZ
	NAS673V14	BOLT (AP)	1	E	PAOZZ	
	AN960JD10L	WASHER (AP)	1	E	PAOZZ	
12	NAS42DD6-32	SPACER (AP)	1	E	PAOZZ	


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	E*	PAOZZ
13	885-200-003	CONNECTOR, RECEPTACLE, ELECTRICAL (99447) (MCDONNELL SPEC ST5M1487-002) (52J-U062)	1		PAOZZ
	885-200-002	CONNECTOR, RECEPTACLE ELECTRICAL (99447) (MCDONNELL SPEC ST5M1487-002) (USE UNTIL EXHAUSTED)	1	A*	PAOZZ
14	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	NAS663V10HT	SCREW	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 15)	2		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 15)	2		PAOZZ
16	NAS663V11HT	SCREW	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 16)	2		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 16)	2		PAOZZ
17	74A890601-2588	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND3-U008)	1		MDOZZ
18	74A890601-2337	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND1-U001)	1		MDOZZ
19	74A890601-2611	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND10U006)	1		MDOZZ
20	74A890601-2339	MARKER, IDENTIFICATION - ELECTRI- CAL (76301) (FOR REF DES GND2-U002)	1		MDOZZ
21	74A890601-2340	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U006)	1		MDOZZ
22	74A890601-2338	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U002)	1		MDOZZ
23	74A890601-2595	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-U002)	1		MDOZZ
24	74A890601-2404	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U003)	1		MDOZZ
25	MS21042L3	NUT	8		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 25)	8		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 25)	8		PAOZZ
26	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	C*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
27	AN735D9	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
28	MS21919WDG #	CLAMP	1	D	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
29	M85052/1-6	CLAMP	1	D	PAOZZ
30	MS21919WDG5	CLAMP	1	D	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
31	82-5967	CONNECTOR, PLUG, ELECTRICAL (74868) ... (MCDONNELL SPEC 5M2497S03) (61P-V266)	1	G	PAOZZ
32	MS21919WDG9	CLAMP	1	G	PAOZZ
	NAS673V3	BOLT (AP)	1	G	PAOZZ
	NAS1149D0316J	WASHER (AP)	1	G	PAOZZ
	AN960JD10LL	WASHER (AP)	1	G	PAOZZ
	NAS1291C3M	NUT (AP)	1	G	PAOZZ
33	82-5770	CONNECTOR, RECEPTACLE, ELECTRICAL ... (74868) (MCDONNELL SPEC 5M2496-001) (61J-U265)	1	G	PAOZZ
34	74A890601-2981	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-U265)	1	G	MDOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162443
B	161737 & UP
C	161359 THRU 161736
D	161353 THRU 161736
E	161353 THRU 161750
F	161751 & UP
G	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

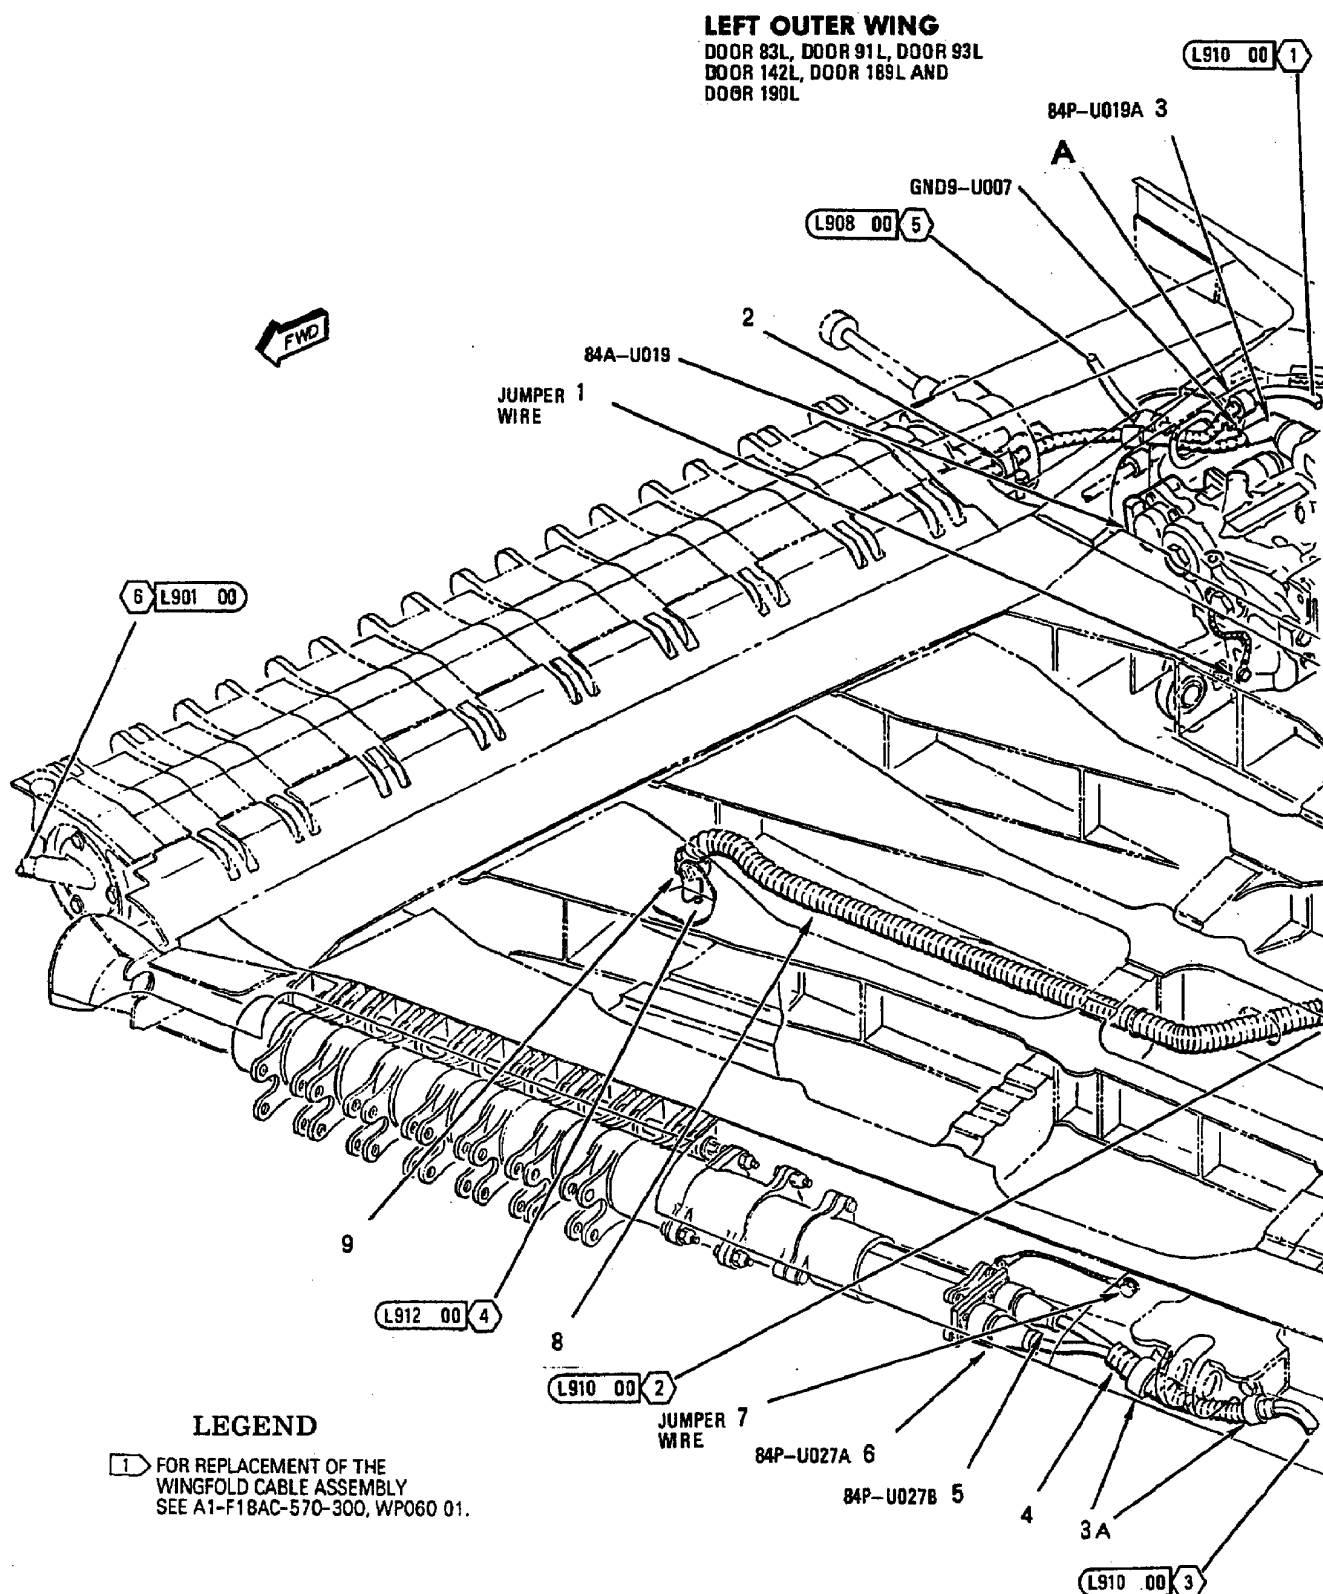

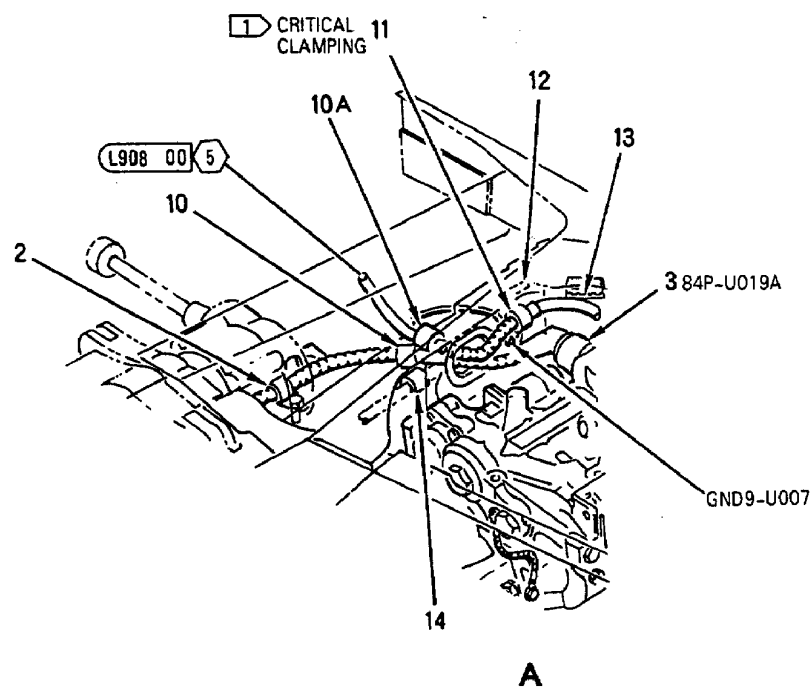

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25083-5BB4	LEAD, ELECTRICAL (JUMPER WIRE)	1	C	PAOZZ
	MS25083-5BB7	LEAD, ELECTRICAL (JUMPER WIRE)	1	D	PAOZZ
	NAS673V1	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	3		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
2	MS21919WDG6	CLAMP	1		PAOZZ
	MS21919WDG7	CLAMP	1	F	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-8	SPACER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (72962) (MCDONNELL SPEC ST3M523C3M)	1		PAOZZ
	130091	SEE ABOVE (76530)	1		PAOZZ
3	MS27467T13B35SB	CONNECTOR, PLUG (84P-U019A)	1		PAOZZ
3A	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
	T0004	SEE ABOVE (66794)	AR	*	PAOZZ
	SC-606-1/4	SEE ABOVE (96904)	AR	*	-
5	MS27467T13B35SA	CONNECTOR, PLUG (84P-U027B)	1		PAOZZ
6	MS27467T13B35S	CONNECTOR, PLUG (84P-U027A)	1		PAOZZ
7	MS25083-5BC4	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	AN508-10-3	SCREW (AP)	1		PAOZZ
	MS35338-100	WASHER (AP)	1		PAOZZ
	MS25082B3	NUT (AP)	1		PAOZZ
8	M81914-4-1207	TUBING	AR		MGGZZ
9	MS21919WDG #	CLAMP	1		-
	NAS673V17	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-55	SPACER (AP)	1		PAOZZ
10	MS21919WDG6	CLAMP	1		PAOZZ
	NAS1712D8-16N	CLAMP	1	F	PAOZZ
	NAS673V #	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
10A	MS21919WDG11	CLAMP	1		PAOZZ
11	MS21919WDG #	CLAMP	1	A	-
	AN742D8	CLAMP	1	B	PAOZZ
	NAS1801-3-13	SCREW (AP)	1	A	PAOZZ
	NAS673V7	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	MS35338-43	WASHER (UNDER NUT) (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
12	74A890601-2471	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U007)	1		MGOZZ
13	MS21266-2N	GROMMET	AR	E	PAOZZ
14	MS21919WDG #	CLAMP	1		-

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

A1-F18AC-WDM-000

Change 4

L909 00


Sheet 4

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			


CODE	USABLE ON
A	161353 THRU 161703
B	161705 & UP
C	161353
D	161358 & UP
E	161966 & UP
F	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

LEFT OUTER WING


DOOR 83L, DOOR 84L
AND DOOR 188L

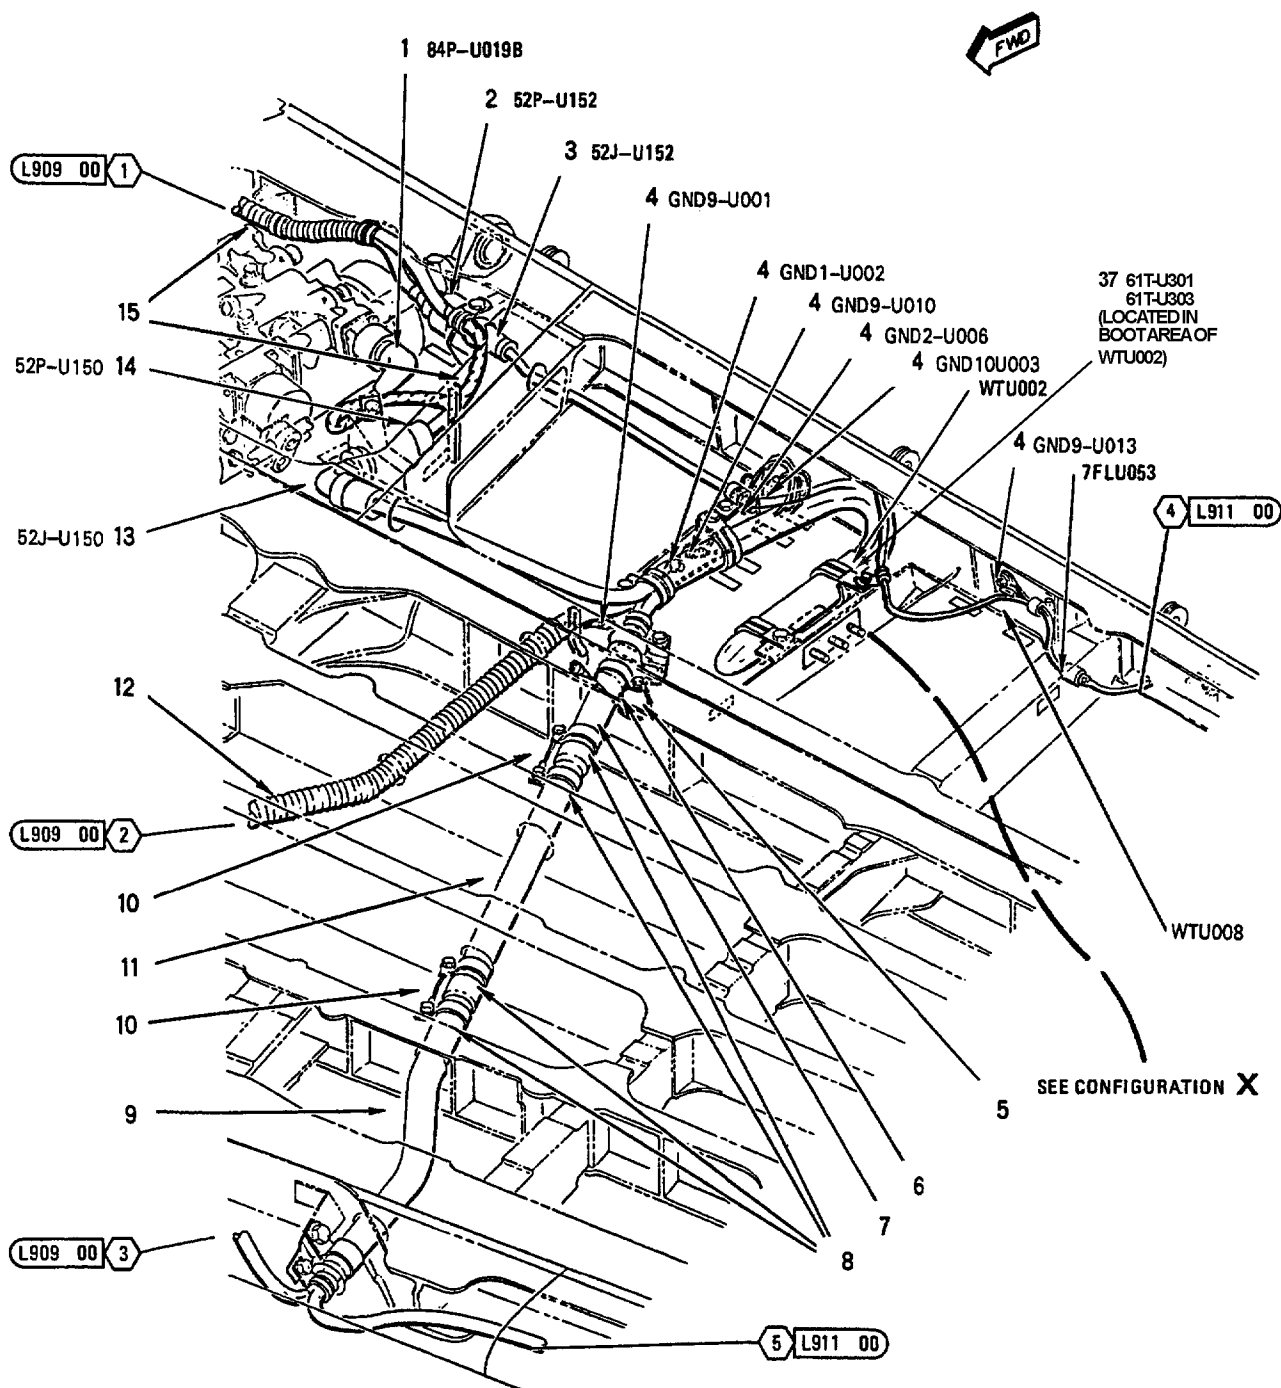

LEFT OUTER WING
DOOR 83L, DOOR 84L
AND DOOR 188L



CONFIGURATION X
161353 THRU 163145

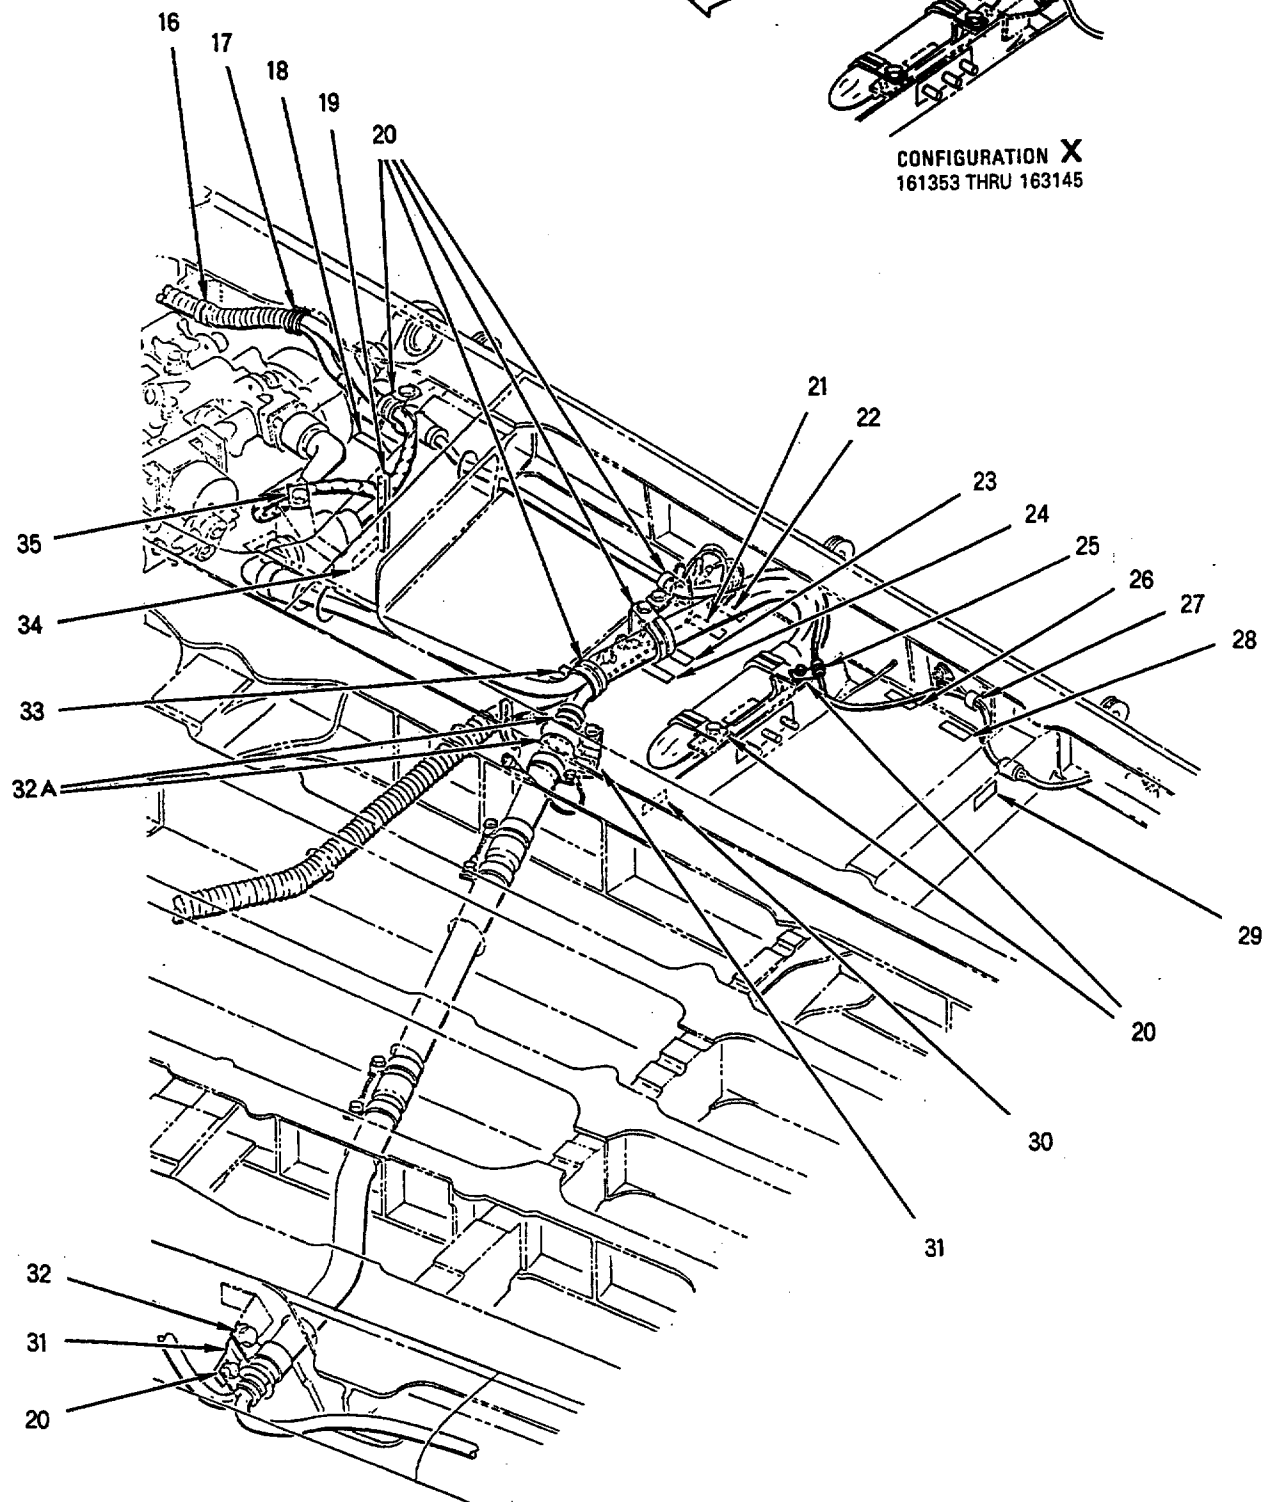

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35S	CONNECTOR, PLUG (84P-U019B)	1		PAOZZ
2	MS27467T13B98S	CONNECTOR, PLUG (52P-U152)	1		PAOZZ
3	MS27656T13B98P	CONNECTOR, RECEPTACLE (52J-U152)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
4	NAS1801-3-11	SCREW	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	6		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	6		PAOZZ
5	MS25083-2BB3	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	MS35338-135	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	AN735D14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	MS35338-43	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
7	74A782458-1001	TUBE, METALLIC-ELECTRICAL CONDUIT, Y140.145 (76301)	1		MGGZZ
8	AN735D14	CLAMP	4		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	MS35338-138	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
9	74A782456-1001	TUBE, BENT, METALLIC-ELECTRICAL CONDUIT, Y124.172 (76301)	1		MGGZZ
10	MS25083-2BB3	LEAD, ELECTRICAL (JUMPER WIRE)	2		PAOZZ
11	74A782457-1001	TUBE, METALLIC-ELECTRICAL CONDUIT, Y133.023 (76301)	1		MGGZZ
12	M81914-4-1207	TUBING	AR		MGOZZ
13	MS27656T17B35P	CONNECTOR, RECEPTACLE (52J-U150)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
14	MS27467T17B35S	CONNECTOR, PLUG (52P-U150)	1		PAOZZ
15	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	C*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
16	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
17	MS21919WDG10	CLAMP	1	A	PAOZZ
	MS21919WDG11	CLAMP	1	B	PAOZZ
	HT4024L3-6	SCREW, CLOSE TOLERANCE (AP) (73197) (MCDONNELL SPEC ST3M455-3L6-1)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
18	74A890601-2428	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-U152)	1		MGOZZ
19	MS21266-2N	GROMMET	AR		PAOZZ
20	MS21919WDG #	CLAMP	7		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
21	74A890601-2483	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-U006)	1		MGOZZ
22	74A890601-2485	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10U003)	1		MGOZZ
23	74A890601-2473	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U010)	1		MGOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	74A890601-2494	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND1-U002)	1		MGOZZ
25	MS21919WDG #	CLAMP	1	E	-
26	74A890601-2602	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U013)	1		MGOZZ
27	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
28	74A890601-2869	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTU008)	1		MGOZZ
29	74A890601-2871	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 7FLU053)	1		MGOZZ
30	74A890601-2029	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTU002)	1		MGOZZ
31	ST9M614-1	STRAP (76301)	2		PAOZZ
32	AN742D14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
32A	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
33	74A890601-2601	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-U001)	1		MGOZZ
34	74A890601-2427	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-U150)	1		MGOZZ
35	MS21919WDG7	CLAMP	1		PAOZZ
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
36	MS21919WDG #	CLAMP	1	D	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
37	5M2867-002	COUPLER, INLINE (61T-U301, 61T-U303) (76301)	2	F	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 THRU 161703

B 161705 & UP

C 161353 THRU 161965


D 161353 THRU 163145

E 163146 & UP

F 162394 THRU 163175
AFTER F/A-18 AFC 341

LEFT OUTER WING

DOOR 84L, DOOR 95L,
DOOR 125L, DOOR 144L
AND DOOR 187L

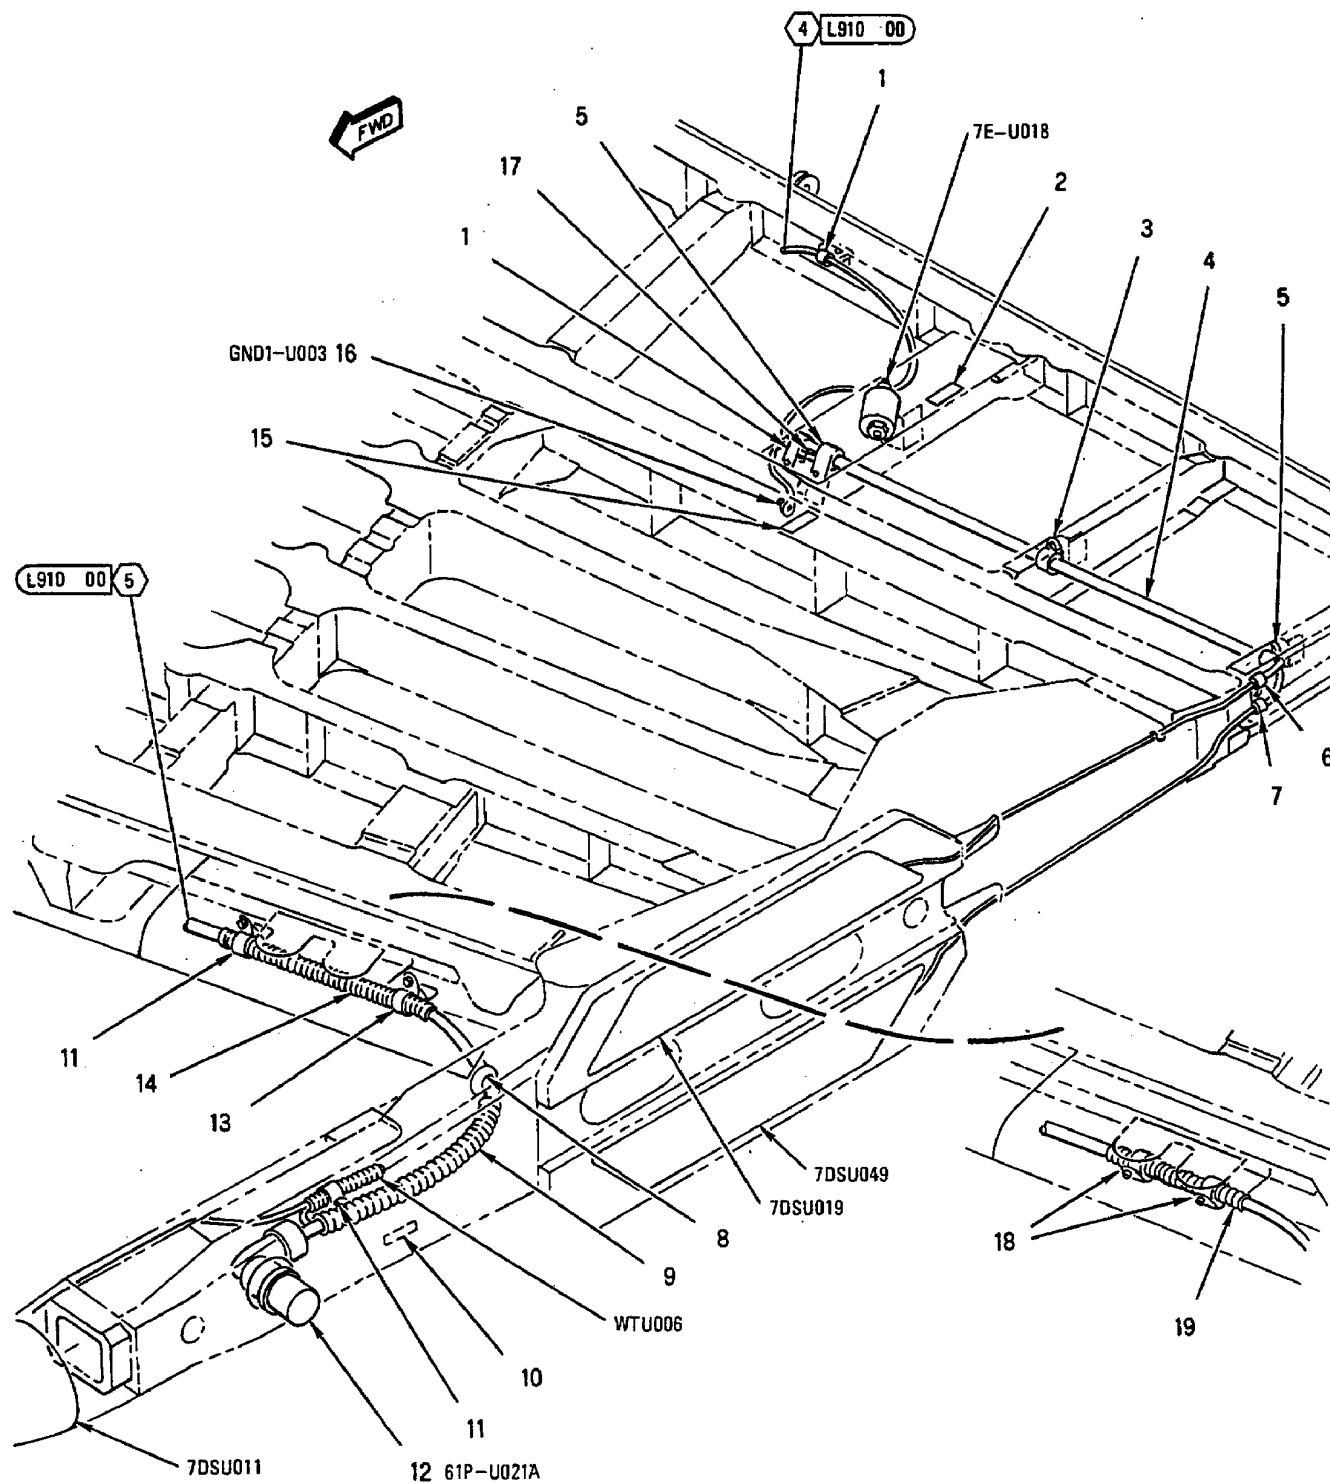

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	74A890601-2433	MARKER, IDENTIFICATION -	1		MGOZZ
		ELECTRICAL (76301) (FOR REF DES 7E-U018)			
3	NMC-ST9M529-6	CLAMP, LOOP (03296)	1		PAOZZ
		(MCDONNELL SPEC ST9M529-6)			
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A782468-1001	TUBE, METALLIC-ELECTRICAL	1		MGOZZ
		CONDUIT, Y150.100 (76301)			
5	AN742D5	CLAMP	2		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	9M144-3D	CLAMP (76301)	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
7	9M144-3D	CLAMP (76301)	1		PAOZZ
8	MS35489-103	GROMMET	1	C	PAOZZ
	9M858A-16	GROMMET	1	D	PAOZZ
9	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)X 1			
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
10	74A890601-2244	MARKER, IDENTIFICATION - ELECTRI-	1		MGOZZ
		CAL (76301) (FOR REF DES WTU006)			
11	MS21919WDG #	CLAMP	1		-
	NAS663V3HT	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
12	DS07-27S-025	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(11139) (MCDONNELL SPEC ST5M1576-27-50SA) (61P-U021A)			
13	MS21919WDG #	CLAMP	2	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
14	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ
15	74A890601-2538	MARKER, IDENTIFICATION - ELECTRI-	1		MGOZZ
		CAL (76301) (FOR REF DES GND1-U003)			
16	NAS1801-3-11	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 16)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 16)	1		PAOZZ
17	ST9M614-1	STRAP (76301)	1		PAOZZ
18	MS21919WDG #	CLAMP	2	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
19	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.


* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

- A 161361 & UP
- B 161353 THRU 161359
- C 161353 AND UP; ALSO 162394
THRU 163175 BEFORE F/A-18
AFC 253 OR F/A-18 AFC 292
- D 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18
AFC 292




LEFT OUTER WING DOOR 159L

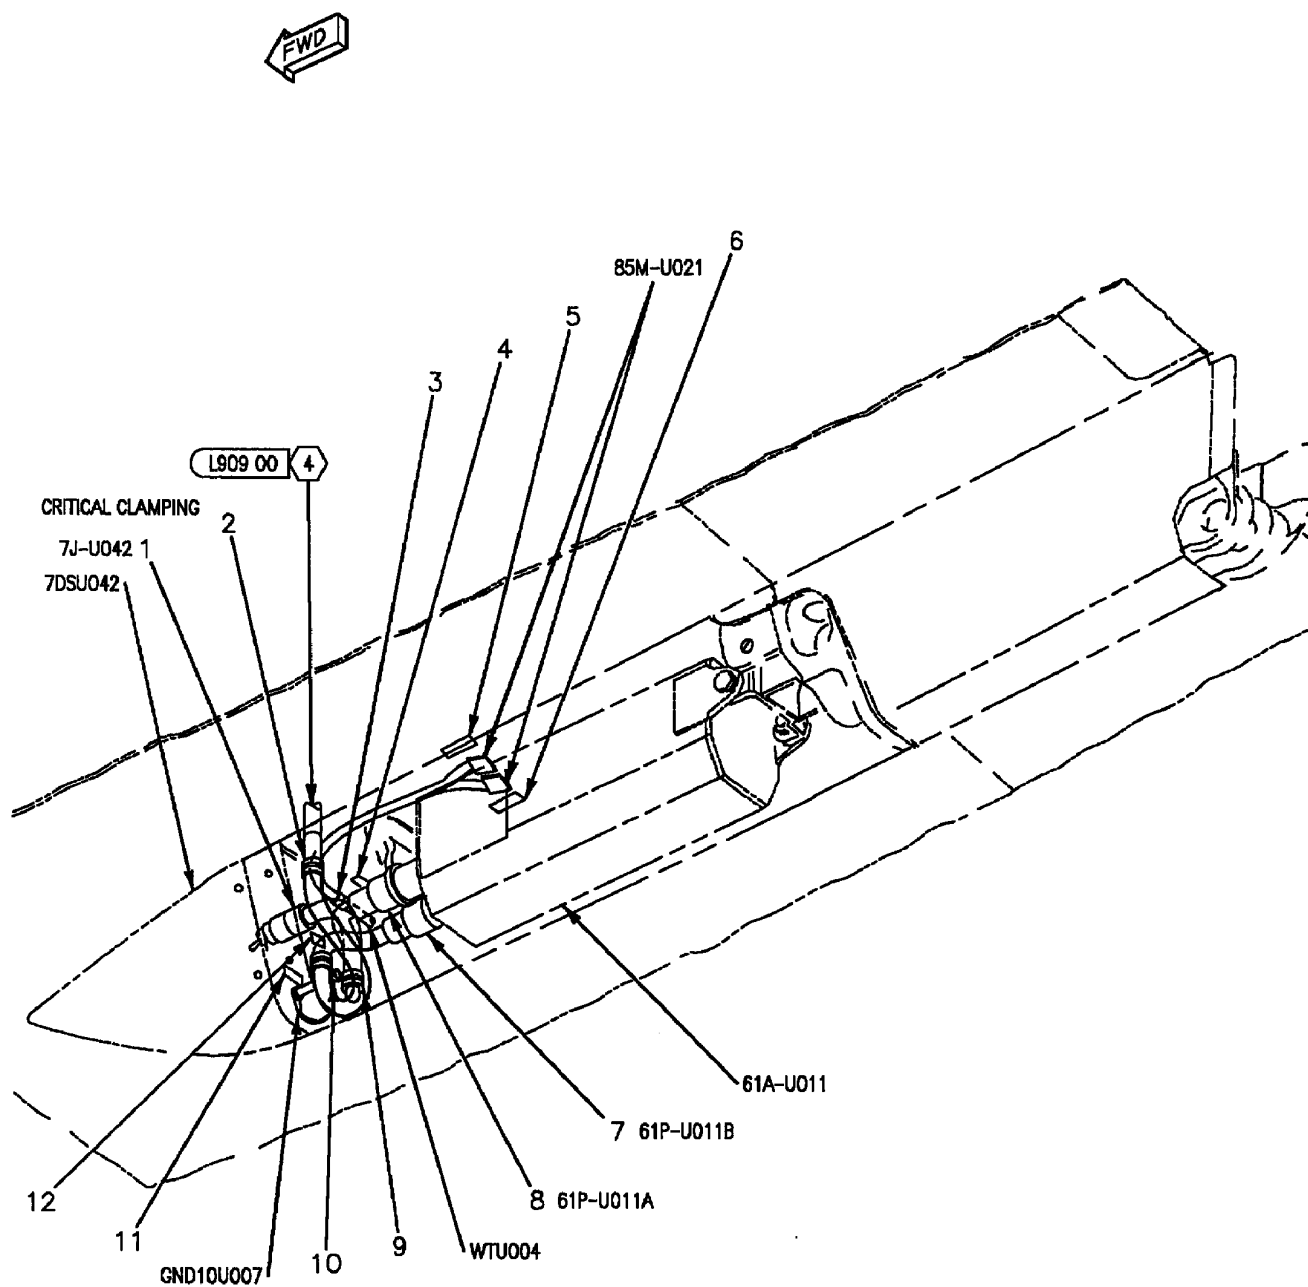


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27656T9B98S	CONNECTOR, RECEPTACLE (7J-U042)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
2	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
3	MS21919WDG #	CLAMP	1		-
4	74A890601-2241	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTU004)	1		MGOZZ
5	74A890601-2840	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 85M-U021)	1		MGOZZ
6	74A890601-2844	MARKER, IDENTIFICATION - ELECTRICAL (76301)	1		MGOZZ
7	MS27467T13B35S	CONNECTOR, PLUG (61P-U011B)	1		PAOZZ
8	MS27467T13B35SD	CONNECTOR, PLUG (61P-U011A)	1		PAOZZ
9	MS21919WDG #	CLAMP	1		-
	NAS673V17	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-55	SPACER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
10	MS21919WDG #	CLAMP	1		-
11	74A890601-2837	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10U007)	1		MGOZZ
12	74A890601-2429	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 7J-U042)	1		MGOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

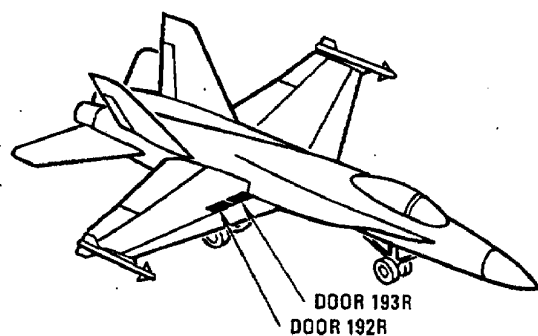

RIGHT INNER WING DOOR 192R AND DOOR 193R

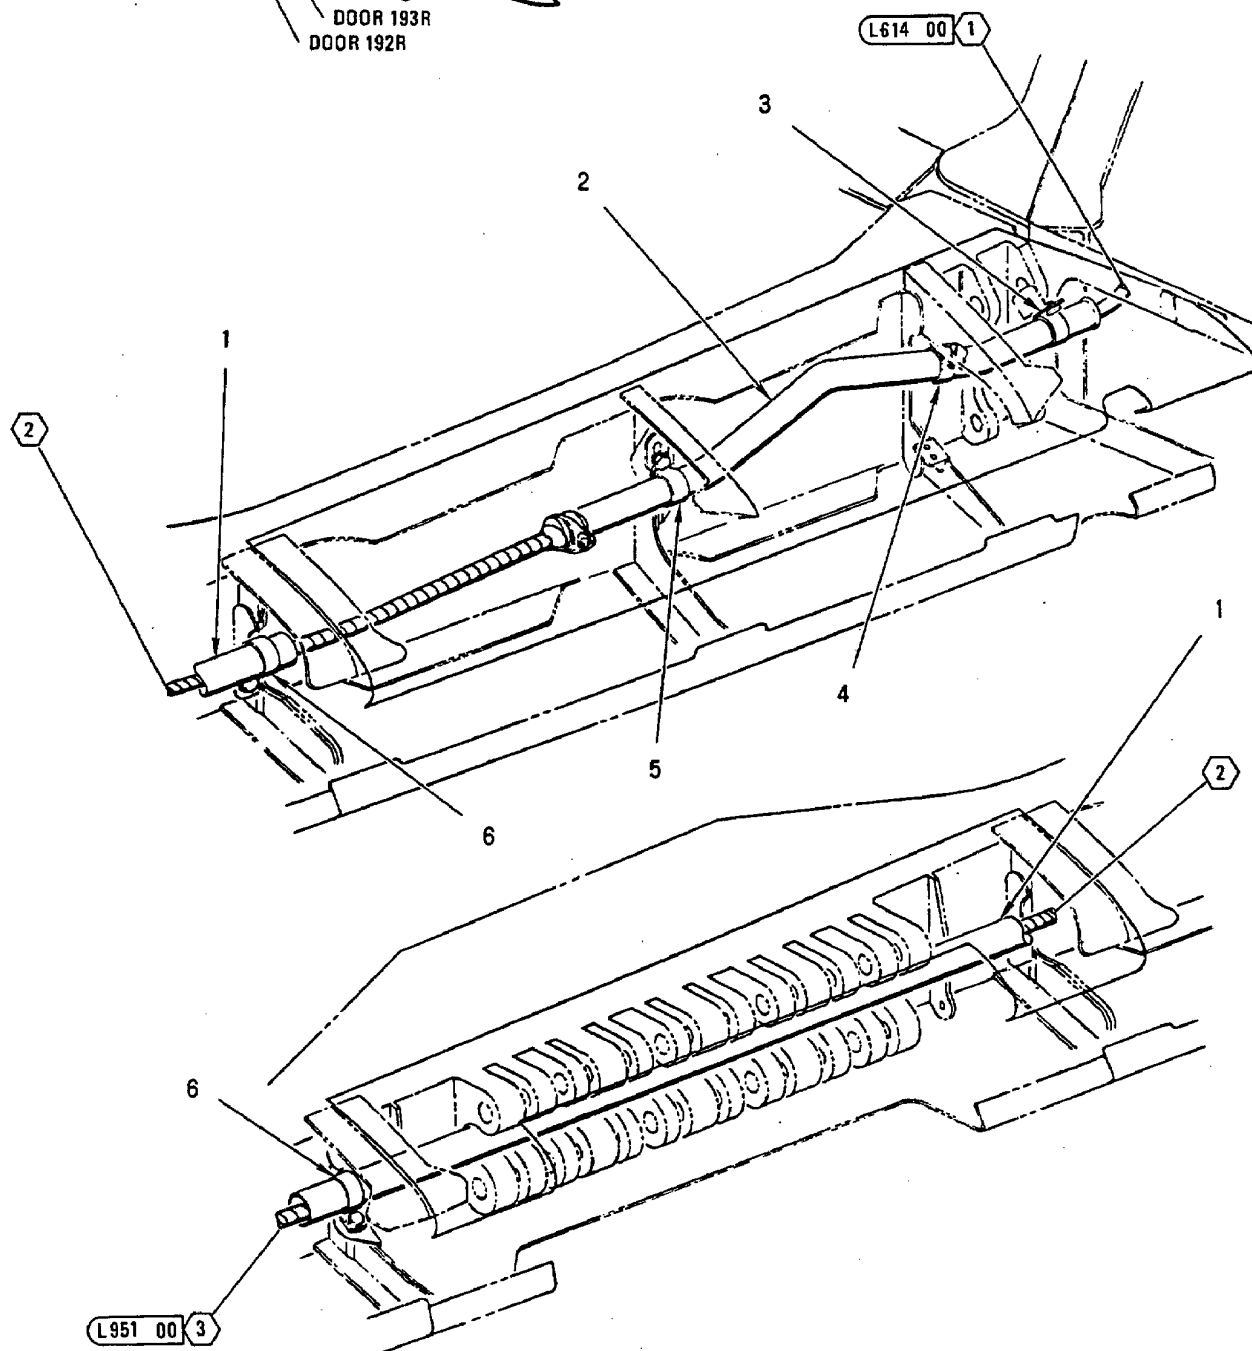


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	5M388T35	INSULATION SLEEVING, ELECTRICAL (76301)	AR		MGOZZ
2	74A782467-2007	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT 176301)	1	A	MGOZZ
	74A782466-1005	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	B	MGOZZ
	74A782466-1007	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1	C	MGOZZ
3	AN742D14	CLAMP	1		PAOZZ
	NAS653V7	BOLT (AP)	1		PAOZZ
	MS35338-138	WASHER (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	MS21919WDG10	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
5	AN742D10	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
6	MS21919WDG16	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ

CODE USABLE ON

A 161353


B 161358 THRU 161949

C 161950 & UP

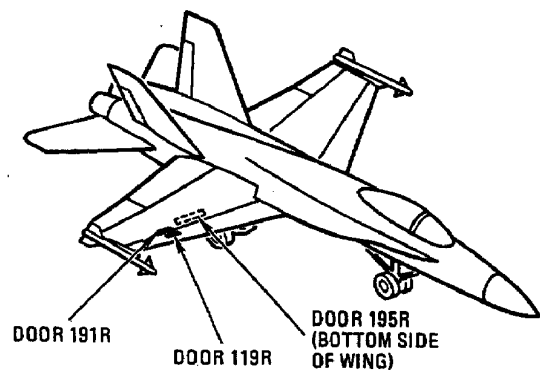

RIGHT INNER WING

DOOR 119R, DOOR 191R
AND DOOR 195R

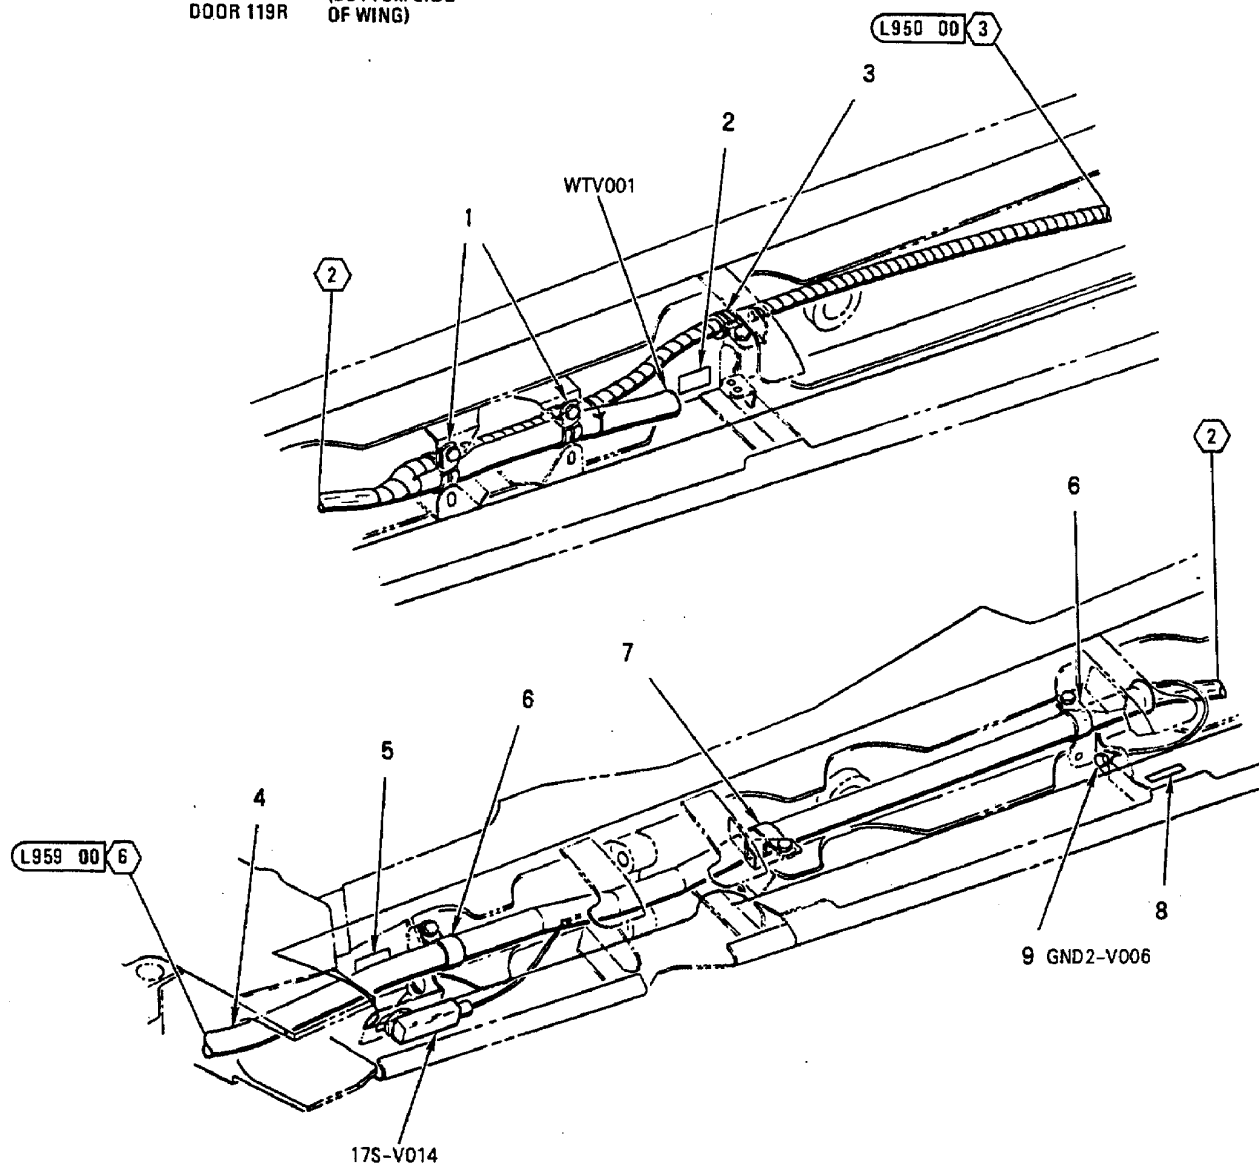


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG16	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	74A890601-2032	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES WTV001)			
3	MS21919WDG14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	74A782460-2003	TUBE, BENT, METALLIC - ELECTRICAL	1	A	MGOZZ
		CONDUIT (76301)			
	74A782460-1003	TUBE, BENT, METALLIC - ELECTRICAL	1	B	MGOZZ
		CONDUIT (76301)			
5	74A890601-2177	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES 17S-V014)			
6	AN742D12	CLAMP	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
7	MS21919WDG12	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
8	74A890601-2482	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND2-V006)			
9	NAS673V4	BOLT	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 9)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 9)	1		PAOZZ

CODE USABLE ON

A 161353 THRU 162476,
162829B 162477 THRU 162898,
162830 & UP

RIGHT INNER WING
ACCESS TO FUEL SENSOR
IS THROUGH DOOR 34R

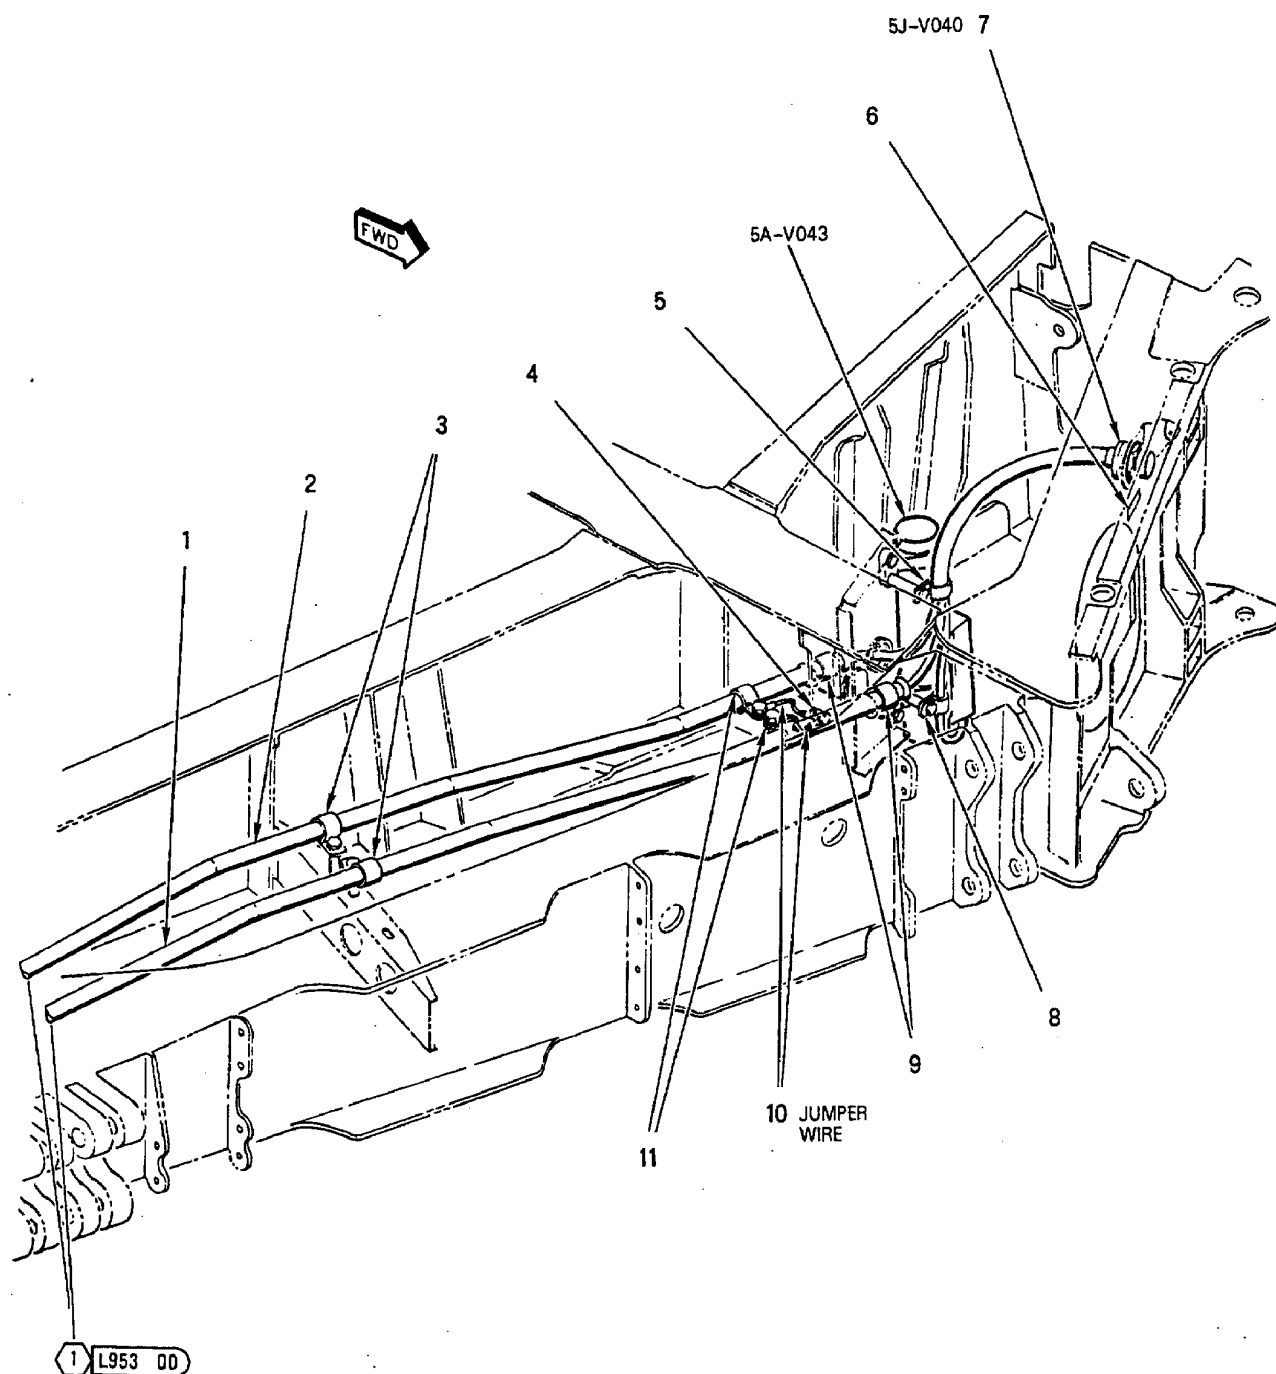


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	74A782426-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
2	74A782429-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
3	NMC-ST9M529-8	CLAMP, LOOP (03296) (MCDONNELL SPEC ST9M529-8)	2		PAOZZ
	NAS673V13	BOLT (AP) (SUPERSEDES 3M881V3-13)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-13) ...	1		PAOZZ
	NAS43DD3-40	SPACER (AP)	1		PADZZ
4	NAS673V4	BOLT (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 4)	1		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 4)	1		PADZZ
5	MS25281-R4	CLAMP (SUPERSEDES MS25281-4)	1		PAOZZ
	80860C3-23	SCREW, CAP, SOCKET HEAD (AP) (50394) (MCDONNELL SPEC 3M965C3-23) (SUPERSEDES 3M881V3-23)	1	*	PAOZZ
	SC2818C3-23	SEE ABOVE (06950)	1	*	PAOZZ
	D16174C3-23	SEE ABOVE (08524)	1	*	PAOZZ
	CS3046C3-23	SEE ABOVE (58998)	1	*	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
6	74A890601-2039	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 5J-V040)	1		MDOZZ
7	10-550598-35P	CONNECTOR, RECEPTACLE, ELECTRICAL (77820) (MCDONNELL SPEC ST5M1473-11-35P) (5J-V040)	1	*	PAOZZ
	18530	CONNECTOR, RECEPTACLE, ELECTRICAL (97814) (MCDONNELL SPEC ST5M1473-11-35P) (5J-V040)	1	*	PAOZZ
	S8202H11B35P	CONNECTOR, RECEPTACLE, ELECTRICAL (12349) (MCDONNELL SPEC ST5M1473-11-35P) (5J-V040)	1	*	PAOZZ
8	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	80860C3-23	SCREW, CAP, SOCKET HEAD (AP) (50394) (MCDONNELL SPEC 3M965C3-23) (SUPERSEDES 3M881V3-23)	1	*	PAOZZ
	SC2818C3-23	SEE ABOVE (06950)	1	*	PAOZZ
	D16174C3-23	SEE ABOVE (08524)	1	*	PAOZZ
	CS3046C3-23	SEE ABOVE (58998)	1	*	PAOZZ
	NAS43DD3-64	SPACER (AP)	1		PAOZZ
9	NMC-ST9M529-6	CLAMP, LOOP (03296) (MCDONNELL SPEC ST9M529-6)	2		PAOZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
10	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	2		PADZZ
11	AN735D8	CLAMP	2		PADZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PADZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PADZZ
	NAS1291C3M	NUT (AP)	1		PADZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

RIGHT INNER WING


DOOR 76R

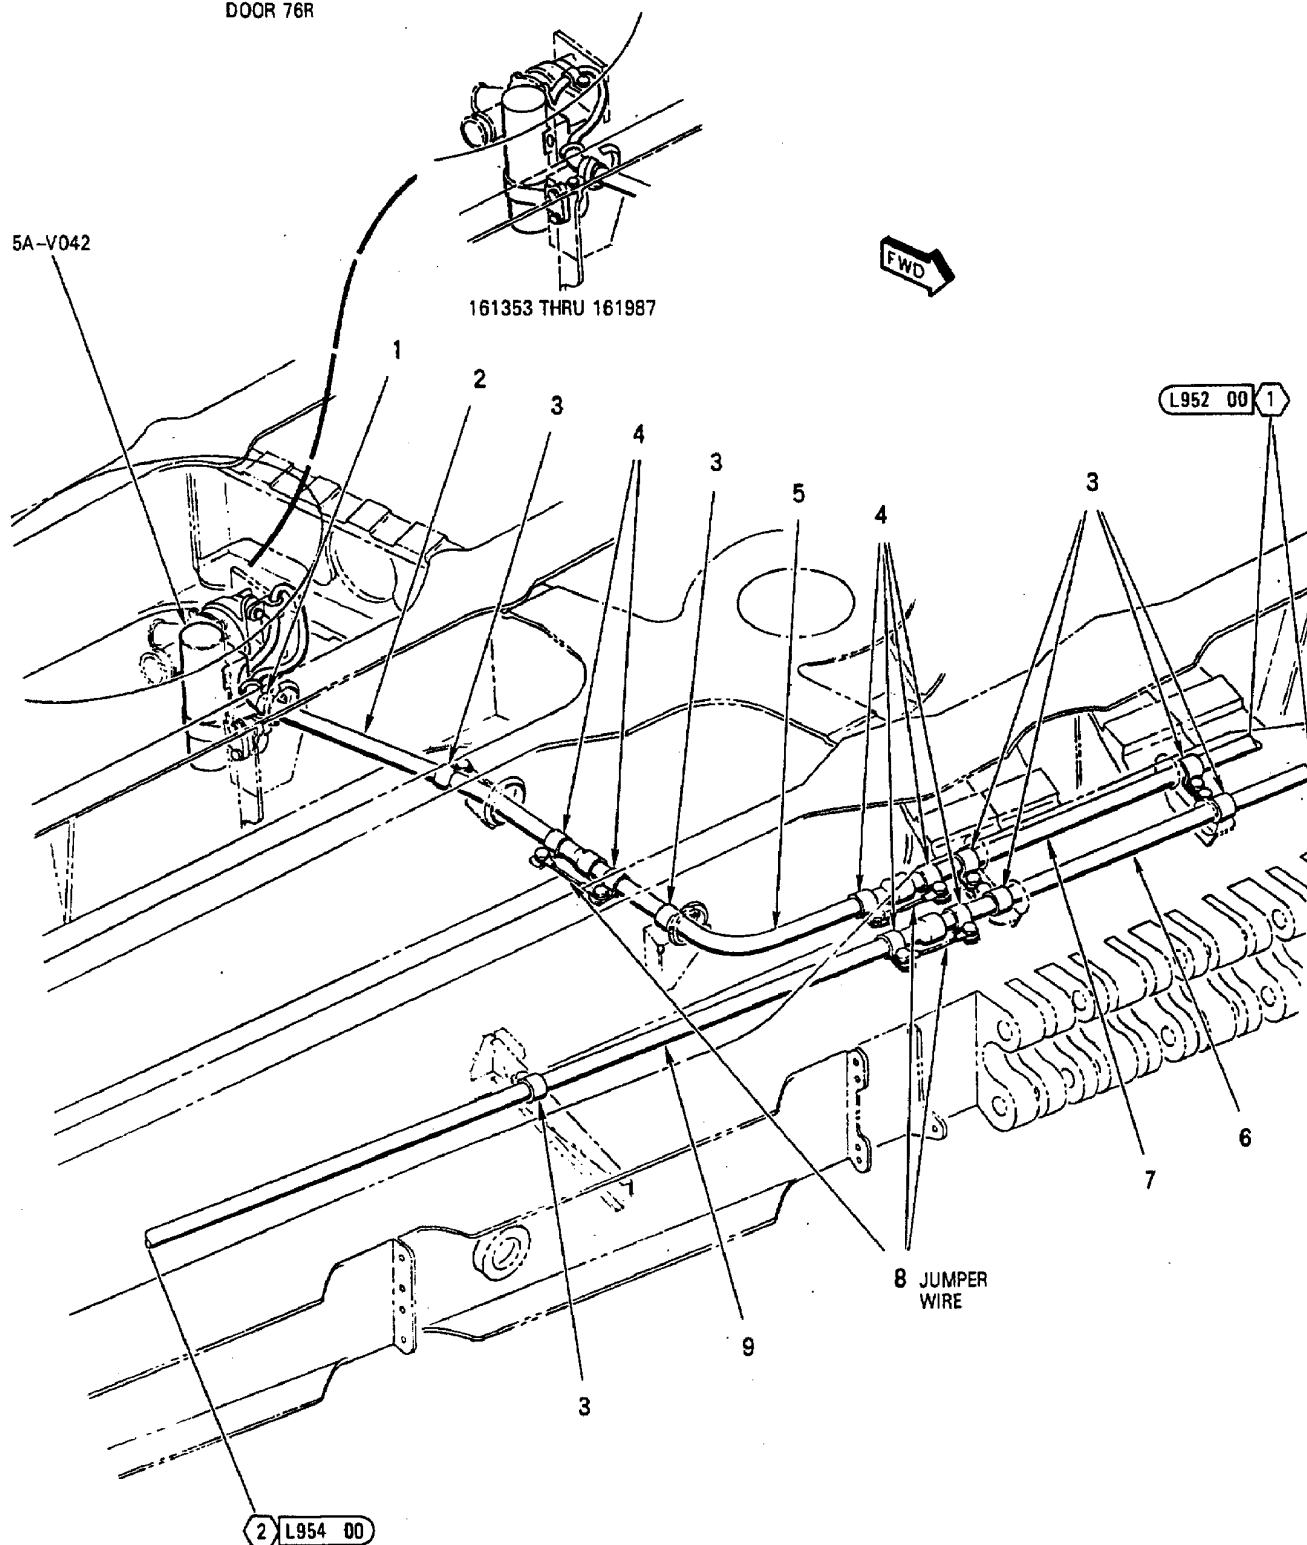

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN742D8	CLAMP	1		PADZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
2	74A782461-1001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
3	NMC-ST9M529-8	CLAMP, LOOP (03296)	7		PADZZ
		(MCDONNELL SPEC ST9M529-8)			
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	AN735D8	CLAMP	6		PADZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
5	74A782437-1001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
6	74A782426-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
7	74A782429-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
8	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	3		PADZZ
9	74A782438-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ

RIGHT INNER WING


DOOR 77R

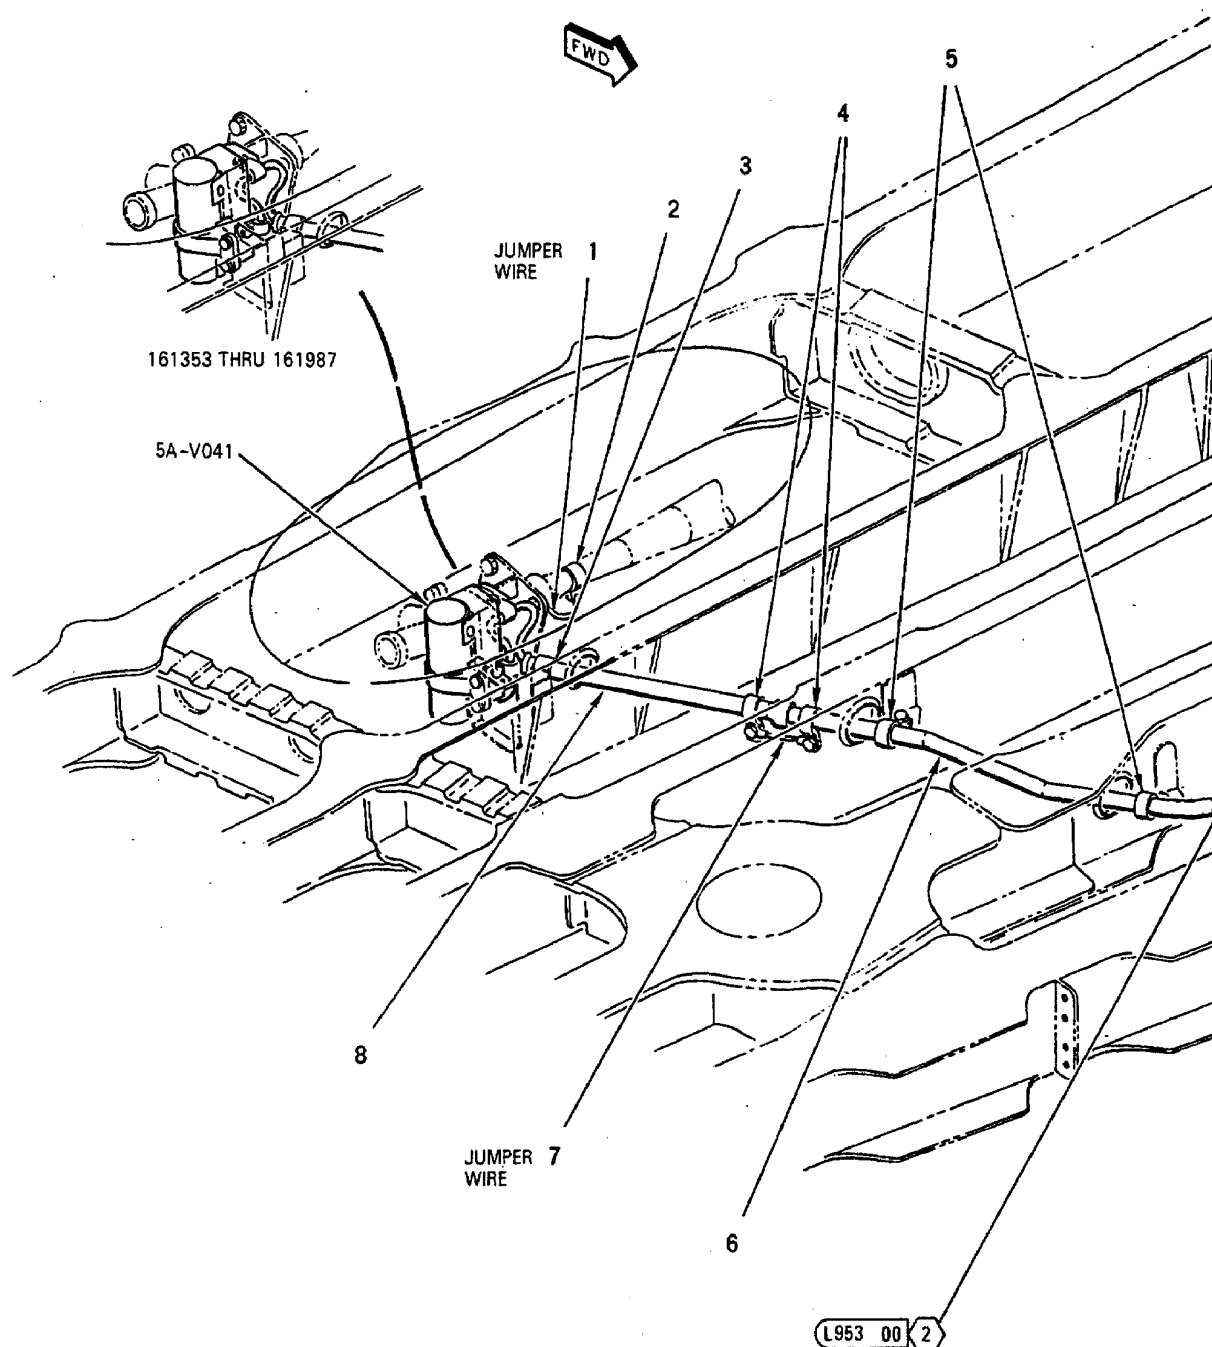


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25083-7BC5	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	VDP0001-2	BOLT, ASSEMBLED WASHER (AP) (06710) (MCDONNELL SPEC 3M881V4-2)	1	*	PAOZZ
	111026-4-2	SEE ABOVE (80539)	1	*	PAOZZ
	T981-4-2	SEE ABOVE (97928)	1	*	PAOZZ
	SC2670-4-2	SEE ABOVE (06950)	1	*	PAOZZ
2	D16175-12-2	SEE ABOVE (08524)	1	*	PAOZZ
	AN735D12	CLAMP	1		PAOZZ
	VDP0002-2	BOLT, ASSEMBLED WASHER (AP) (06710) (MCDONNELL SPEC 3M881V3-2)	1	*	PAOZZ
	111026-3-2	BOLT, ASSEMBLED WASHER (AP) (80539) (MCDONNELL SPEC 3M881V3-2)	1	*	PAOZZ
	T981-3-2	BOLT, ASSEMBLED WASHER (AP) (97928) (MCDONNELL SPEC 3M881V3-2)	1	*	PAOZZ
	SC2670-3-2	BOLT, ASSEMBLED WASHER (AP) (06950) (MCDONNELL SPEC 3M881V3-2)	1	*	PAOZZ
	D16175-10-2	BOLT, ASSEMBLED WASHER (AP) (08524) (MCDONNELL SPEC 3M881V3-2)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	AN742D8	CLAMP	1		PADZZ
	NAS673V4	BOLT (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
3	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-4)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PADZZ
	AN735D8	CLAMP	2		PADZZ
	NAS673V3	BOLT (AP) (SUPERSEDES 3M991V3-3)	1		PAOZZ
	AN960JD10L	WASHER (AP) (SUPERSEDES 3M881V3-3)	1		PAOZZ
4	NAS1291C3M	NUT (AP)	1		PADZZ
	NMC-ST9M529-8	CLAMP, LOOP (03296) (MCDONNELL SPEC ST9M529-8)	2		PADZZ
	NAS673V4	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A782438-1003	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ
5	MS25083-7BB3	LEAD, ELECTRICAL (JUMPER WIRE)	1		PADZZ
6	74A782428-1001	TUBE, BENT, METALLIC - ELECTRICAL CONDUIT (76301)	1		MDDZZ

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

RIGHT INNER WING DOOR 78R TRAILING EDGE

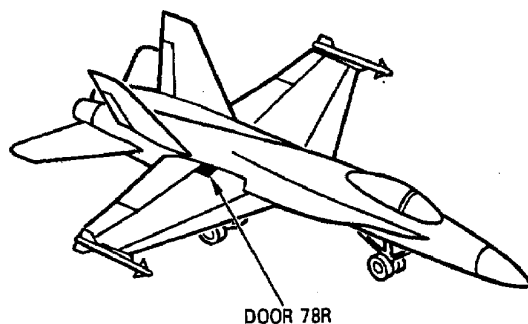

DOOR 78R

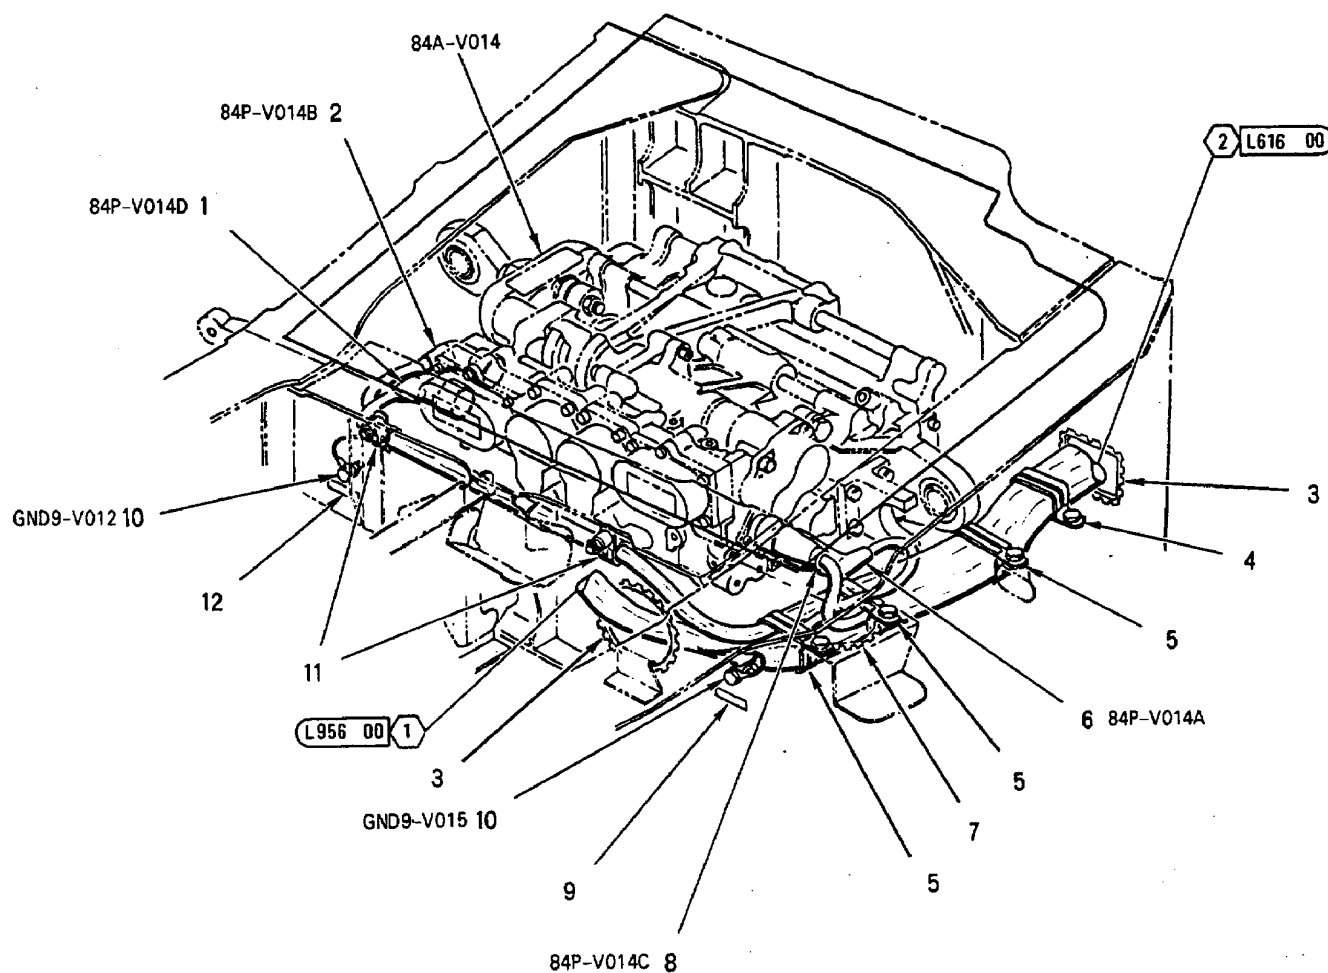


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35SD	CONNECTOR, PLUG (84P-V014D)	1		PAOZZ
2	MS27467T13B35SB	CONNECTOR, PLUG (84P-V014B)	1		PAOZZ
3	MS21266-5N	GROMMET	AR		PAOZZ
4	NAS1677D8-30N	STRAP	1		PAOZZ
	NAS673V6	BOLT (AP)	2		PAOZZ
	AN960JD10	WASHER (AP)	2		PAOZZ
5	NAS1712D12-24N	CLAMP	3	A	PAOZZ
	NAS1712D12-22N	CLAMP	3	B	PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
6	MS27467T13B35SA	CONNECTOR, PLUG (84P-V014A)	1		PAOZZ
7	MS21266-2N	GROMMET	AR		PAOZZ
8	MS27467T13B35SC	CONNECTOR, PLUG (84P-V014C)	1		PAOZZ
9	74A890601-2710	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-V015)			
10	NAS673V2	BOLT	2		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 10)	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 10)	2		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 10)	2		PAOZZ
	MS21042L3	NUT (USE WITH INDEX 10)	2		PAOZZ
11	MS21919WDG10	CLAMP	2		PAOZZ
	NAS673V8	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
12	74A890601-2606	MARKER, IDENTIFICATION -	1		MDOZZ
		ELECTRICAL (76301) (FOR REF DES GND9-V012)			

CODE 0USABLE ON

A 161353 THRU 161982

B 161983 & UP


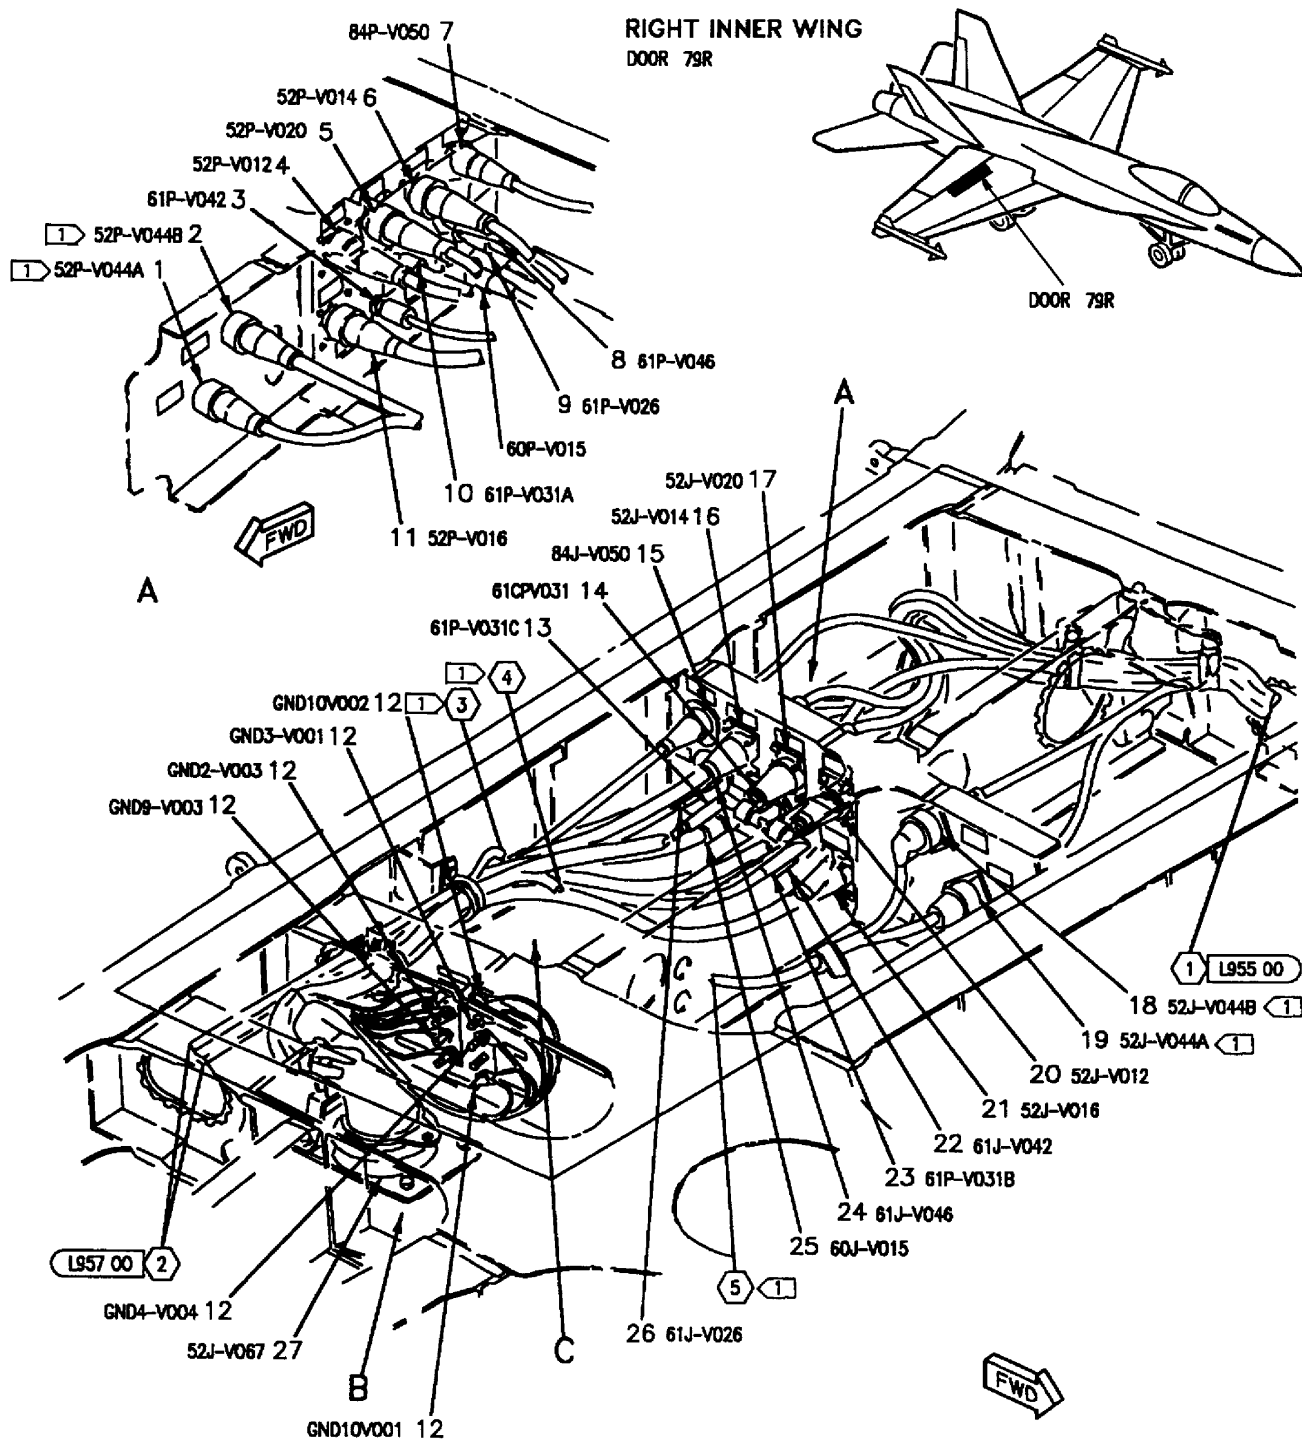


LEGEND


- 1 162394 THRU 163175 AFTER
F/A-18 AFC 253 OR F/A-18 AFC 292


RIGHT INNER WING

DOOR 79R

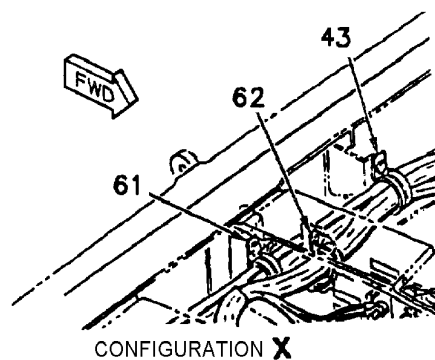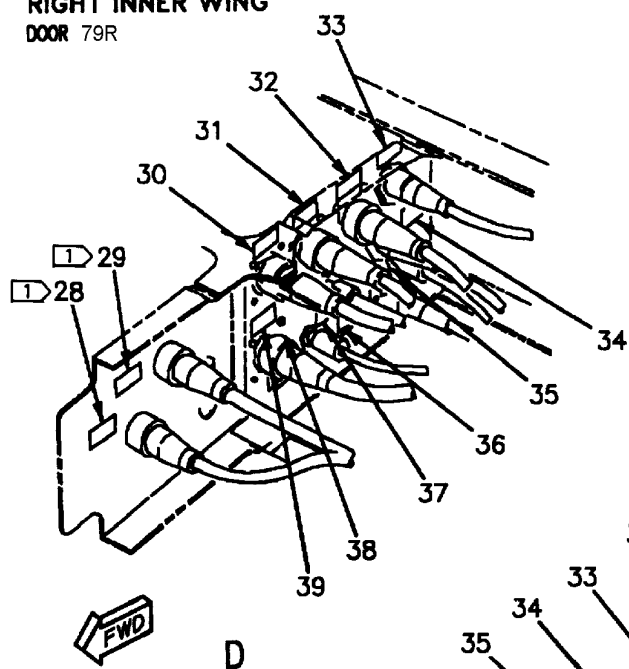


SEE
CONFIGURATION X

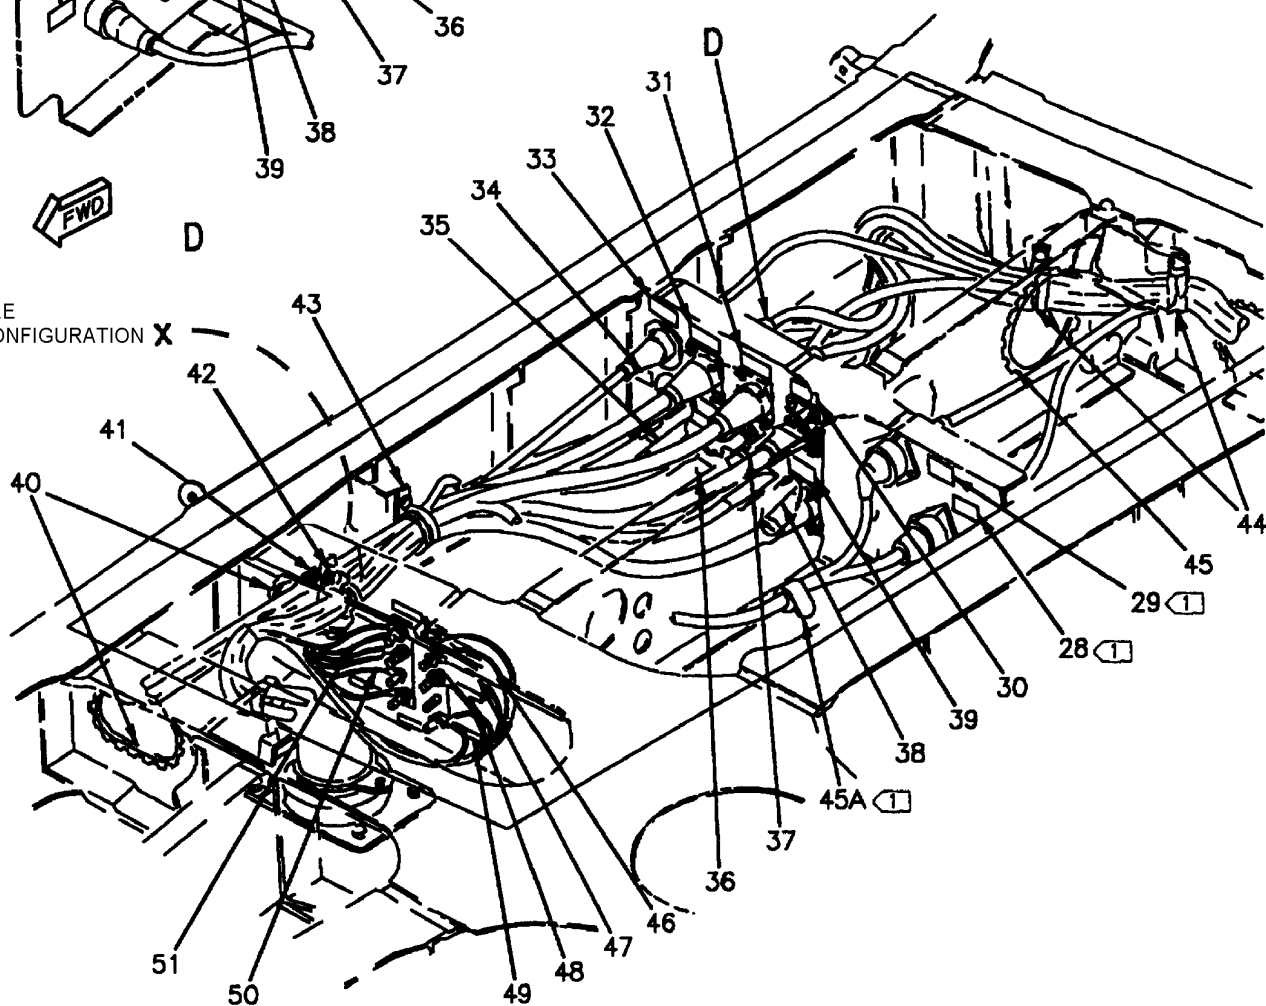

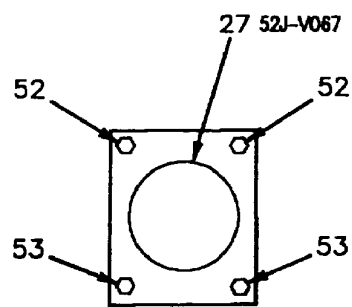

VIEW LOOKING DOWN

B



1 C

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T25B29S	CONNECTOR, PLUG (52P-V044A)	1	C	PAOZZ
2	MS27467T25B4S	CONNECTOR, PLUG (52P-V044B)	1	C	PAOZZ
3	82-5773-5	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2497551)			
		(61P-V042)			
	31-33449-3	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1425-01S)			
		(61P-V042)			
	5801-0901	SEE ABOVE (95077)	1	*	PAOZZ
4	MS27467T19B35SB	CONNECTOR, PLUG (52P-V012)	1		PAOZZ
5	MS27467T19B35S	CONNECTOR, PLUG (52P-V020)	1		PAOZZ
6	MS27467T19B11SA	CONNECTOR, PLUG (52P-V014)	1		PAOZZ
7	MS27467T15B35SA	CONNECTOR, PLUG (84P-V050)	1		PAOZZ
8	MS27467T11B35S	CONNECTOR, PLUG (61P-V046)	1		PAOZZ
9	82-5773-1	CONNECTOR, PLUG, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2497S11)			
		(61P-V026)			
	31-33449-4	CONNECTOR, PLUG, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1425-02S)			
		(61P-V026)			
	5801-0902	SEE ABOVE (95077)	1	*	PAOZZ
10	M39012/26-0503	CONNECTOR, PLUG (61P-V031A)	1		PAOZZ
11	MS27467T19B11SC	CONNECTOR, PLUG (52P-V016)	1		PAOZZ
12	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 12)	6		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 12)	6	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 12)	6	*	PAOZZ
	ST5M1379 #	TERMINAL STRIP (76301)	2		-
13	M39012/30-0503	CONNECTOR, PLUG (61P-V031C)	1		PAOZZ
14	M55339-50-00001	ADAPTER (61CPV031)	1		PAOZZ
15	MS27468T15B35PA	CONNECTOR, RECEPTACLE (84J-V050)	1		PAOZZ
16	MS27656T19B11PA	CONNECTOR, RECEPTACLE (52J-V014)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
17	MS27656T19B35P	CONNECTOR, RECEPTACLE (52J-V020)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
18	MS27656T25B4P	CONNECTOR, RECEPTACLE (52J-V044B)	1	C	PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
19	MS27656T25B29P	CONNECTOR, RECEPTACLE (52J-V044A)	1	C	PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
20	MS27656T19B35PB	CONNECTOR, RECEPTACLE (52J-V012)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
21	MS27656T19B11PC	CONNECTOR, RECEPTACLE (52J-V016)	1		PAOZZ
	NAS600-6P	SCREW (AP)	4		PAOZZ
	NAS1149DN416J	WASHER (AP)	4	*	PAOZZ
	AN960JD4L	WASHER (AP)	4	*	PAOZZ
22	82-5780	CONNECTOR, RECEPTACLE, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2496-003)			
		(61J-V042)			
	31-33819-11	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1426A001)			
		(61J-V042)			
	5841-0904	SEE ABOVE (95077)			
23	M39012/30-0503	CONNECTOR, PLUG (61P-V031B)	1		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
24	MS27468T11B35P	CONNECTOR, RECEPTACLE (61J-V046)	1		PAOZZ
25	M39012/03-0501	CONNECTOR, RECEPTACLE (60J-V015)	1		PAOZZ
26	82-5770	CONNECTOR RECEPTACLE, ELECTRICAL	1	C	PAOZZ
		(74868) (MCDONNELL SPEC 5M2496-001)			
		(61J-V026)			
	31-33819-12	CONNECTOR RECEPTACLE, ELECTRICAL	1	*D	PAOZZ
		(74868) (MCDONNELL SPEC ST5M2496-001)			
		(61J-V026)			
	5841-0905	SEE ABOVE (95077)	1	*D	PAOZZ
	31-33819-12	CONNECTOR, RECEPTACLE, ELECTRICAL	1	*	PAOZZ
		(74868) (MCDONNELL SPEC ST5M1426A002)			
		(61J-V026)			
	5841-0905	SEE ABOVE (95077)			
27	885-200-003	CONNECTOR, RECEPTACLE, ELECTRICAL	1		PAOZZ
		(99447) (MCDONNELL SPEC ST5M1487-002)			
		(52J-V067)			
28	74A890601-2966	MARKER, IDENTIFICATION - ELECTRICAL	2	C	MDOZZ
		(76301) (FOR REF DES 52J-V044A)			
29	74A890601-2967	MARKER, IDENTIFICATION - ELECTRICAL	2	C	MDOZZ
		(76301) (FOR REF DES 52J-V044B)			
30	74A890601-2054	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 52J-V012)			
31	74A890601-2061	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 52J-V020)			
32	74A890601-2056	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 52J-V014)			
33	74A890601-2153	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 84J-V050)			
34	74A890601-2102	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 61J-V026)			
35	74A890601-2095	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 60J-V015)			
36	74A890601-2334	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 61CPV031)			
37	74A890601-2113	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 61J-V042)			
38	74A890601-2115	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 61J-V046)			
39	74A890601-2058	MARKER, IDENTIFICATION - ELECTRICAL	2		MDOZZ
		(76301) (FOR REF DES 52J-V016)			
40	MS21266-5N	GROMMET	AR		PAOZZ
41	MS21919WDG16	CLAMP	1	D	PAOZZ
	MS21919WDG18	CLAMP	1	C	PAOZZ
42	MS21919WDG11	CLAMP	1		PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
43	MS21919WDG #	CLAMP	1		-
	NAS673V5	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	A11144A7-3	NUT, CLIP-ON (AP) (56878) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (60119)	1	*	PAOZZ
44	MS21919WDG16	CLAMP	2		PAOZZ
	NAS673V6	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS42DD6-16	SPACER (AP)	1		PAOZZ
	A11144A7-3	NUT, CLIP-ON (AP) (56878) (MCDONNELL SPEC ST3M523C3M)	1	*	PAOZZ
	130091	SEE ABOVE (60119)	1	*	PAOZZ
45	MS21266-2N	GROMMET	AR		PAOZZ
45A	MS21919WDG10	CLAMP	1	C	PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
46	74A890601-2488	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND10V002)			
47	74A890601-2589	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND3-V001)			
48	74A890601-2598	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND4-V004)			
49	74A890601-2581	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND10V001)			
50	74A890601-2441	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND9-V003)			
51	74A890601-2444	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES GND2-V003)			
52	NAS663V11HT	SCREW	2		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 52)	2	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 52)	2	*	PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 52)	2		PAOZZ
53	NAS663V12HT	SCREW	2		PAOZZ
	NAS1149D0316J	WASHER (USE WITH INDEX 53)	2	*	PAOZZ
	AN960JD10LL	WASHER (USE WITH INDEX 53)	2	*	PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 53)	2		PAOZZ
54	MS27467T17B26P	CONNECTOR, PLUG (52P-V044D)	1		PAOZZ
55	74A890601-2969	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-V044D)			
56	MS27467T25B29P	CONNECTOR, PLUG (52P-V044C)	1		PAOZZ
57	MS27656T25B29S	CONNECTOR, RECEPTACLE (52J-V044C)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
58	74A890601-2968	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-V044C)			
59	MS21919WDG10	CLAMP	2		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
60	MS27656T17B26S	CONNECTOR, RECEPTACLE (52J-V044D)	1		PAOZZ
	NAS601-8P	SCREW (AP)	4		PAOZZ
	NAS1149DN616J	WASHER (AP)	4	*	PAOZZ
	AN960JD6L	WASHER (AP)	4	*	PAOZZ
61	MS21919WDG16	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL	1	B*	PAOZZ
		SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	B*	PAOZZ
62	MS21919WDG11	CLAMP	1	B	PAOZZ
	NAS673V5	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL	1	B*	PAOZZ
		SPEC ST3M523C3M)			
	130091	SEE ABOVE (76530)	1	B*	PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162443
B	161353 THRU 161987
C	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292
D	161353 AND UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292

RIGHT INNER WING DOOR 79R

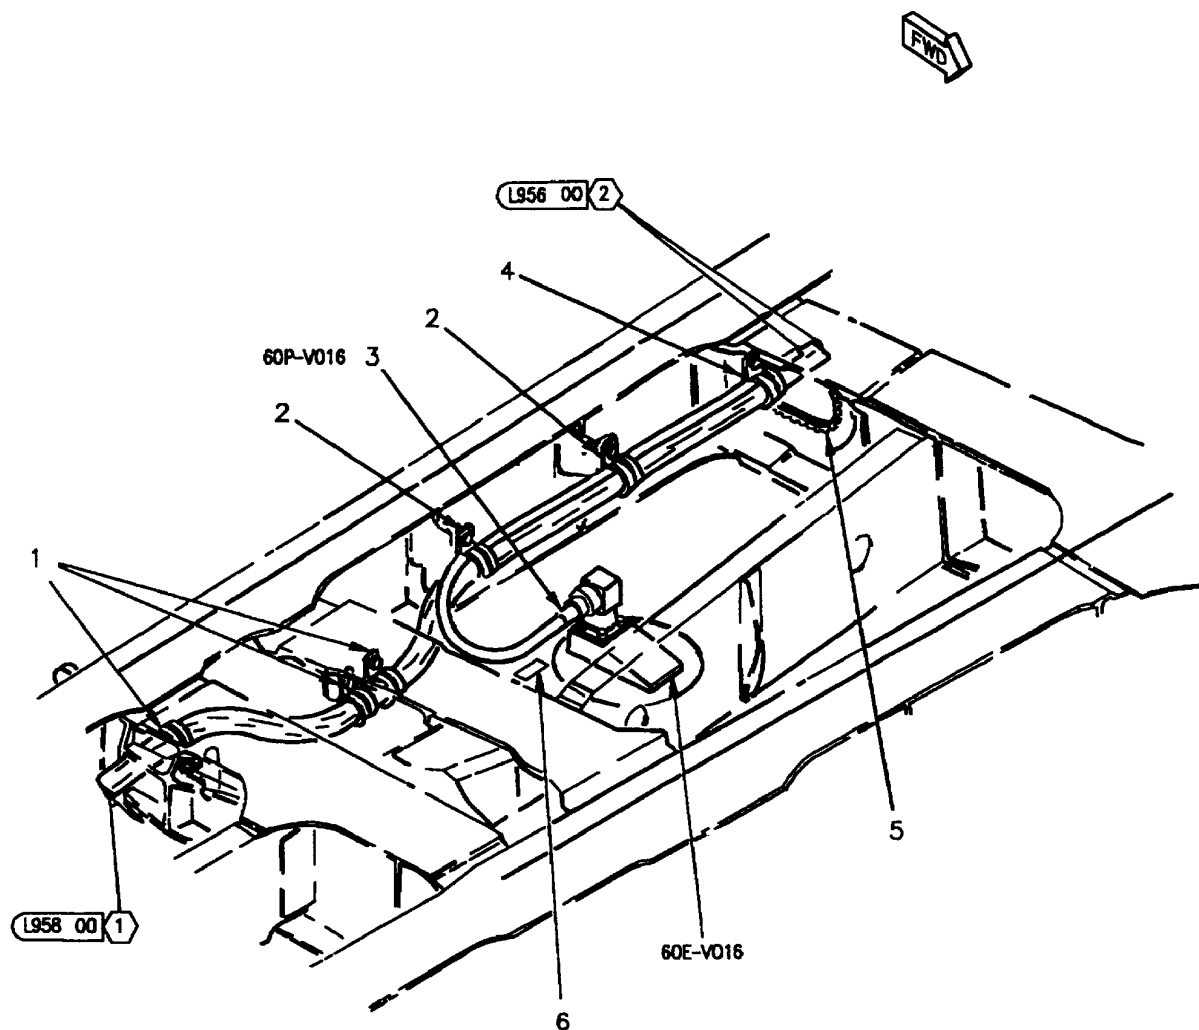

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG13	CLAMP	3	A	PAOZZ
	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
2	MS21919WDG13	CLAMP	2	A	PAOZZ
	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
3	M39012/05-0501	CONNECTOR, PLUG (60P-V016)	1		PAOZZ
4	MS21919WDG13	CLAMP	1	A	PAOZZ
	MS21919WDG15	CLAMP	1	B	PAOZZ
	NAS673V #	BOLT (AP)	1		-
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
5	MS21266-5N	GROMMET	AR		PAOZZ
6	74A890068-2049	PLATE, IDENTIFICATION - UPPER EQUIP	1		MDOZZ
		BAY, ZONE 12 (76301)			





LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE USABLE ON

A 161353 AND UP; ALSO 162394 THRU
163175 BEFORE F/A-18 AFC 253 OR
F/A-18 AFC 292

B 162394 THRU 163175 AFTER F/A-18
AFC 253 OR F/A-18 AFC 292

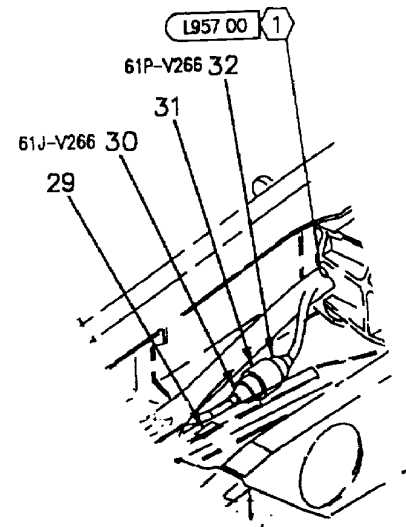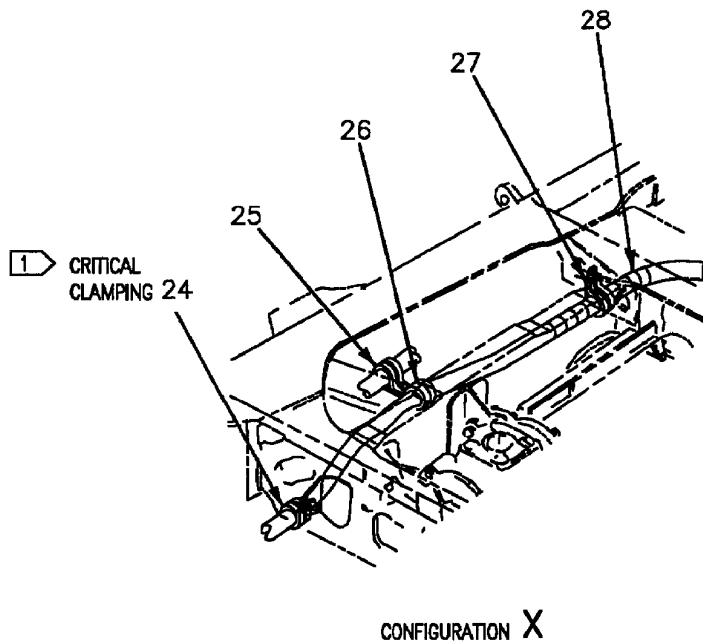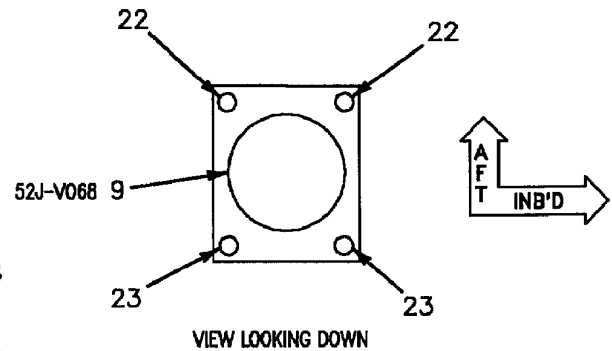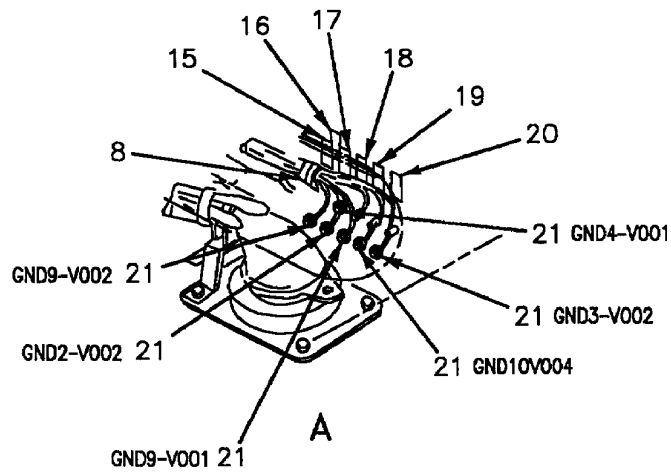

2 CONFIGURATION Y

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	AN735D9	CLAMP	1	C	PAOZZ
	NAS673V2	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
	NAS1291C3M	NUT (AP)	1	C	PAOZZ
2	MS21919WDG5	CLAMP	2	C	PAOZZ
	NAS673V3	BOLT (AP)	1	C	PAOZZ
	AN960JD10L	WASHER (AP)	1	C	PAOZZ
3	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	C*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
4	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
	MS21919WDG12	CLAMP	1		PAOZZ
	MS21919WDG15	CLAMP	1	G	PAOZZ
	NAS673V6	BOLT (AP)	1	E	PAOZZ
	NAS673V14	BOLT (AP)	1	F	PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-32	SPACER (AP)	1	F	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
5	MS21919WDG5	CLAMP	1		PAOZZ
	MS21919WDG15	CLAMP	1	G	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	74A890601-2561	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 52J-V068)			
7	MS21919WDG13	CLAMP	2		PAOZZ
	MS21919WDG15	CLAMP	2	G	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	*	PAOZZ
		ST3M523C3M)			
	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
9	AN960JD10L	WASHER (AP)	1		PAOZZ
	885-200-003	CONNECTOR, RECEPTACLE, ELECTRICAL	1		PAOZZ
		(99447) (MCDONNELL SPEC ST5M1487-002)			
		(52J-V068)			
	885-200-002	CONNECTOR, RECEPTACLE ELECTRICAL	1	A*	PAOZZ
		(99447) (MCDONNELL SPEC ST5M1487-002)			
		(USE UNTIL EXHAUSTED)			
	MS21919WDG12	CLAMP	1	E	PAOZZ
	NAS673V14	BOLT (AP)	1	E	PAOZZ
	AN960JD10L	WASHER (AP)	1	E	PAOZZ
10	NAS42DD6-32	SPACER (AP)	1	E	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC	1	E*	PAOZZ
		ST3M523C3M)			
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC	1	E*	PAOZZ
		ST3M523C3M)			
	74A890601-2179	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES 17S-V016)			
	74A890601-2035	MARKER, IDENTIFICATION - ELECTRICAL	1		MDOZZ
		(76301) (FOR REF DES WTV005)			
	MS27656T11B35S	CONNECTOR, RECEPTACLE (17J-V018)	1		PAOZZ
12	NAS600-6P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
13	74A890601-2041	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 17J-V018)	1		MDOZZ
14	MS21919WDG5	CLAMP	1		PAOZZ
	MS21919WDG15	CLAMP	1	G	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	74A890601-2440	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-V002)	1		MDOZZ
16	74A890601-2475	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-V001)	1		MDOZZ
17	74A890601-2443	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-V002)	1		MDOZZ
18	74A890601-2603	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-V001)	1		MDOZZ
19	74A890601-2612	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND10V004)	1		MDOZZ
20	74A890601-2590	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND3-V002)	1		MDOZZ
21	MS21042L3	NUT	6		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 21)	6		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 21)	6		PAOZZ
22	NAS663V10HT	SCREW	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 22)	2		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 22)	2		PAOZZ
23	NAS663V11HT	SCREW	2		PAOZZ
	AN960JD10	WASHER (USE WITH INDEX 23)	2		PAOZZ
	NAS1291C3M	NUT (USE WITH INDEX 23)	2		PAOZZ
24	MS21919WDG5	CLAMP	1	D	PAOZZ
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	A11144-7-3	NUT, CLIP (AP) (72962) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
	130091	NUT, CLIP (AP) (76530) (MCDONNELL SPEC ST3M523C3M)	1	D*	PAOZZ
25	M85052/1-6	CLAMP	1	D	PAOZZ
26	MS21919WDG #	CLAMP	1	D	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
27	AN735D9	CLAMP	1	D	PAOZZ
	NAS673V2	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
	NAS1291C3M	NUT (AP)	1	D	PAOZZ
28	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	B*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
29	74A890601-2958	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 61J-V266)	1		MDOZZ
30	82-5770	CONNECTOR, RECEPTACLE, ELECTRICAL (74868) (MCDONNELL SPEC 5M2496-001) (61J-V266)	1		PAOZZ
31	MS21919WDG9	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	NAS1149D0316J	WASHER (AP)	1	*	PAOZZ
	AN960JD10LL	WASHER (AP)	1	*	PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
32	82-5967	CONNECTOR, PLUG, ELECTRICAL (74868) (MCDONNELL SPEC 5M2497S03) (61P-V266)	1		PAOZZ


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 162443
B	161359 THRU 161736
C	161737 & UP
D	161353 THRU 161736
E	161353 THRU 161750
F	161751 & UP
G	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292

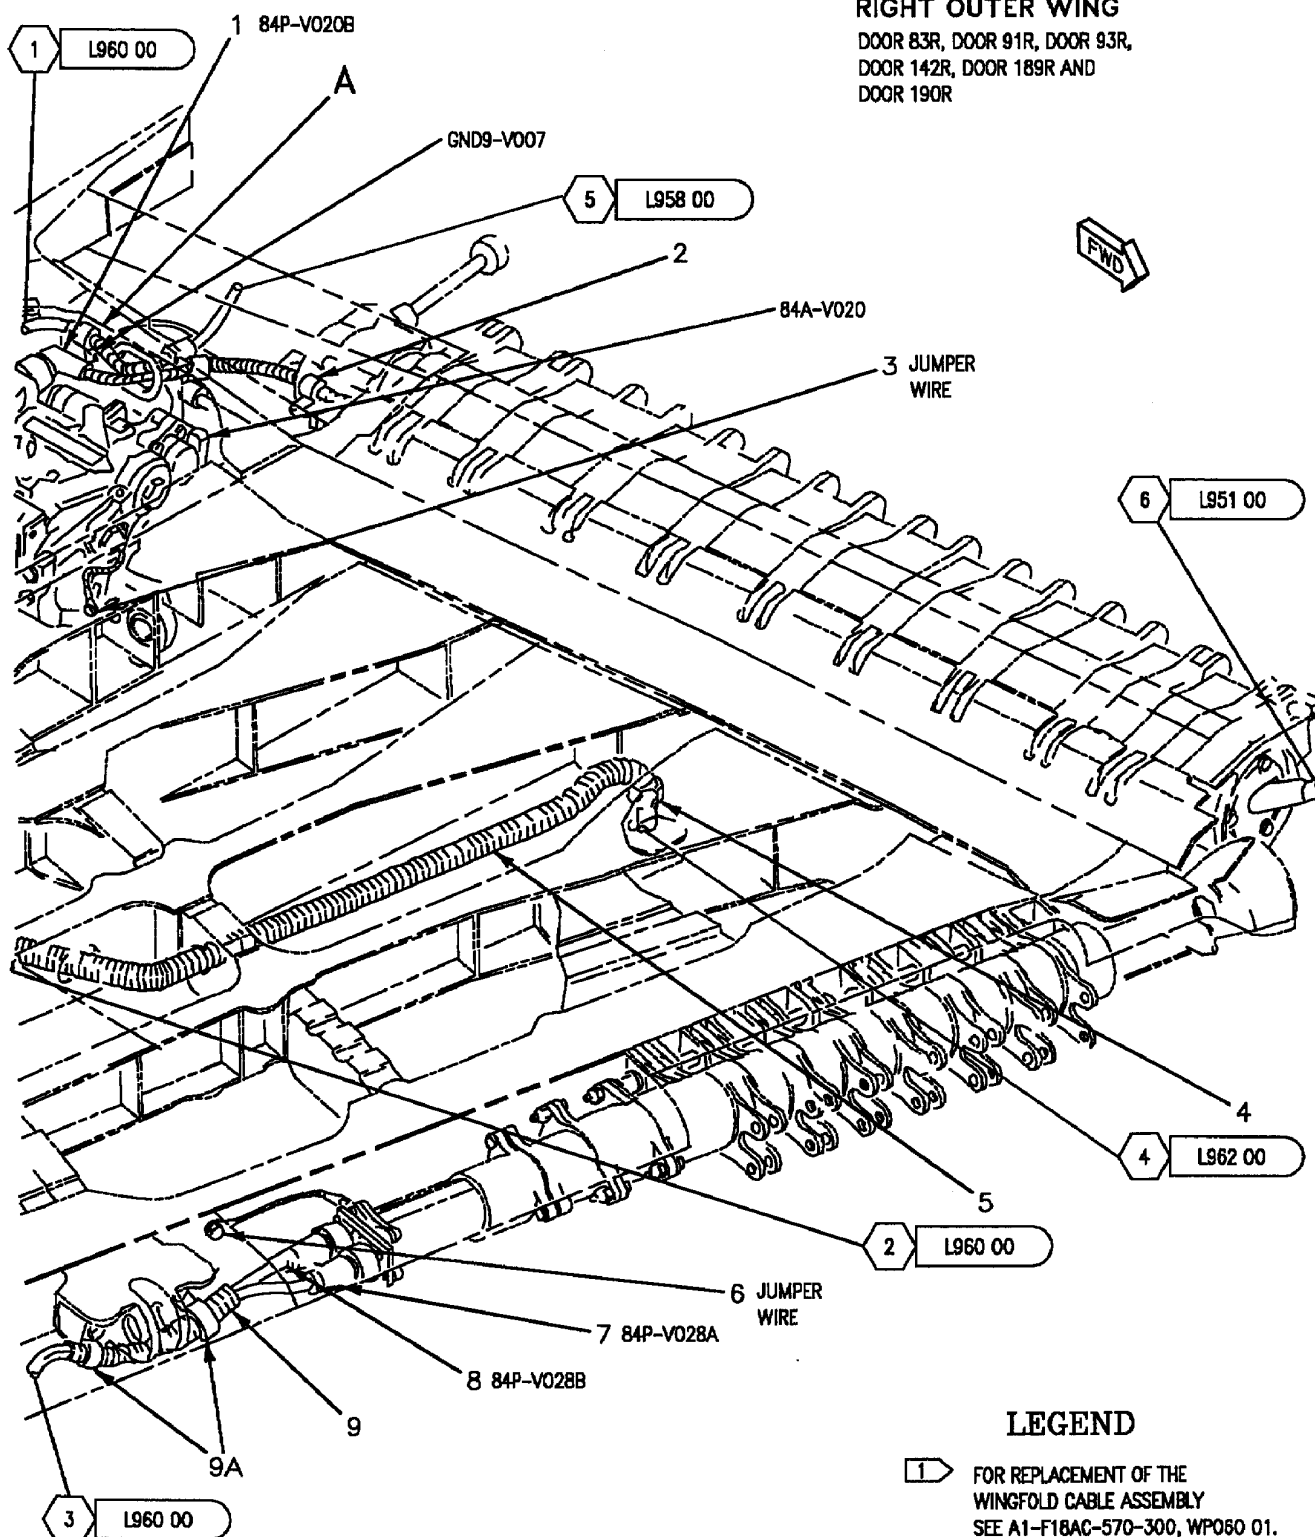

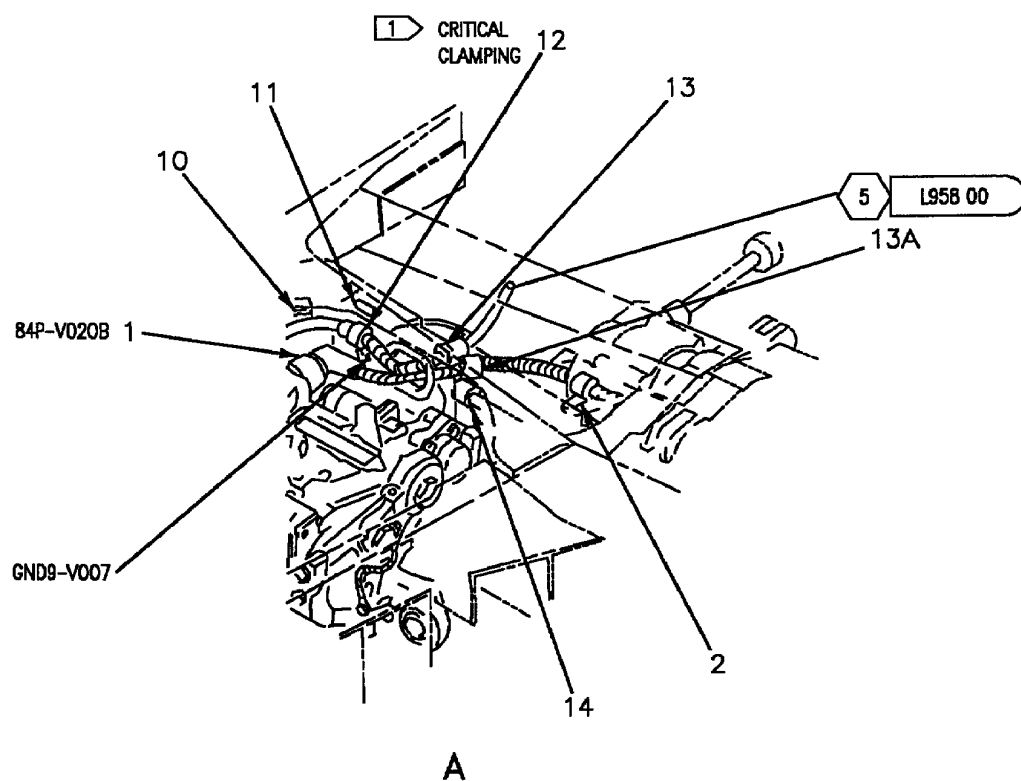

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS27467T13B35S	CONNECTOR, PLUG (84P-V020B)	1		PAOZZ
2	MS21919WDG6	CLAMP	1		-
	MS21919WDG7	CLAMP	1	F	PAOZZ
	NAS673V5	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-8	SPACER (AP)	1		PAOZZ
3	MS25083-5BB4	LEAD, ELECTRICAL (JUMPER WIRE)	1	C	PAOZZ
	MS25083-5BB7	LEAD, ELECTRICAL (JUMPER WIRE)	1	D	PAOZZ
	NAS673V1	BOLT (AP)	2		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
4	MS21919WDG #	CLAMP	1		-
	NAS673V17	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-55	SPACER (AP)	1		PAOZZ
5	M81914-4-1207	TUBING	AR		MGOZZ
6	MS25083-5BC4	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	AN508-10-3	SCREW (AP)	1		PAOZZ
	MS35338-100	WASHER (AP)	1		PAOZZ
	MS25082B3	NUT (AP)	1		PAOZZ
7	MS27467T13B35S	CONNECTOR, PLUG (84P-V028A)	1		PAOZZ
8	MS27467T13B35SA	CONNECTOR, PLUG (84P-V028B)	1		PAOZZ
9	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
9A	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21266-2N	GROMMET	AR	E	PAOZZ
11	74A890601-2472	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-V007)			
12	MS21919WDG #	CLAMP	1	A	-
	AN742D8	CLAMP	1	B	PAOZZ
	NAS1801-3-13	SCREW (AP)	1	A	-
	NAS673V7	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	MS35338-43	WASHER (UNDER NUT) (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1	A	PAOZZ
	NAS1291C3M	NUT (AP)	1	B	PAOZZ
13	MS21919WDG11	CLAMP	1		PAOZZ
	NAS1712D8-16N	CLAMP	1	F	PAOZZ
	NAS673V #	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	2		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
13A	MS21919WDG6	CLAMP	1		PAOZZ
14	MS21919WDG #	CLAMP	1		-

LENGTH/SIZE TO BE DETERMINED AT INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161703
B	161705 & UP

A1-F18AC-WDM-000

Change 4


L959 00

Sheet 4

INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			
		C						161353			
		D						161358 & UP			
		E						161966 & UP			
		F						162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292			


RIGHT OUTER WING

DOOR 83R, DOOR 84R
AND DOOR 188R

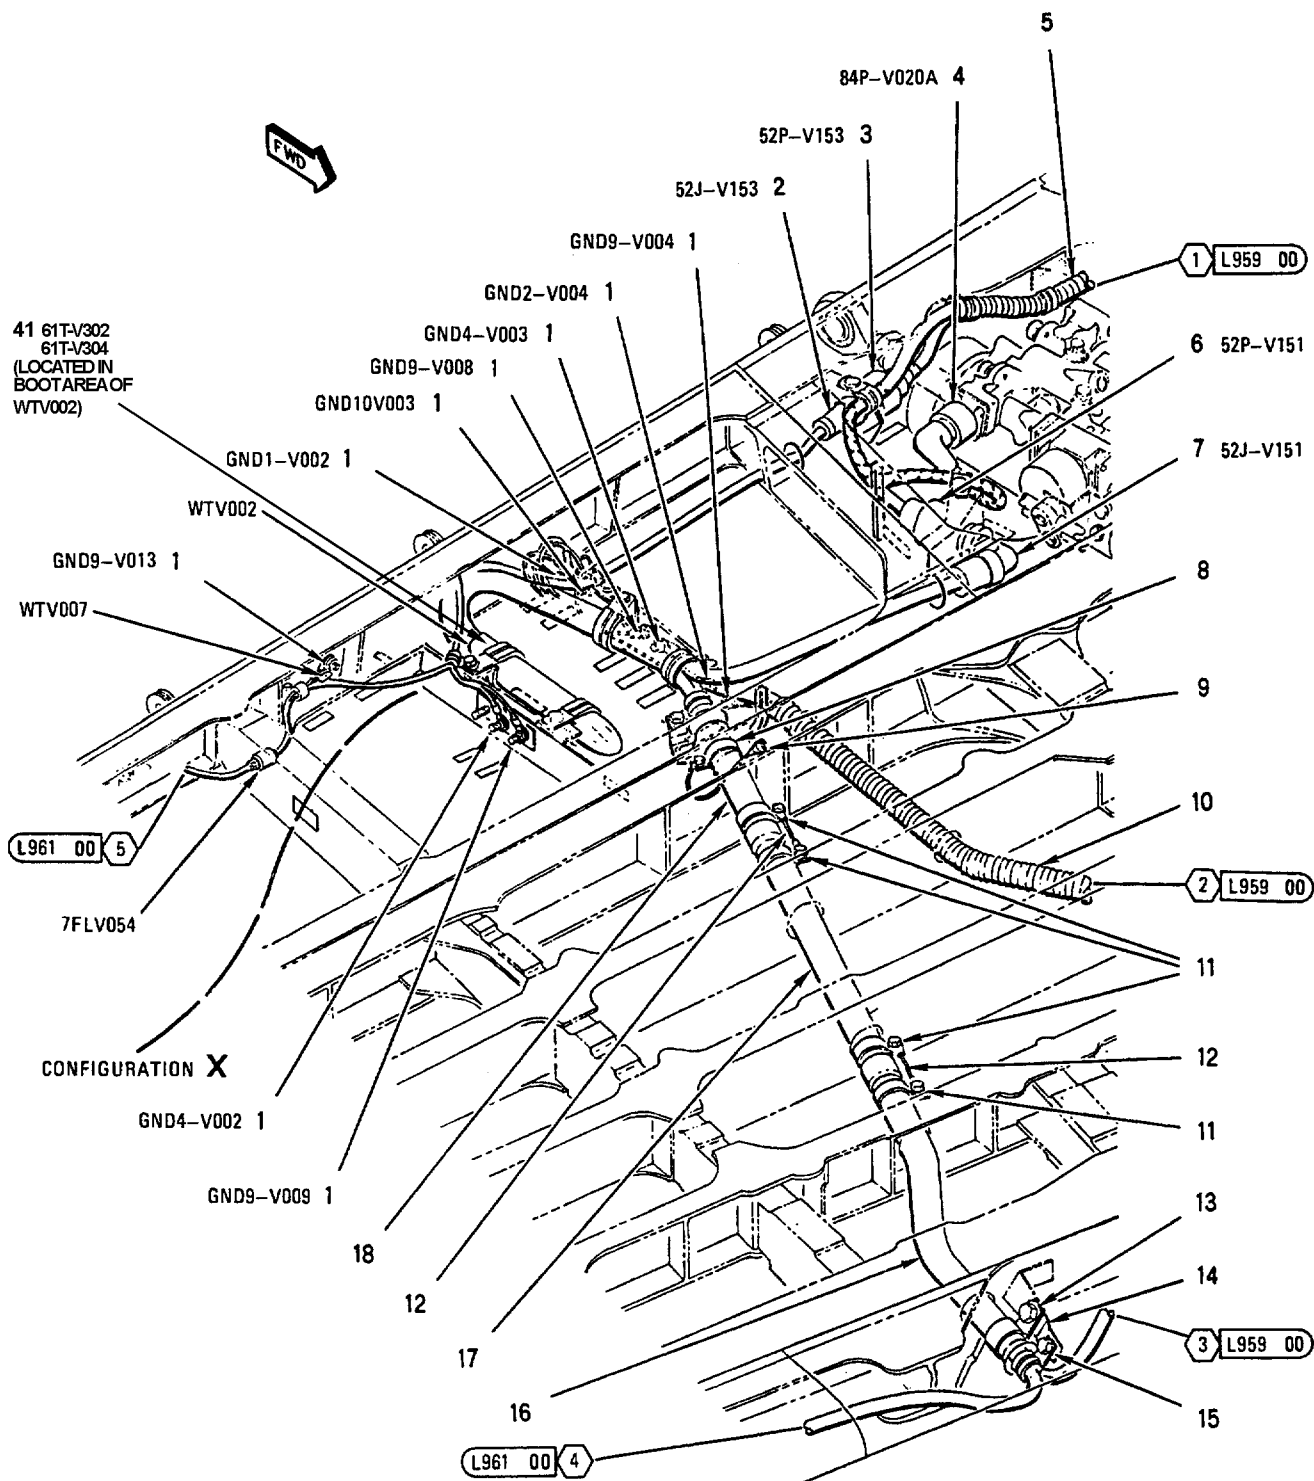

RIGHT OUTER WING

DOOR 83R, DOOR 84R
AND DOOR 188R

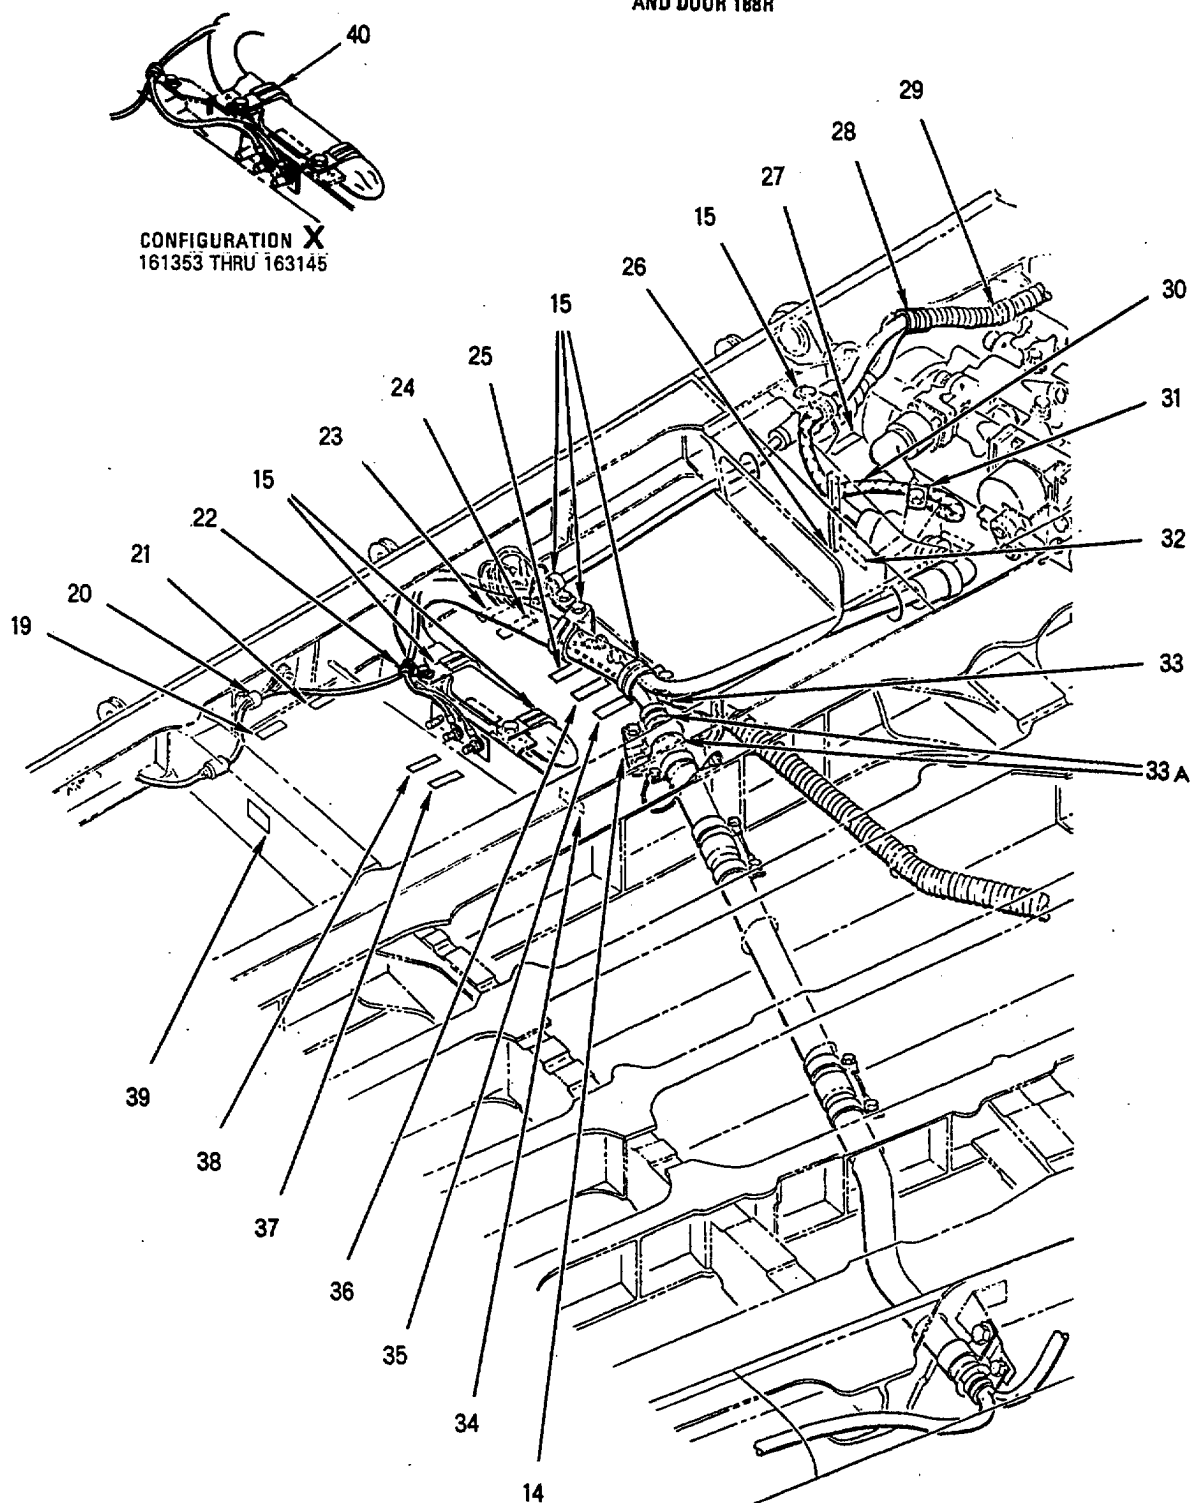

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	NAS1801-3-11	SCREW	9		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 1)	9		PAOZZ
	AN960JD10L	WASHER (USE WITH INDEX 1)	9		PAOZZ
2	MS27656T13B98P	CONNECTOR, RECEPTACLE (52J-V153)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
3	MS27467T13B98S	CONNECTOR, PLUG (52P-V153)	1		PAOZZ
4	MS27467T13B35SB	CONNECTOR, PLUG (84P-V020A)	1		PAOZZ
5	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	C*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
6	MS27467T17B35S	CONNECTOR, PLUG (52P-V151)	1		PAOZZ
7	MS27656T17B35P	CONNECTOR, RECEPTACLE (52J-V151)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
8	AN735D14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	MS35338-43	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
9	MS25083-2BB3	LEAD, ELECTRICAL (JUMPER WIRE)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
	MS35338-135	WASHER (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	M81914-4-1207	TUBING	AR		MGOZZ
11	AN735D14	CLAMP	4		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10	WASHER (AP)	1		PAOZZ
	MS35338-138	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
12	MS25083-2BB3	LEAD, ELECTRICAL (JUMPER WIRE)	2		PAOZZ
13	AN742D14	CLAMP	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
14	ST9M614-2	STRAP (76301)	2		PAOZZ
15	MS21919WDG #	CLAMP	7		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
16	74A782456-1001	TUBE, BENT, METALLIC-ELECTRICAL	1		MGGZZ
		CONDUIT, Y124.172 (76301)			
17	74A782457-1001	TUBE, METALLIC-ELECTRICAL CONDUIT,	1		MGGZZ
		Y133.023 (76301)			
18	74A782458-1001	TUBE, METALLIC-ELECTRICAL CONDUIT,	1		MGGZZ
		Y140.145 (76301)			
19	74A890601-2870	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES WTV007)			
20	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	1		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
21	74A890601-2607	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-V013)			
22	MS21919WDG #	CLAMP	1	E	-
23	74A890601-2481	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND1-V002)			
24	74A890601-2486	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND10V003)			
25	74A890601-2454	MARKER, IDENTIFICATION - ELECTRICAL	1		MGOZZ
		(76301) (FOR REF DES GND9-V008)			
26	MS21266-2N	GROMMET	AR		PAOZZ

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
27	74A890601-2432	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-V153)	1		MGOZZ
28	MS21919WDG10	CLAMP	1	A	PAOZZ
	MS21919WDG11	CLAMP	1	B	PAOZZ
	HT4024L3-6	SCREW, CLOSE TOLERANCE (AP) (73197) (MCDONNELL SPEC ST3M455-3L6-1)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS1291C3M	NUT (AP)	1		PAOZZ
29	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-48	SPACER (AP)	1		PAOZZ
30	500024-1	TUBING, PLASTIC, SPIRAL (13577) (MCDONNELL SPEC 14M912TN4)	AR	C*	PAOZZ
	T25T	SEE ABOVE (06383)	AR	C*	PAOZZ
31	MS21919WDG7	CLAMP	1		PAOZZ
	NAS673V11	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
32	74A890601-2431	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 52J-V151)	1		MGOZZ
33	74A890601-2604	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-V004)	1		MGOZZ
33A	MS21919WDG #	CLAMP	2		-
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
34	74A890601-2033	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES WTV002)	1		MGOZZ
35	74A890601-2484	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND2-V004)	1		MGOZZ
36	74A890601-2597	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-V003)	1		MGOZZ
37	74A890601-2605	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND9-V009)	1		MGOZZ
38	74A890601-2596	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES GND4-V002)	1		MGOZZ
39	74A890601-2872	MARKER, IDENTIFICATION - ELECTRICAL (76301) (FOR REF DES 7FLV054)	1		MGOZZ
40	MS21919WDG #	CLAMP	1	D	-
	NAS673V3	BOLT (AP)	1	D	PAOZZ
	AN960JD10L	WASHER (AP)	1	D	PAOZZ
41	5M2867-002	COUPLER, INLINE (61T-V302, 61T-V304) (76301)	2	F	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

A1-F18AC-WDM-000

Change 5

L960 00

Sheet 5


INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

CODE	USABLE ON
A	161353 THRU 161703
B	161705 & UP
C	161353 THRU 161965
D	161353 THRU 163145
E	163146 & UP
F	162394 THRU 163175 AFTER F/A-18 AFC 341



RIGHT OUTER WING

DOOR 84R, DOOR 95R, DOOR 125R,
DOOR 144R AND DOOR 187R

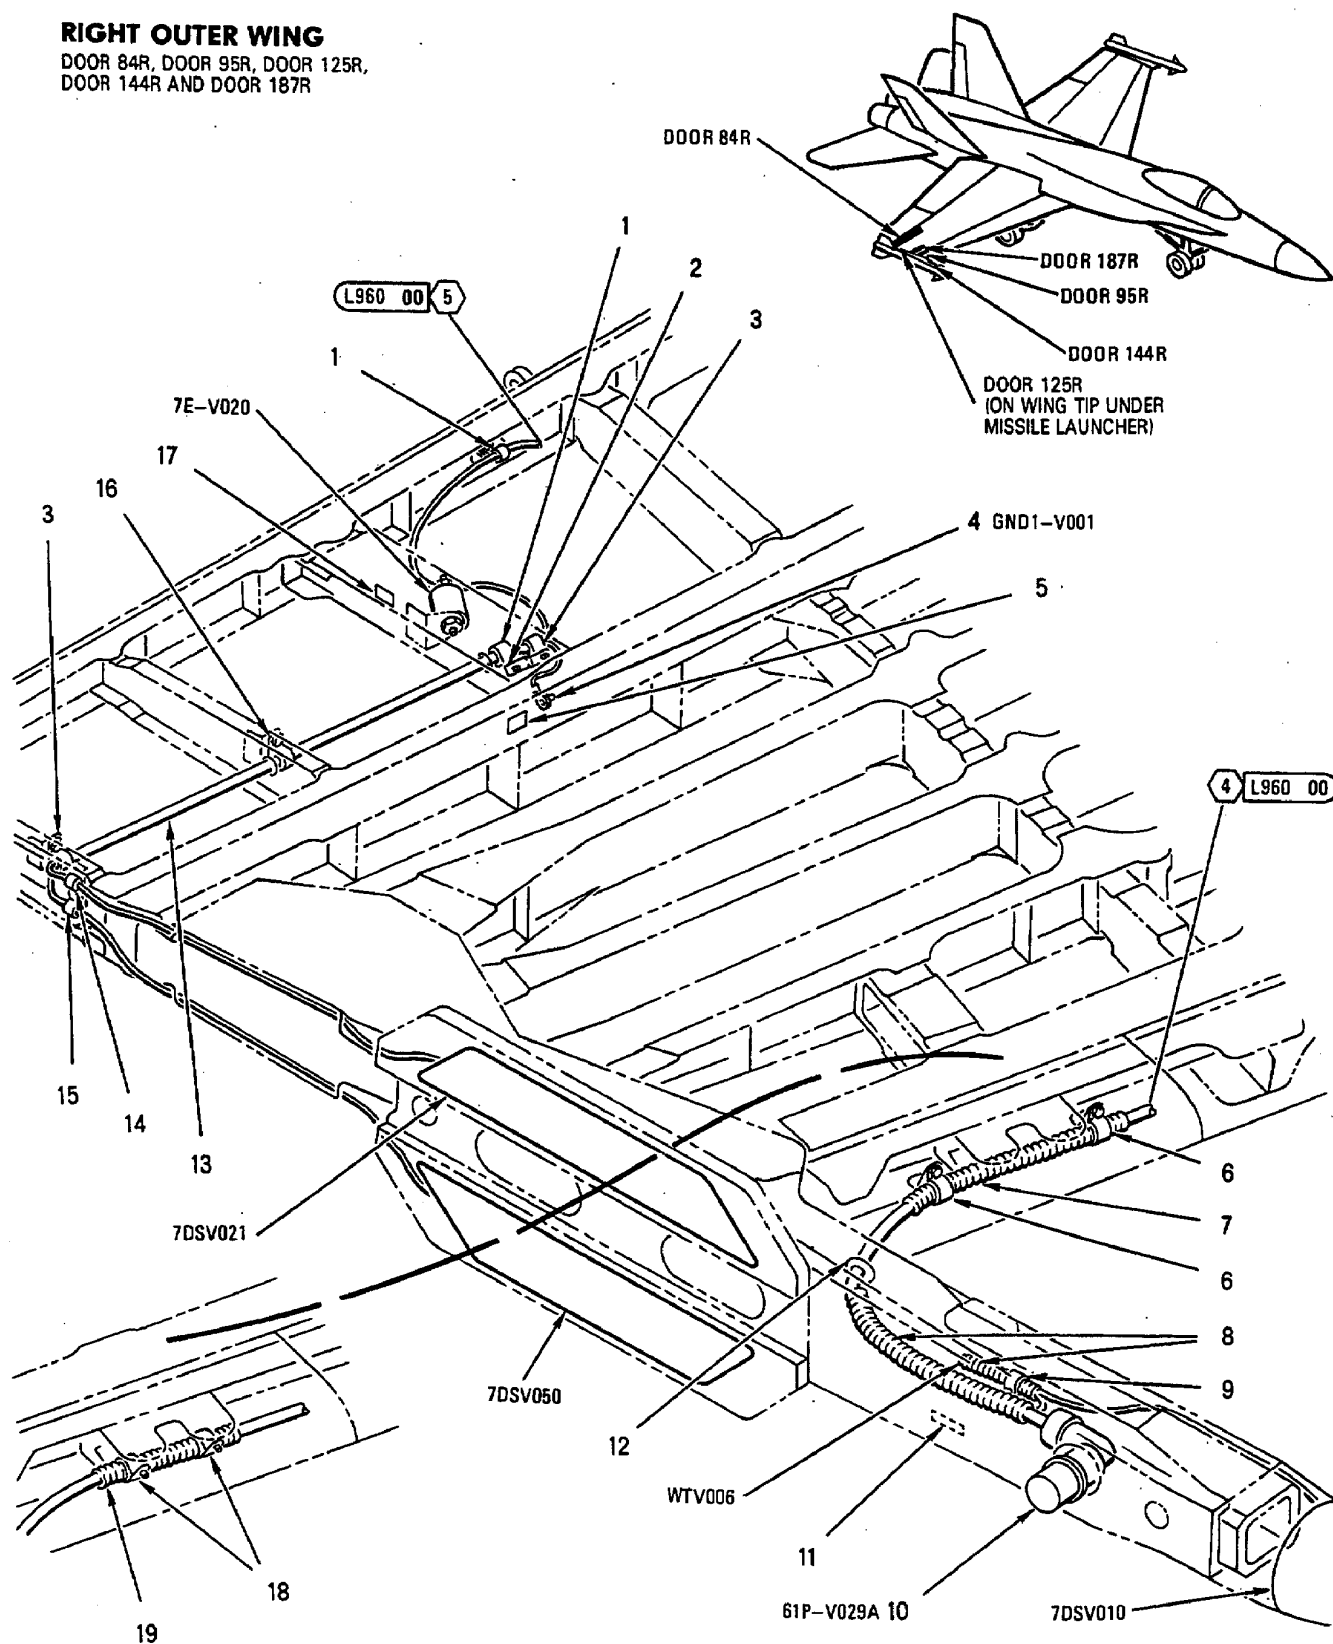

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS25281-R2	CLAMP (SUPERSEDES MS25281-2)	2		PAOZZ
	NAS673V3	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	ST9M614-2	STRAP (76301)	1		PAOZZ
3	AN742D6	CLAMP	2		PAOZZ
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
4	NAS1291C3M	NUT (AP)	1		PAOZZ
	NAS1801-3-11	SCREW	1		PAOZZ
	MS35338-43	WASHER (USE WITH INDEX 4)	1		PAOZZ
5	AN960JD10L	WASHER (USE WITH INDEX 4)	1		PAOZZ
	74A890601-2496	MARKER, IDENTIFICATION -	1		MGOZZ
		ELECTRICAL (76301) (FOR REF DES GND1-V001)			
6	MS21919WDG #	CLAMP	2	B	-
	NAS673V3	BOLT (AP)	1	B	PAOZZ
	AN960JD10L	WASHER (AP)	1	B	PAOZZ
7	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	B*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	B*	PAOZZ
8	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	*	PAOZZ
9	MS21919WDG #	CLAMP	1		-
	NAS663V3HT	SCREW (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
10	MS21042L3	NUT (AP)	1		PAOZZ
	DS07-27S-025	CONNECTOR, PLUG, ELECTRICAL	1		PAOZZ
		(11139) (MCDONNELL SPEC ST5M1576-27-50S) (61P-V029A)			
11	74A890601-2245	MARKER, IDENTIFICATION - ELECTRI-	1		MGOZZ
		CAL (76301) (FOR REF DES WTV006)			
12	MS35489-103	GROMMET	1	C	PAOZZ
	9M858A-16	GROMMET	1	D	PAOZZ
13	74A782468-1001	TUBE, METALLIC-ELECTRICAL	1		MGGZZ
		CONDUIT, Y150.100 (76301)			
14	9M144-3D	CLAMP (76301)	1		PAOZZ
	NAS673V2	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
15	9M144-3D	CLAMP (76301)	1		PAOZZ
16	NMC-ST9M529-6	CLAMP, LOOP (03296)	1		PAOZZ
		(MCDONNELL SPEC ST9M529-6)			
	NAS673V3	BOLT (AP)	1		PAOZZ
17	AN960JD10L	WASHER (AP)	1		PAOZZ
	74A890601-2434	MARKER, IDENTIFICATION - ELECTRI-	1		MGOZZ
		CAL (76301) (FOR REF DES 7E-V020)			
18	MS21919WDG #	CLAMP	2	A	-
	NAS673V3	BOLT (AP)	1	A	PAOZZ
	AN960JD10L	WASHER (AP)	1	A	PAOZZ
19	500024-1	TUBING, PLASTIC, SPIRAL (13577)	AR	A*	PAOZZ
		(MCDONNELL SPEC 14M912TN4)			
	T25T	SEE ABOVE (06383)	AR	A*	PAOZZ

LENGTH/SIZE TO BE DETERMINED AT INSTALLATION.



INDEX NO.	PART NUMBER	DESCRIPTION							UNITS PER ASSY	USE ON CODE	SM&R CODE
		1	2	3	4	5	6	7			

* ALTERNATE OR EQUIVALENT PARTS.
(INTRO)

CODE	USABLE ON
A	161353 THRU 161359
B	161361 & UP
C	161353 AND UP; ALSO 162394 THRU 163175 BEFORE F/A-18 AFC 253 OR F/A-18 AFC 292
D	162394 THRU 163175 AFTER F/A-18 AFC 253 OR F/A-18 AFC 292



RIGHT OUTER WING DOOR 159R

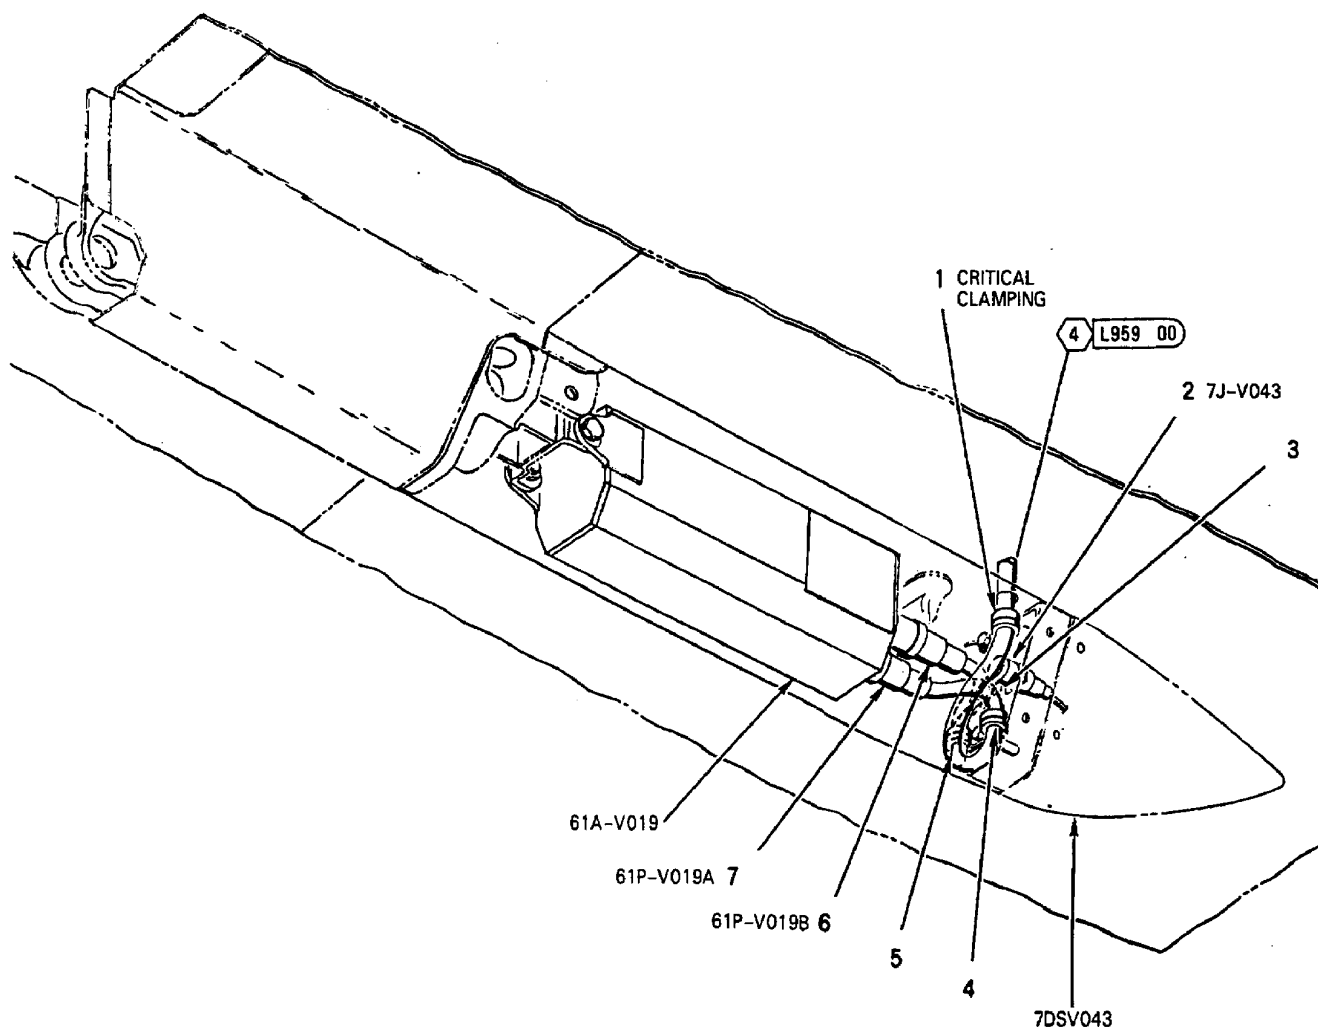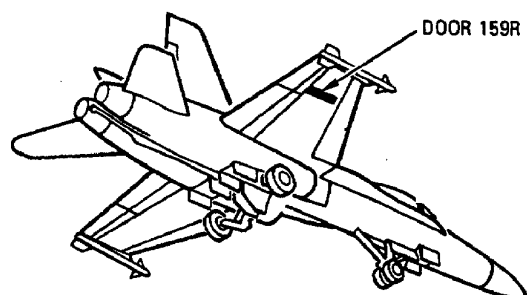

INDEX NO.	PART NUMBER	DESCRIPTION 1 2 3 4 5 6 7	UNITS PER ASSY	USE ON CODE	SM&R CODE
1	MS21919WDG #	CLAMP	1		-
	NAS673V #	BOLT (AP)	1		-
	AN960JD10L	WASHER (AP)	1		PAOZZ
2	MS27656T9B98S	CONNECTOR, RECEPTACLE (7J-V043)	1		PAOZZ
	NAS600-8P	SCREW (AP)	4		PAOZZ
	AN960JD4L	WASHER (AP)	4		PAOZZ
3	74A890601-2430	MARKER, IDENTIFICATION -	2		MGOZZ
		ELECTRICAL (76301) (FOR REF DES 7J-V043)			
4	MS21919WDG #	CLAMP	1		-
	NAS673V17	BOLT (AP)	1		PAOZZ
	AN960JD10L	WASHER (AP)	1		PAOZZ
	NAS42DD6-55	SPACER (AP)	1		PAOZZ
	MS21042L3	NUT (AP)	1		PAOZZ
5	MS21919WDG #	CLAMP	1		-
6	MS27467T13B35S	CONNECTOR, PLUG (61P-V019B)	1		PAOZZ
7	MS27467T13B35SD	CONNECTOR, PLUG (61P-V019A)	1		PAOZZ

LENGTH/SIZE TO BE DETERMINED AT
INSTALLATION.